
loose plate flange PN 40

short name: LF.40*

für glatten Bund



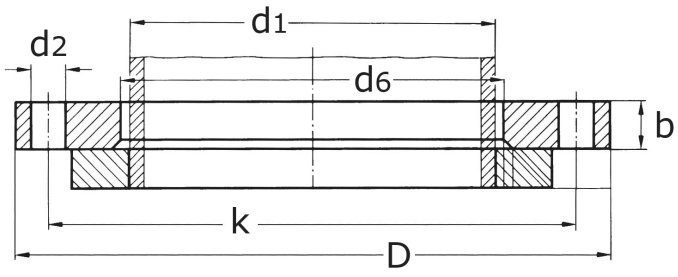


technical product sheet

DN	d1	Typ	D	d6	b	k	d2	M	kg	Art.-Nr.
10	17,2	EN 1092-1/0	90	21	14	60	14	4 x M12	0,600	LF-017-E40
10	17,2	DIN 2656	90	19	16	60	14	4 x M12	0,564	LF-017-040
10	17,2	DIN 2656	90	21	14	60	14	4 x M12	0,619	LF-017-E40
15	21,2	EN 1092-1/0	95	25	14	65	14	4 x M12	0,695	LF-021-E40
15	21,3	EN 1092-1/0	95	25	14	65	14	4 x M12	0,696	LF-021-E40
15	21,3	DIN 2656	95	24	16	65	14	4 x M12	0,750	LF-021-040
20	26,9	EN 1092-1/0	105	31	16	75	14	4 x M12	0,930	LF-026-E40
20	26,9	DIN 2656	105	30	16	75	14	4 x M12	0,930	LF-026-040
25	33,7	EN 1092-1/0	115	38	16	85	14	4 x M12	1,100	LF-033-E40
25	33,7	DIN 2656	115	36	18	85	14	4 x M12	1,237	LF-033-040
32	42,4	EN 1092-1/0	140	47	18	100	18	4 x M16	1,850	LF-042-E40
32	42,4	DIN 2656	140	46	18	100	18	4 x M16	1,850	LF-042-040
40	41,0	EN 1092-1/0	150	46	18	110	18	4 x M16	2,164	LF-041-E40
40	48,3	EN 1092-1/0	150	53	18	110	18	4 x M16	2,056	LF-048-E40
40	48,3	DIN 2656	150	54	18	110	18	4 x M16	2,100	LF-048-040
50	57,0	DIN 2656	165	62	20	125	18	4 x M16	2,770	LF-057-040
50	60,3	EN 1092-1/0	165	65	20	125	18	4 x M16	3,679	LF-060-E40
50	60,3	DIN 2656	165	65	20	125	18	4 x M16	2,750	LF-060-040
65	76,1	EN 1092-1/0	185	81	22	145	18	8 x M16	3,380	LF-076-E40
65	76,1	DIN 2656	185	81	20	145	18	8 x M16	3,110	LF-076-040
80	88,9	EN 1092-1/0	200	94	24	160	18	8 x M16	4,243	LF-088-E40
80	88,9	DIN 2656	200	94	22	160	18	8 x M16	3,910	LF-088-040
100	108,0	DIN 2656	235	113	22	190	22	8 x M20	5,312	LF-108-040
100	114,3	EN 1092-1/0	235	120	26	190	22	8 x M20	5,980	LF-114-E40
100	114,3	DIN 2656	235	119	22	190	22	8 x M20	5,230	LF-114-040
100	114,3	DIN 2656	235	119	26	190	22	8 x M20	4,805	LF-114-040
125	133,0	DIN 2656	133	138	24	220	26	8 x M24	7,230	LF-133-040
125	139,7	EN 1092-1/0	270	145	28	220	26	8 x M24	7,950	LF-139-E40
125	139,7	DIN 2656	270	145	24	220	26	8 x M24	7,010	LF-139-040
150	159,0	DIN 2656	300	164	24	250	26	8 x M24	8,656	LF-159-040
150	168,3	EN 1092-1/0	300	174	30	250	26	8 x M24	10,150	LF-168-E40
150	168,3	DIN 2656	300	173	24	250	26	8 x M24	8,600	LF-168-040
200	219,1	EN 1092-1/0	375	226	36	320	30	12x M27	34,800	LF-219-E40
200	219,1	DIN 2656	375	225	30	320	30	12x M27	16,460	LF-219-040
250	273,0	EN 1092-1/0	450	281	42	385	33	12x M30	28,900	LF-273-E40
250	273,0	DIN 2656	450	279	36	385	33	12x M30	0,000	LF-273-040

DN	d1	Typ	D	d6	b	k	d2	M	kg	Art.-Nr.
300	323,9	EN 1092-1/0	515	333	52	450	33	16x M30	0,000	LF-323-E40
300	323,9	DIN 2656	515	329	40	450	33	16x M30	33,500	LF-323-040
350	355,6	EN 1092-1/0	580	365	58	510	36	16x M33	0,000	LF-355-E40
350	355,6	DIN 2656	580	362	46	510	36	16x M33	0,000	LF-355-040
400	406,4	EN 1092-1/0	660	416	65	585	39	16x M36	0,000	LF-406-E40
400	406,4	DIN 2656	660	413	50	585	39	16x M36	0,000	LF-406-040
450	457,2	EN 1092-1/0	685	467		610	39	20x M36	0,000	LF-457-E40
500	508,0	EN 1092-1/0	755	519		670	42	20x M39	0,000	LF-508-E40
600	610,0	EN 1092-1/0	890	622		795	48	20x M45	0,000	LF-610-E40

available material: 1.4307, 1.4541, 1.4571, 304L

Flanges › loose plate flanges › DIN / EN › PN 40

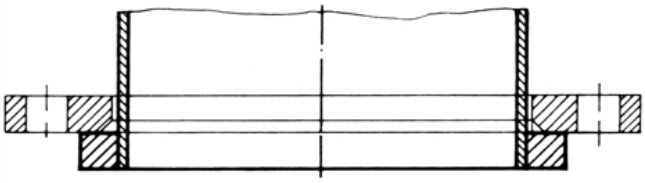

Verwendung mit glattem Bund

Loose plate flange PN 40

Comparison DIN und EN:

DIN (old)	EN (new)
DIN 2656	EN 1092-1 type 02

Use with smooth collars according to DIN 2655 or according to EN 1092-1 with smooth collars of type 32 and with welded-on rings of type 35.

In contrast to the DIN standard, EN-1092-1 only specifies the pipe connection dimensions of the ISO series. It is therefore sufficient to stamp the nominal diameter (DN) for marking purposes.

Dimensions range

DIN 2656	EN 1092-1
DN 10 to 400	DN 10 to 600

Comparison of dimension DIN 2656 and EN 1092-1

The following dimensions are identical:

- Outer diameter, [D]
- Hole of pattern, [k]
- Number of drill holes, [Num]
- Hole diameter, [d2]

Deviations at a glance:

Dimensions [b], Thickness of sheet

DN	DIN	EN
10	16	14
15	16	14
25	18	16
65	20	22
80	22	24
100	22	26
125	24	28
150	24	30
200	30	36
250	36	42
300	40	52
350	46	58
400	50	65
450	(*)	(b)
500	(*)	(b)
600	(*)	(b)

All dimensions in mm

(*) = DN 450 and DN 600 were recently added to EN 1092-1

(b) = to be specified by the ordering party

Dimensions [d6], Inner diameter

DN	DIN	EN
10	19	21
15	24	25
20	30	31
25	36	38
32	46	47
40	54	53
100	119	120
150	173	174
200	225	226
250	279	281
300	329	333
350	362	365
400	413	416
450	(*)	467
500	(*)	519
600	(*)	622

All dimensions in mm

(*) = DN 450 and DN 600 were recently added to EN 1092-1

Flange connection according to DIN 601

(fits to a pair of flanges)

Consisting of hexagon head screws (number of corresponding flange drill holes) 4-6 Mu DIN 601 and a gasket EN 1514 DIN 2690 (for example Klingersil C-4400).

DN	Number	Size
10	4	M 12 x 45
15	4	M 12 x 45
20	4	M 12 x 50
25	4	M 12 x 50
32	4	M 16 x 50
40	4	M 16 x 50
50	4	M 16 x 55
65	8	M 16 x 60
80	8	M 16 x 60
100	8	M 20 x 65
125	8	M 24 x 75
150	8	M 24 x 75
200	12	M 27 x 90
250	12	M 30 x 100
300	16	M 30 x 110
350	16	M 33 x 120
400	16	M 36 x 130
450	20	M 36 x 140
500	20	M 39 x 150
600	20	M 45 x 190