



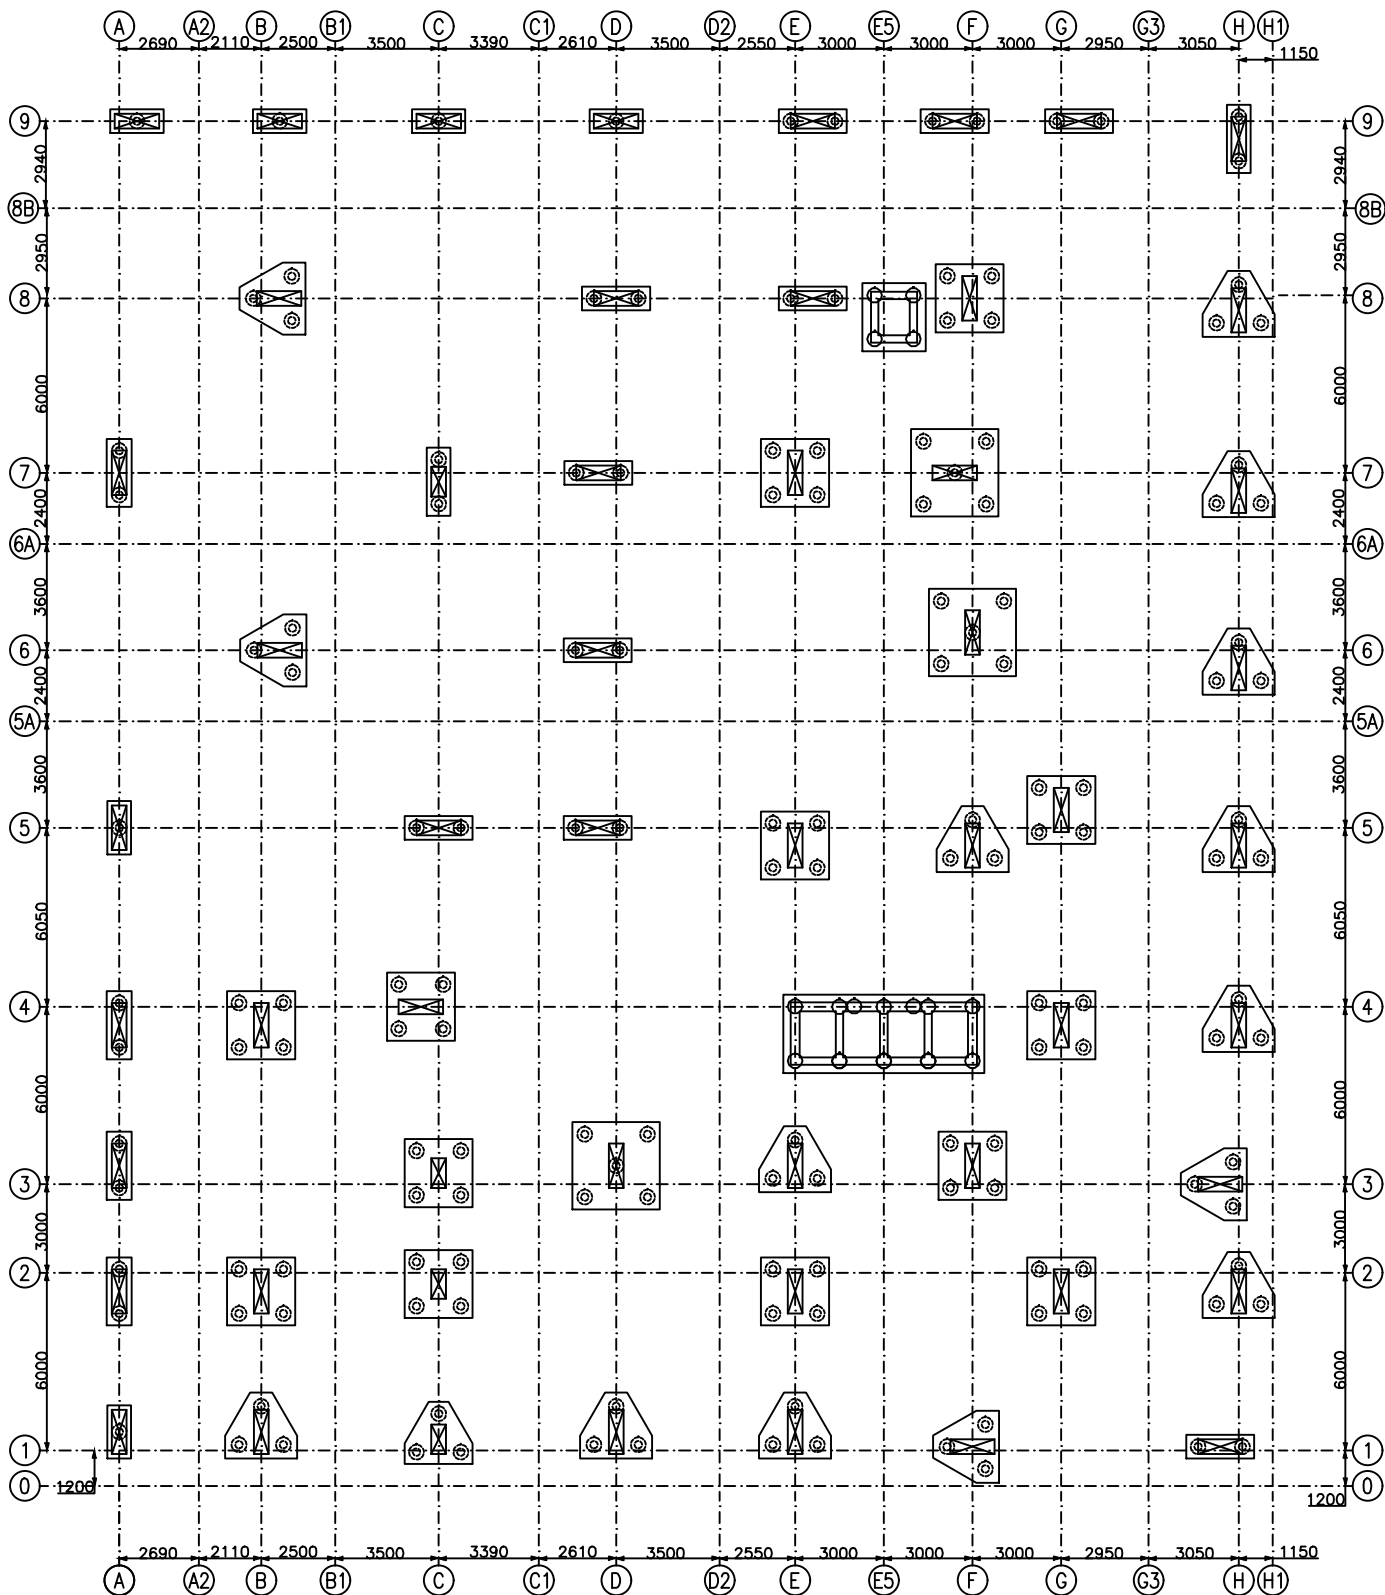


PILE FOUNDATION KEY PLAN

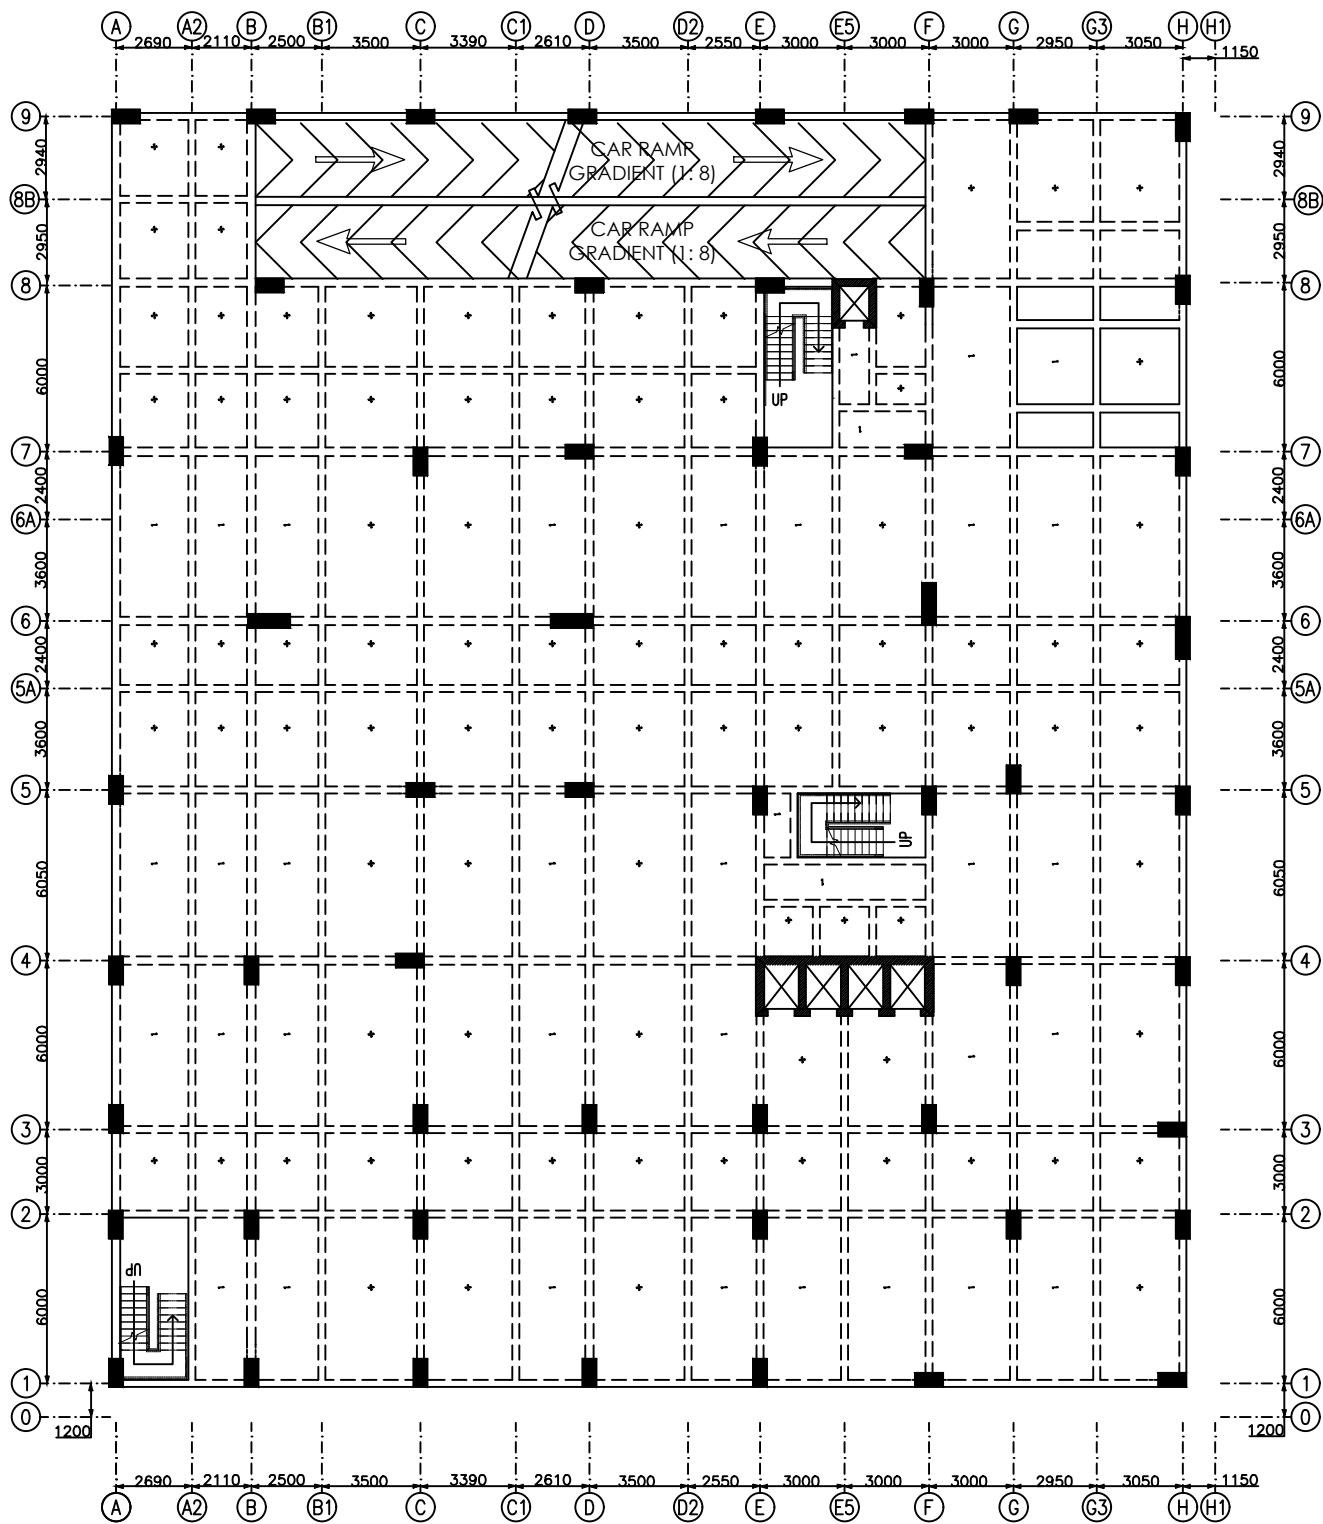

FLOOR KEY PLAN: GB (Reception & Shops)


ALL SLAB THICKNESS = 150MM THK. Unless Otherwise Stated

ALL TOILETS HAVE DROP OF 50mm

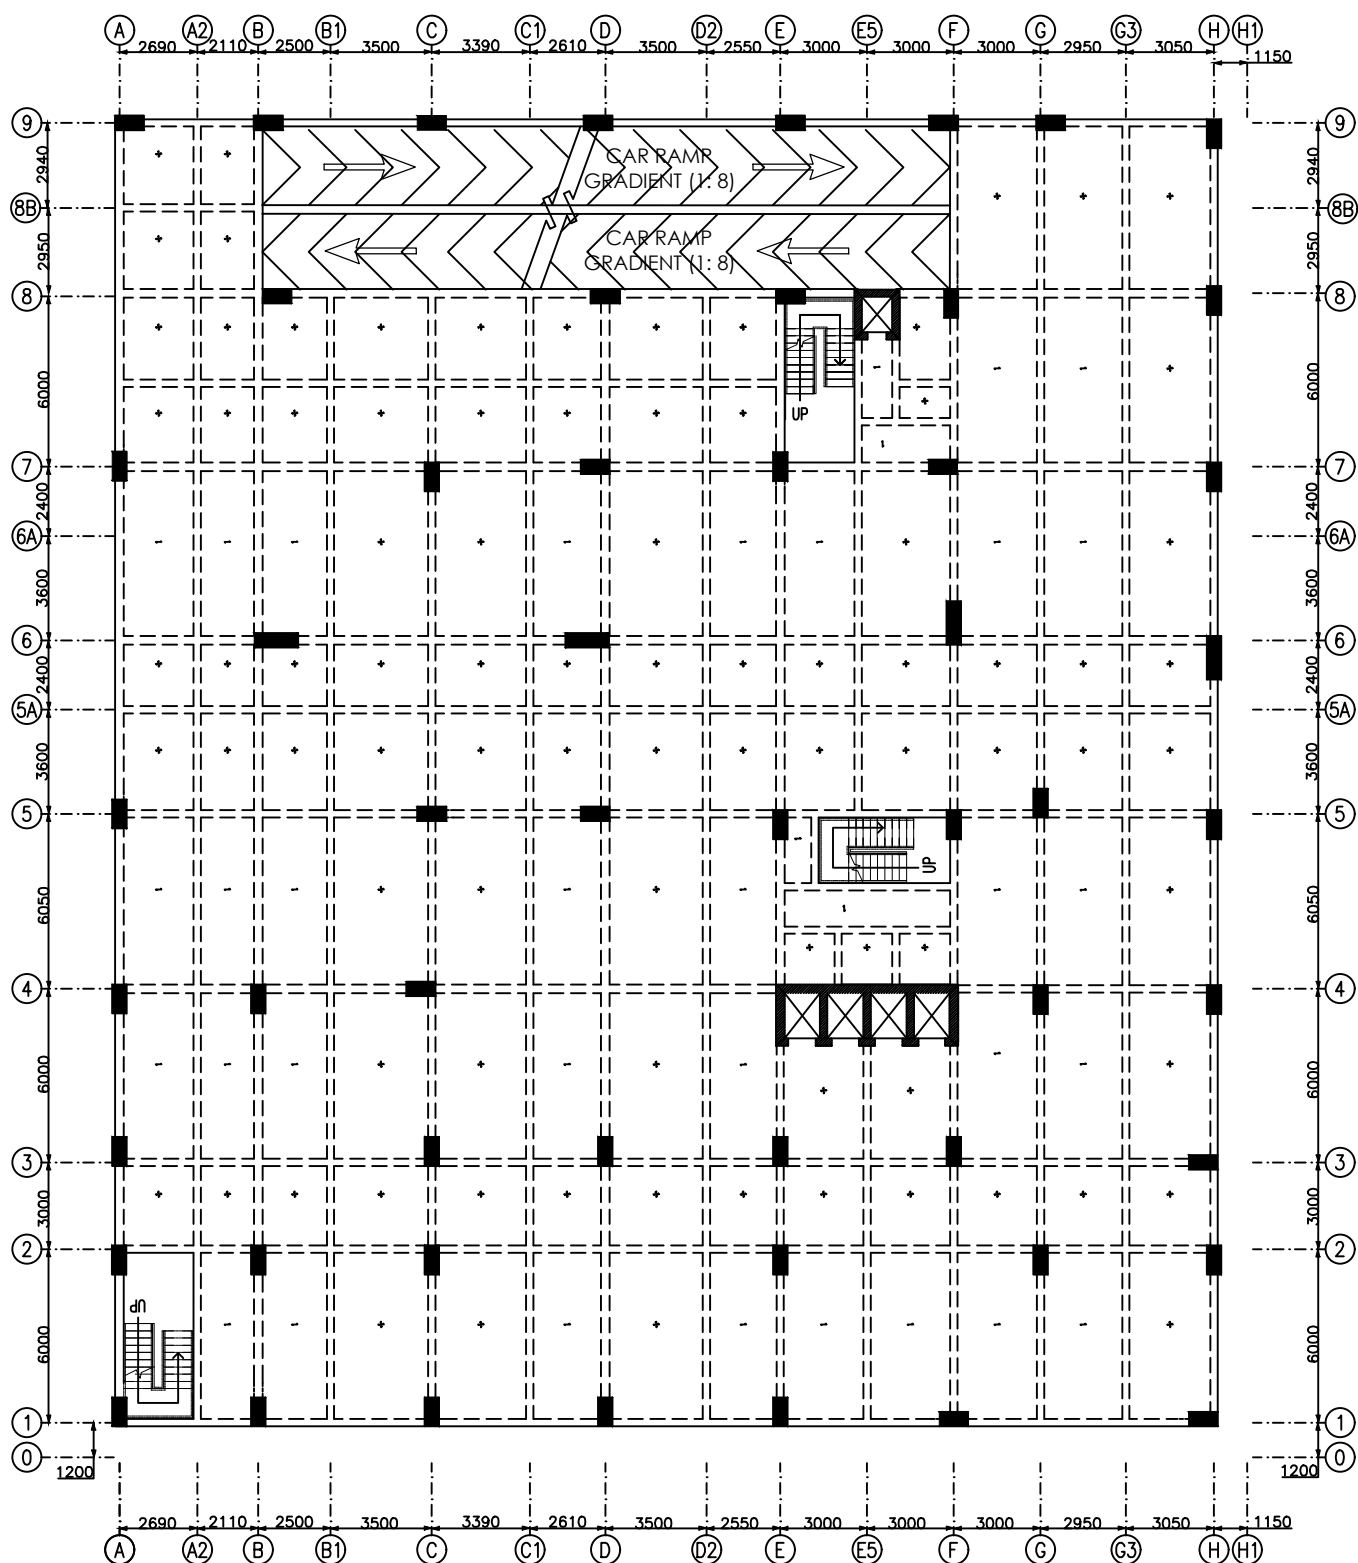

FLOOR KEY PLAN: 1B TO 5B (CAR PARKING)

ALL SLAB THICKNESS = 150MM THK. Unless Otherwise Stated

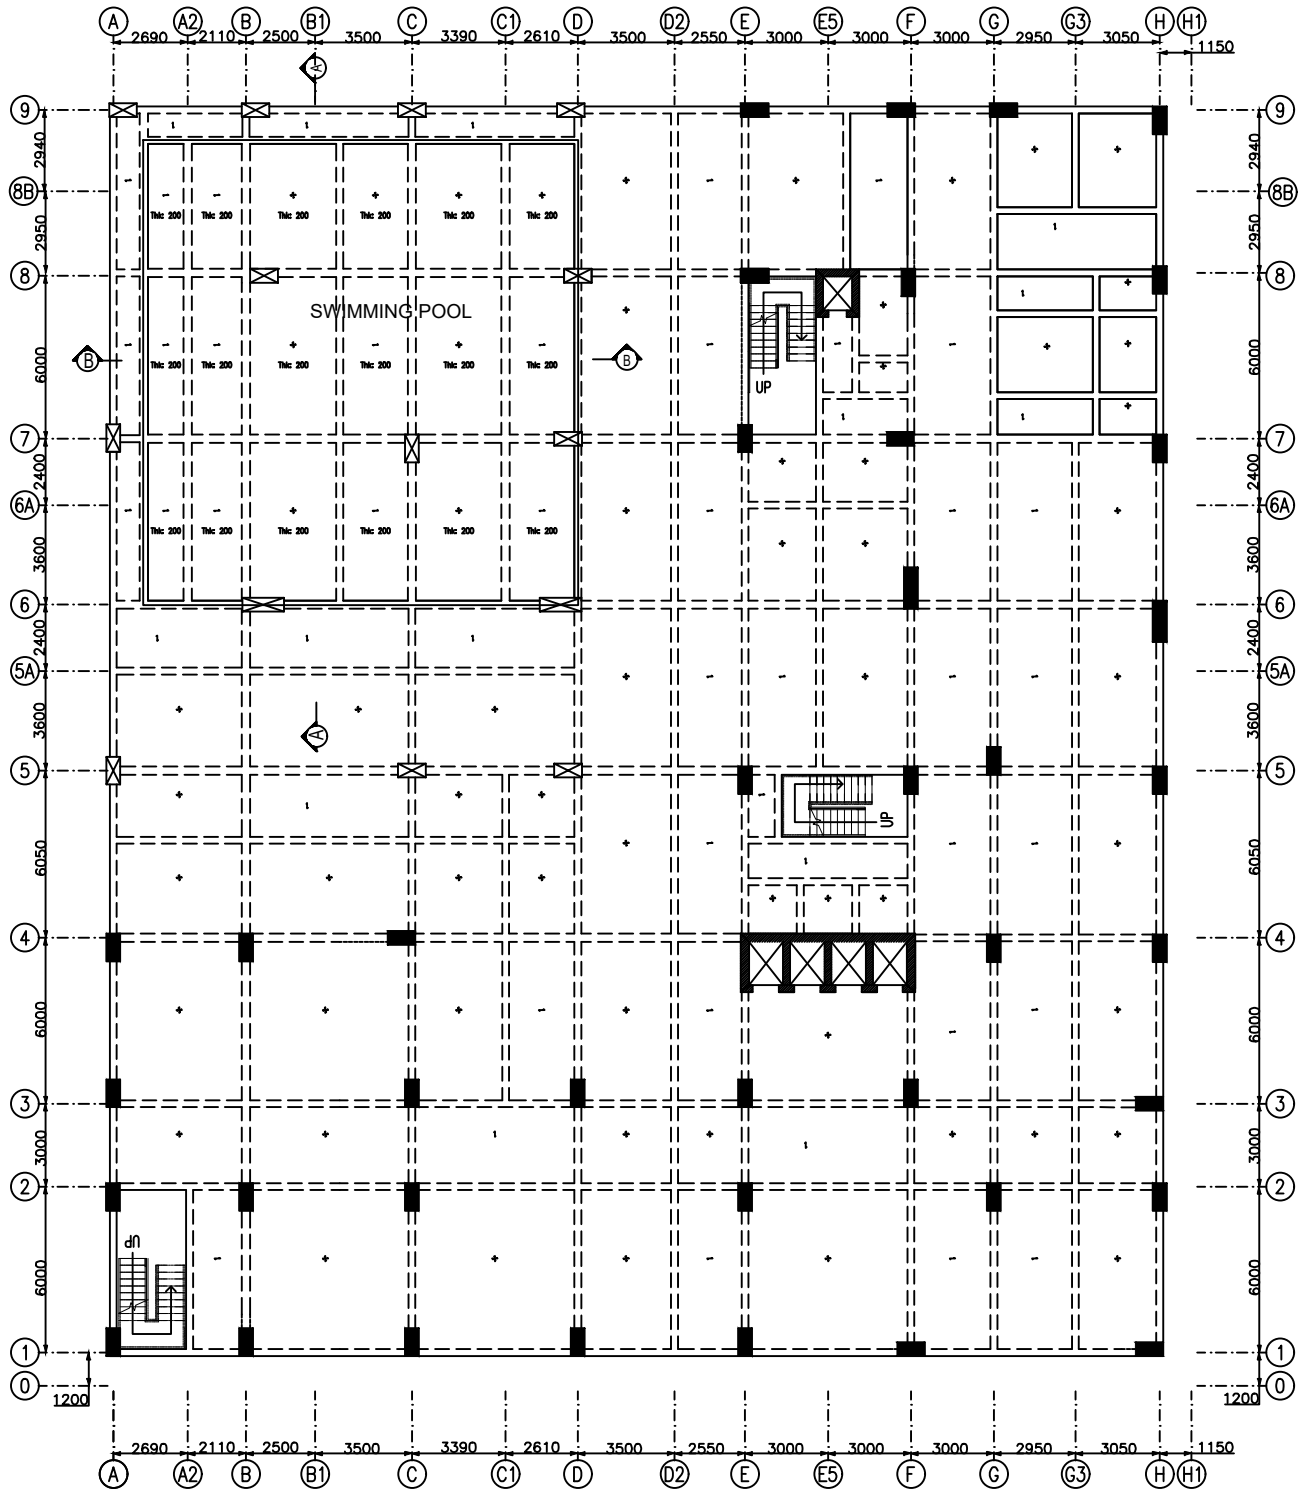


FLOOR KEY PLAN: 6B (PODIUM)

ALL SLAB THICKNESS = 150MM THK. UNLESS OTHERWISE STATED

ALL TOILETS HAVE DROP OF 50mm


SWIMMING POOL DROP = 1500mm

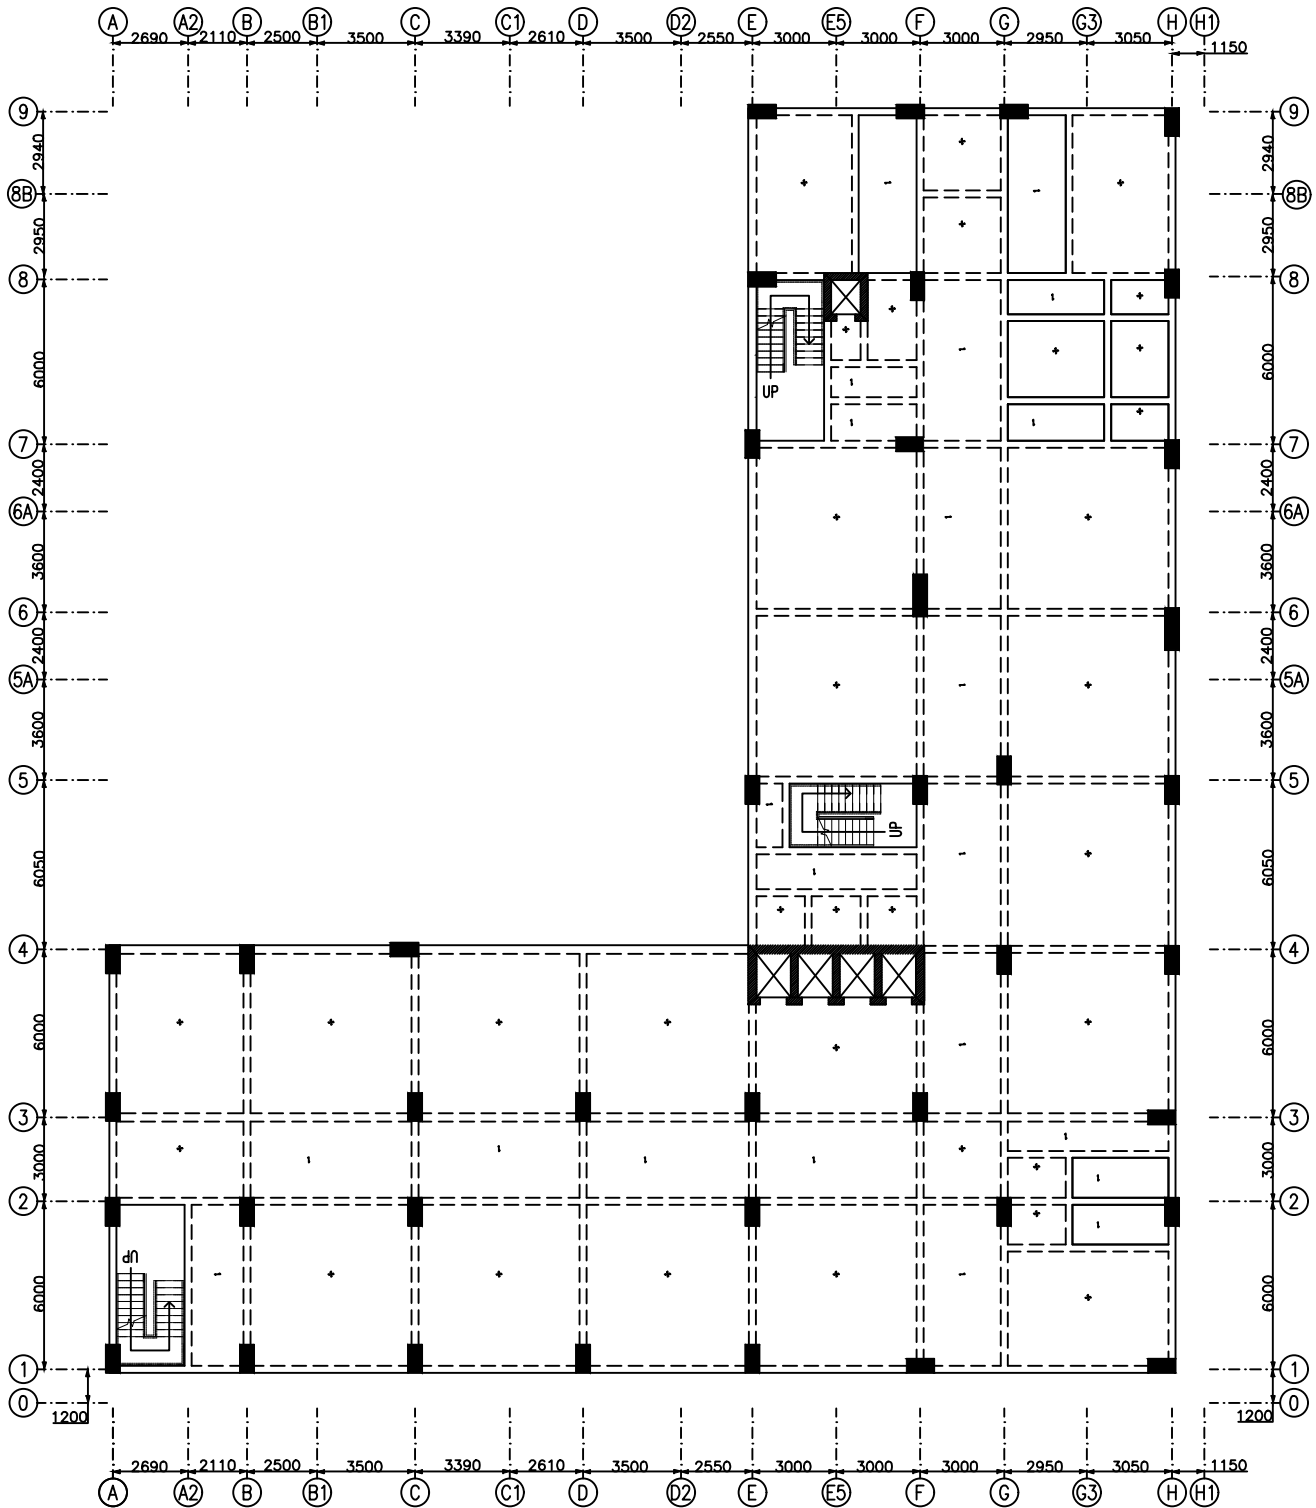

FLOOR KEY PLAN: 7B TO 9B (Offices)

ALL SLAB THICKNESS = 150MM THK. Unless Otherwise Stated


ALL TOILETS & WUDHU AREA HAVE DROP OF 50mm

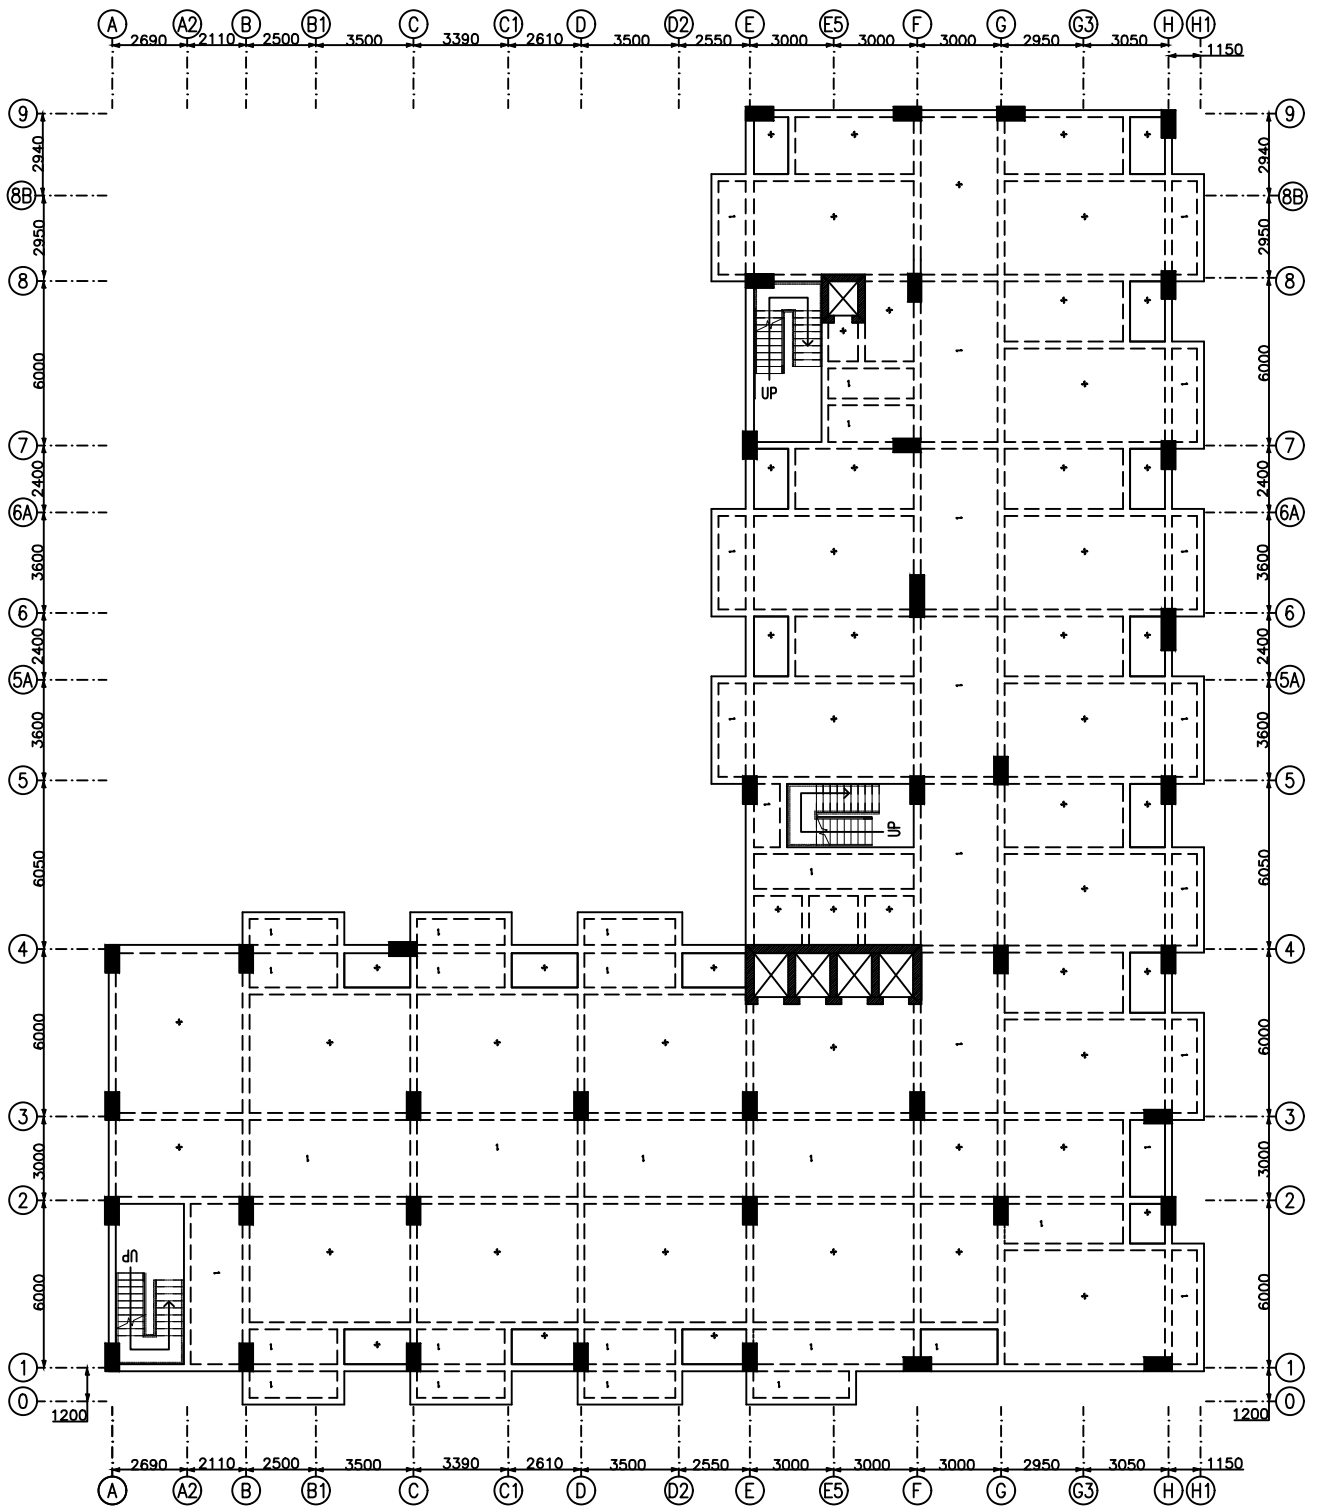

FLOOR KEY PLAN: 10B TO 19B (Hotel Rooms)

ALL SLAB THICKNESS = 150MM THK. UNLESS OTHERWISE STATED


ALL TOILETS HAVE DROP OF 50mm

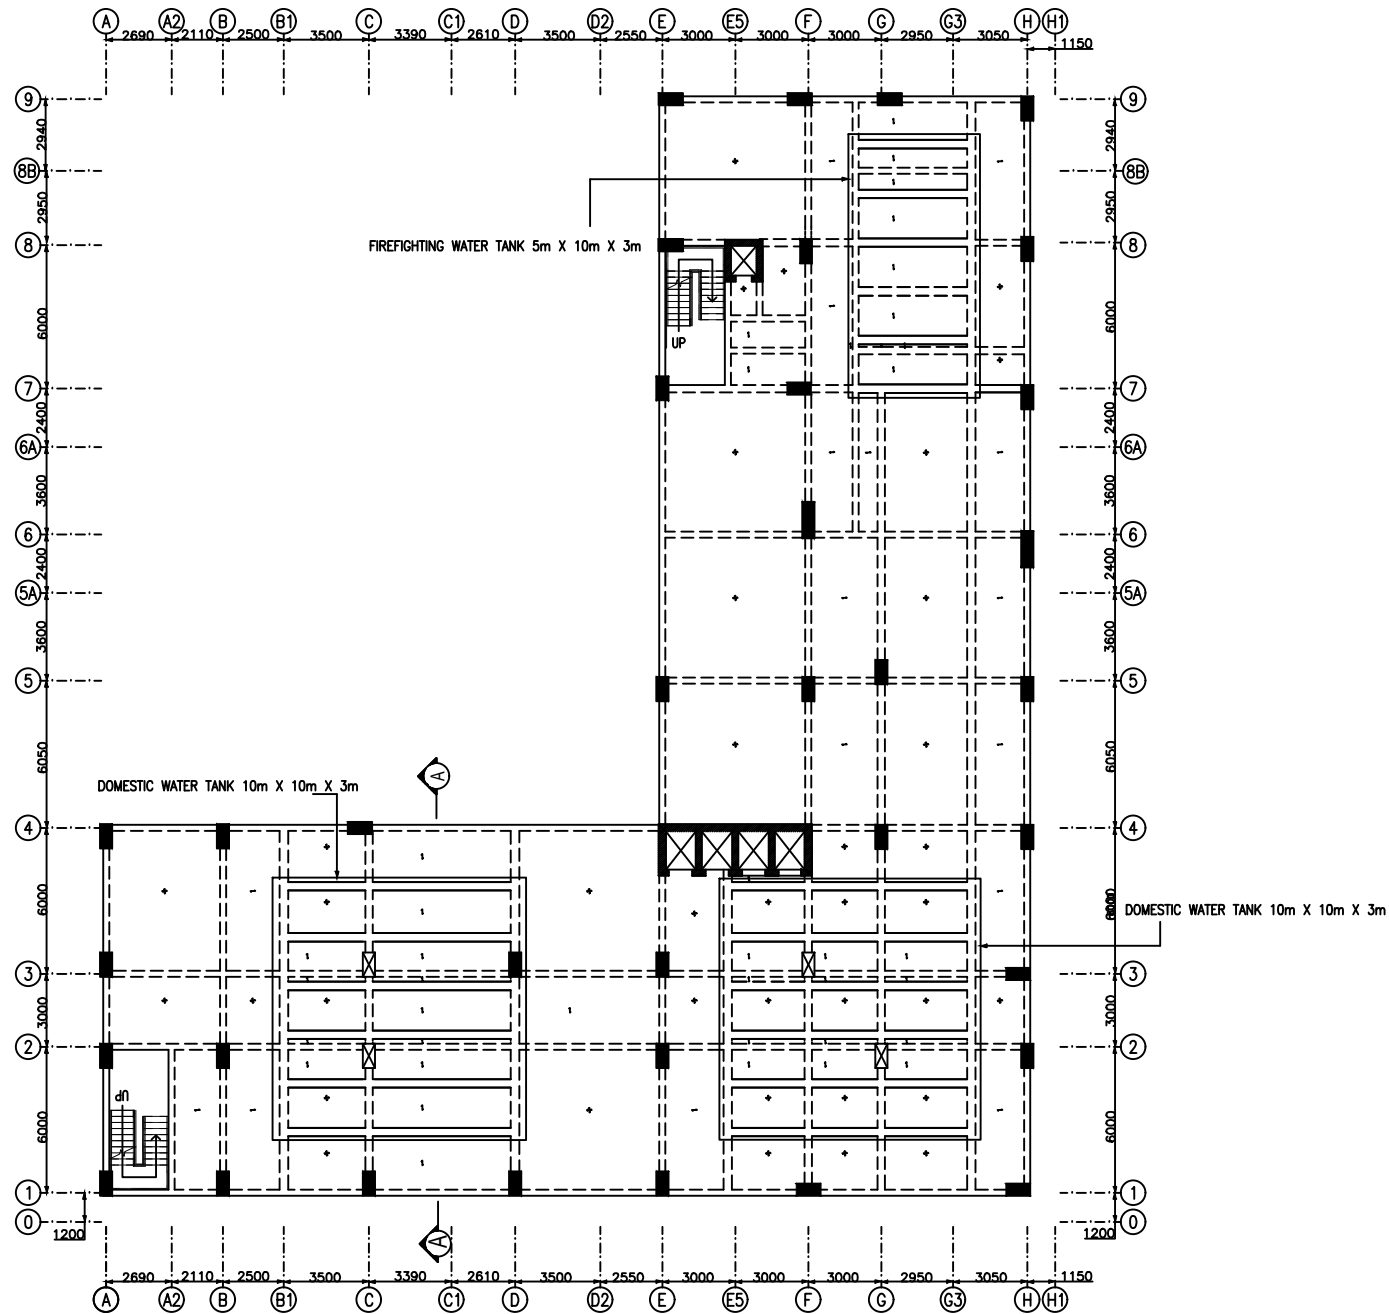

FLOOR KEY PLAN: 20B


ALL SLAB THICKNESS = 150MM THK. Unless Otherwise Stated

WATER TANK PLINTH BEAM SPACING = 2000mm

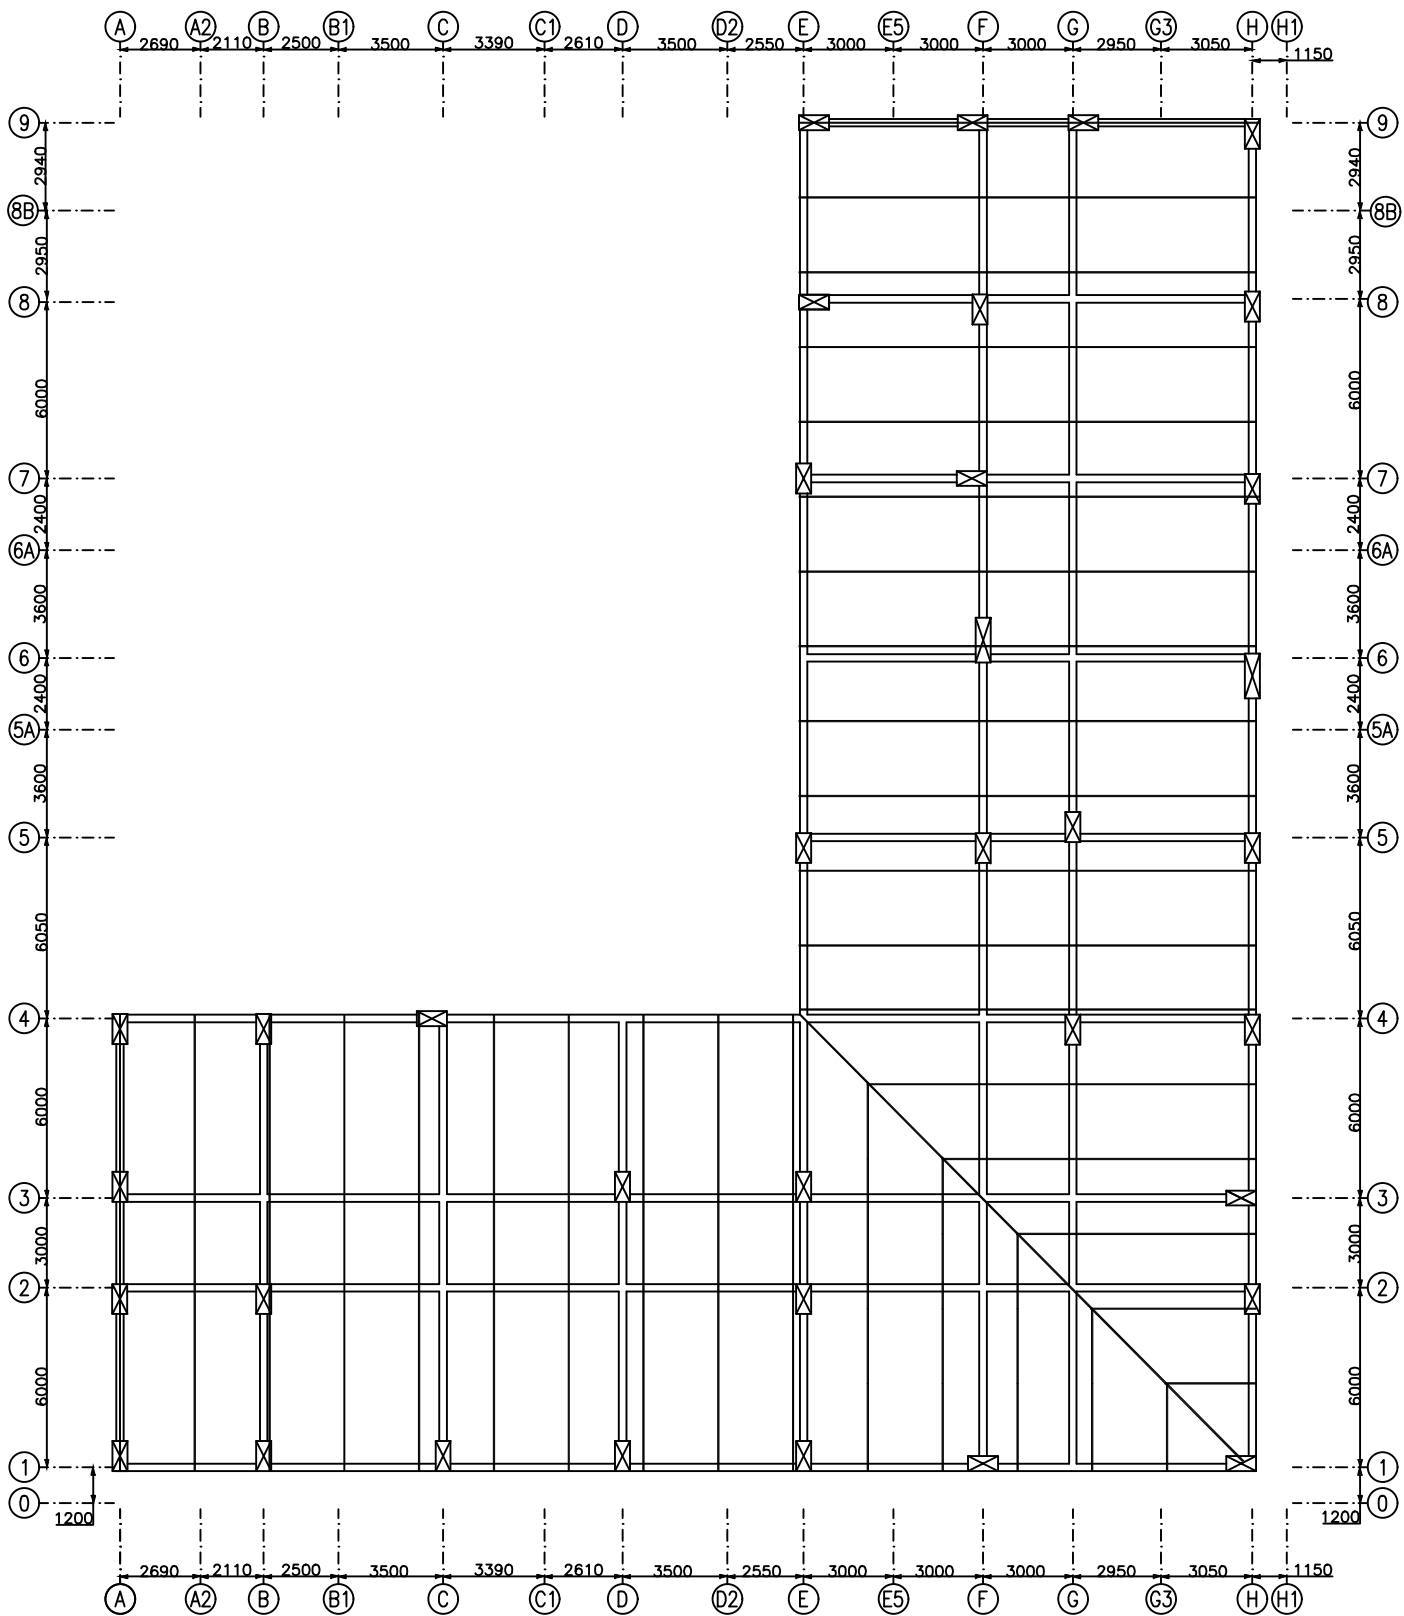


FLOOR KEY PLAN: RB (Rooftop & Truss Spacing)


TRUSS SPACING = 2500mm

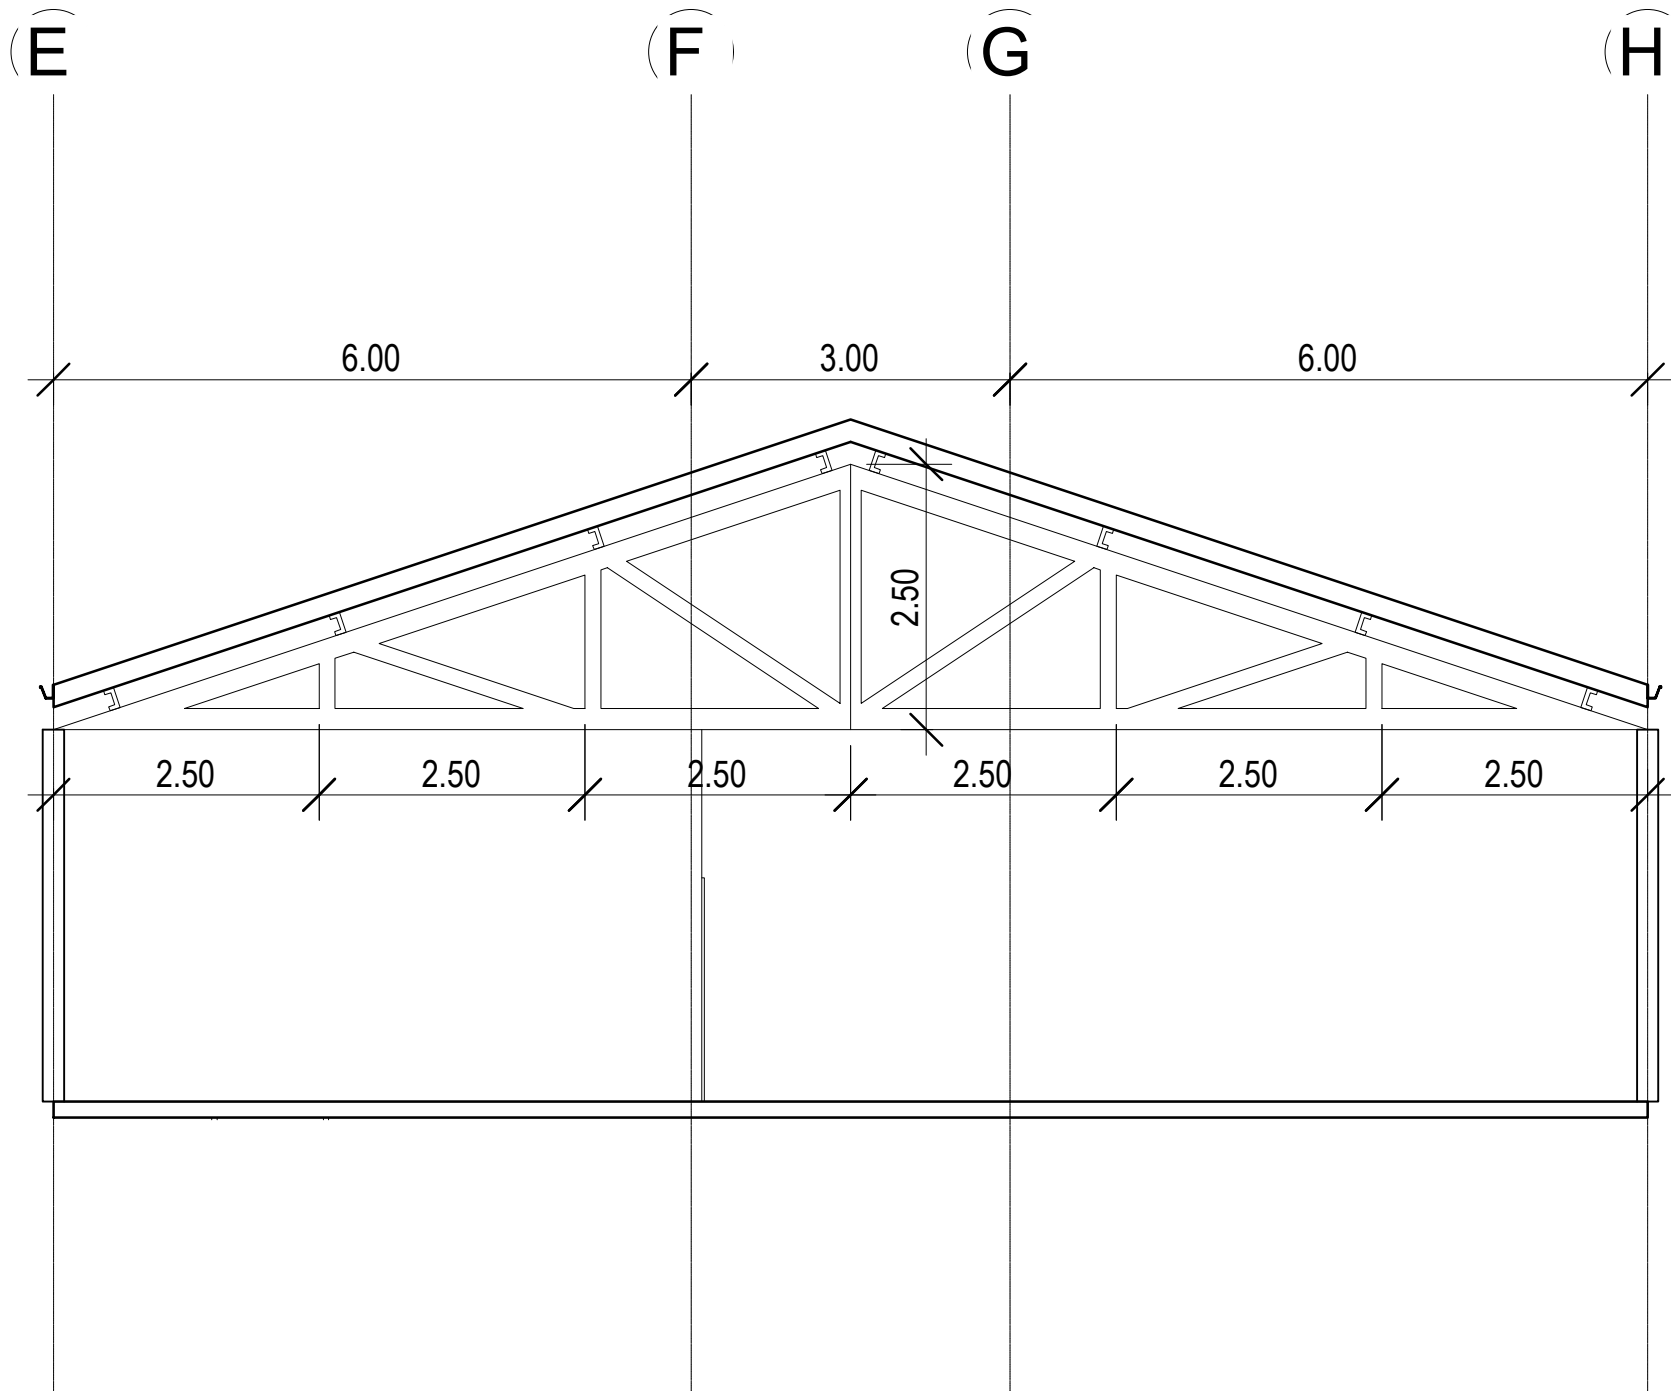











PILECAP	PILECAP DIMENSION			REINFORCEMENT			NO. of PILES	PILE SIZE (mm)	CAPACITY of PILE (tonnes)
MARK	B,mm	L,mm	H,mm	XDirBar	YDirBar	TIES			
P1	800	1800	300	8T12	4T12	2T6	1	500 Dia	280
P2	1800	800	300	4T12	8T12	2T6	1	500 Dia	280
P3	2300	800	600	10T12	15T12	4T6	2	500 Dia	280
P4	800	2300	600	15T12	10T12	4T6	2	500 Dia	280
P5	800	2300	1450	25T16	9T16	13T6	2	500 Dia	280
P6	850	2300	600	15T12	10T12	4T6	2	500 Dia	280
P7	2300	2099	2000	21T20	22T20	18T6	3	500 Dia	280
P8	2434	2233	1650	28T16	30T16	15T6	3	500 Dia	280
P9	2233	2434	1650	30T16	28T16	15T6	3	500 Dia	280
P10	2300	2300	1950	23T20	22T20	18T6	4	500 Dia	280
P11	2300	2300	1950	22T20	23T20	18T6	4	500 Dia	280
P12	2300	2300	2000	23T20	23T20	18T6	4	500 Dia	280
P13	2950	2950	2200	33T20	32T20	20T6	5	500 Dia	280
P14	2950	2950	2200	32T20	33T20	20T6	5	500 Dia	280
P15	2150	2300	750	31T12	29T12	6T6	4	500 Dia	280
P16	6800	2650	950	35T12	91T12	8T6	15	500 Dia	280


FOUNDATION REINFORCEMENT SCHEDULE

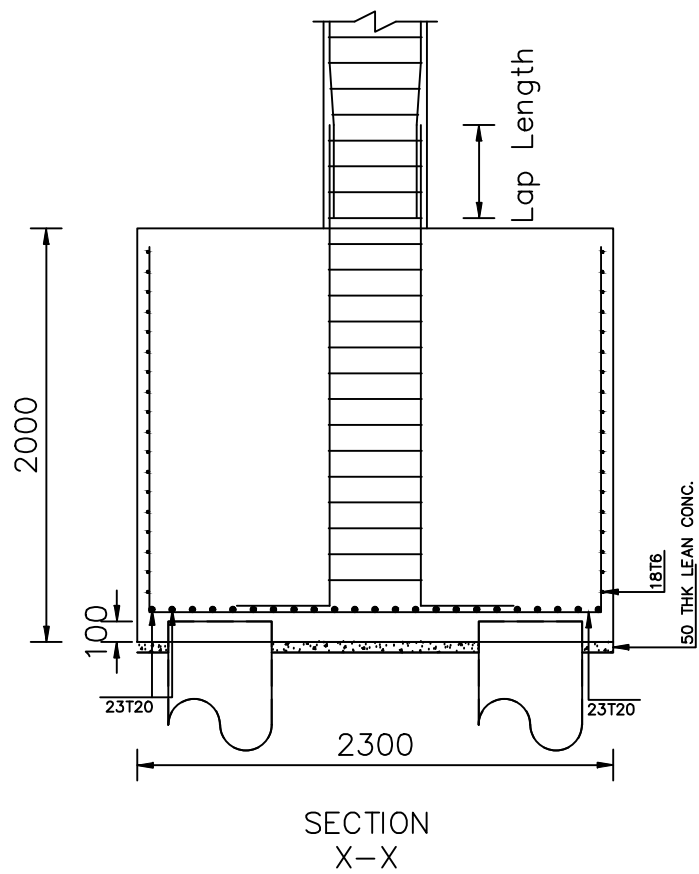

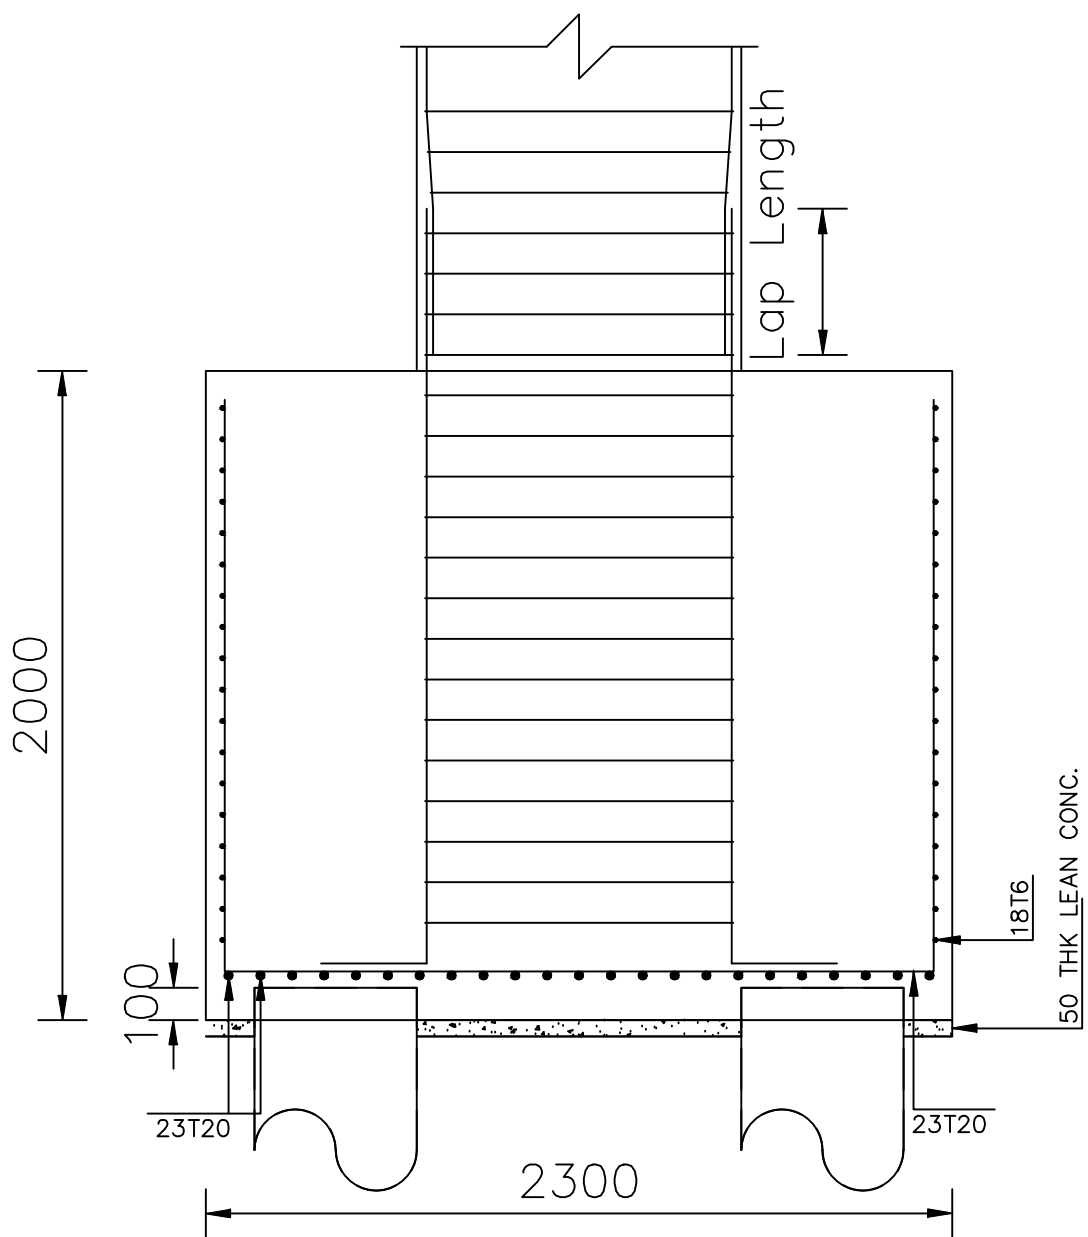


SECTION
Y-Y


COLUMN MARK		C1: (1,A)	C2: (1,B)	C3: (1,C)	C4: (1,D)	C5: (1,E)
FLOOR						
RB To 20B						
	MAIN BAR	16T16	16T16	16T16	16T16	16T16
	OUTER TIES	T10 – 100	T10 – 100	T10 – 100	T10 – 100	T10 – 100
	INNER TIES	6T10 – 100	6T10 – 100	6T10 – 100	6T10 – 100	6T10 – 100
	COL. SIZE	500 X 1500	500 X 1500	500 X 1500	500 X 1500	500 X 1500
20B To 19B						
	MAIN BAR	16T16	16T16	16T16	16T16	16T16
	OUTER TIES	T10 – 100	T10 – 100	T10 – 100	T10 – 100	T10 – 100
	INNER TIES	6T10 – 100	6T10 – 100	6T10 – 100	6T10 – 100	6T10 – 100
	COL. SIZE	500 X 1500	500 X 1500	500 X 1500	500 X 1500	500 X 1500


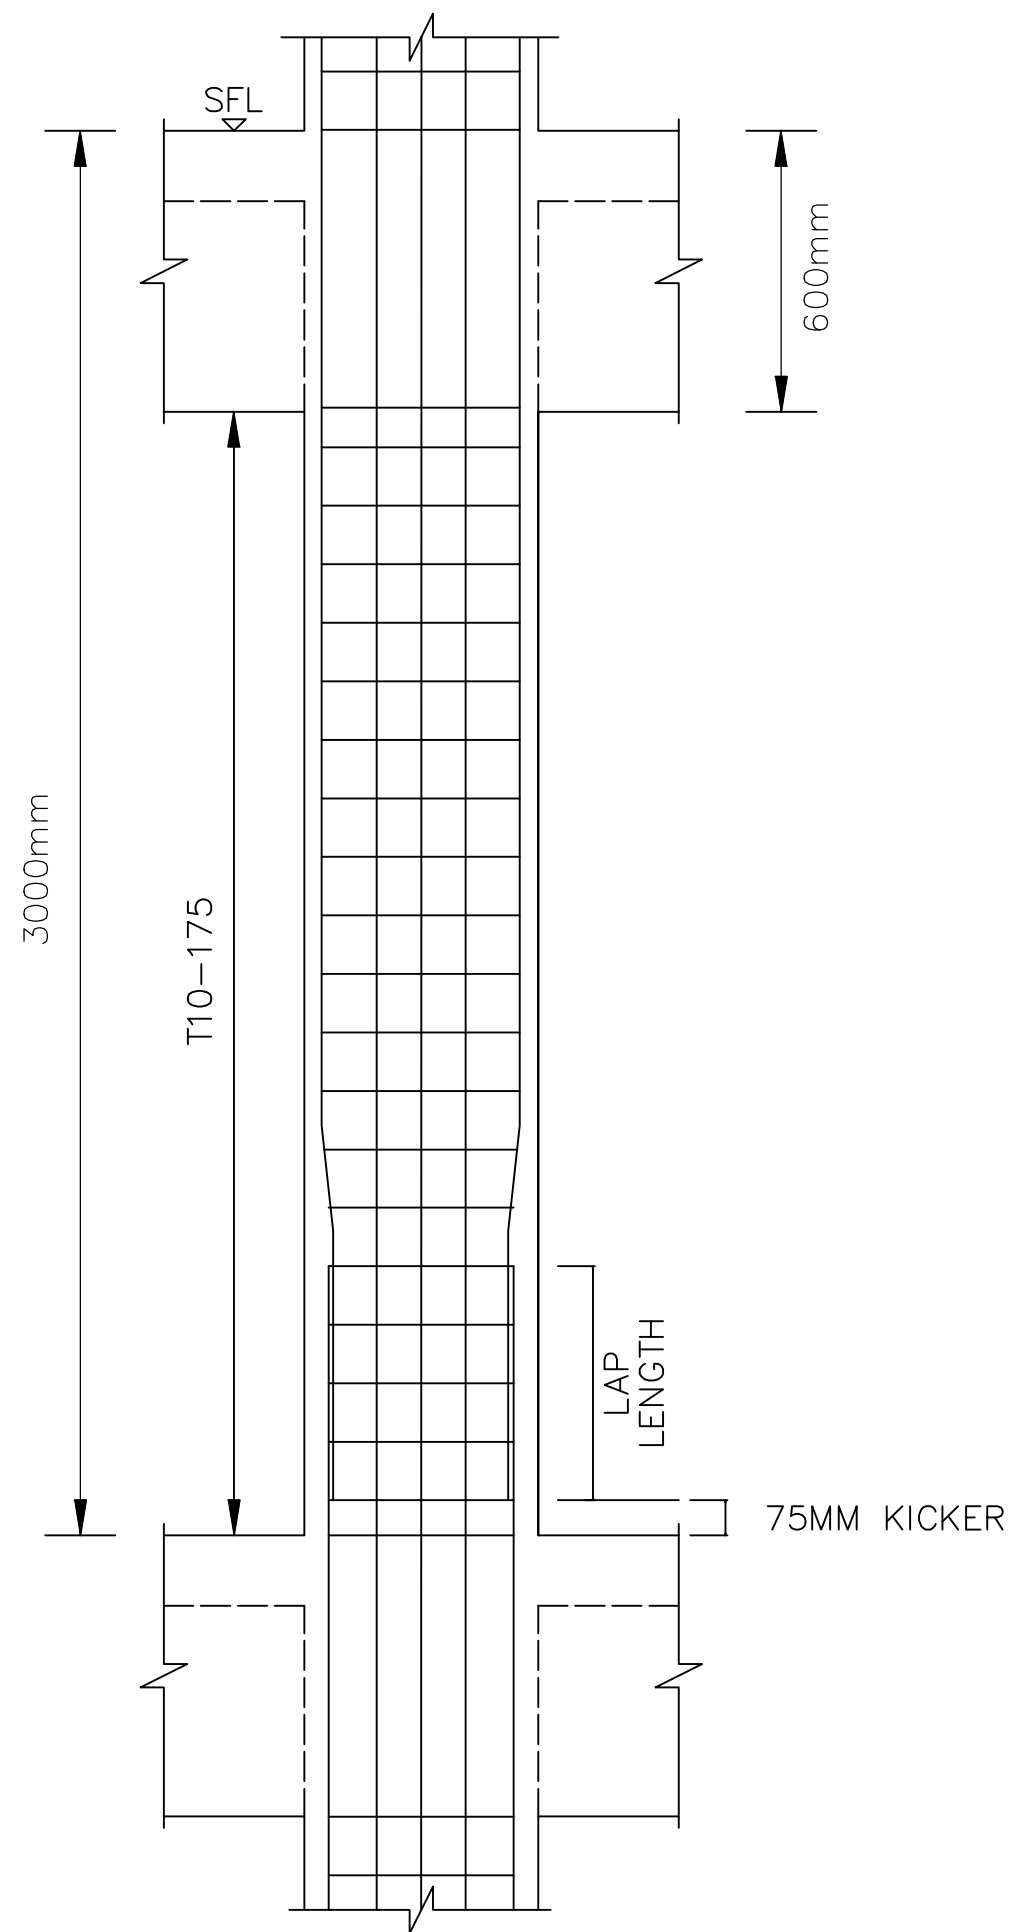


COLUMN
ELEVATION DETAILING



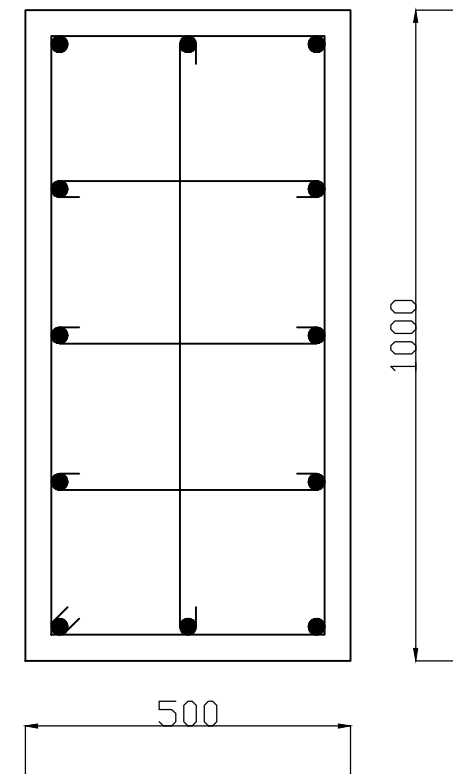


MAIN BAR = 12T20
 OUTER TIES = T10 - 175
 INNER TIES = 4T10 - 175
 COLUMN SIZE = 500 X 1000
 LAP LENGTH = $40 \times 40 = 1600\text{mm}$
 COVER = 40mm

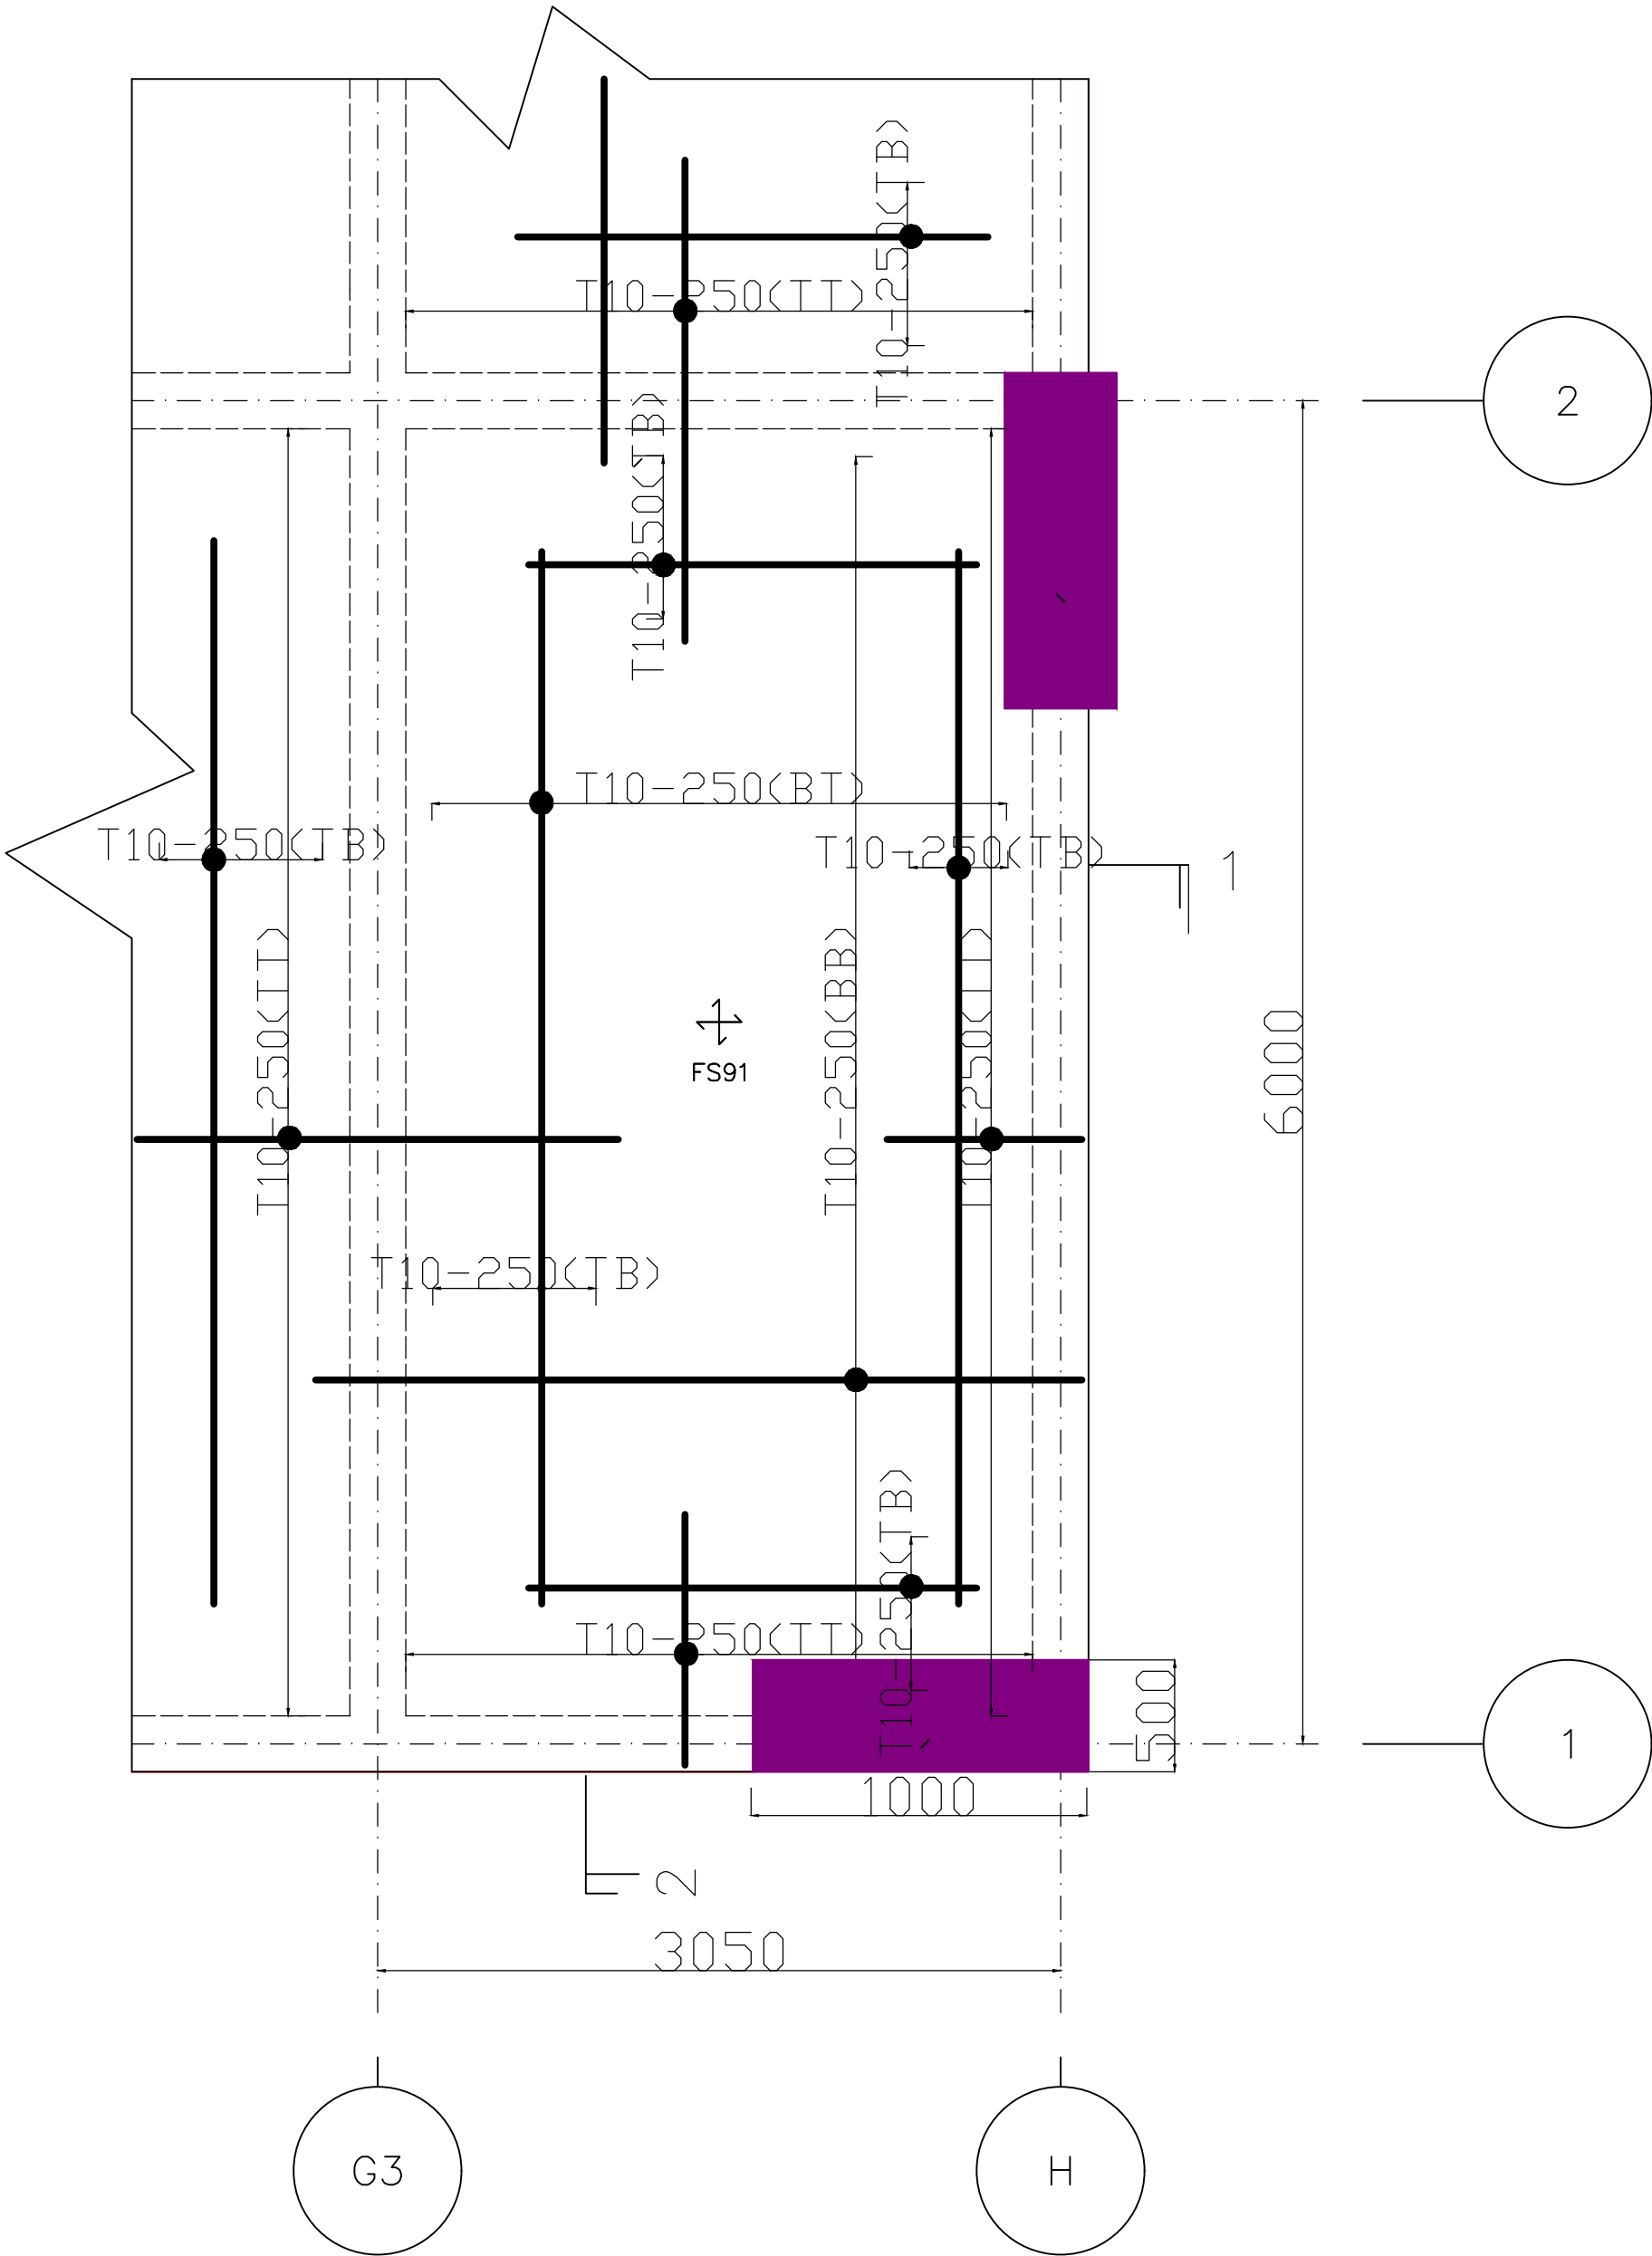

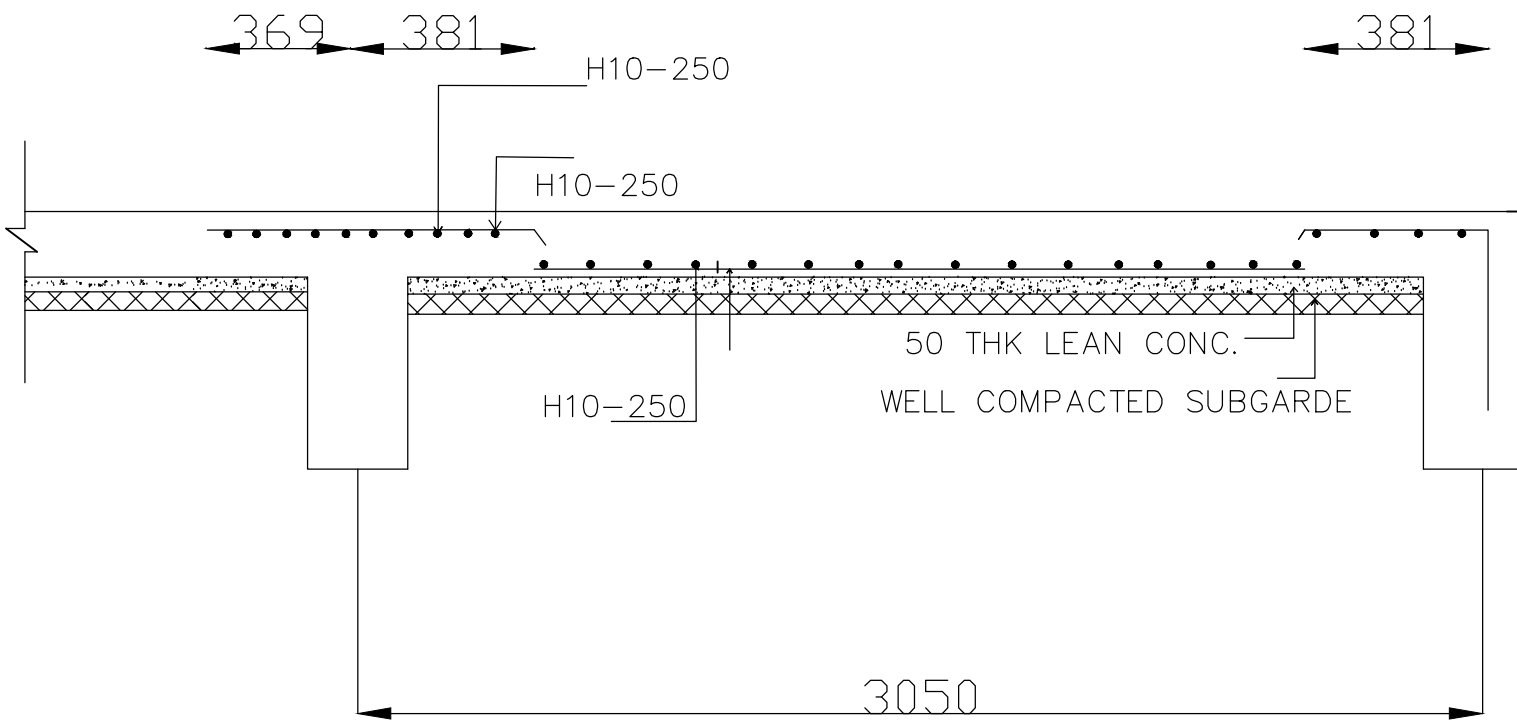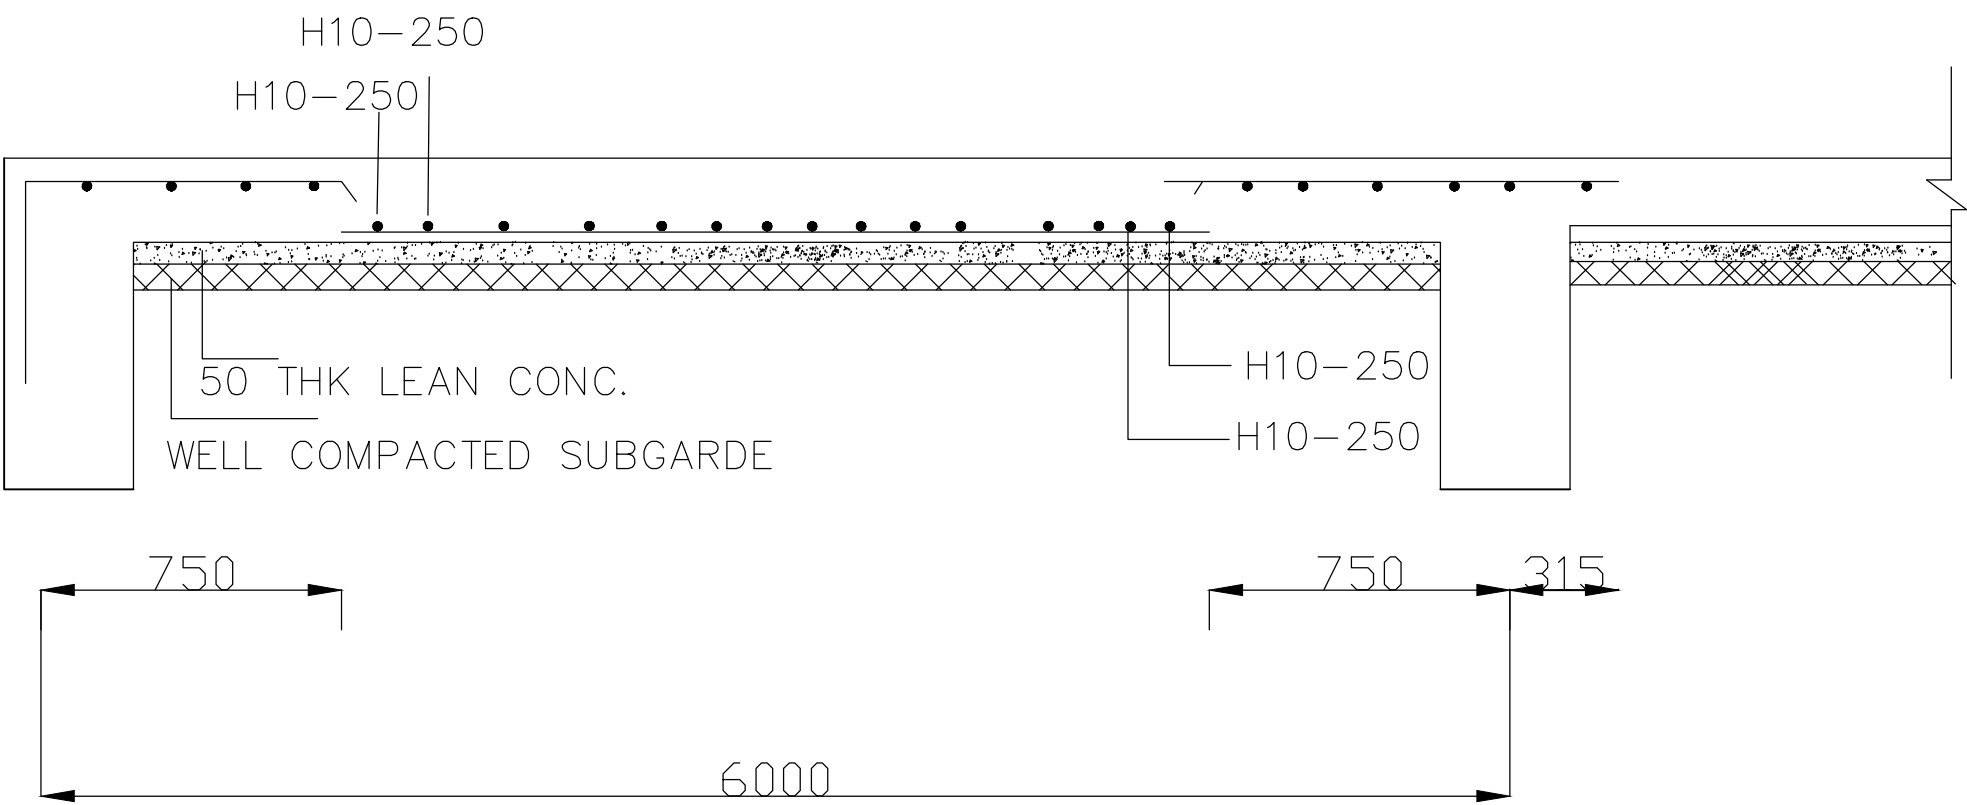

B — B

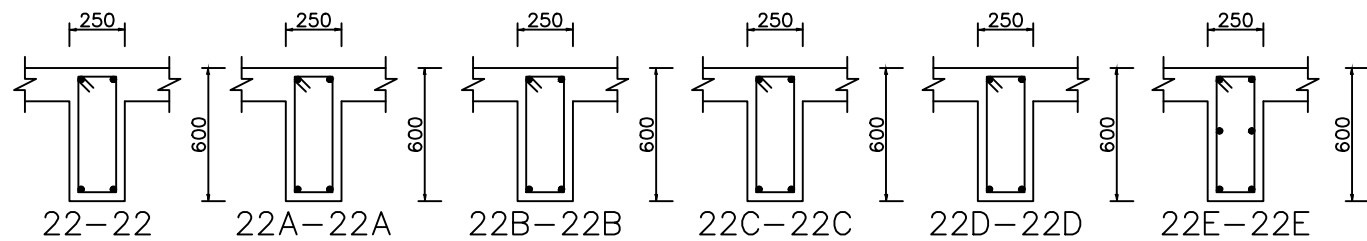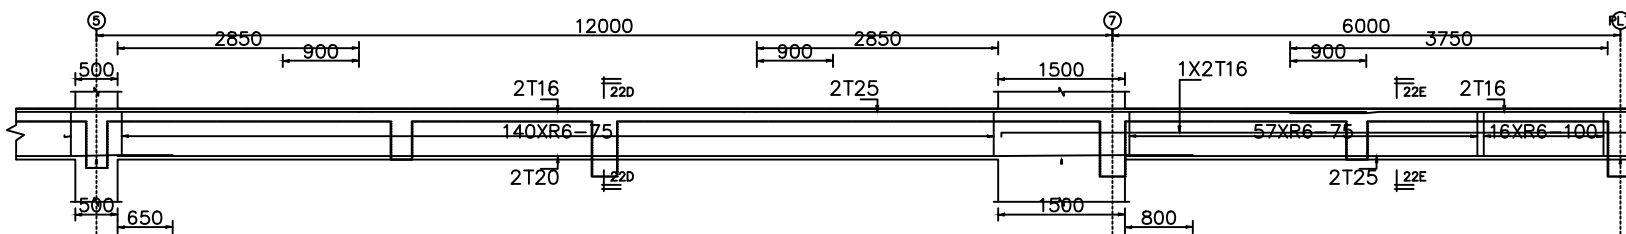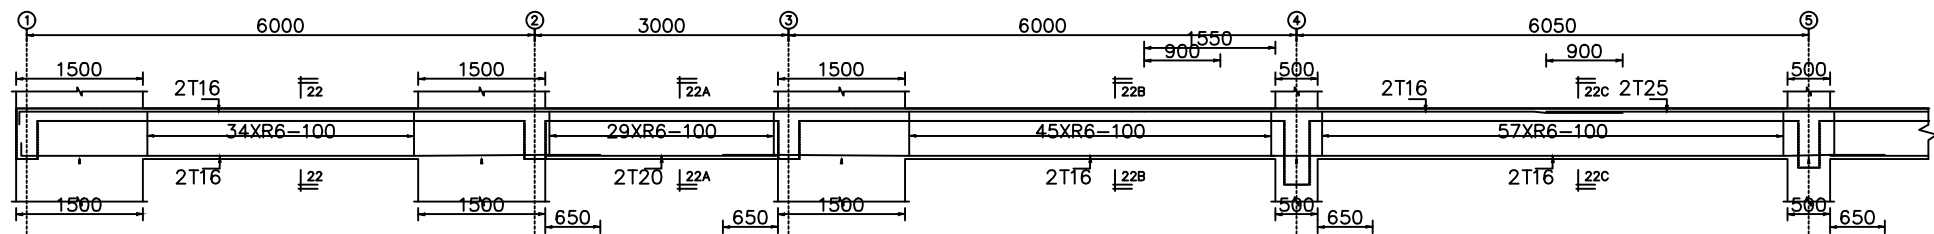

1B22(250x600)