



NOT STOCK CAN 1.85: power and CAN board behind the Waveshare ESP32-S3-Touch-LCD-1.85


Input: fuse, reverse polarity, load dump

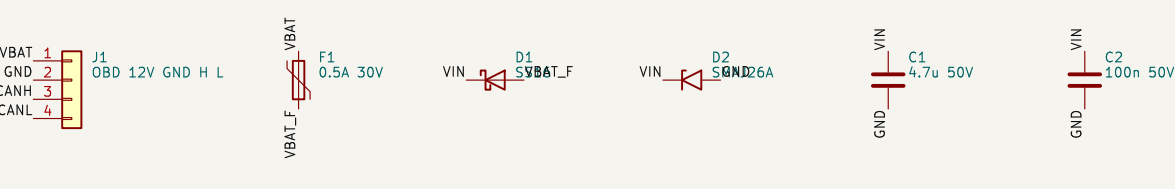


CAN transceiver, ESD, termination (JP1 open: the car's bus is terminated already)

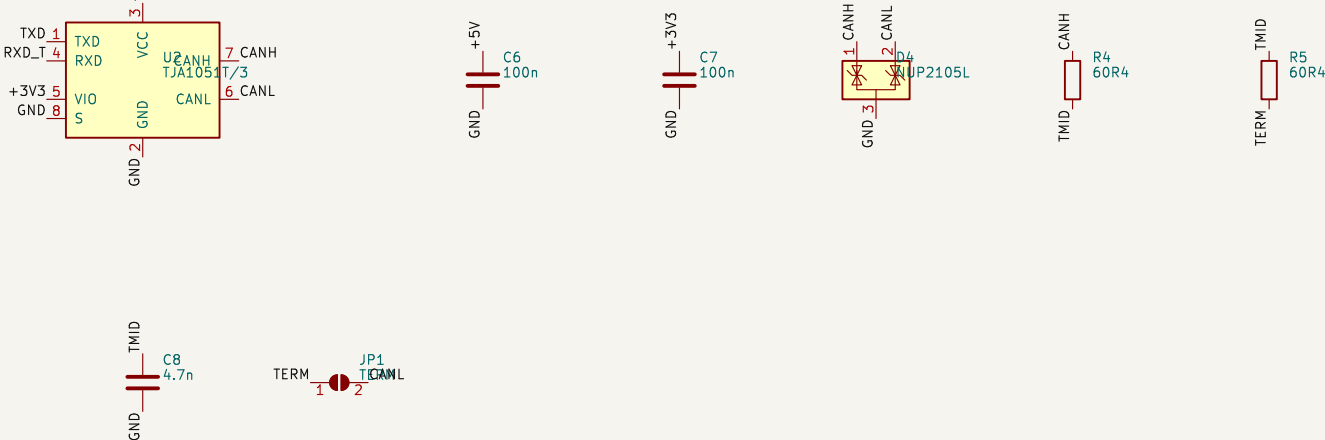

12 V -> 5 V

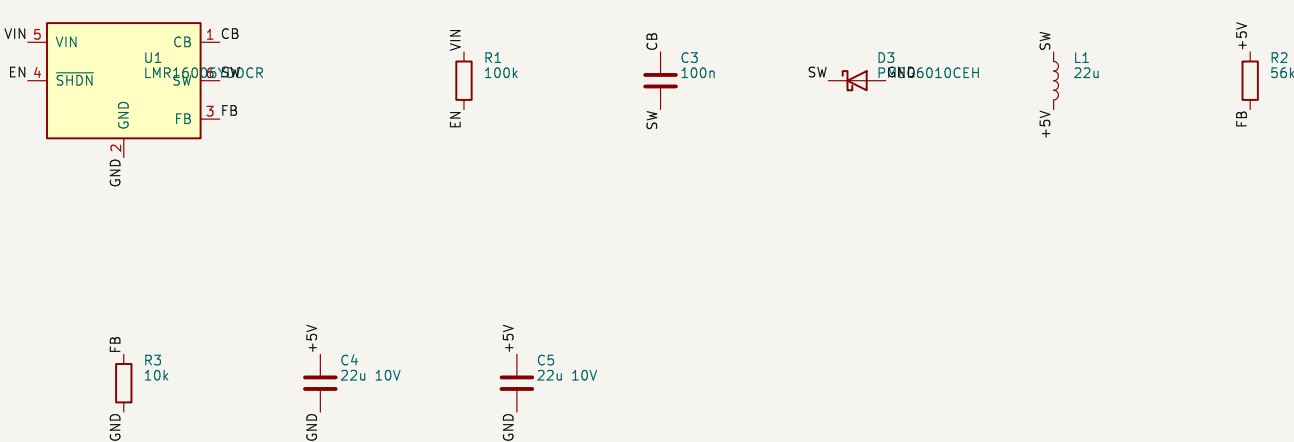

To the display ESP32-S3-Touch-LCD-1.85: UART socket (SH 1.0 cable, 1:1) and USB-C (5 V)

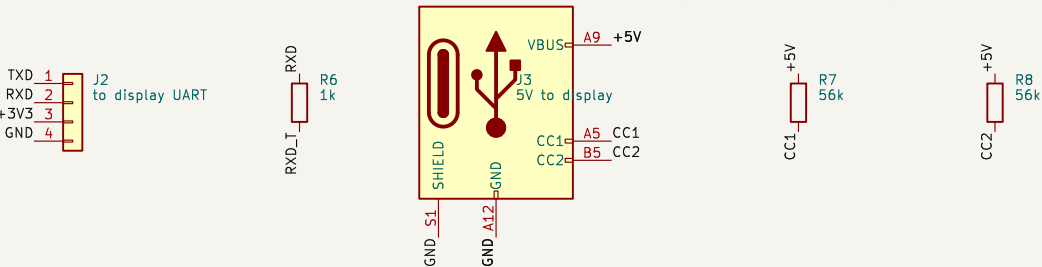

Mounting: the display's M2 holes



Supply flags



12 V -> 5 V, CAN (TJA1051T/3) for the round gauge		
Sheet: / File: notstock-can185.kicad_sch		
Title: NOT STOCK CAN 1.85		
Size: A3	Date:	Rev: 1
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1