

PREMIUM RANGE EQUIPMENT



WELCOME

NIMROD AFRICA LTD. situated at Nimrod House, 77 Parklands Road, Nairobi is a Private Limited Company, established in 1977 to provide sales and after sales service of Fire Fighting Equipment to both the Private and Corporate sectors in Kenya.


We supply of a unique range of portable fire equipment, fire hose reels, fire pumps, smoke & heat detectors, fire blankets, trolley units, fire alarm systems and signage products together with spares. Our policy of continuous investment in technology and product development allows us to offer our unique brand of quality products at exceptional value.



MADE IN THE UK



INNOVATION



TECHNICAL EXPERTISE



EFFICIENCY



QUALITY

FIRE EXTINGUISHERS

PREMIUM RANGE



MADE IN THE UK

Premium Range fire extinguishers are manufactured in UK.

Our advanced deep draw cylinder technology produces a unique, quality fire extinguisher with a robust safety record.



COLOUR CODED

Manufactured with a unique colour coding system in accordance with the guidelines in BS 7863:2009. In the event of a fire, your staff will easily and quickly be able to identify the extinguisher required. This is valuable and critical time saved.



FULLY CERTIFIED

The Premium Range extinguishers are manufactured under our BS EN ISO 9001 quality system and they are fully certified with third party approvals.



GUARANTEE

All of our Premium Range fire extinguishers come with a 5 year guarantee and are backed up with comprehensive technical support.

► FIRE EXTINGUISHERS

PREMIUM RANGE

Wet Chemical



MADE IN THE UK



COLOUR CODED



FULLY CERTIFIED



5 YEAR GUARANTEE

► Premium Range, the 3 and 6 litre wet chemical fire extinguishers are both LPCB certified to BS EN3. These stored pressure wet chemical extinguishers are specifically designed for use on class F fires involving cooking appliances containing oil but are also suitable for class A fires.

- Quality deep drawn cylinders.
- High quality heavy-duty brass valves.
- Thermoplastic lining.
- Colour coded handles and bases.
- Spray nozzle complies with the dielectric test of BS EN3-7:2004, clause 9.



CE
0086

► EWCS3H : 3 Litre Wet Chemical



i SUITABLE FOR FAT FRYERS UP TO 25 LITRES OIL CAPACITY

► EWCS6H : 6 Litre Wet Chemical



i SUITABLE FOR FAT FRYERS UP TO 75 LITRES OIL CAPACITY

Product Specifications

EXTINGUISHER :	3 Litre Wet Chemical	6 Litre Wet Chemical
PRODUCT CODE :	EWCS3H	EWCS6H
MEDIUM :	Wet Chemical	Wet Chemical
PROPELLANT :	Nitrogen gas	Nitrogen gas
FIRE RATING :	25F 8A	75F 13A
OPERATING TEMPERATURE :	+5°C to +60°C	+5°C to +60°C
OPERATING PRESSURE :	8 bar at 20°C	8 bar at 20°C
AVERAGE DISCHARGE TIME :	28.4 seconds	51.3 seconds
HEIGHT & DIAMETER :	Height 353mm Diameter 160mm	Height 517mm Diameter 160mm
FILLED WEIGHT & EMPTY WEIGHT :	Filled 6.68kg Empty 3.10kg	Filled 11.08kg Empty 4.16kg
PACKING SPEC (HxWxD) :	529 x 177 x 177mm	529 x 177 x 177mm
REFILL PART NUMBER :	X4206	X4207

► FIRE EXTINGUISHERS

ABC Powder

PREMIUM RANGE



MADE IN THE UK



COLOUR CODED



FULLY CERTIFIED



GUARANTEE

► Part of our UK manufactured Premium Range, the 12kg ABC Powder fire extinguisher is Kitemark certified to BS EN3. The stored pressure fire extinguisher is suitable for use on class A, B and C fires in offices, commercial premises and industrial premises. It is highly effective against petrol and volatile liquids which makes them ideal for vehicle protection.



► EPS12 : 12kg ABC Powder

- Quality deep drawn cylinder.
- High quality heavy-duty brass valve.
- Colour coded handle and base.



KM 57904
BS EN 3



► EXTINGUISHER :	12kg ABC Powder
► PRODUCT CODE :	EPS12
► MEDIUM :	ABC 40 Dry Powder
► PROPELLANT :	Nitrogen gas
► FIRE RATING :	43A 233B C
► OPERATING TEMPERATURE :	-20 °C to +60 °C
► OPERATING PRESSURE :	15 bar at 20 °C
► AVERAGE DISCHARGE TIME :	20.7 seconds
► HEIGHT & DIAMETER :	Height 703mm Diameter 189mm
► FILLED WEIGHT & EMPTY WEIGHT :	Filled 17.3kg Empty 5.1kg
► PACKING SPEC (HxWxD) :	715 x 205 x 205mm

► FIRE EXTINGUISHERS

ABC Powder

PREMIUM RANGE



MADE IN THE UK



COLOUR CODED



FULLY CERTIFIED



GUARANTEE

► Part of our UK manufactured Premium Range, the 2kg ABC Powder fire extinguisher is Kitemark certified to BS EN3. The stored pressure fire extinguisher is suitable for use on class A, B and C fires in offices, commercial premises and industrial premises. It is highly effective against petrol and volatile liquids which makes them ideal for vehicle protection.

- Aluminium cylinder.
- High quality heavy-duty brass valve.
- Colour coded handle.



KM 57904
BS EN 3



0086

► EPS2 : 2kg ABC Powder



► EXTINGUISHER :	2kg ABC Powder
► PRODUCT CODE :	EPS2
► MEDIUM :	ABC 40 Dry Powder
► PROPELLANT :	Nitrogen gas
► FIRE RATING :	13A 70B C
► OPERATING TEMPERATURE :	-20°C to +60°C
► OPERATING PRESSURE :	15 bar at 20°C
► AVERAGE DISCHARGE TIME :	9.5 seconds
► HEIGHT & DIAMETER :	Height 391mm Diameter 108mm
► FILLED WEIGHT & EMPTY WEIGHT :	Filled 3.2kg Empty 1.2kg
► PACKING SPEC (HxWxD) :	393 x 159 x 117mm

FIRE EXTINGUISHERS

PREMIUM RANGE

Foam  



MADE IN THE UK



COLOUR CODED



FULLY CERTIFIED



GUARANTEE

› Part of our UK manufactured Premium Range, the 2 litre AFFF (foam) and 2 litre AFFF (foam) freeze protected fire extinguishers are Kitemark certified to BS EN3. The aqueous film forming foam (AFFF) extinguishers are suitable for use on class A and B fires in industrial and commercial premises.

- › Aluminium cylinders.
- › High quality heavy-duty brass valves.
- › Colour coded handles.
- › Spray nozzle complies with the dielectric test of BS EN3-7:2004, clause 9.



KM 57904
BS EN 3



0086



› EFS2 : 2 Litre Foam



› EFS2FP : 2 Litre Foam Freeze Protected

Freeze Protected
-10°C to +60°C

Product Specifications

EXTINGUISHER :	2 Litre Foam	2 Litre Foam Freeze Protected
PRODUCT CODE :	EFS2	EFS2FP
MEDIUM :	Aqueous Film Forming Foam	Aqueous Film Forming Foam
PROPELLANT :	Nitrogen gas	Nitrogen gas
FIRE RATING :	5A 34B	5A 34B
WATER & AFFF CONTENT :	1.88 Litres Water 0.12 Litres AFFF	1.40 Litres Water 0.20 Litres AFFF
ANTI-FREEZE CONTENT :	N/A	0.40 Litres
OPERATING TEMPERATURE :	+5°C to +60°C	-10°C to +60°C
OPERATING PRESSURE :	15 bar at 20°C	15 bar at 20°C
AVERAGE DISCHARGE TIME :	14.1 seconds	14.1 seconds
HEIGHT & DIAMETER :	Height 391mm Diameter 108mm	Height 391mm Diameter 108mm
FILLED WEIGHT & EMPTY WEIGHT :	Filled 3.2kg Empty 1.2kg	Filled 3.2kg Empty 1.2kg
PACKING SPEC (HxWxD) :	393 x 159 x 117mm	393 x 159 x 117mm
REFILL PART NUMBER :	X4203	N/A

> FIRE EXTINGUISHERS

PRESTIGE

Water



POLISHED FINISH

- > With a stunning mirrored finish, the Prestige Range is the ideal fire extinguisher for the modern and elegant location.

- > Corrosion-resistant stainless steel cylinder.
- > Stainless steel handles.
- > Colour coded header labels.
- > Nickel plated brass valves.

Available in 6 and 9 litre models, these stored pressure water extinguishers are specifically designed for use on class A fires.

CE
0036



> EWS6PS : 6 Litre Water Polished Stainless Steel



> EWS9PS : 9 Litre Water Polished Stainless Steel

Product Specifications

EXTINGUISHER :	6 Litre Water Polished Stainless Steel	9 Litre Water Polished Stainless Steel
PRODUCT CODE :	EWS6PS	EWS9PS
MEDIUM :	Water	Water
PROPELLANT :	Nitrogen gas	Nitrogen gas
FIRE RATING :	13A	13A
OPERATING TEMPERATURE :	+0°C to +60°C	+0°C to +60°C
OPERATING PRESSURE :	15 bar at 20°C	15 bar at 20°C
AVERAGE DISCHARGE TIME :	15 seconds	15 seconds
HEIGHT & DIAMETER :	Height 450mm Diameter 162mm	Height 525mm Diameter 184mm
FILLED WEIGHT :	Filled 10.30kg	Filled 14.50kg
PACKING SPEC (HxWxD) :	570 x 175 x 170mm	640 x 205 x 200mm

FIRE EXTINGUISHERS

PRESTIGE

Foam  



POLISHED FINISH

› With a stunning mirrored finish, the Prestige Range is the ideal fire extinguisher for the modern and elegant location.

- › Corrosion-resistant stainless steel cylinder.
- › Stainless steel handles.
- › Colour coded header labels.
- › Nickel plated brass valves.

Available in 6 and 9 litre models, these stored pressure foam extinguishers are specifically designed for use on class A and B fires.

CE
0036



› EFS6PS : 6 Litre Foam Polished Stainless Steel



› EFS9PS : 9 Litre Foam Polished Stainless Steel

Product Specifications

› EXTINGUISHER :	6 Litre Foam Polished Stainless Steel	9 Litre Foam Polished Stainless Steel
› PRODUCT CODE :	EFS6PS	EFS9PS
› MEDIUM :	Aqueous Film Forming Foam	Aqueous Film Forming Foam
› PROPELLANT :	Nitrogen gas	Nitrogen gas
› FIRE RATING :	13A 144B	21A 183B
› OPERATING TEMPERATURE :	+0°C to +60°C	+0°C to +60°C
› OPERATING PRESSURE :	12 bar at 20°C	12 bar at 20°C
› AVERAGE DISCHARGE TIME :	15 seconds	15 seconds
› HEIGHT & DIAMETER :	Height 450mm Diameter 162mm	Height 525mm Diameter 184mm
› FILLED WEIGHT :	Filled 10.30kg	Filled 14.50kg
› PACKING SPEC (HxWxD) :	570 x 175 x 170mm	640 x 205 x 200mm

› FIRE EXTINGUISHERS

PRESTIGE

Carbon Dioxide



POLISHED FINISH

› With a stunning mirrored finish, the Prestige Range is the ideal fire extinguisher for the modern and elegant location.

Available in a 2kg model, the stored pressure carbon dioxide extinguisher is specifically designed for use on class B and electrical fires.

- › Polished aluminium cylinder.
- › Stainless steel handle.
- › Colour coded header label.
- › Frost free horn.

CE
0086



› EC2FPA : 2kg CO2 Polished Aluminium

Product Specifications

› EXTINGUISHER :	2kg CO2 Polished Aluminium
› PRODUCT CODE :	EC2FPA
› MEDIUM :	Carbon Dioxide
› PROPELLANT :	Nitrogen gas
› FIRE RATING :	55B
› OPERATING TEMPERATURE :	-20 °C to +60 °C
› AVERAGE DISCHARGE TIME :	9.7 seconds
› HEIGHT & DIAMETER :	Height 500mm Diameter 117mm
› FILLED WEIGHT :	Filled 5.15kg
› PACKING SPEC (HxWxD) :	524 x 185 x 130mm

EXTINGUISHER STANDS

PRESTIGE

- › With a stunning mirrored finish, the Prestige Range fire extinguisher stands are ideal for the modern and elegant location.
- › Fabricated from strong tubular section mild steel.
- › Polished chrome finish.
- › Practical and stylish stands.
- › Available in two models: Single extinguisher and double extinguisher.
- › Adaptor bracket (BF007) available to fit 2kg CO2 extinguisher on single stand.



› MST1CR : Single Chrome Range Stand



› MST2CR : Double Chrome Range Stand



› BF007 : Adaptor Bracket

Product Specifications

› PRODUCT CODE :	MST1CR	MST2CR
› SIZE :	Single	Double
› HOLDS :	1 x 6 / 9 litre extinguisher or 1 x 2kg CO2	1 x 6 / 9 litre extinguisher & 1 x 2kg CO2
› FINISH :	Chrome	Chrome
› DIMENSIONS :	605 x 430 x 285mm	605 x 430 x 285mm



PRESTIGE RANGE SIGNS

- › Silver finish signs are the perfect complement to the Prestige Range and are ideal for use in locations such as hotels, reception areas, corporate offices and conference halls. **Contact us for details**

► FIRE BLANKETS

PREMIUM RANGE



MADE IN THE UK



3-PLY MATERIAL




FULLY CERTIFIED



5 YEAR GUARANTEE

► All of our fire blankets, have the essential performance requirement in that they must extinguish a cooking oil fire (as detailed in BS EN 1869:1997).

► Unique 3-ply material. Two layers of woven glass-fibre fabric with an inner layer of fire retardant film.
 ► Compact and practical.

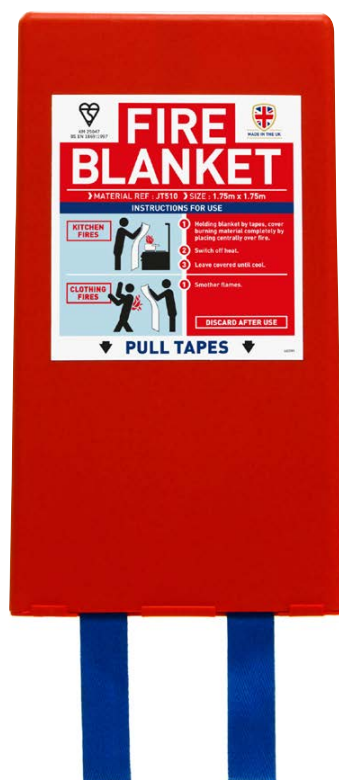

THE FACTS

The essential performance requirement of a fire blanket is to extinguish a cooking oil fire (as detailed in BS EN 1869 : 1997).

Therefore the blanket must :

- Be flexible, with good draping qualities to eliminate oxygen from the burning oil.
- Allow the oil to cool gradually to below its self-ignition temperature - and not re-ignite when the blanket is removed after 17 minutes.
- Control the cooling process.

WELDING DRAPES AND CURTAINS


- Available in two materials
 NG200 - For general duty use
 GPF1300 - For heavy duty use

► NG200 (Neoprene coated glass fibre)

Weight : 890 g/m²
 Thickness : 0.55mm
 Temperature range : -50°C to +107°C Portable, multi-purpose and waterproof. Brass eyelets can be fitted to hang / secure.

► GPF1300 (Coated glass fibre)

Weight : 1300 g/m²
 Thickness : 1.7mm
 High performance up to +1000°C
 Portable and multi-purpose.
 Brass eyelets can be fitted to hang / secure.

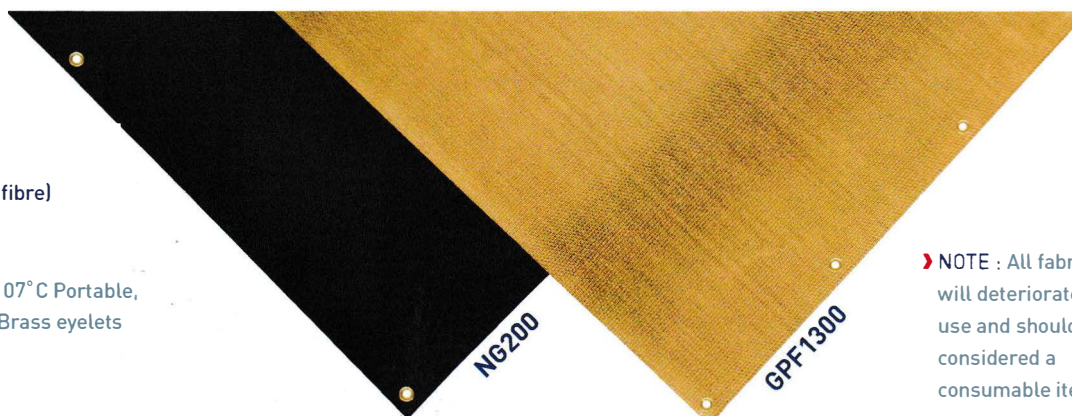

NG200

► General duty - grinding and mild weld splatter

GPF1300

► High temperature resistance

► NOTE : All fabrics will deteriorate with use and should be considered a consumable item

› FIRE ACCESSORIES

Fire Point Trolley

› Ideal for building sites, petrol station forecourts and factories our fire point trolleys provide highly visible and easily accessible mobile storage trolleys for fire fighting equipment. Strong and durable our fire point trolleys have space available for signs and alarms / bells.

› Fabricated from strong tubular section mild steel with a red epoxy polyester powder coated finish.
 › Polypropylene wheels with rubber compound thread.
 › Suitable for up to 3 fire extinguishers.

› Large back plate with room to display signage, an alarm or a site or building zone plan.
 › Supplied in easy to assemble 2 piece design, for easy transportation.



Polypropylene wheels



Easy to assemble

Product Specifications

› PRODUCT CODE :	FPT5
› DESCRIPTION :	Fire point trolley
› HOLDS :	3 extinguishers
› SIZE (HxWxD) :	1770 x 730 x 540mm

> FIRE ACCESSORIES


Howler Alarm

- > **Site Alert Howler alarm**, a battery operated site evacuation alarm. Reliable, simple and tough, the Site Alert is noisy at 100dB at 1 metre and has a high intensity LED red flashing beacon.
- > **VISUAL WARNING** : High intensity LED red flashing beacon fitted as standard. Ideal for noisy areas.
- > **NOISY** : 100dB at 1 metre.
- > **WEATHER PROOF** : Push on/push off rocker switch operation.
- > **BATTERY POWERED** : 9v battery – easy to replace.
- > **BATTERY TEST** : Built in low battery warning.
- > **LINKING OPTION** : Up to 20 units can be linked using 2 core cable.
- > **COMPACT DIMENSIONS** : Slimline design. 60 x 160 x 75mm (HxWxD)

SCA004 : Site Alert Howler Alarm



Slimline design



High intensity LED beacon

> PRODUCT CODE :	SCA004
> DESCRIPTION :	Site Alert Howler Alarm
> SIZE (HxWxD) :	60 x 160 x 75mm

› FIRE ACCESSORIES

Extinguisher Cover

- › Our fire extinguisher covers are perfect for the general protection of fire extinguishers. This small fire extinguisher cover is specifically designed to fit our 2kg and 2 litre models of fire extinguisher.
- › For general protection of fire extinguishers.
- › Vision panel for ease of gauge viewing.
- › Hand loops for quick removal.
- › Velcro fastening for tailored fit.



› PRODUCT CODE :	EXT0E/R
› DESCRIPTION :	Cover for up to 2kg / 2 litre extinguisher
› SIZE (HxW) :	450 x 250mm

› www.nimrodafrica.com
› fire@nimrodafrica.com
› +254 722 724001 / 2 / 3

Nimrod House, 77 Parklands Road
P. O. Box 250 - 00606, Sarit Centre,
Nairobi, KENYA



Certificate No. FM 25049