


CLEW P1 — Payload Interface Plate

Rev A · Finished dimensions AFTER Type III hardcoat · Supersedes pre-coat Ø3.00

THIRD ANGLE · UNITS: mm · SCALE OF TOP VIEW: 1.5 : 1

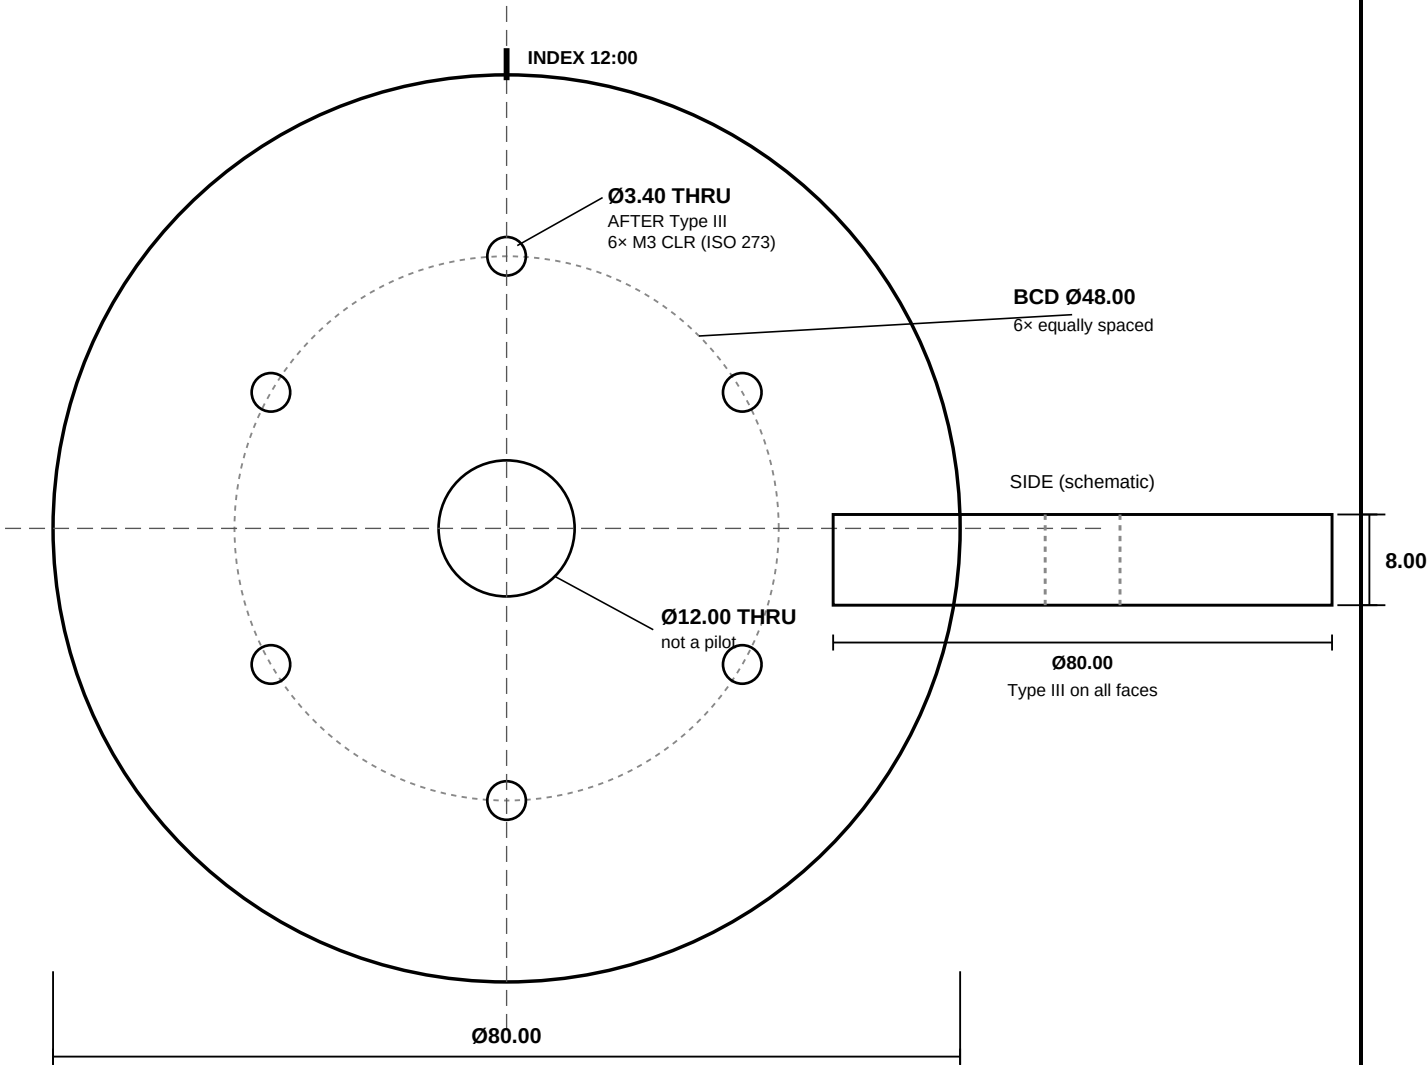

NOTES / SPEC (Rev A)

- Envelope Ø80.00 × 8.00 mm.
- BCD 48.00 mm frozen — 6× equally spaced M3 CLR.
- Holes Ø3.40 thru AFTER Type III (ISO 273 normal CLR).
- All six holes identical; index = 12:00 hole + rim tick (not a larger hole).
- Bore Ø12.00 thru — cable/optics clearance; NOT a locating feature.
- Material: 6061-T6 aluminum.
- Finish: Type III hardcoat black (MIL-A-8625 Type III or equiv.).
- Etch face: CLEW P1 REV A.
- Qty: 2 (first article / unit of sale two-pack).
- Tol unless noted: ±0.1 mm linear; hole Ø ±0.05 mm after coat.
- CRITICAL: machine undersize so FINISHED hole = Ø3.40 after coat.
- Match STEP: CLEW-P1-RevA.step (finished geometry).

CLEW Industries

Part: CLEW-P1-RevA
Title: Payload Interface Plate
Rev: A
clewindustries.com/p1

Material: 6061-T6
Finish: Type III black
Units: millimeters
Qty: 2 (two-pack)
Dims: AFTER Type III

STEP: CLEW-P1-RevA.step
Scale (top): 1.5 : 1
Projection: 3rd angle
For quote / FAI
2026-09-08