

SINCE 2010



ARMORFIRE®
INDUSTRIES PRIVATE LIMITED

Shield of Quality



BMC Approval By



INDIA'S LARGEST INHOUSE MANUFACTURING COMPANY

Product Family



We don't take chance...





Introduction

Mahadev Casting With The Premium Brand **ARMORFIRE** Is Not Only A Leading World Class Manufacturer But Also Supplies Its Fire Fighting Equipments To Domestic As Well As Overseas Markets, As We Are Having Highly Facilitated In-house Manufacturing Unit Of Casting, Machining, Assembly And Testing Processes, We Are Trying To Grab Every Opportunity In Our Field To Reduce The Fire Risk To Minimum In Living Spaces And Industrial Areas. All The Goods And Services We Offer To Our Clients Are Certified By Internationally Recognized Certification Bodies. We Are Committed To Deliver High Quality Goods And Services Which Fully Meets Our Customer's Needs For Quality Assurance Together With Iso 9001:2015 Requirements And We Constantly Seek Ways To Improve Our Quality Continuously And Ensure Its Continuation, As We Have Technically Expert Employees Determine To Benchmark Quality Standard, We Are Confident That You Will Find Our Presentation Of Interest And Assure You Of Our Competence And Desire To Realize Your Contract In A Way Totally Satisfactory To You.

Vision

Vision To be recognised as one of the world's most trusted and innovative manufacturer of fire-fighting products by providing our customers highest quality products that combine performance and advanced technology with value pricing while achieving 100 % customer satisfaction.

Our Philosophy

"Committed to protecting" are simple words, but these have a very deep meaning when put into practice. These important words represent our prime principles to which we will always be dedicated.

Foundry Unit

Production Capacity :

Steel Foundry :

After Second World war birth of **No Back Alfa Set Casting** process came into existence. which provides finest Quality aspect. We have the capacity of 1500 Tones/Year.

Quality assurance is ensured by a written assurance program that include the following testing and inspection procedure: Stainless Steel Material Such as CF8, CF8M

Materials :

Stainless Steel

(High and Low temp, service)

CF8, CF8M, CF3, CF3M, CF8C



ISI PRODUCT

01



IS : 5290



CML : 7600124609

S.S. HYDRANT VALVE TYPE-A

TECHNICAL SPECIFICATION

Size Of Landing Valve	: 63mm
Inlet (Type-a)	: 3" Nb Flanged For Single Outlet.
Outlet	: Female Instantaneous.
Material	: Stainless Steel
Conforming Specification	: Is.5290.

PERFORMANCE TEST

Hydrostatic test (Body Test)	: Tested at 23 kgf/cm ² for 2 ½ minute.
Water Tightness (Seat Text)	: Tested at 14 kgf/cm ²
Flow Test	: (TYPE-A) 900 LPM discharge at 7 kgf/cm ²
Documentation	: Test & Guarantee Certificate

HAND WHEEL

Grey Cast Iron.

WARRANTY

12 Months from the date of supply.

Weight 8.5kg Approx

ISI PRODUCT

02



IS : 5290



CML :7600124609

S.S. HYDRANT VALVE TYPE-B

TECHNICAL SPECIFICATION

Size Of Landing Valve	: 63mm
Inlet (Type-b)	: 4" Nb Flanged For Double Outlet
Outlet	: Female Instantaneous.
Material	: Stainless Steel
Conforming Specification	: Is.5290.

PERFORMANCE TEST

Hydrostatic test (Body Test)	: Tested at 23 kgf/cm ² for 2 ½ minute.
Water Tightness (Seat Text)	: Tested at 14 kgf/cm ²
Flow Test	: (TYPE-B) 1800 LPM discharge at 7 kgf/cm ²
Documentation	: Test & Guarantee Certificate

HAND WHEEL

Grey Cast Iron.

WARRANTY

12 Months from the date of supply.

Weight 17.1kg Approx



03



ISI PRODUCT



S.S. MALE-FEMALE COUPLING

TECHNICAL SPECIFICATION

Size	: 63mm
Material	: Stainless Steel
Conforming Specification	: IS.903

PERFORMANCE TEST

Hydraulic test (Body Test)	: Tested at 21 kgf/cm ² for 2 ½ minute.
Documentation	: Test & Guarantee Certificate

WARRANTY

12 Months from the date of supply.

Weight 2.6kg Approx

04



S.S. BRANCH PIPE & NOZZLE

TECHNICAL SPECIFICATION

Size Of Branch Pipe	: 63mm
Size Of Nozzles	: 20mm
Material	: Stainless Steel
Conforming Specification	: IS.903

PERFORMANCE TEST

Hydraulic test (Body Test)	: Tested at 21 kgf/cm ² for 2 ½ minute.
Working Pressure	: 7 kgf/cm ²
Documentation	: Test & Guarantee Certificate

WARRANTY

12 Months from the date of supply.

Weight 2.2kg Approx

05



ISI PRODUCT



ARMOR FIRE RRL HOSE

- Hose** : Armore Fire RRL Hose(Reinforced Rubber Lined Hose) Conforming to IS : 636/1988Type-A, ISI Marked
- Application** : This RRL Hose is used for water delivery Purpose in Fire-Fighting & Civil Engineering Applications etc.
- Construction:**
- Jacket** : Circular woven jacket made from a special blend of cotton & synthetic yarn with high abrasion and heat resistance. Jacket is also treated with suitable rot proofing agent
 - Reinforcement** : A thin fabric reinforcement bonded by a special adhesive.

- Rubber Lining** : A rubber inner lining with suitable rubber compound which gives flexibility, durability & better resistance.
- Standard Length** : 15 Mtrs & 30 Mtrs.
- Documentation** : Test & Guarantee Certificate
- End Connection** : Male Female Coupling Stainless Steel
- Features** : Compact Flexible & Light Weight, And Easy To Maintain, Ability To Withstand High Operating, & Back Pressure, High Abrasion Resistance, Excellent Heat Resistance Fabric, Strong And Durable

Size/Weight 15Mtrs. ISI 7.400kg.

Size/Weight 30Mtrs. ISI 12kg.

Size/Weight 15Mtrs. ISI 6.600kg.

Size/Weight 30Mtrs. ISI 11.200kg.

Regular Type Hose Reel Drum

06



Regular Type Hose Reel Drum

FEATURES :

Strong and Durable, Premium,
Corrosion resistance, Leakage resistance,
Reduces Hose wear.

GENERAL DATA :

Make : ARMOR FIRE
Size/Model : HOSE REEL (Swinging Type)
Inlet : 3/4" MBSP Threaded connection.
Outlet : Hose fitted with Stainless Steel & Brass
shut-off nozzle. (Jet/Spray type optional)

MATERIAL OF CONSTRUCTION :

Side Plates : Mild Steel IS : 513
Hub : Mild Steel IS : 513
Side Rim : Mild Steel IS : 513
Swivel Joint : Mild Steel IS : 513
Hose Reel Tubing : Thermoplastic IS: 12585

DIMENSIONS :

Plate Thickness : 0.8 mm Plate
Diameter : 490 mm HUB
Distance : 165 mm

PERFORMANCE TEST :

Range : 6 Mtr. (Min)
Flow : 24 L.P.M @ 7 Bar

PERFORMANCE TEST :

Range : 6 Mtr. (Min)
Flow : 24 L.P.M @ 7 Bar

FINISH :

Plates perfectly shaped
Powder coated fire Red color as per IS:5,
Shade No:536

WARRANTY :

12 Months from the date of supply.

Size/Weight 20mm 14kg Approx

07

Malaysian Type Hose Reel Drum



Malaysian Type Hose Reel Drum

FEATURES :

Strong and Durable, Leakage resistance,
Premium Quality, Corrosion resistance,
Reduces Hose wear.

GENERAL DATA :

Make : ARMOR FIRE
Size/Model : HOSE REEL (Swinging Type)
Inlet : 3/4" MBSP Threaded connection.
Outlet : Hose fitted with Stainless Steel & Brass
shut-off nozzle. (Jet/Spray type optional)

MATERIAL OF CONSTRUCTION :

Hub : Mild Steel IS : 513
Side Rim : Mild Steel IS : 513
Swivel Joint : Aluminium
Hose Reel Tubing : Thermoplastic IS: 12585

DIMENSIONS :

Plate Thickness : 18 and 20 Gauge
Diameter : 540 mm
Distance : 150 mm

PERFORMANCE TEST :

Range : 6 Mtr. (Min.)
Flow : 24 L.P.M @ 7 Bar

PERFORMANCE TEST :

Flow : Min. 24 L.P.M @ 7 Bar
Range : 6 Mtr. (Min.)
Documentation : Test Certificate

FINISH :

Plates perfectly shaped
Powder coated fire Red color as per IS:5, Shade No:536

WARRANTY :

12 Months from the date of supply.

Size/Weight 20mm 16.3kg Approx

TWO WAY INLET

08



Two way Inlet

- (1) Non return valve : Stainless steel
- (2) Flange size : # P.C.D-180 mm, O.D-220 mm, I.D--100 mm.
- (3) No. of hole : # 08 Nos. Dia of hole: # 19 mm.

Weight 9.8kg Approx

09

THREE WAY INLET



Three Way Inlet

- (1) Non return valve : Stainless steel
- (2) Flange size : # P.C.D-180 mm, O.D-220 mm, I.D-100 mm.
- (3) No. of hole : # 08 Nos. Dia. of hole : # 19mm.

Weight 14.9kg Approx

FOUR WAY INLET

10



Four Way Inlet

- (1) Non return valve : Stainless steel
- (2) Flange size : # P.C.D-242 mm, O.D-280 mm, I.D-150 mm.
- (3) No. of hole : #08 Nos. Dia. of hole : # 19mm.

Weight 23kg Approx

BUTTERFLY VALVE



IS-13 Cast Iron Butterfly Valve (Wafer Type), Lever Operated With S.S. (AISI-304) Disc, PN-1.6, Without Lugs

Test Pressure

Max. Body Test Pressure : 348 PSIG Hyd.


Seat Test Pressure : 232 PSIG Hyd.

Max. Working Temperature : 80°C

Dimensions

Nominal Size (Inches)	Nominal Size (mm)	L ± 2	H App.	W App.
1 1/2	40	33	120	214
2	50	43	139	214
2 1/2	65	46	150	214
3	80	46	160	214
4	100	52	178	240
5	125	56	189	268
6	150	56	211	268
8	200	60	292	300

List of Machinery & Testing Facilities

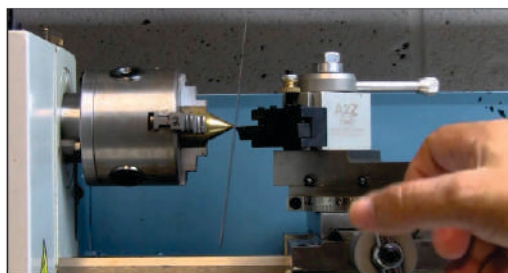

Most advanced Manufacturing & Quality Control Systems

List of Machinery Installed

Sr. No	DESCRIPTION	SIZE Centre x Bed Width x Length	Qty Nos.
1	CNC Machine - 200/300	Medium Duty	10 Nos.
2	CNC Machine - 300/500	Heavy Duty	5 Nos.
3	Lathe Machine	Heavy Duty	20 Nos.
	Lathe Machine	Medium Duty	6 Nos.
4	Pillar Drill Machine	25 mm (Drilling Capacity)	3 Nos.
5	Bench Grinder	300 mm	10 Nos.
6	Mitutoyo Caliper	300 mm	5 Nos.
7	Mitutoyo Insize	-	4 Nos.
8	Hand Grinder	8"	6 Nos.
9	HYD. Testing Pump	100 Kg Pressure	2 Nos.
10	Welding / Argon Machine	600 Amp.	3 Nos.
11	Hydraulic Trolley	1 TONE,	1 Set
12	Hand Operated Trolley	500 Kg	4 Set
13	Foundry	350 Kg & 100 Kg	2 Nos.
14	Plazma Cutter	Heavy	1 Set
15	Spectro Machine Hitachi	-	1 Set
16	Permeability Tester	-	1 Set
17	Sand Washer	-	1 Set
18	Sand Siever	-	1 Set
19	Muffle Furnace	-	1 Set
20	Core Hardness Tester	-	1 Set
21	Polishing Machine	Heavy Duty	12 Set
22	Sand Core Shooter	Heavy Duty	4 Set
23	Shot Blasting Machine	Heavy Duty	1 Set
24	Powder Coating Plant	-	1 Set
25	Pin Dot Marking	-	2 Set
26	Laser Marking	-	1 Set
27	Air Screw Compressor	-	3 Set



The Institute of Indian Foundrymen

(Affiliated to World Foundry Organization)
IIF CENTER, 335, Rajdanga Main Road, Kolkata-700 107

Be it known that

M/s MAHADEV CASTING

**is an Industry Member of
this Institute**

Unique Membership No.

CM/17569/W/RAJ


Executive Director





CERTIFICATE

*This is to Certify that the
Quality Management System
of*

MAHADEV CASTING

SURVEY NO 123/P2 PLOT NO. 43, TO 45/3, J.K. DIAMOND INDUSTRIAL AREA,
B/H MADHUVAN RESTAURANT AT LOTHDA, DIST: RAJKOT-360002(GUJARAT)

Has been independently assessed and is compliant
with the requirements of

ISO 9001:2015

This certificate is applicable to the following product or service ranges:

**MANUFACTURER, EXPORTER OF LANDING VALUE, HOSE COUPLING,
HOSE PIPE AND ALL TYPES OF FIRE FIGHTING EQUIPMENTS**

Code: 17

NACE Code: 25.50, 24.20

:: Certificate No :: IN118382A

Date of initial registration

22 Nov. 2020

Date of this certificate

22 Nov. 2020

Recertification Due / Certificate expiry

21 Nov. 2023

This Certificate is a property of LMS Certifications and remains valid
subject to satisfactory surveillance audits.



Signature
Director



For verification and updated information concerning the present certificate visit to www.lmsassessments.com

This Certificate is the property of LMS Certifications Private Limited and shall be returned immediately when demanded.



006-CB-QMS

LMS Certifications Private Limited
1, Ananddham, Opp. Kukrail Picnic Spot Gate,
Farid Nagar, Lucknow - 226015, U.P. (INDIA).
Phone : +91-9554645464
Visit > www.lmsassessments.com
E-mail > info@lmsassessments.com

LMS/DAC/F109Q/17/REV02



Certificate of Compliance

This is to certify that the technical documentation for the product:

Landing Valve, Hose Coupling, Hose Pipe and Fire Fighting Equipments.

Manufactured by:

Mahadev Casting

Survey No. 123/P2, Plot No. 43 to 45/3, J. K. Diamond Industrial Area, B/H Madhuvan Restaurant,
AT: Lothda, District Rajkot - 360002 (Gujarat), India.

Complies with the requirements (technical documentation including inspection & test results) of **Pressure Equipment Directive 97/23/EC**. Hence manufacturer's declaration of conformity according to above regulation is accepted. **Mahadev Casting** can place the CE marking as per laid down regulations on the products mentioned above.

Certificaat Nummer / Certificate No. : CE-BV-2007-2926

Datum Van Publicatie / Date of Issue : 22/12/2020
Vervaldatum / Date of Expiry : 22/12/2023
1st Annual surveillance audit due on : 22/11/2021
2nd Annual surveillance audit due on : 22/11/2022

Royal Stancert B.V.

Feitelijke Beoordelingen - Wereldwijde Beoordelingen

Regd. Office - Joop Geesinkweg 701, 1114 AB Amsterdam, The Netherlands.
(KvK-Nummer 71431802 / RSIN 858713139 - Rechtsvorm - Besloten Vennootschap)

This certificate remains the property of Royal Stancert B.V. and must be returned whenever demanded. The validity of this certificate can be verified at <http://www.royalstancert.org>. Royal Stancert B.V. is an independent system, product and personal assessment body accredited by Global Euro Accreditation Centre, Georgia. (GCIN - 654). Email: info@royalstancert.org



Director (Certification)



202926



PAC-GEAC-1506-299



भारतीय मानक ब्यूरो
Bureau of Indian Standards
 The National Standards Body of India

**For any other
communication**

Address:

Rajkot Branch Office-I-F P
 No. 364/P, Ward no.
 13, Opposite Crystal Mall,
 Next to Bharat Petrol
 Pump, Kalawad Road,
 Rajkot,
 RAJKOT, GUJARAT, 360005

Phone:

0281-2563981, 2563982,
 2563984, 2563978

Fax:

0

E-Mail:

rjbo@bis.gov.in

Web:

www.bis.org.in,
 www.manakonline.in

BUREAU OF INDIAN STANDARDS

Attachment to Licence No. CM/L- 7600124609

CM/L-No	Name of the Licensee with the Factory Address	Name of the Product	Indian Standard No.
7600124609	MAHADEV CASTING -survey no.123/P2, plot no.43 to 45/2, J.K.Diamond Industrial area, B/h Madhuvan Restaurant, rajkot : 360002	Specification for landing valves	IS 5290 : 1993

Endorsement No. 3 Dated 15-Nov-2022

Whereas, the licence was valid upto Sixteenth December Two Thousand Twenty Two.

Now, consequent upon renewal, the validity of the licence given in schedule of the Licence Dated 15-DEC-2022 has been extended from Sixteenth December Two Thousand Twenty Two to Fifteenth December Two Thousand Twenty Three

Other terms and conditions of licence remain same.

Branch Head (Rajkot Branch Office-I)

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002, 9 Bahadur Shah Zafar Marg, DELHI, 110002

Contact No: +91 11 23230131, 23233375,
 23239402

Fax: +91 11 23234062, 232

Email: info@bis.gov.in



भारतीय मानक ब्यूरो
Bureau of Indian Standards
 The National Standards Body of India

**For any other
communication**

Address: Rajkot Branch Office-I-F P
 No. 364/P, Ward no.
 13, Opposite Crystal Mall,
 Next to Bharat Petrol
 Pump, Kalawad Road,
 Rajkot,
 RAJKOT, GUJARAT, 360005

Phone: 0281-2563981, 2563982,
 2563984, 2563978

Fax: 0

E-Mail: rjbo@bis.gov.in

Web: www.bis.org.in,
 www.manakonline.in

BUREAU OF INDIAN STANDARDS

Attachment to Licence No. CML- 7600124710

CM/L-No	Name of the Licensee with the Factory Address	Name of the Product	Indian Standard No.
7600124710	MAHADEV CASTING -survey no.123/P2, plot no.43 to 45/2, J.K.Diamond Industrial area,B/h Madhuvan Restaurant , rajkot : 360002	Specification for Fire Hose Delivery Couplings, Branch Pipe, Nozzles And Nozzle Spanner - Specification	IS 903 : 1993

Endorsement No. 3 Dated 15-Nov-2022

Whereas, the licence was valid upto Sixteenth December Two Thousand Twenty Two.

Now, consequent upon renewal, the validity of the licence given in schedule of the Licence Dated 15-DEC-2022 has been extended from Sixteenth December Two Thousand Twenty Two to Fifteenth December Two Thousand Twenty Three

Other terms and conditions of licence remain same.

Branch Head (Rajkot Branch Office-I)

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002. ,9 Bahadur Shah Zafar Marg, ,DELHI,110002

Contact No: +91 11 23230131, 23233375, **Fax:** +91 11 23234062, 232 **Email:** info@bis.gov.in
 23239402

FIRE PROTECTION ASSOCIATION OF INDIA

CERTIFICATE OF MEMBERSHIP

This is to certify that **MAHADEV CASTING**
has been enrolled as Member of FPAI
for year 2022 - 2023
in witness thereof.
we have hereunto set our hands and seals
on 1st October 2022


NITIN SHAH
President




MUKESH SHAH
vice President



VENDOR ASSESSMENT REPORT

July 6th, 2021
MAHADEV CASTING
VA-621261357874752



Company visit at a Glance



Core Department



Moulding Department



Metal Lab Testing



Foundry Department



Fettling Department



Semi-Finishing Department




Hydro Testing Department



Quality Control Room



Dispatch Area

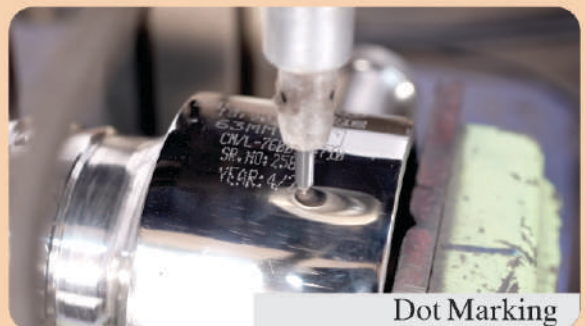


Dot Marking



Finishing Department



Final Finishing Department

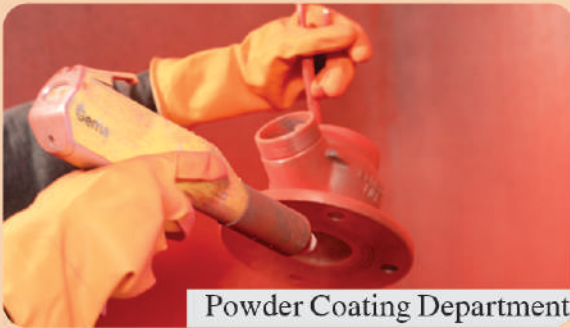

Powder Coating Department



Assembly & Dispatch Department



Dispatch Department



R.R.L. Binding



Few of Our Illustrious Projects



SINCE 2010



ARMORFIRE®

INDUSTRIES PRIVATE LIMITED

Shield of Quality

IS : 5290



TYPE-A
CM/L : 7600124609

IS : 5290



TYPE-B
CM/L : 7600124609

IS : 903



CM/L : 7600124710

IS : 636



CM/L : 8700021816



ARMORFIRE INDUSTRIES PRIVATE LIMITED



Mahadev CASTING

Mfg. : All Types of Fire Fighting Equipment's

Plot No. 43/44/45, JK Diamond Ind. Area, B/h. Madhuvan Restaurant,
Village Lothda, Rajkot-Kotdasangani State Highway-360022. (Guj.)

e-mail : ho@armorfire.co.in / mahadevcasting@gmail.com

Mo. : +91 99245 77421 / +91 99045 72167

Sales Manager Contact : +91 9978007672

www.armorfire.in