

---

# **Okuma America Corporation**

---

## **THINC-API Release Notes for Lathe**

**Document No.: S5015-008-35**

THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

## Revision History

Date	Version	Description	Author
5/21/2007	S5015-008-00	Public release for Lathe THINC-API version 1.0.0.0	LHuynh
6/04/2007	S5015-008-01	Public release for Lathe THINC-API version 1.1.0.0	Lhuynh
08/15/2007	S5015-008-02	Public release for Lathe THINC-API version 1.2.0.0	Lhuynh
2/22/2008	S5015-008-03	Public Release 1.6.0.0 for Lathe THINC-API	Lhuynh
4/11/2008	S5015-008-04	Public Release 1.6.0.0 for Lathe THINC-API	Lhuynh
06/27/2008	S5015-008-05	Public Release 1.6.3.0 for Lathe THINC-API	Lhuynh
07/25/2008	S5015-008-06	Public Release 1.6.4.0 for Lathe THINC-API	Lhuynh
10/27/2008	S5015-008-07	Public Release 1.7.0.0 for Lathe THINC-API	Lhuynh
12/18/2008	S5015-008-08	Public Release 1.8.0.0 for Lathe THINC-API	Lhuynh
04/30/2009	S5015-008-09	Public Release 1.9.1.0 for Lathe THINC-API	Lhuynh
10/12/2009	S5015-008-10	Public Release 1.10.0.0 for Lathe THINC-API	Lhuynh
04/28/2010	S5015-008-11	Public Release 1.11.0.0 for Lathe THINC-API	Lhuynh
09/14/2010	S5015-008-12	Public Release 1.11.1.0 for Lathe THINC-API	Lhuynh
01/04/2011	S5015-008-13	Public Release 1.12.0.0 for Lathe THINC-API	Lhuynh
02/02/2011	S5015-008-14	Public Release 1.12.1.0 for Lathe THINC-API	Lhuynh
11/14/2011	S5015-008-15	Beta Release 1.14.0.0 for Lathe THINC-API	Lhuynh
01/15/2012	S5015-008-16	Beta Release 1.14.1.0 for Lathe THINC-API	Lhuynh
09/21/2012	S5015-008-17	Beta Release 1.14.2.0 for Lathe THINC-API	Lhuynh
12/04/2012	S5015-008-18	Public Release 1.15.0.0 for Lathe THINC-API	Lhuynh

THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

03/06/2013	S5015-008-19	Beta Release 1.15.1.0 for Lathe THINC-API	Lhuynh
03/18/2013	S5015-008-20	Beta Release 1.15.2.0 for Lathe THINC-API	Lhuynh
09/25/2013	S5015-008-21	Public Release 1.16.0.0 for Lathe THINC-API	Lhuynh
01/15/2014	S5015-008-22	Public Release 1.17.0.0 for Lathe THINC-API	Lhuynh
04/01/2014	S5015-008-23	Public Release 1.17.1.0 for Lathe THINC-API	Lhuynh
10/08/2014	S5015-008-24	Public Release 1.17.2.0 for Lathe THINC-API	Lhuynh
10/18/2015	S5015-008-25	Public Release 1.18.0.0 for Lathe THINC-API	Lhuynh
10/18/2016	S5015-008-26	Public Release 1.19.0.0 for Lathe THINC-API	Lhuynh
12/07/2017	S5015-008-27	Public Release 1.20.0.0 for Lathe THINC-API	Lhuynh
06/14/2018	S5015-008-28	Public Release 1.21.1.0 for Lathe THINC-API	Lhuynh
03/11/2019	S5015-008-29	Public release 1.22.0.0 for Lathe THINC-API	Lhuynh
02/08/2020	S5015-008-30	Public release 1.23.0.0 for Lathe THINC-API	Lhuynh
08/017/2020	S5015-008-31	Public release 1.23.1.0 for Lathe THINC-API	Lhuynh
02/02/2023	S5015-008-32	Public release 1.24.0.0 for Lathe THINC-API	Lhuynh
05/26/2023	S5015-008-33	Public release 1.24.1.0 for Lathe THINC-API	Lhuynh
09/15/2023	S5015-008-34	Public release 1.24.2.0 for Lathe THINC-API	Lhuynh
03/29/2024	S5015-008-35	Public release 1.25.0.0 for Lathe THINC-API	Lhuynh

THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

# Table of Contents

1.	Introduction	5
1.1	Disclaimer of Warranty	5
1.2	Purpose	5
1.3	Scope	5
1.4	Definitions, Acronyms, and Abbreviations	5
1.5	References	5
2.	About This Release	5
3.	Change/New	8
3.1	Command-API	8
3.1.1	CATC	8
3.1.2	CATC	8
3.1.3	CSpec	8
3.2	DATA-API	9
3.2.1	CATC	9
3.2.2	CSpec	9
3.2.3	CTools	9
4.	Known Bugs and Limitations	9
4.1	Defect	9
4.1.1	General Defect	9
4.1.2	Firebird Database Log File	9
4.1.3	Data-API	10
4.2	Defects Fixed in this Release	10

THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

# Release Notes for Lathe

## 1. Introduction

### 1.1 Disclaimer of Warranty

Okuma America Corporation makes no representations or warranties, either expressed or implied, by or with respect to anything in this document, and shall not be liable for any implied warranties of merchantability or fitness for a particular purpose or for any indirect, special or consequential damages.

**Copyright © 2024, Okuma America Corporation.**  
**All rights reserved.**

GOVERNMENT RIGHTS LEGEND: Use, duplication or disclosure by the U.S. Government is subject to restrictions set forth in the applicable Okuma America Corporation license agreement and as provided in DFARS 227.7202-1(a) and 227.7202-3(a) (1995), DFARS 252.227-7013(c)(1)(ii) (Oct 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14, as applicable.

"Okuma America Corporation" and Okuma America Corporation's products are trademarks of Okuma America Corporation. References to other companies and their products use trademarks owned by the respective companies and are for reference purpose only.

### 1.2 Purpose

The purpose of the **Release Notes** document is to communicate major new features and changes in this release of the THINC-API for Lathe libraries. It also documents known problems and workarounds.

### 1.3 Scope

This document describes the Public Release version 1.25.0.0 of THINC-API for Lathe.

### 1.4 Definitions, Acronyms, and Abbreviations

GAC – Global Assembly Cache Windows folder located in 'C:\WINDOWS\assembly'

### 1.5 References

None.

## 2. About This Release

***All applications compiled with Beta Release from version 1.15.X.X must be compiled with Public Release version 1.17.0.0 or higher when it is available.***

***In current version of THINC-API, some of the existing functions related to ATC, Tool, TailStock, and Chuck Data from DATA-API or Command API might not function correctly on OSP-P300S (SLP) and OSP-P300L control.***


***Please refer to the help file for detail usage and compatibility information of each function.***  
***This version requires latest OSP system disk.***

From this release and forward, THINC API libraries will check dependency libraries during installation. THINC API will fail to install if version of dependency OCJ libraries cannot support current version of THINC API.

From this release and forward, API Notifier will delay the checking of API for an approximately of 1 minutes or so after NC is running. API Notifier service does use Windows Performance Counters service. As a result, API Notifier will not run correctly if Windows Performance Counters service is not enable. During the installation of THINC-API, Windows Performance Counters will be reset to 0 in the Windows system registry as shown below:

THINC-API Release notes	©Okuma America Corporation, 2024	Page 5 of 10
-------------------------	-------------------------------------	--------------

THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

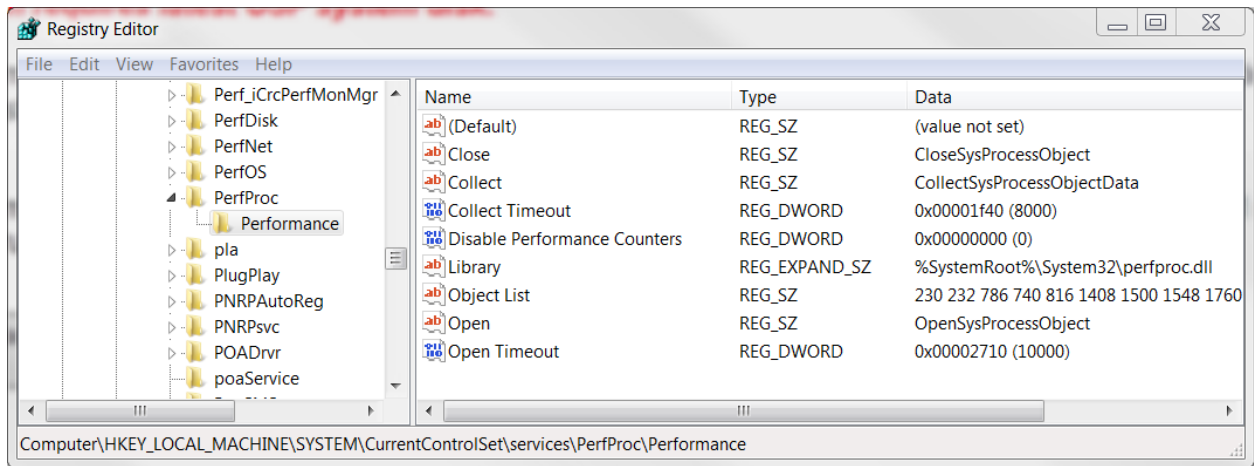

*The API Notifier status displayed in the system tray on the previous OSP-P controls such as P300/200/100II can be also checked by clicking on the shortcut of API Notifier on OSP-P500 VKEY.*

Libraries included in this release for Lathe are compiled with .NET Framework 4.0:

Version of Okuma.CLDATAPI.dll in this release is 4.0.0.0

Version of Okuma.CLCMDAPI.dll in this release is 4.0.0.0

Version of APINotifierService.exe in this release is 1.25.0.0

Version of APINotifierStatus.exe in this release is 1.4.0.0

Version of Okuma.Flexnet.Net4.dll in this release is 1.0.0.0

Version of Okuma.Apilog2.dll in this release is 1.2.0.0

This release requires OCJ custom API version 004B on target machine. THINC-API will verify the existing of OCJ custom API version before performing the installation.

The PLC system package listed in the table per control type is also required.

OSP	PLCS package
P100II/P200	From 110A to 110C
P200A Type1	From 120A to 130A
P200A Type2/P300	From 201B to 201G, or 300A and over

**Important: All applications designed with THINC-API libraries must use THINC-API version 1.21.1.0 or higher to be able to run on Microsoft Windows 10.**

**Starting from the public release, version 1.24.0.0, all previous versions of THINC-API installed on machine must be first un-installed before installing newer versions.**

The following functions of Okuma.CLDATAPI.dll library will not be available in OSP-P100II control machines:

Classes	Interfaces
---------	------------

THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

CMachine	OnOffStateEnum GetNCStatus(NCStatusEnum enNCStatus)
CMachine	CCurrentAlarm* GetCurrentAlarm()
CIO	OnOffStateEnum GetUserTaskIOVariable(IOTypeEnum enIO, Int32 intIndex) ;
CIO	void SetUserTaskOutputVariable(Int32 intIndex, OnOffStateEnum enValue) ;
CIO	OnOffStateEnum GetProtectedUserTaskOutputVariable(Int32 intIndex) ;
CIO	void SetProtectedUserTaskOutputVariable(Int32 intIndex, OnOffStateEnum enValue) ;

The following functions of Okuma.CLCMDAPI.dll library will not be available in OSP-P100II control machines:

Classes	Interfaces
CATC	Sub RegisterToolPot(ByVal intPotNo As Integer, ByVal intToolNo As Integer, ByVal enSettingToolKind As SettingToolKindEnum, ByVal enSettingToolSize As SettingToolSizeEnum, ByVal enReturnMagazine As ReturnMagazineEnum)
CATC	Sub SetNextTool(ByVal intToolNo As Integer, ByVal enSettingToolKind As SettingToolKindEnum, ByVal enSettingToolSize As SettingToolSizeEnum, ByVal enReturnMagazine As ReturnMagazineEnum)
CATC	Sub SetToolInStation(ByVal intToolNo As Integer, ByVal enSettingToolKind As SettingToolKindEnum, ByVal enSettingToolSize As SettingToolSizeEnum, ByVal enReturnMagazine As ReturnMagazineEnum, ByVal enTurretStation As TurretStationEnum)
CATC	Sub UnRegisterToolPot(ByVal intPotNo As Integer)
CProgram	CancelMainProgram()
CProgram	SelectMainProgramRSide(ByVal strMainProgramFileName As String, Optional ByVal strSubProgramFileName As String = "", Optional ByVal strSystemSubstituteProgramFileName As String = "", Optional ByVal strProgramName As String = "")
CProgram	SelectMainProgramLSide(ByVal strMainProgramFileName As String, Optional ByVal strSubProgramFileName As String = "", Optional ByVal strSystemSubstituteProgramFileName As String = "", Optional ByVal strProgramName As String = "")
CTools	CalcualteToolOffset(ByVal intToolNo As Integer, ByVal enAxisIndex As OffsetAxisIndexEnum, ByVal enSubSystem As SubSystemEnum, ByVal dblValue As Double)
CTools	AddConstantToolOffset(ByVal intOffsetNo As Integer, ByVal enAxisIndex As OffsetAxisIndexEnum, ByVal enSubSystem As SubSystemEnum, ByVal enCuttingPosition As CuttingPositionEnum)
CTools	AddConstantNoseRadiusCompensation(ByVal intOffsetNo As Integer, ByVal enAxisIndex As OffsetAxisIndex2Enum, ByVal enSubSystem As SubSystemEnum, ByVal enCuttingPosition As CuttingPositionEnum)
CTools	AddConstantToolWear(ByVal intOffsetNo As Integer, ByVal enAxisIndex As OffsetAxisIndex2Enum, ByVal enSubSystem As SubSystemEnum, ByVal enCuttingPosition As CuttingPositionEnum)
CTools	SubtractConstantToolOffset(ByVal intOffsetNo As Integer, ByVal enAxisIndex As OffsetAxisIndexEnum, ByVal enSubSystem As SubSystemEnum, ByVal enCuttingPosition As CuttingPositionEnum)
CTools	SubtractConstantNoseRadiusCompensation(ByVal intOffsetNo As Integer, ByVal enAxisIndex As OffsetAxisIndex2Enum, ByVal enSubSystem As SubSystemEnum, ByVal enCuttingPosition As CuttingPositionEnum)
CTools	SubtractConstantToolWear(ByVal intOffsetNo As Integer, ByVal enAxisIndex As OffsetAxisIndex2Enum, ByVal enSubSystem As SubSystemEnum, ByVal enCuttingPosition As CuttingPositionEnum)

CProgram	SelectScheduleProgramLSide(ByVal strScheduleProgramFileName As String)
CProgram	SelectScheduleProgramRSide(ByVal strScheduleProgramFileName As String)
CMachine	Public Sub SetUserAlarm(ByVal enAlarm As UserAlarmEnum, Optional ByVal strAlarmMessage As String = "", Optional ByVal enUserAlarmSubSystem As UserAlarmSubSystemEnum = 0)
CMachine	Public Sub ClearUserAlarmD(ByVal enUserAlarmSubSystem As UserAlarmSubSystemEnum)

Note: User Alarm will require OKUMA.Lathe.UserAlarm license feature in order to function on OSP-P200 or newer controls if machine can support.

### 3. Change/New

The following functions in DATA-API and Command API have been changed to support VTR-A machine spec. Please refer to the help file for detail information of each function.

#### 3.1 Command-API

##### 3.1.1 CATC

```
Public Sub AttachTool
(
    intToolNo As Integer,
    intTargetNo As Integer,
    enToolLocation As ToolLocationEnum
)
```

This function can attach a registered tool to main spindle for VTR-A machine. The target number parameter is used to specify the Return P Pot number for VTR-A machine spec.

##### 3.1.2 CATC

```
Public Sub RegisterTool(ByVal intToolNo As Integer, _
    ByVal intTargetNo As Integer, _
    ByVal enEdgeNo As ToolEdgeEnum, _
    ByVal enSettingToolKind As Enumerations.SettingToolKindEnum, _
    ByVal enSettingToolSize As Enumerations.SettingToolSizeEnum, _
    ByVal enSpindleAxis As Enumerations.BasicPositionSpindleEnum, _
    ByVal enBaseCuttingPositionSetting As
Enumerations.BaseCuttingPositionSettingEnum, _
    ByVal dblAngle As Double, _
    ByVal enToolLocation As ToolLocationEnum)
```

This function can support register tools on VTR-A machine spec.

##### 3.1.3 CSpec

Functions	Description
Public Function GetSpec(enSpec As OSPSpecEnum) As Boolean	Get the current state of given OSP spec. enum value



THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

## 3.2 DATA-API

### 3.2.1 CATC

The following functions can now support VTR-A machine

```
Public Function GetMagazinePosition (intMagazineNo As Integer) As Integer
Public Function GetPotNo (intToolNo As Integer) As Integer
Public Function GetToolNo (intPotNo As Integer) As Integer
Public Function GetMaxPots (enMagazineType As MagazineTypeEnum) As Integer
Public Function GetToolSize (intPotNo As Integer) As ToolSizeEnum
Public Function GetToolKind (intPotNo As Integer) As ToolKindEnum
Public Function GetATCPanelToolSetupInfo As ATCPanelToolSetupInfo
```

### 3.2.2 CSpec

```
Public Function GetMachineSerialNumber As String
```

The function can now support alphanumeric machine serial number.

### 3.2.3 CTools

The function can now support VTR-A machine

```
Public Function GetToolKind (intToolNo As Integer) As ToolKind2Enum
```

## 4. Known Bugs and Limitations

This section identifies known and existing problems in this release and describes any work-arounds.

### NOTES: Threading

**All THINC-API objects must be created and called from STA threads ONLY. Threads created by Window System such as thread pool which are under MTA threads cannot be supported.**

### 4.1 Defect

#### 4.1.1 General Defect

DATA-API library, Okuma.CLDATAPI.dll, cannot create directly under ASP.NET web application.

Solution/Work-arounds: Create and initialize DATA-API in a separate thread. All function calls must be called from objects created inside separated thread mentioned above.

DATA-API library can only support applications designed with single-threaded apartment of COM threading model. The underlying library, LDATAPI.dll, cannot be loaded during call to CMachine.Init function when an MTAThread attribute is applied to the application.

Solution/Work-arounds: None

#### 4.1.2 Firebird Database Log File

THINC-API libraries compiled with .NET Framework 1.1 use Firebird Database engine. The log file created by Firebird database engine can be corrupted, unexpectedly.

Solution/Work-arounds: A bat file is created during the installation of THINC-API and will be executed every time

THINC-API Release notes	©Okuma America Corporation, 2024	Page 9 of 10
-------------------------	-------------------------------------	--------------

THINC-API	Version: S5015-008-34
Release Notes For Lathe	Date: 09/15/2023

Windows is first started to replace the existing log.fdb located in “D:\Program files\Okuma\LoggingService” to prevent file corruption.

*New THINC-API libraries that compiled with .NET Framework 4.0 will use SQLite database for its logging service. All applications should use new version THINC-API if possible to prevent using Firebird database and to be compatible with Windows 10.*

#### 4.1.3 Data-API

##### 4.1.3.1 MacMan.COperationHistory class

Function:

```
Int32 COperation* GetOperationHistory(Int32 intIndex) ;
ArrayList* GetOperationHistory(Int32 intFromIndex, Int32 intToIndex);
Int32 GetMaxCount() ;
Int32 GetCount() ;
```

Symptom: Failed to get correct data for Subsystem L and R side if MacMan screen is different than current setting of subsystem. It always gets the data from current MacMan screen.

Solution/Work around: None

##### 4.1.3.2 CAxis class

Function:

```
Double GetActualPositionProgramCoord(AxisIndex1Enum enAxisIndex)
Double GetTargetPosition (AxisIndex1Enum enAxisIndex)
```

Symptom: The Z-axis position for sub system NC-AL and NC-AR does not return data correctly. It is based on the current selection of spindle in NC panel or command program G140/G141.

Solution/Work around: None

#### 4.2 Defects Fixed in this Release

None