PVC/Nylon/PVC, 600V Type TC-ER, Unshielded, Series E2BEA


Special color coding

PRODUCT NAME

PVC/Nylon/PVC, 600V Type TC-ER, Unshielded,

APPLICATION

- In conduit, duct, free air, raceways and direct burial, primary installations include cable trays, and outdoor locations.
- In wet or dry locations
- Approved for direct burial, Class I Div. 2 industrial hazardous locations per NEC
- Permitted for Exposed Run (ER) use in accordance with NEC for 3 or more conductors

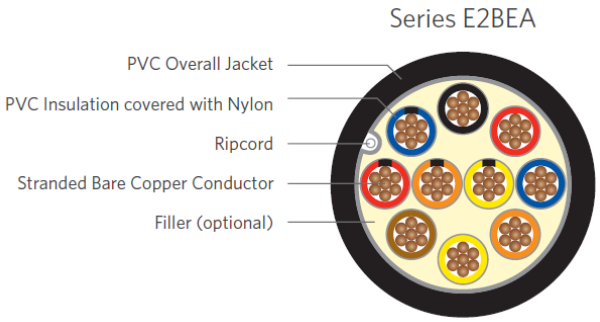

DESCRIPTION

The Superior Essex PVC/Nylon/PVC, 600V Type TC Cables consist of fully annealed bare copper Class B stranded conductors, covered with Polyvinyl Chloride (PVC) and clear Nylon insulation, unshielded or shielded and black PVC jacket. These cables are used in industrial power or station control circuits.

SPECIFICATIONS

Conductor	Bare Copper, Class B strand
Insulation	PVC/Nylon
Jacket	PVC

Packaging	Non-returnable reels
Performance	ASTM B8
Compliance	ASTM B33 UL 66 UL 83 UL 1277 UL 1581 ICEA S-95-658 NEC
Other Compliances	EPA 40 CFR, Part 261 OSHA RoHS-compliant

Special color code: Each conductor is identified with a base color

(Conductor #1) **Brown** – (conductor #2) **Orange** – (conductor #3) **Yellow** - (conductor #4) **Green**

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Cond count	Cond Size Gauge	Insulation Thickness	Jacket Thickness	OD	Net Weight
E2BEA-121B04CQ02	4 C	12AWG	20mils	45mils	0.420”	138 lbs/mft
E2BEA-101B04CQ01	4 C	10AWG	20mils	45mils	0.505”	209 lbs/mft