

Technical Data Sheet

Power Distribution Box

Product Code: 5.02

5.02

Features & Advantages

- 4 Way IP65 Polycarbonate Hinged Window on MCB
- Metric brass inserts in base for multiple opening & closing of cover
- Stainless Steel (SS304) Screws
- Suitable for Wall or Flush mounting
- Outside Mounting provision on all corners
- Bushes provided for easy installation of DIN channel
- Provision for 3/4 MCBs in one box
- Ample space for wiring
- Electrically Insulated for safe handling
- Dust and Water Resistant




Optional Accessories

- Hinges
- Cable Glands
- Pole Mounting Accessory with Clamp as per Pole Diameter
- Coupler

Technical Data

Description	IP65 DB BOX (ABS)	IP65 Window (PC)
Dimension	225x150x100 mm	99x93x28 mm
Material	ABS with PC Window	Polycarbonate
Ingress Protection	IP 65, IEC-60529	IP 65, IEC-60529
Ultraviolet Protection	UV Stabilized	UV Stabilized, EN ISO 4892
Impact Resistance	IK07	IK08/09/10, IEC 60068-2-72
Glow Wire Test	650° C	820/960 °C, IS 11000-2-1, IEC 60695-2-10
Ambient Temperature	-20 to +60° C	-25 to +80 Deg. C
Fire Rating	HB / V2 Optional	UL94V-0
ROHS	Compliant	Compliant IEC 62321
Environment Protection	Halogen Free	Halogen Free

Drawings

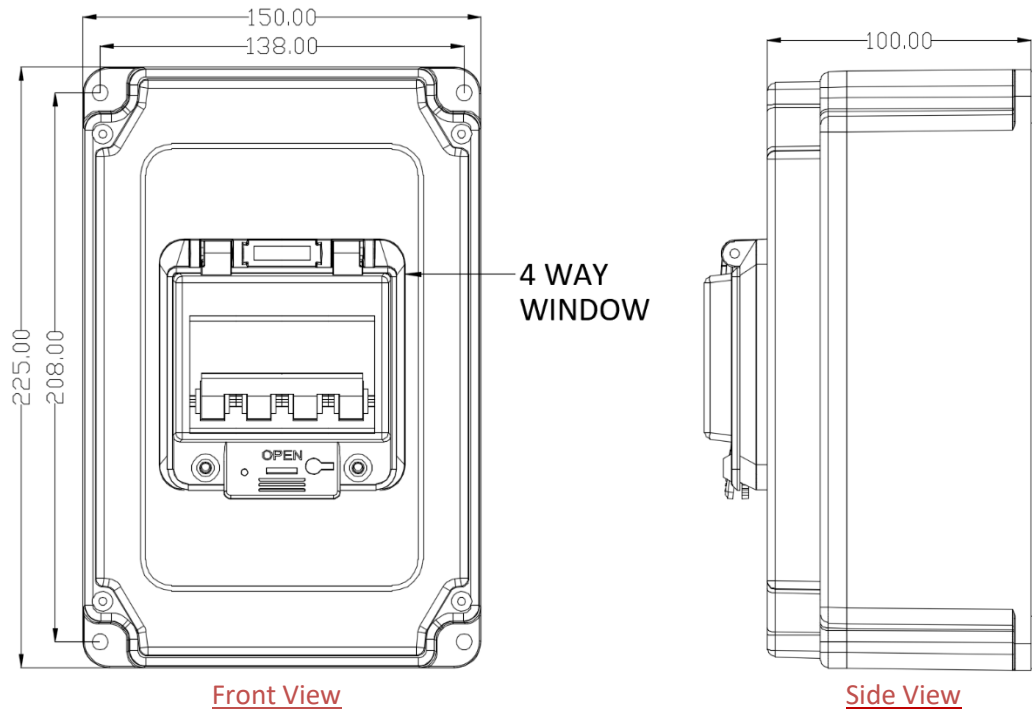

Application Picture

