

# Service Manual



## HI-FI Speaker System SB-CS55

### SPECIFICATIONS (SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR FURTHER IMPROVEMENT)

Type:	2 way 2 speaker system.	Output Sound Pressure Level:	85 dB/W (1.0 m).
Speakers:	Woofer: 18 cm cone type. Tweeter: 2.5 cm dome type.	Crossover Frequency:	2.5 kHz.
Impedance:	8 Ohms.	Frequency Range:	43 Hz ~ 25 kHz (-16 dB). 50 Hz ~ 22 KHz (-10 dB).
Input Power:	120 W, Music. 60 W, DIN.	Dimensions:	24.6 (W) x 42.2 (H) x 24.1 (D) cm.
		Weight:	6 kg.

### ESPECIFICACIONES (ESTAS ESPECIFICACIONES ESTÁN SUJETAS A CUALQUIER CAMBIO SIN PREVIO AVISO)

Tipo:	Sistema con 2 altavoces.	Nivel de presión acústica de salida:	85 dB/W (1,0 m).
Altavoces:	Graves: tipo cónico de 18 cm. Agudos: tipo cúpula de 2,5 cm.	Frecuencia de cruce:	2,5 kHz.
Impedancia:	8 Ohmios.	Respuesta de frecuencias:	43 Hz ~ 25 kHz (-16 dB). 50 Hz ~ 22 KHz (-10 dB).
Capacidad de potencia:	120 W, Música. 60 W, DIN.	Dimensiones:	24,6 (ancho) x 42,2 (alto) x 24,1 (prof.) cm.
		Peso:	6 kg.

### SPECIFICATIONS (SUJET À CHANGEMENT SANS PREAVIS)


Type:	2 voies, 2 haut-parleurs.	Niveau de pression sonore de sortie:	85 dB/W (1,0 m).
Haut-parleurs:	Graves: 18 cm cone type. Aigus: 2,5 cm type a dome.	Fréquence de commutation:	2,5 kHz.
Impédance:	8 Ohms.	Gamme de fréquences:	43 Hz ~ 25 kHz (-16 dB). 50 Hz ~ 22 KHz (-10dB).
Entrée maximale:	120 W, Musique. 60 W, DIN.	Dimensions:	24,6 (L) x 42,2 (H) x 24,1 (P) cm.
		Poids:	6 kg.




■ SCHEMATIC DIAGRAM

(This schematic diagram may be modified at any time with development of new technology).

(Este esquema puede ser modificado en cualquier momento con el desarrollo de nuevas tecnologías).

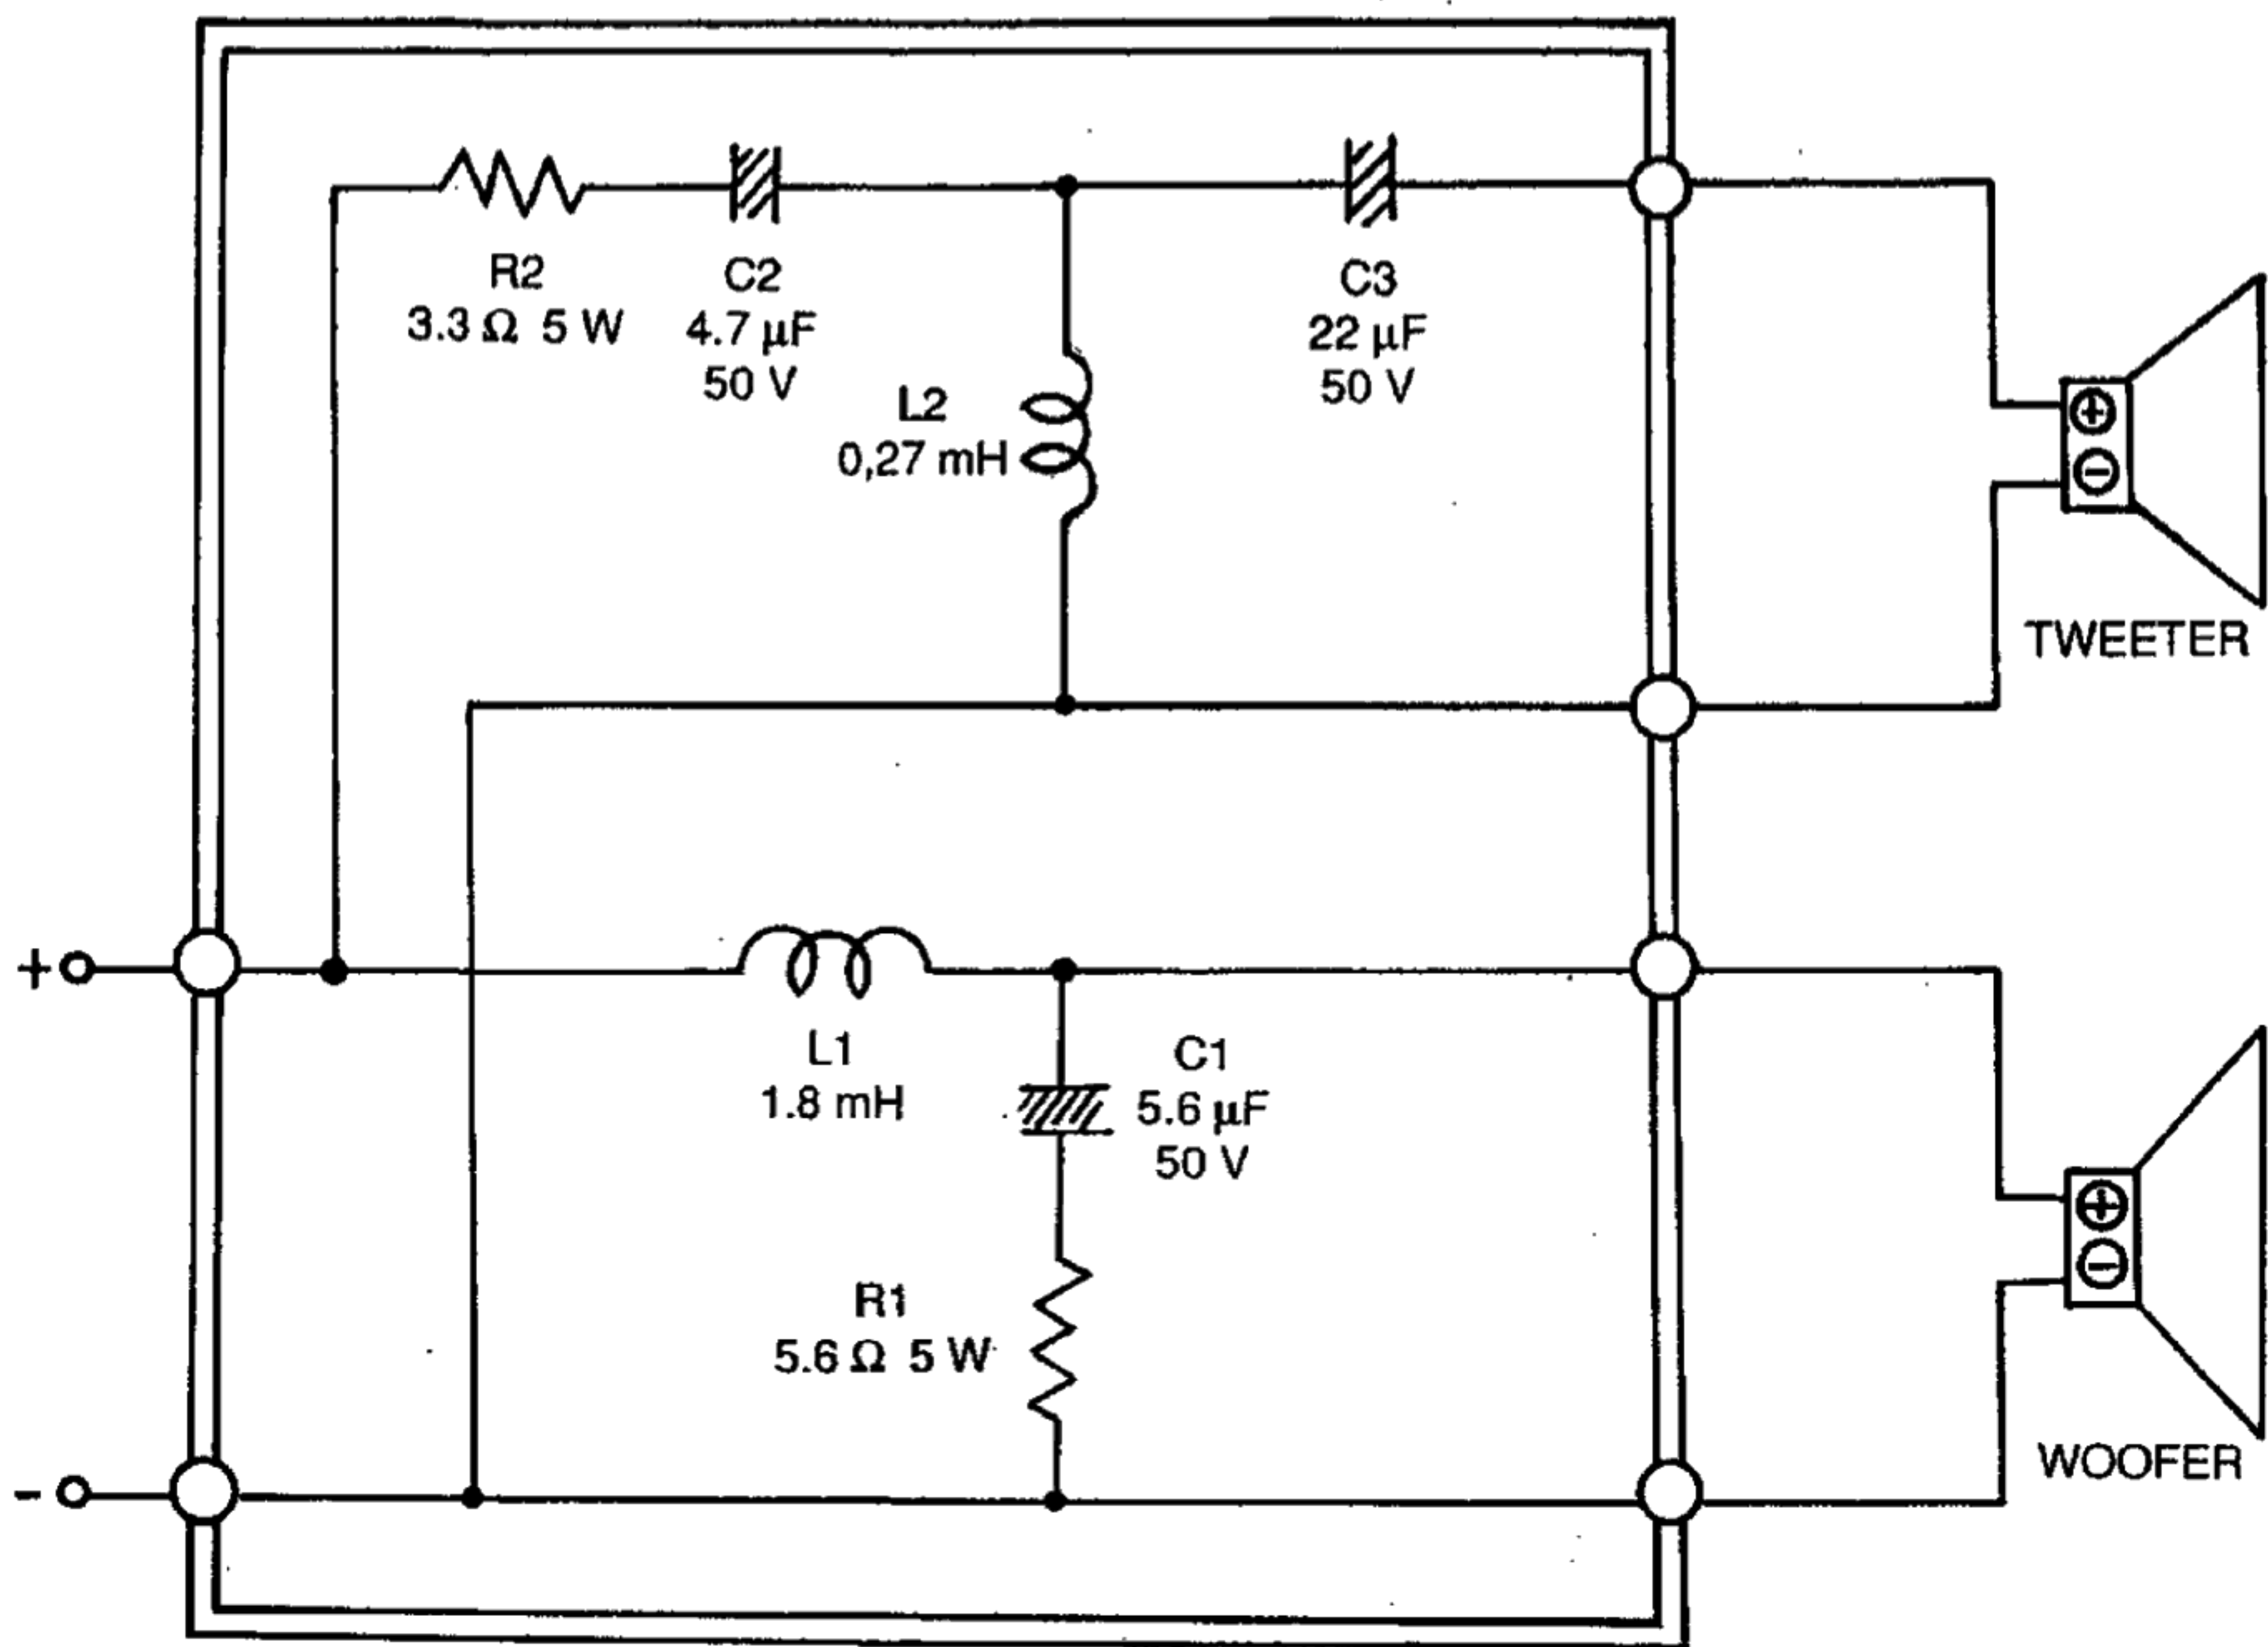

■ EXPLODED VIEW

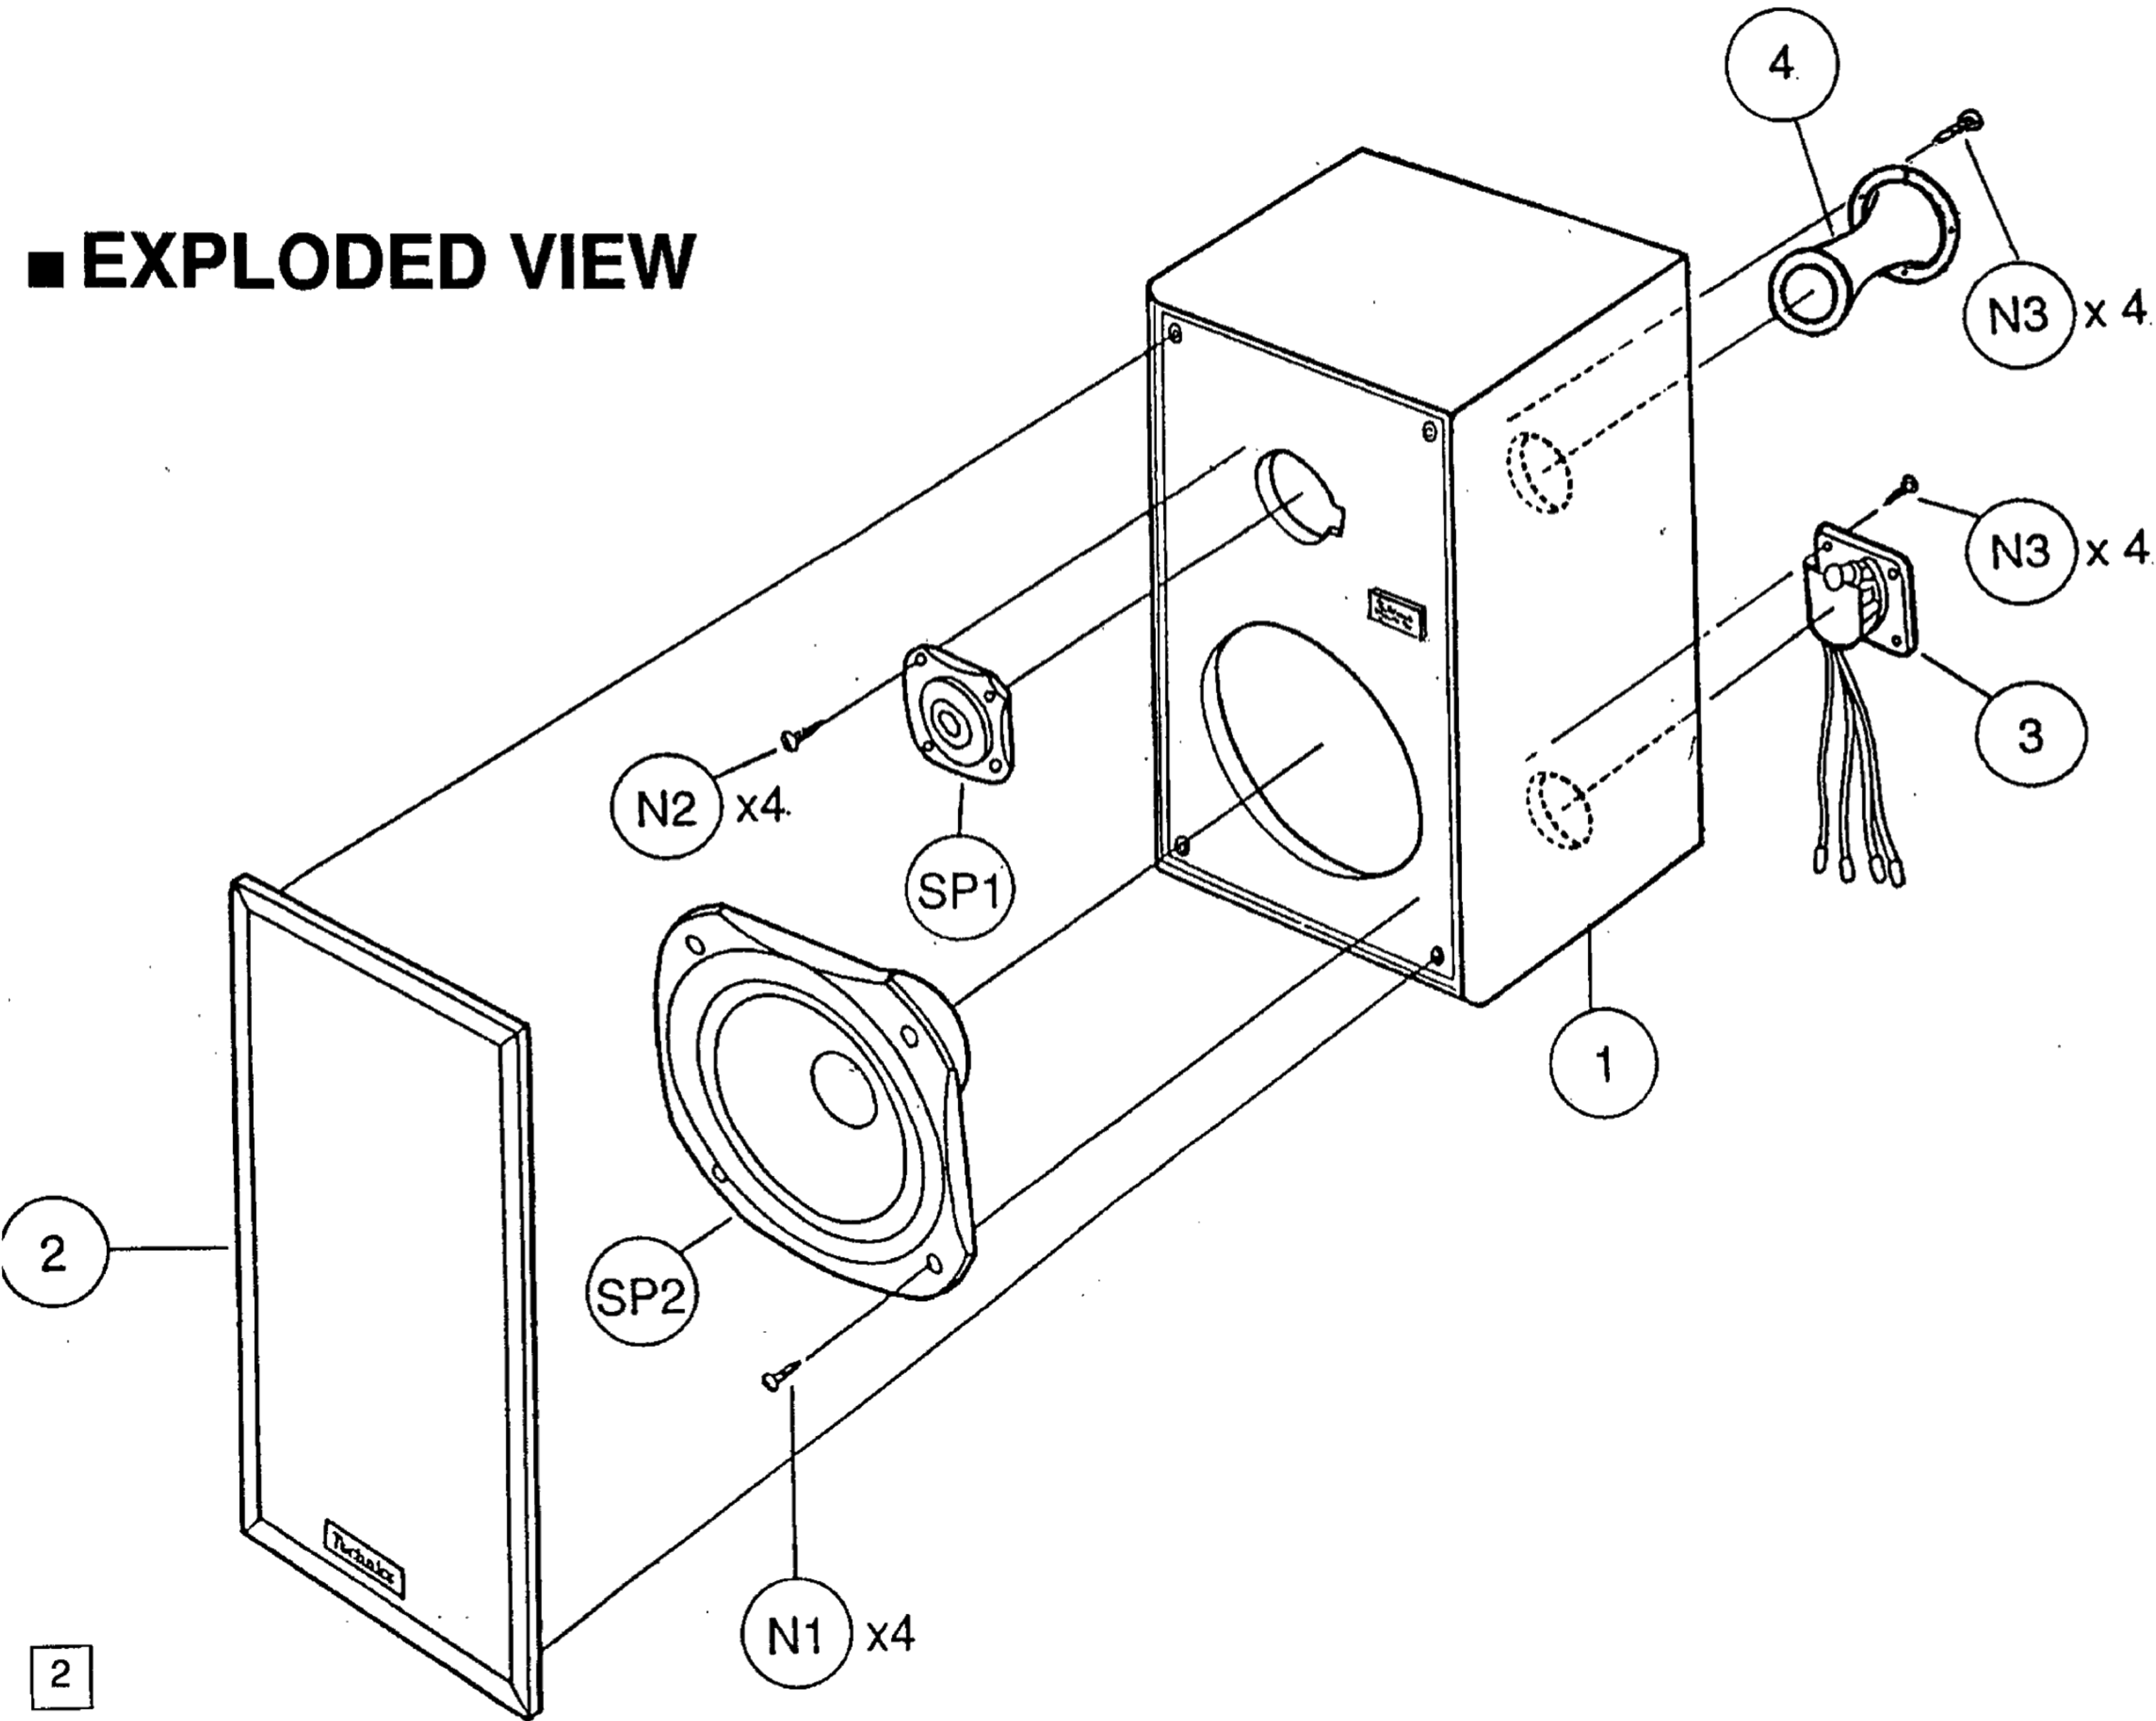

# ■ REPLACEMENT PARTS LIST

Notes: 1. Part numbers are indicated on most mechanical parts. Please use this part number for parts orders.

Nota: 1. El código está indicado en la mayoría de las piezas. Por favor, use este código para sus pedidos.

Ref. Nº		Part. Nº	Part Name & Description
SPEAKERS			
SP1		EAS25KH303T	Tweeter
SP2		EAS18PL302T	Woofers
COILS			
L1		SLCSR182J	Choque coil 1.8 mH
L2		SLCSR271J	Choque coil 0.27 mH
CAPACITORS			
C1		ECEA50Y5R6K	Non-polar capacitor 5.6 µ F 50V
C2		ECEA50Y4R7K	Non-polar capacitor 4.7 µ F 50V
C3		ECEA50Y22K	Non-polar capacitor 22 µ F 50V
RESISTORS			
R1		ERF5ZXK5R6	Resistor 5.6 Ohm 5W
R2		ERF5ZXK3R3	Resistor 3.3 Ohm 5W
CABINET PARTS			
1		SYM8GBCS55	Cabinet Ass'y
2		SYB8GBCS55	Grill
3		SWE8GBCS55	Terminal Ass'y
4		SGES8G187	Bass Reflex
SCREWS			
N1		XTN5+25FG	Screw Woofer
N2		XTN4+25FG	Screw Tweeter
N3		XTC3+15FZ	Screw Terminal, Bass Reflex
ACCESORIES			
A1		SQX8GBCS55	Instruction book
A2		SWX8G214	Cord
PACKING PARTS			
P1		SPG8GBCS55	Carton box
P2		SPS8GBCS9	Pad
P3		SPHS8G30 150A03	Sheet



■ PACKING

