



SCALE 1:10 - VIEWS IN THIRD-ANGLE PROJECTION

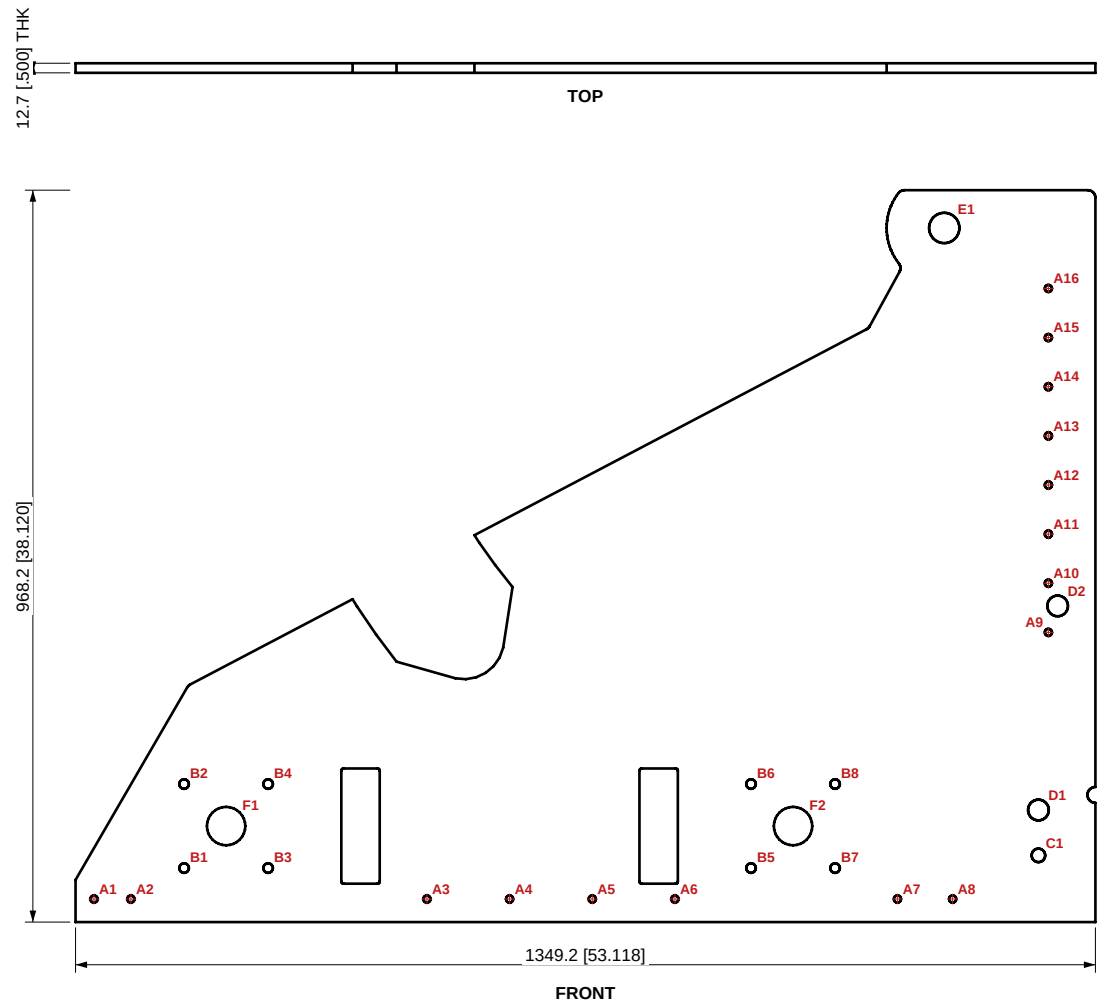

ISOMETRIC VIEW (REF, NOT TO SCALE)

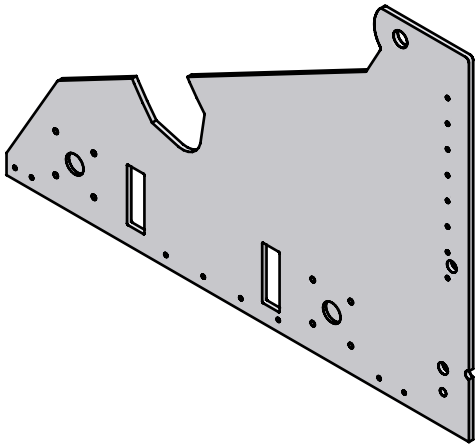

HOLE TABLE					X, Y FROM LOWER-LEFT CORNER OF EACH VIEW	
TAG	VIEW	X	Y	SIZE		
A1	FRONT	24.4 [1.961]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A2	FRONT	73.2 [2.882]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A3	FRONT	464.8 [18.301]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A4	FRONT	574.2 [22.606]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A5	FRONT	683.6 [26.912]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A6	FRONT	792.9 [31.217]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A7	FRONT	1087.3 [42.807]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A8	FRONT	1160.3 [45.681]	30.5 [1.200]	Ø9.5 [.375] THRU DRILL*		
A9	FRONT	1287 [50.668]	383.3 [15.089]	Ø9.5 [.375] THRU DRILL*		
A10	FRONT	1287 [50.668]	448.3 [17.648]	Ø9.5 [.375] THRU DRILL*		
A11	FRONT	1287 [50.668]	513.3 [20.207]	Ø9.5 [.375] THRU DRILL*		
A12	FRONT	1287 [50.668]	578.3 [22.766]	Ø9.5 [.375] THRU DRILL*		
A13	FRONT	1287 [50.668]	643.3 [25.325]	Ø9.5 [.375] THRU DRILL*		
A14	FRONT	1287 [50.668]	708.3 [27.884]	Ø9.5 [.375] THRU DRILL*		
A15	FRONT	1287 [50.668]	773.3 [30.443]	Ø9.5 [.375] THRU DRILL*		
A16	FRONT	1287 [50.668]	838.3 [33.002]	Ø9.5 [.375] THRU DRILL*		
B1	FRONT	143.6 [5.654]	71.4 [2.811]	Ø12.7 [.500] THRU		
B2	FRONT	143.6 [5.654]	182.6 [7.189]	Ø12.7 [.500] THRU		
B3	FRONT	254.8 [10.031]	71.4 [2.811]	Ø12.7 [.500] THRU		
B4	FRONT	254.8 [10.031]	182.6 [7.189]	Ø12.7 [.500] THRU		
B5	FRONT	893.6 [35.182]	71.4 [2.811]	Ø12.7 [.500] THRU		
B6	FRONT	893.6 [35.182]	182.6 [7.189]	Ø12.7 [.500] THRU		
B7	FRONT	1004.8 [39.559]	71.4 [2.811]	Ø12.7 [.500] THRU		
B8	FRONT	1004.8 [39.559]	182.6 [7.189]	Ø12.7 [.500] THRU		
C1	FRONT	1273.8 [50.150]	88.3 [3.474]	Ø17.9 [.704] THRU		
D1	FRONT	1273.8 [50.150]	148.3 [5.837]	Ø27.4 [1.079] THRU		
D2	FRONT	1299.2 [51.150]	418.3 [16.467]	Ø27.4 [1.079] THRU		
E1	FRONT	1149.2 [45.244]	918.3 [36.152]	Ø40.1 [1.579] THRU		

NOTES - UNLESS OTHERWISE SPECIFIED

- DIMENSIONS IN MILLIMETRES [INCHES]. DO NOT SCALE DRAWING.
- GENERATED FROM THE OPENSCAD MODEL. IF THIS SHEET AND THE MODEL DISAGREE, THE MODEL GOVERNS. THE GEOMETRY ID IDENTIFIES THE MODEL VERSION.
- CUT THE PROFILE FROM generated/df/f/P3_side-panel-inner.dxf AT 1:1. THIS SHEET IS FOR INSPECTION AND HOLE CHECKING.
- TOLERANCES: PROFILE AND HOLE POSITION ± 0.8 [$\pm .03$]; HOLE $\varnothing \pm 0.5/-0$ [$\pm .02/-0$].
- HOLES MARKED DRILL* ARE SMALLER THAN THE PLATE THICKNESS: PLASMA-MARK THE CENTRE ONLY, THEN DRILL TO SIZE.
- EDGES SQUARE UNLESS NOTED. BREAK SHARP EDGES. MARK THE PART NUMBER ON EACH PIECE.
- SAME PART FOR THE LEFT AND RIGHT INNER PANELS.
- CHECK BEFORE MAKING: THE UWU BEARING BOLT HOLES ARE MODELLED BLIND (8.35 DEEP IN 12.7 PLATE, uwu_bearing_holes_3d USES center=true). THEY ARE BOLT HOLES: CUT THEM THROUGH.

PROJECT LIFETRAC v25 - OPEN SOURCE ECOLOGY						PART NO. P3	
TITLE SIDE PANEL, INNER							
MATERIAL / STOCK PL 1/2 [12.7] ASTM A36						QTY PER MACHINE (COUNTED IN MODEL) 2	
PROCESS CNC PLASMA CUT			FINISH REMOVE DROSS, DEBURR; PRIME + PAINT			BLANK SIZE 1349.2 x 968.2	MASS (CALC) 75.70 kg
SCALE 1:10	UNITS mm [in]	3RD ANGLE 	SHEET 1 OF 2	REV B	REV DATE 2026-09-27	GEOMETRY ID SHEET SIZE b5b07b32 A (LETTER)	
SOURCE (OPENS CAD) openscad/lifetrac_v25.scad : side_panel_left_inner()						USED IN Base frame, both sides (arm pivot sandwich)	

HOLE TABLE (CONT.)

X, Y FROM LOWER-LEFT CORNER OF EACH VIEW

TAG	VIEW	X	Y	SIZE
F1	FRONT	199.2 [7.843]	127 [5.000]	Ø50.8 [2.000] THRU
F2	FRONT	949.2 [37.370]	127 [5.000]	Ø50.8 [2.000] THRU

NOTES - UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS IN MILLIMETRES [INCHES]. DO NOT SCALE DRAWING.
2. GENERATED FROM THE OPENSCAD MODEL. IF THIS SHEET AND THE MODEL DISAGREE, THE MODEL GOVERNS. THE GEOMETRY ID IDENTIFIES THE MODEL VERSION.
3. CUT THE PROFILE FROM generated/dxf/P3_side-panel-inner.dxf AT 1:1. THIS SHEET IS FOR INSPECTION AND HOLE CHECKING.
4. TOLERANCES: PROFILE AND HOLE POSITION ±0.8 [±.03]; HOLE Ø +0.5/-0 [+.02/-0].
5. HOLES MARKED DRILL* ARE SMALLER THAN THE PLATE THICKNESS: PLASMA-MARK THE CENTRE ONLY, THEN DRILL TO SIZE.
6. EDGES SQUARE UNLESS NOTED. BREAK SHARP EDGES. MARK THE PART NUMBER ON EACH PIECE.
7. SAME PART FOR THE LEFT AND RIGHT INNER PANELS.
8. CHECK BEFORE MAKING: THE UWU BEARING BOLT HOLES ARE MODELLED BLIND (8.35 DEEP IN 12.7 PLATE, uwu_bearing_holes_3d USES center=true). THEY ARE BOLT HOLES: CUT THEM THROUGH.

PROJECT					PART NO.		
LIFETRAC v25 - OPEN SOURCE ECOLOGY					P3		
TITLE							
SIDE PANEL, INNER							
MATERIAL / STOCK					QTY PER MACHINE (COUNTED IN MODEL)		
PL 1/2 [12.7] ASTM A36					2		
PROCESS			FINISH		BLANK SIZE		MASS (CALC)
CNC PLASMA CUT			REMOVE DROSS, DEBURR; PRIME + PAINT		1349.2 x 968.2		75.70 kg
SCALE	UNITS	3RD ANGLE	SHEET	REV	REV DATE	GEOMETRY ID SHEET SIZE	
-	mm [in]		2 OF 2	B	2026-09-27	b5b07b32 A (LETTER)	
SOURCE (OPENS CAD)						USED IN	
openscad/lifetrac_v25.scad : side_panel_left_inner()						Base frame, both sides (arm pivot sandwich)	