DATA SHEET

EYP-DFB-0785-00012-1500-BFY22-0007

Revision 0.70

2022-06-07

SINGLE FREQUENCY LASER DIODES
Distributed Feedback Laser

General Product Information

Product	Application
785 nm DFB Laser	Spectroscopy
with hermetic 14-Pin Butterfly Housing (RoHS compliant)	Metrology
including Monitor Diode, Thermoelectric Cooler and Thermistor	
with integrated two-stage µ-Isolator and PM Fiber	



Absolute Maximum Ratings

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Storage Temperature	T_S	°C	-40		85	Stress in excess of one of the Absolute Maximum Ratings may damage the laser. Please note that a damaging optical power level may occur although the maximum current is not reached. These are stress ratings only, and functional operation at these or any other conditions beyond those indicated under Recommended Operational Conditions is not implied.
Operational Temperature at Case	T_C	°C	-15		70	
Operational Temperature at Laser Chip	T_{LD}	°C	5		50	
Forward Current	I_F	mA			220	
Reverse Voltage	V_R	V			2	
Output Power	P_{opt}	mW			20	
TEC Current	I_{TEC}	A			1.8	
TEC Voltage	V_{TEC}	V			3.2	

Recommended Operational Conditions

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Operational Temperature at Case	T_{case}	°C	5		60	
Operational Temperature at Laser Chip	T_{LD}	°C	5		45	measured by integrated Thermistor
Forward Current	I_F	mA			200	
Output Power	P_{opt}	mW	10		12	

Characteristics at T_{LD} at optimum temperature (will be reported for each laser)

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Center Wavelength	λ_C	nm	780	785	790	see images on page 4
Target Wavelength	λ_T	nm				reached within T_{LD} =
Linewidth (FWHM)	$\Delta\lambda$	MHz		0.6	1	P_{opt} = 12 mW
Mode-hop free Tuning Range	$\Delta\lambda_{tune}$	pm				
Sidemode Supression Ratio	SMSR	dB	30	45		P_{opt} = 12 mW

eagleyard Photonics GmbH Rudower Chaussee 29 12489 Berlin GERMANY
www.toptica-eagleyard.com info@toptica-eagleyard.com fon +49.30.6392 4520

EYP-DFB-0785-00012-1500-BFY22-0007

Revision 0.70

2022-06-07

SINGLE FREQUENCY LASER DIODES
Distributed Feedback Laser

Characteristics at T_{LD} at optimum temperature (will be reported for e: cont'd

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Temperature Coefficient of Wavelength	$d\lambda / dT$	nm / K		0.06		
Current Coefficient of Wavelength	$d\lambda / dI$	nm / mA		0.003		
Laser Current @ P_{opt} = 12 mW	I_{LD}	mA			200	ex fiber
Slope Efficiency	η	W / A		0.1		
Threshold Current	I_{th}	mA			70	
Polarization Extinction Ratio	PER	dB		20		P_{opt} = 12 mW

Monitor Diode

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Monitor Detector Responsivity	I_{mon} / P_{opt}	µA/mW	5		100	U_R = 5 V

Thermoelectric Cooler

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Current	I_{TEC}	A		0.4		P_{opt} = 12 mW, ΔT =30 K
Voltage	U_{TEC}	V		1.5		P_{opt} = 12 mW, ΔT = 30 K
Power Dissipation (total loss at case)	P_{loss}	W		0.5		P_{opt} = 12 mW, ΔT = 30 K
Temperature Difference	ΔT	K			45	P_{opt} = 12 mW, ΔT = |Tcase - TLD|

Thermistor (Standard NTC Type)

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Resistance	R	kΩ		10		T_{LD} = 25° C
Beta Coefficient	β			3892		$R_1 / R_2 = e^{\beta (1/T_1 - 1/T_2)}$ at T_{LD} = 0° … 50° C
Steinhart & Hart Coefficient A	A			1.1293×10^{-3}		$1/T = A + B(\ln R) + C(\ln R)^3$
Steinhart & Hart Coefficient B	B			2.3410×10^{-4}		T: temperature in Kelvin
Steinhart & Hart Coefficient C	C			8.7755×10^{-8}		R: resistance at T in Ohm

EYP-DFB-0785-00012-1500-BFY22-0007

Revision 0.70

2022-06-07

SINGLE FREQUENCY LASER DIODES
Distributed Feedback Laser

Pin Assignment

1	Thermoelectric Cooler (+)	14	Thermoelectric Cooler (-)
2	Thermistor	13	Case
3	Photodiode (Anode)	12	not connected
4	Photodiode (Cathode)	11	Laser Diode (Cathode)
5	Thermistor	10	Laser Diode (Anode)
6	not connected	9	not connected
7	not connected	8	not connected



Package Drawings

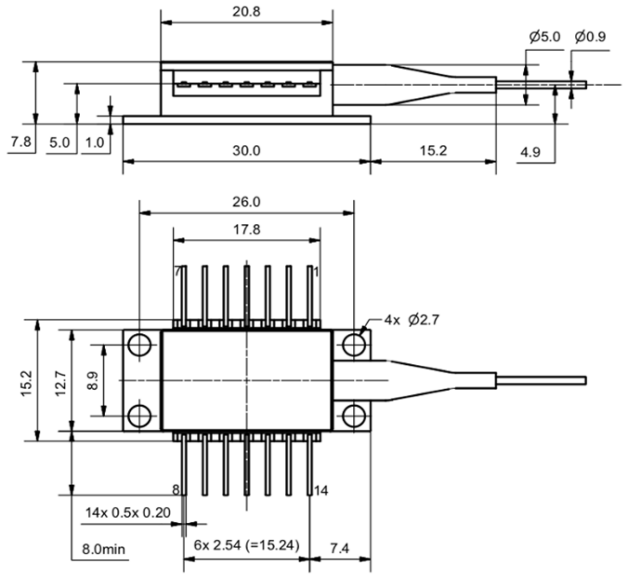

AIZ-16-0222-1415

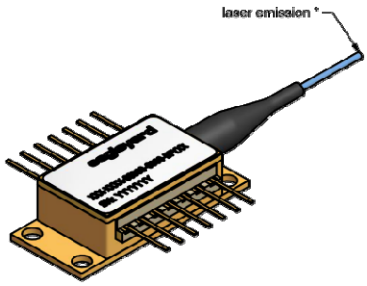

Caution. Excessive mechanical stress on the package can lead to a damage of the laser.
See instruction manual on www.eagleyard.com

Fiber and Connector Type

PM Fiber	900 / 125 / 5.5 µm, UV/Polyester-elastomer Coating (l = 1 +/-0.1 m)
Connector	FC/APC (narrow key / 2mm)
	other types on request

Measurement Conditions / Comments



EYP-DFB-0785-00012-1500-BFY22-0007

Revision 0.70

2022-06-07

SINGLE FREQUENCY LASER DIODES
Distributed Feedback Laser

Typical Measurement Results

Output Power vs. Current

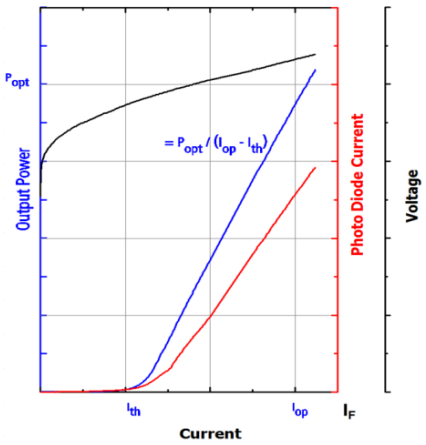

Spectra at Specified Optical Output Power

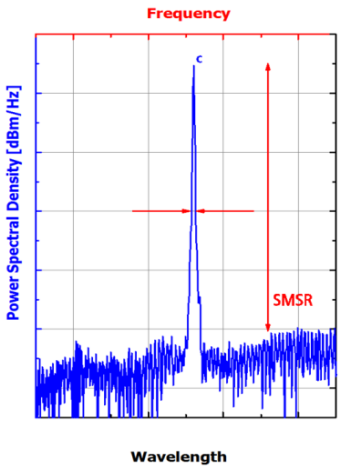

Performance figures, data and any illustrative material provided in this specification are typical and must be specifically confirmed in writing by eagleyard Photonics before they become applicable to any particular order or contract. In accordance with the eagleyard Photonics policy of continuous improvement specifications may change without notice.

Unpacking, Installation and Laser Safety

Unpacking the laser diodes should only be done at electrostatic safe workstations (EPA). Though protection against electro static discharge (ESD) is implemented in the laser package, charges may occur at surfaces. Please store this product in its original package at a dry, clean place until final use. During device installation, ESD protection has to be maintained.

The DFB laser is sensitive against optical feedback, so an optical isolator may be required in order to avoid any disturbance of the emission spectrum. Operating at moderate temperatures on proper heat sinks will contribute to a long lifetime of the diode.

Avoid direct and/or indirect exposure to the free running beam. Collimating and focussing the free running beam with optics as common in optical instruments will increase threat to the human eye.

Performance figures, data and any illustrative material provided in this specification are typical and must be specifically confirmed in writing by eagleyard Photonics before they become applicable to any particular order or contract. In accordance with the eagleyard Photonics policy of continuous improvement specifications may change without notice.