


Oct.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

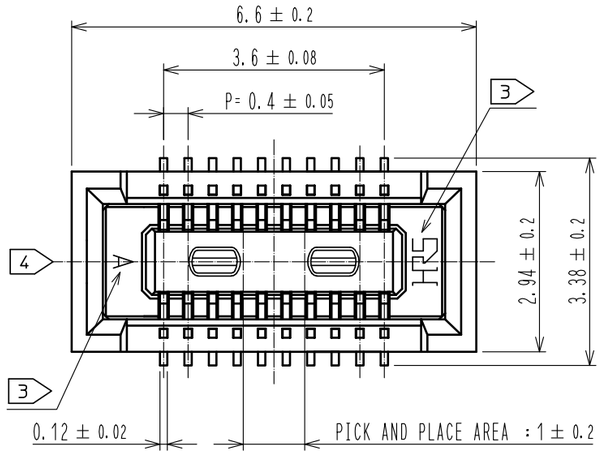

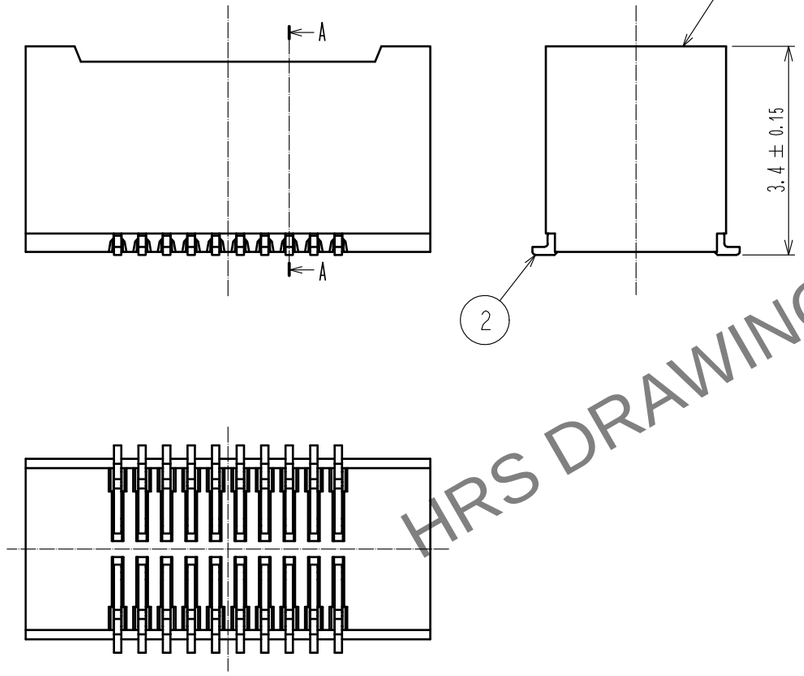


RECOMMENDED PATTERN

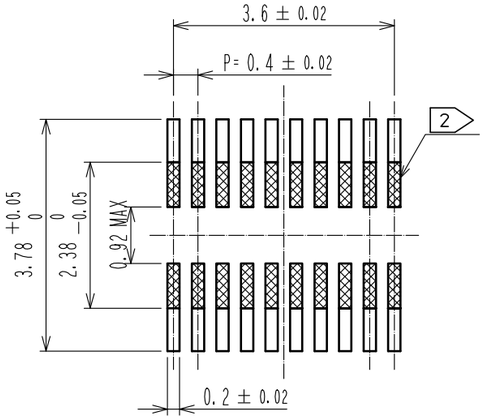


RECOMMENDED METAL MASK THICKNESS : 120μm
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD

A-A(20:1)

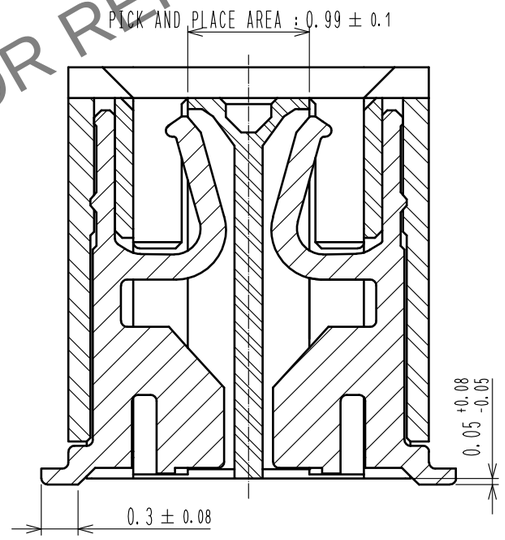

ENGAGEMENT FIGURE (20:1)

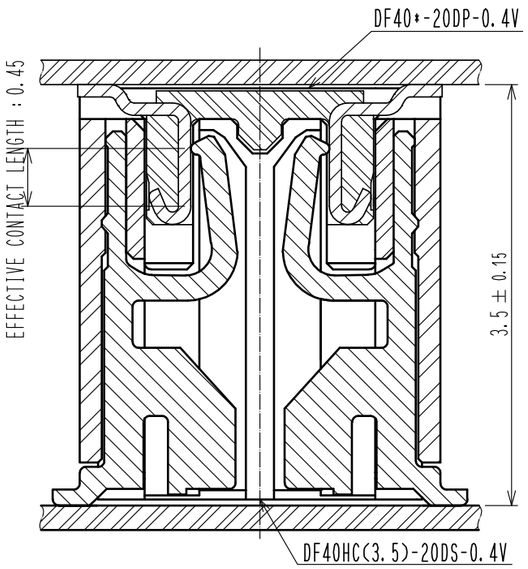

HRS DRAWING FOR REFERENCE

NOTES)
1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. ▨ IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3. HRS MARK AND CAV NO. ARE INDICATED IN APPROXIMAL POSITION SHOWN.
4. GATE POSITION IS POSITIONED IN PPROXIMAL AREA SHOWN.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.05μm MIN SMT LEAD:GOLD 0.05μm MIN UNDERPLATING:NICKEL 1μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
			5	PS	BLACK, PLASTIC REEL
			4	POLYESTER	CLEAR, COVER TAPE
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	10 : 1	2	1	DIS-H-00009450	RH. KAGAMI	YK. SATAKE	20210527

HIROSE ELECTRIC CO., LTD.


APPROVED	KH. IKEDA	20140127
CHECED	YH. MICHIDA	20140127
DESIGNED	RT. SHIMIZU	20140127
DRAWN	KR. AJITO	20140127


DRAWING NO.	EDC-345683-51-01
PART NO.	DF40HC(3.5)-20DS-0.4V(51)
CODE NO.	CL0684-4188-0-51

2 1/2

Oct.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


EMBOSSED CARRIER TAPE (FREE)

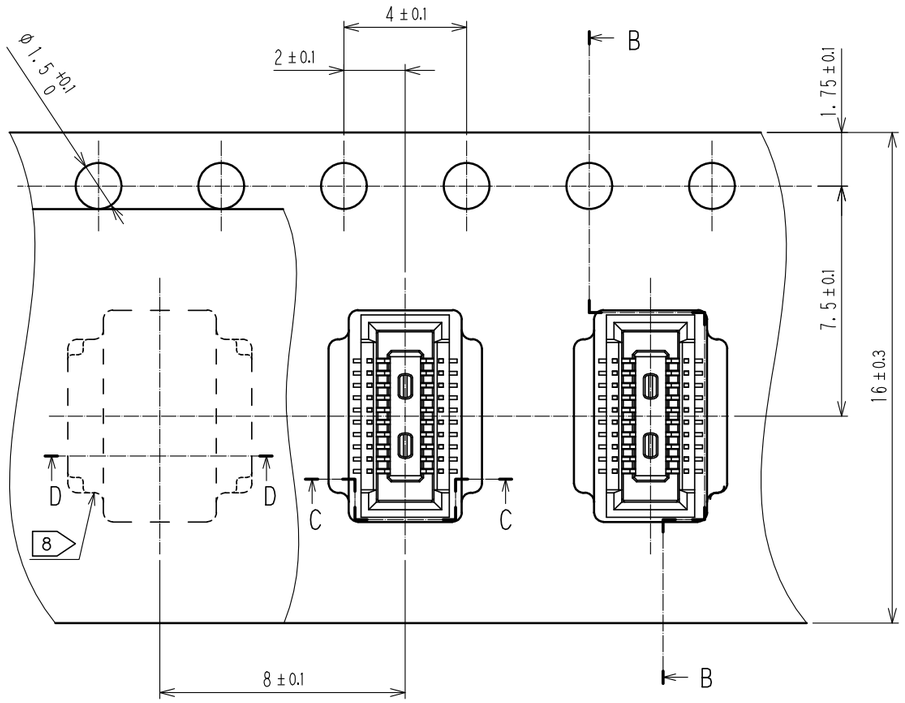

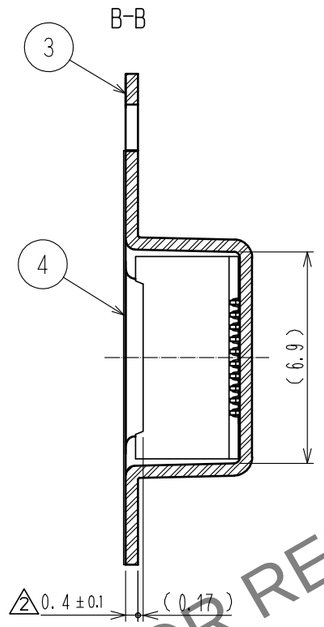



DIRECTION OF UNREELING

D-D




C-C




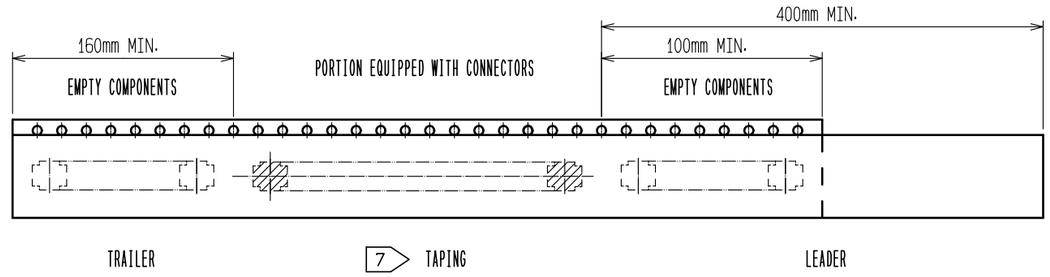

STYLE AND DIMENSION OF REEL(FREE SIZE)

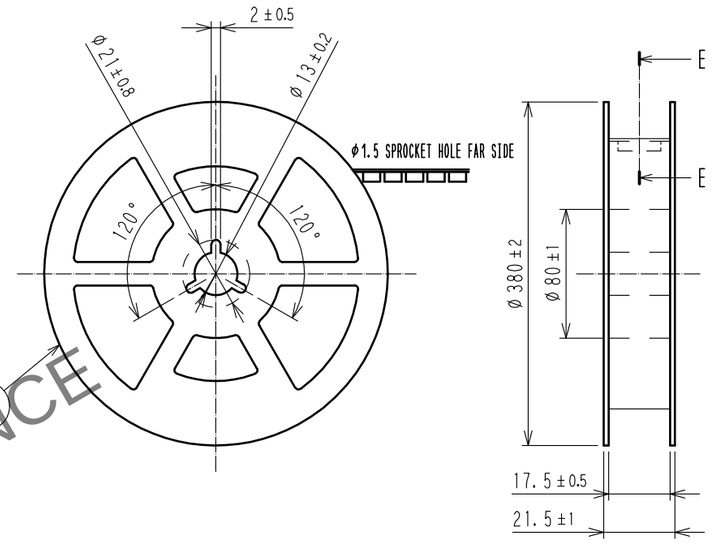

E-E (FREE)

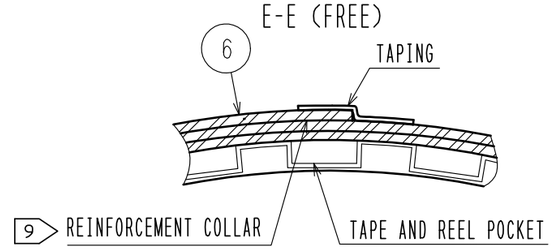

NOTES
5. PER REEL 2000 CONNECTORS.
6. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
7. REFER TO JIS C 0806(IEC 60286-3)(PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
8. THE POCKET SHAPE IS SPECIFIED AT INTERVALS OF FOUR POCKETS.
9. AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC-345683-51-01
	PART NO.	DF40HC(3.5)-20DS-0.4V(51)
	CODE NO.	CL0684-4188-0-51