Product Datasheet | 07 - 2024

USGKnauf Clip-in-Metal Ceiling Tiles

USGKnauf Clip-in-Metal Ceiling tile is manufactured out of 0.50 mm thick Polyester coil coated galvanized steel. These tiles have bevelled edges. These tiles shall be fixed by inserting their flanges in Clip-in-Carrier profile grids. These are suitable for 600 mmx600 mm module.

USGKnauf Clip-In-Metal Ceiling Tiles:

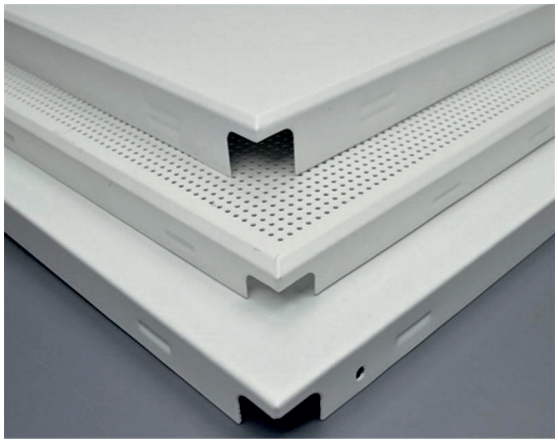

Product Item Code With Description:

Item Code	Item Description
784083	USGKnauf GI Metal Ceiling Clip in Perforated (1.8 mm Dia) 600 mmx600 mmx0.5 mm, 25 mm Height (DSR Specs) Bevel
784094	USGKnauf GI Metal Ceiling Clip in Plain 600 mmx600 mmx0.5 mm, 25 mm Height (DSR Specs) Bevel

Product Properties:

Description	Unit	Range
Size	mm	600x600
Edge	-	Bevelled Edge
Thickness	mm	0.50 (+/- 0.02)
Material	GSM	100 Galvanized Stell
Surface	NA	Plain & Perforated
Perforation Dia	mm	1.8 (Applicable for Perforated Tile)
Coating (Powder Coated)	Micron	Up to 60
Colour	NA	White
Height	mm	25
Perforation Area	%	20% with 1.8 mm Dia Holes (Applicable for Perforated Tile)
NRC	NA	0.5 (Applicable for Perforated Tile)

Knauf India Private Limited

Head Office: 9th Floor, Plaza Tower, DLF Phase -1, Gurugram - 122002, Haryana, India

Customer Care No: +91 - 9015147147
Email: info.india@knauf.com

www .usgknauf.com

2021 USGKNAUF® All rights reserved. USGKNAUF® is a trademark owned by Knauf Gips KG. Information provided is for reference purpose only. Due care has been taken to ensure accuracy at time of publication. Products, specifications and requirements may vary according to geographical locations and applications. As each project is unique, please contact your nearest USGKNAUF® representative for further assessment.