

Performance of grid-connected PV

PVGIS-5 estimates of solar electricity generation:


Provided inputs:

Latitude/Longitude: 19.456,72.828
Horizon: Calculated
Database used: PVGIS-ERA5
PV technology: Cryst Sil Original
PV installed: 1 kWp
System loss: 14 %


Simulation outputs

Slope angle: 35 °
Azimuth angle: 0 °
Yearly PV energy production: 1424.28 kWh
Yearly in-plane irradiation: 2015.8 kWh/m²
Year-to-year variability: 32.64 kWh
Changes in output due to:
Angle of incidence: -2.47 %
Spectral effects: 0.16 %
Temperature and low irradiance: -15.89 %
Total loss: -29.34 %


Outline of horizon at chosen location:

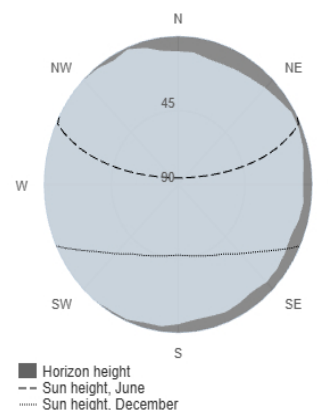

Monthly energy output from fix-angle PV system:

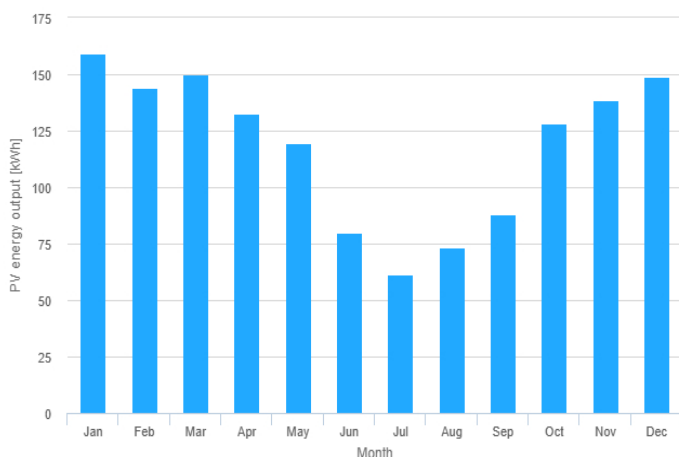

Monthly in-plane irradiation for fixed-angle:

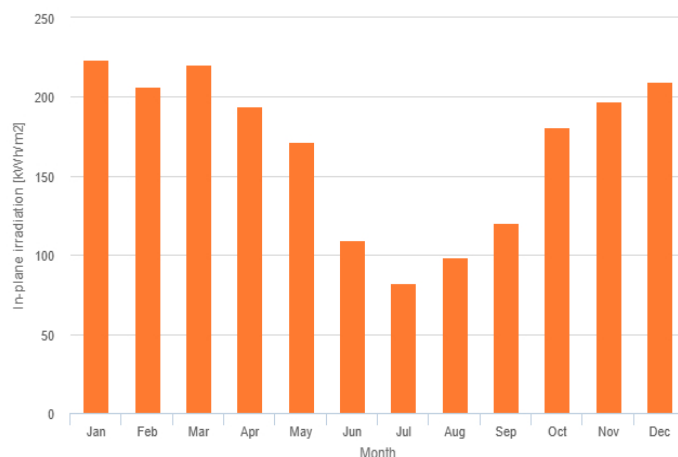

Monthly PV energy and solar irradiation

Month	E_m	H(i)_m	SD_m
January	159.1	223.8	4.1
February	144.2	206.9	3.5
March	150.0	220.2	4.0
April	132.8	194.4	1.8
May	119.3	171.6	4.3
June	79.8	109.4	7.0
July	61.1	82.7	9.6
August	73.5	98.9	9.6
September	88.1	120.2	11.0
October	128.4	181.1	9.1
November	138.7	197.1	7.8
December	149.1	209.5	6.4

E_m: Average monthly electricity production from the defined system [kWh].

H(i)_m: Average monthly sum of global irradiation per square meter received by the modules of the given system [kWh/m²].

SD_m: Standard deviation of the monthly electricity production due to year-to-year variation [kWh].