


Rocket Design

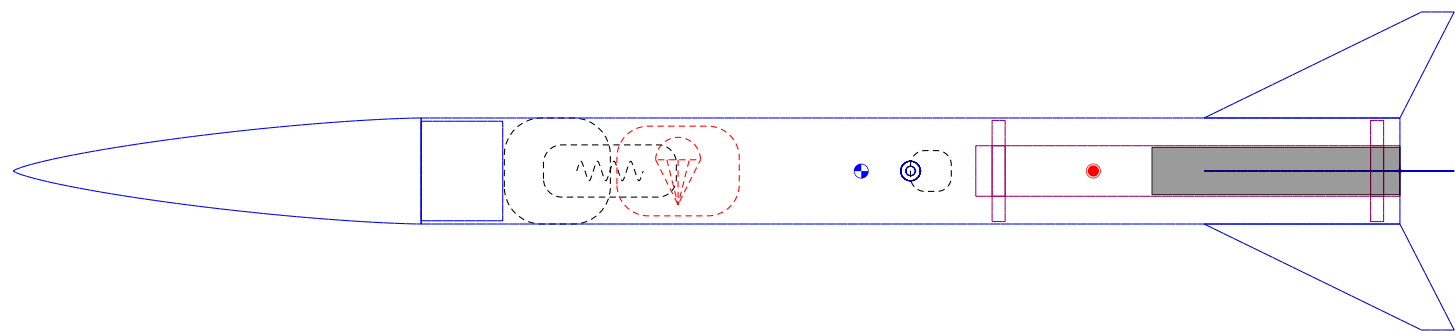

Rocket
Stages: 1
Mass (with motor): 736 g
Stability: 2.19 cal / 16.1 %
CG: 52 cm
CP: 66.2 cm

F57-6

Altitude	282 m	Motor	Avg Thrust	Burn Time	Max Thrust	Total Impulse	Thrust to Wt	Motor Wt	Size
Flight Time	54.9 s	F57	59.3 N	1.14 s	68.5 N	67.4 Ns	8.22:1	62.1 g	29/152 mm
Time to Apogee	13.8 s								
Optimum Delay	6.65 s								
Velocity off Pad	15.2 m/s								
Max Velocity	81.4 m/s								
Velocity at Deployment	3.11 m/s								
Landing Velocity	7.14 m/s								


Parts Detail


Stage: Sustainer


	Nose Cone	PETG - 100% infill (1.25 g/cm³)	Haack series	Len: 25 cm	Mass: 64.3 g
	Body Tube	Cardboard (0.68 g/cm³)	Dia _{in} 6.2 cm Dia _{out} 6.5 cm	Len: 60 cm	Mass: 122 g
	Trapezoidal Fin Set (4)	Balsa (0.17 g/cm³)	Thick: 0.3 cm		Mass: 9.28 g
	Inner Tube	Cardboard (0.68 g/cm³)	Dia _{in} 2.9 cm Dia _{out} 3.1 cm	Len: 26 cm	Mass: 16.7 g
	Centering Ring	Cardboard (0.68 g/cm³)	Dia _{in} 3.1 cm Dia _{out} 6.2 cm	Len: 0.8 cm	Mass: 20 g
	Centering Ring	Cardboard (0.68 g/cm³)	Dia _{in} 3.1 cm Dia _{out} 6.2 cm	Len: 0.8 cm	Mass: 20 g
	Flight Computer		Dia _{out} 6.5 cm		Mass: 150 g
	Parachute	Ripstop nylon (67 g/m²)	Dia _{out} 60 cm	Len: 7.5 cm	Mass: 60 g
	Shroud Lines	Elastic cord (round 2 mm, 1/16 in) (1.8 g/m)	Lines: 6	Len: 30 cm	
	Shock Cord	Elastic cord (round 2 mm, 1/16 in) (1.8 g/m)		Len: 300 cm	Mass: 45 g
	Unspecified		Dia _{out} 2.5 cm		Mass: 50 g


Pod Set: Pod Set

	Rail Button	PETG - 100% infill (1.25 g/cm³)		Len: 0 cm	Mass: 1.5 g
---	-------------	---------------------------------------	--	-----------	-------------

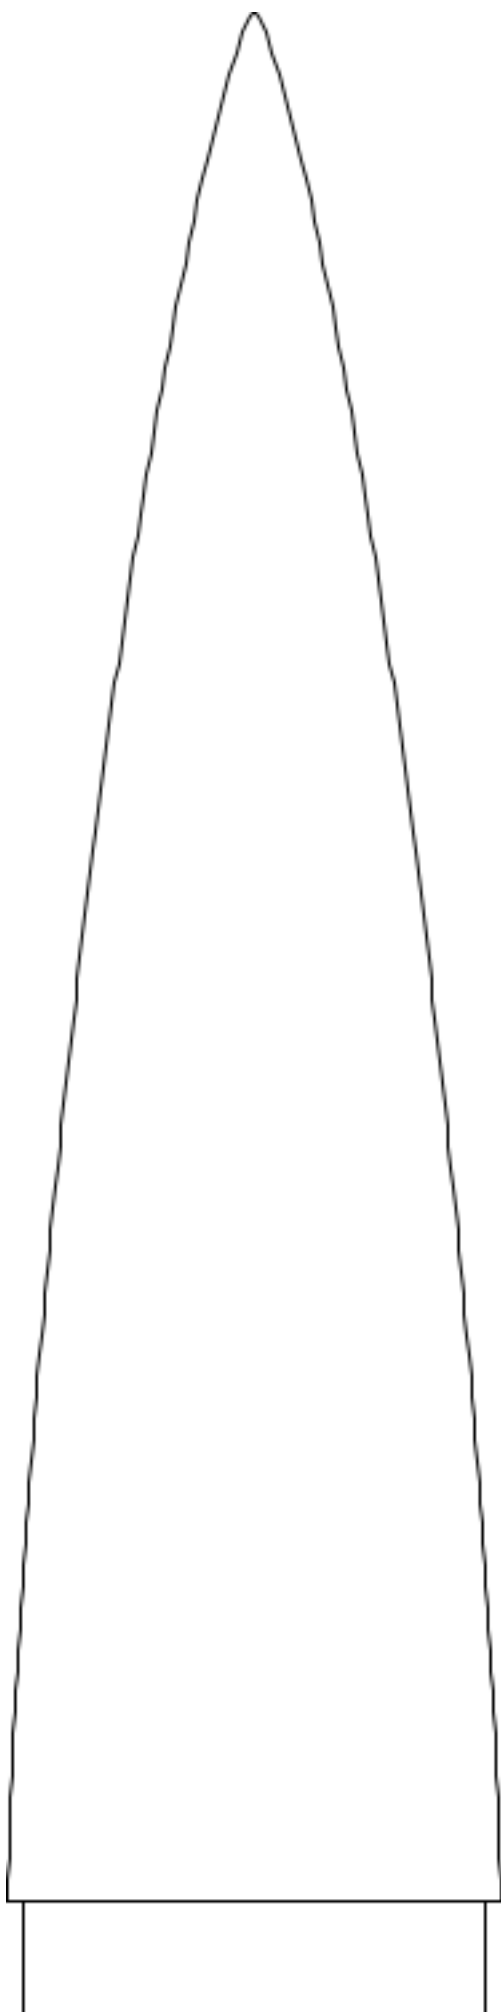



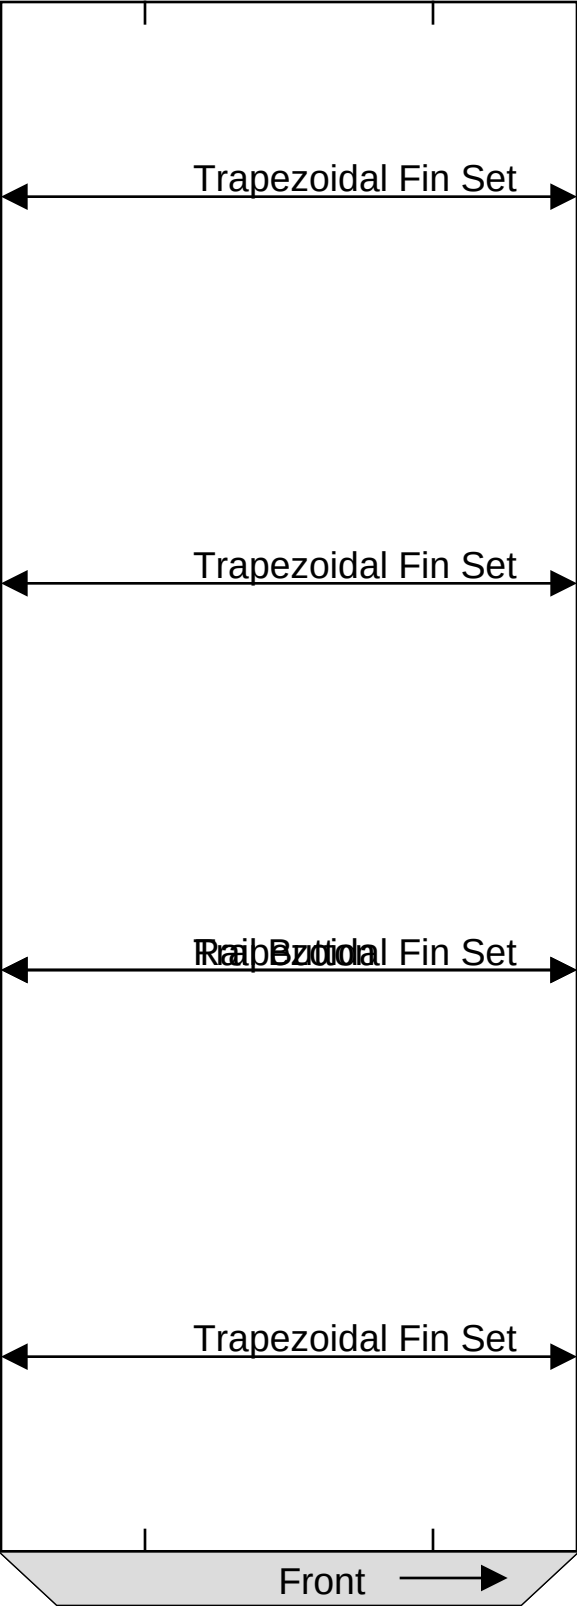

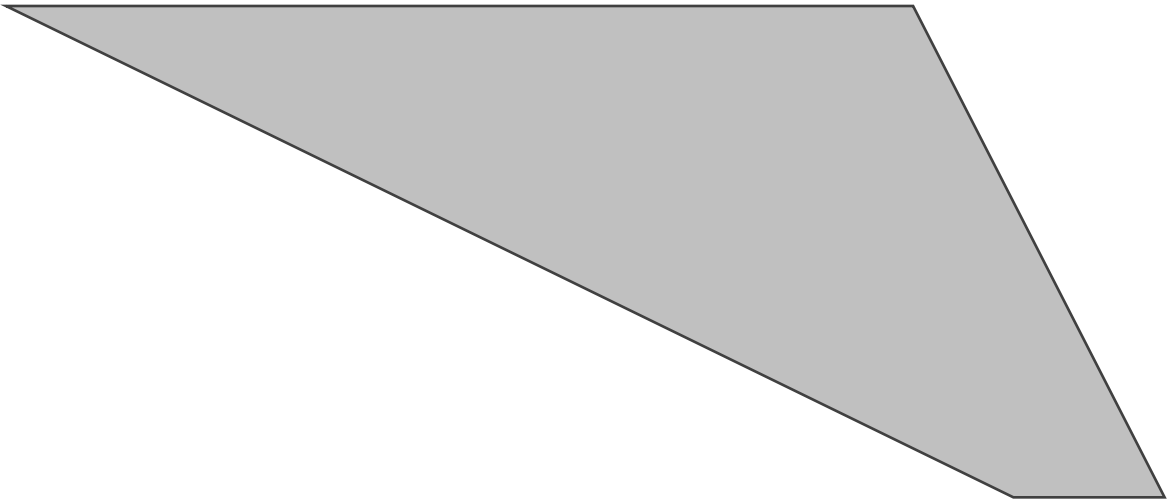

in cm

