

IEC Connector with Power Switch

Green Indicator Light, Screw on, C14, 15A UL, DPST-NO



\$15.34 Each
5428N114

Connection Type	Straight Blade
Electrical Connector Component	Receptacle
Receptacle Type	Single
Gender	Male
Shape	Straight
Grounding	Grounded
IEC Style	C14
Voltage	250V AC
Current (Rating)	15A (UL), 10A (IEC)
Frequency	50 Hz, 60 Hz
Switch Starting Position	2 Off (Normally Open)
Industry Designation	DPST-NO
Wire Connection Type	Quick-Disconnect Terminals
Terminal	
Width	0.187"
Thickness	0.032"
Housing Material	Plastic
Mount Type	Screw On
Mounting Location	Panel
For Panel Cutout	
Height	1.24"
Width	1.09"
For Panel Thickness	0.24"
Mounting Hole Diameter	0.14"
Temperature Range	-10° to 155° F
Environmental Rating	IP40
Shock Protection Class	I
Specifications Met	UL Recognized Component, C-UL Recognized Component, CSA Certified, ENEC Marked, UL 94 V-0, CE Marked
Color	Black
Features	Power Switch, Indicator Light
Indicator Color	Green
RoHS	RoHS 3 (2015/863/EU) compliant with exemption 6(c) - Lead in copper alloy
REACH	REACH (EC 1907/2006) (06/25/2025, 250 SVHC) Compliant
DFARS	Specialty Metals COTS-Exempt
Country of Origin	Czech Republic
Schedule B	853669.5050
ECCN	EAR99


Switch your device on and off without needing a separate switch. These connectors work with industry standard cords often found on power

supplies, appliances, and other electronic devices. Wire these connectors using the quick-disconnect terminals. They slide together with mating terminals for a secure hold that's also easy to pull apart to make repairs. The terminals are on the back of the connector, so the wiring stays inside your device.

Class I shock protection means they have insulation and a protective ground. They meet UL 94 V-0, so they self-extinguish within 10 seconds if they catch fire and won't spread the fire by dripping. They're also UL and C-UL recognized components, CE and ENEC marked, and CSA certified—they meet U.S., Canadian, and European safety standards.

Drill mounting holes in your device to mount screw-on connectors to housings of any thickness.

The power switch on connectors with an indicator light illuminates when your device is on.

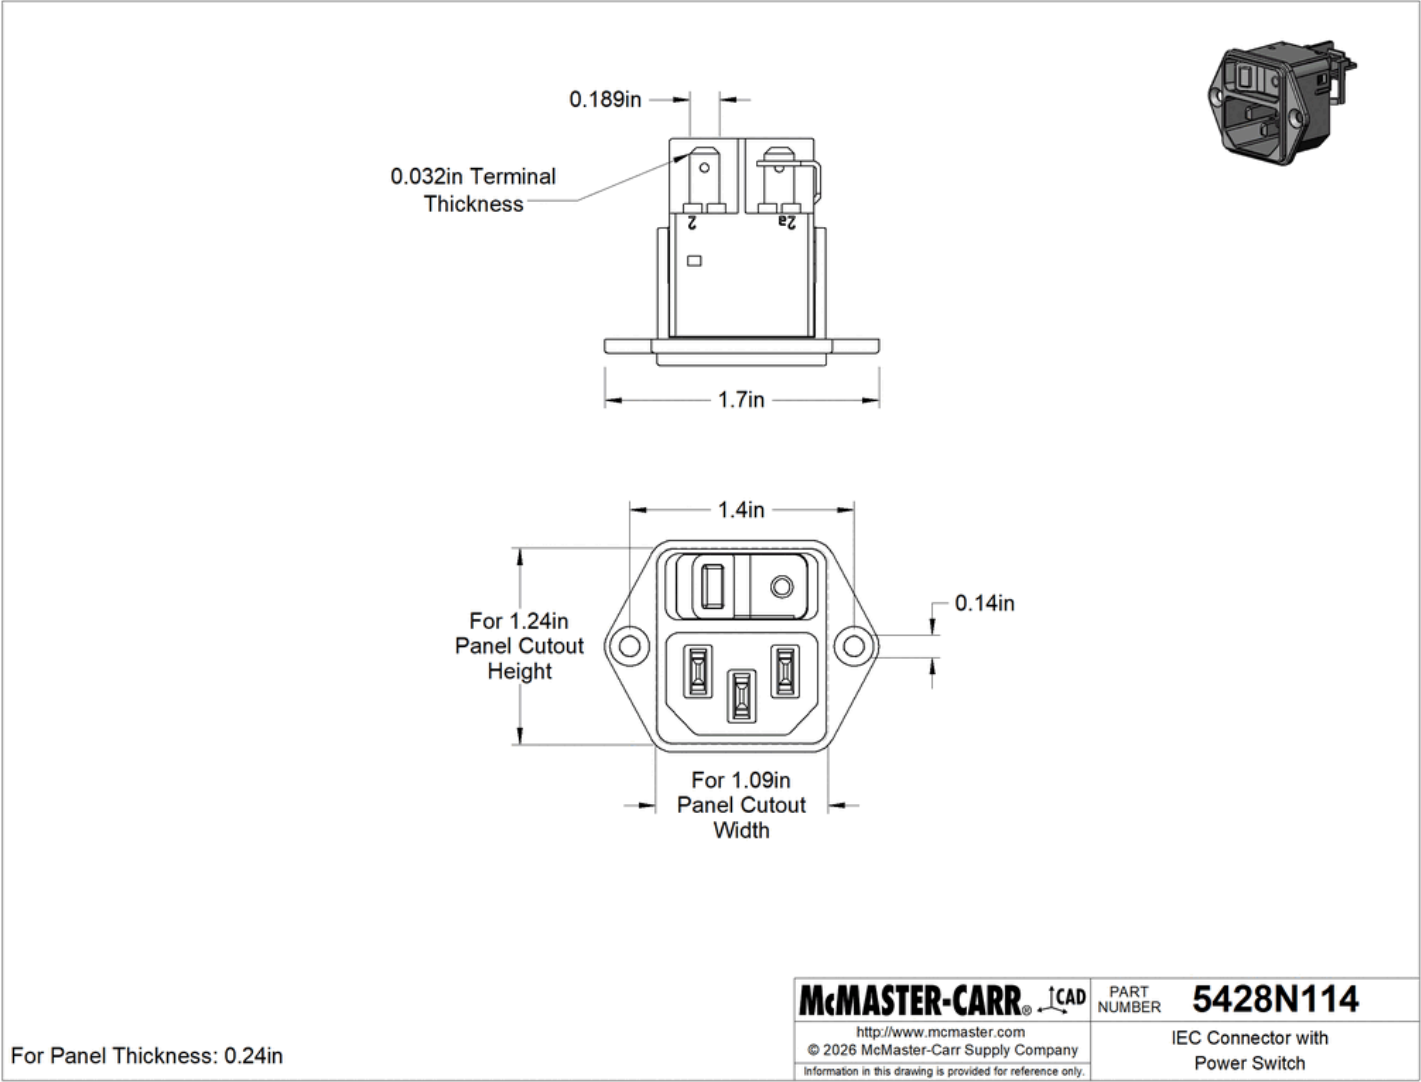

The information in this 3-D model is provided for reference only.