

## Shaking intensity (IMS-25)

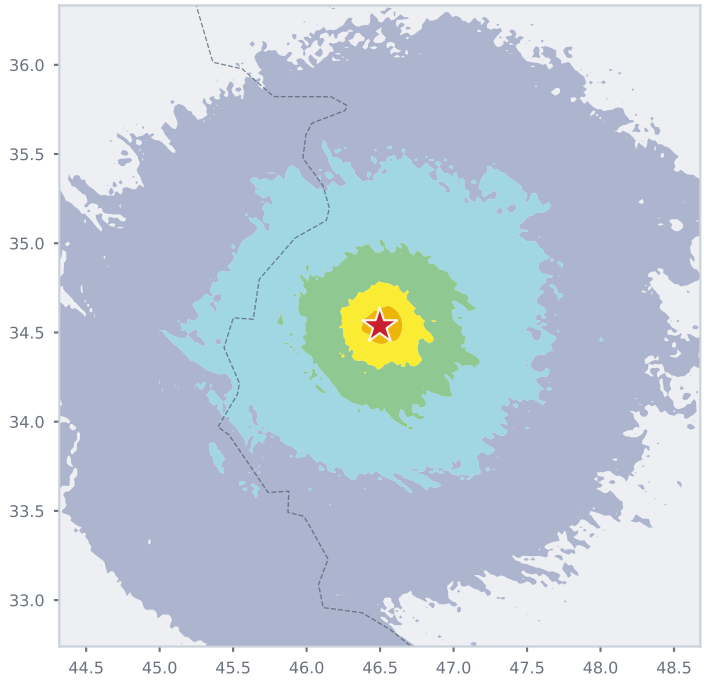


IMS-25 intensity

I II III IV V VI VII VIII IX X XI XII

## Expected building damage grade

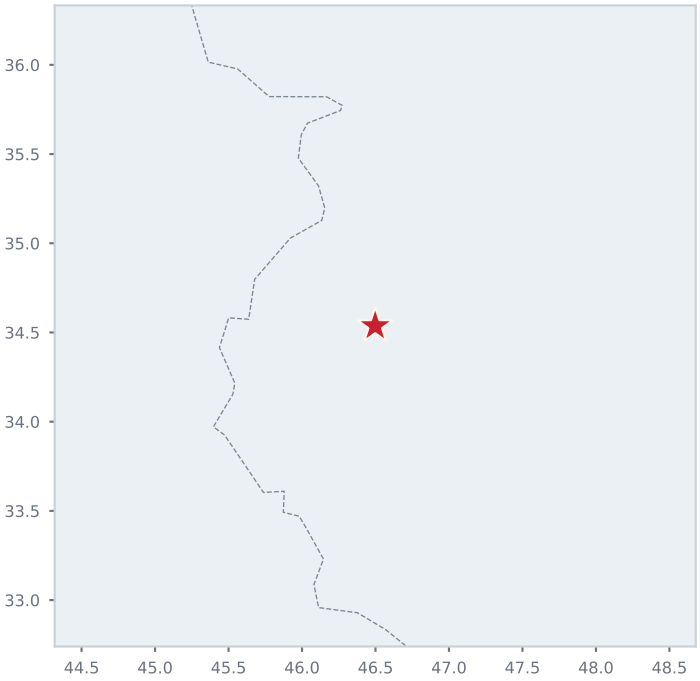


Expected damage grade (IMS-25)

DG1 DG2 DG3 DG4 DG5

Damage alert

**YELLOW** Some buildings damaged, mostly repairable

**Provisional** **Transit occupancy**

Buildings heavily damaged (DG3 or worse)

# 82 to 1.1 thousand

Central estimate 270. The range is the 5th to 95th percentile.

Buildings in the shaken area

# 3.6 million


21% of them inferred from built-up area, not observed footprints.

People by shaking level

**IV** 643 thousand

Building exposure modelled for: Iraq. Shaded areas without exposure data are shown for shaking only.

Share of buildings in the mapped area by expected damage




Little or no damage: 100% | Moderate damage: <1% | Heavy damage: <1% | Very heavy or collapse: <1%

## Which buildings failed


Share of each type's own buildings heavily damaged, worst first

| | | | |
|---|---|---|---|
| Rubble stone, fieldstone | class A | **0.0%** | ≈ 22 buildings |
| Adobe, earth brick | class A | **0.0%** | ≈ 18 buildings |
| Manufactured stone units, timber floors | class B | **0.0%** | ≈ 54 buildings |
| Simple stone | class B | **0.0%** | ≈ 38 buildings |
| Manufactured stone with RC floors | class C | **0.0%** | ≈ 49 buildings |
| RC frame — no / low code (ERD-L) | class C | **0.0%** | ≈ 8 buildings |
| RC frame — moderate code (ERD-M) | class D | **0.0%** | ≈ 3 buildings |

## Governorates most affected: heavily damaged buildings, central estimate and 90% range

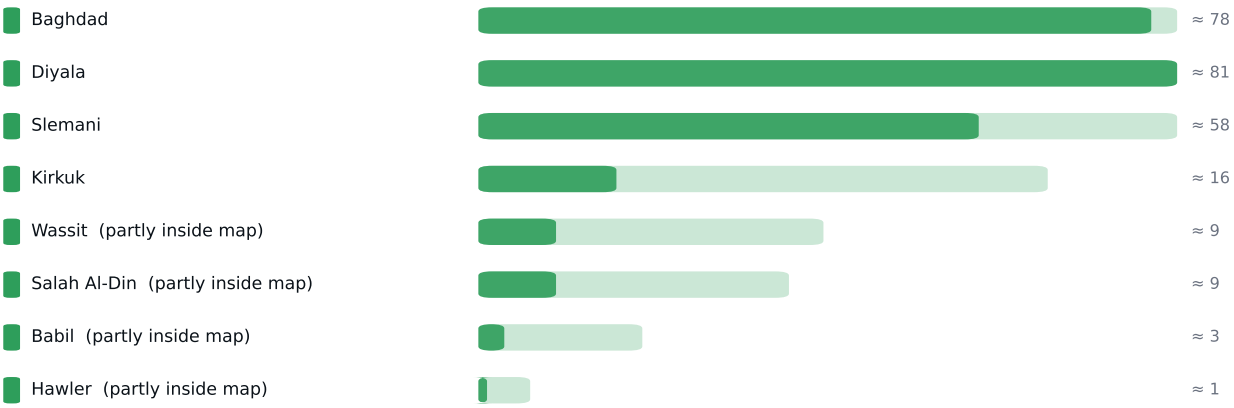


## Cities most affected

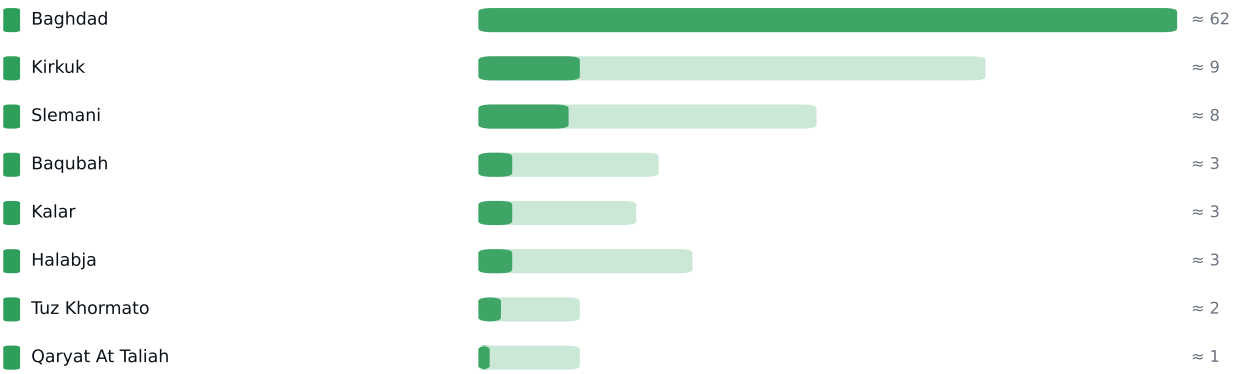

## Every governorate inside the map

| Area | Buildings | Heavy (P50) | 90% range | % of its stock |
|---|---|---|---|---|
| Baghdad | 1.6 million | 66 | 23 to 340 | 0.00% |
| Diyala | 605 thousand | 60 | 25 to 340 | 0.01% |
| Slemani | 664 thousand | 46 | 18 to 220 | 0.01% |
| Kirkuk | 335 thousand | 14 | 5 to 66 | 0.00% |
| Wassit | 152 thousand | 8 | 3 to 40 | 0.01% |
| Salah Al-Din | 125 thousand | 7 | 3 to 36 | 0.01% |
| Babil | 77 thousand | 3 | 1 to 19 | 0.00% |
| Hawler | 61 thousand | 1 | 1 to 6 | 0.00% |
| Maysan | 8 | none | none to none | 0% |

## How this report was made

**Hazard engine** Bumelerze SHAKEmap 26.2.0, ground-motion models CY14, ASB14, BSSA14, KALE15, intensity via Zaniniandhofer19 (IMS-25)

**Observations** 0 seismic stations, 0 felt-report cells (felt channel: none)

**Damage scale** IMS-25

### Data sources

Built from USGS, EMSC and GEOFON earthquake parameters; building footprints from GFZ OpenBuildingMap (c) OpenStreetMap contributors, ODbL, and Microsoft, CDLA-Permissive-2.0; JRC Global Human Settlement Layer and WorldPop, CC BY 4.0; OCHA COD-AB Iraq, CC BY-IGO; GEM Global Exposure Model; IMS-25 vulnerability table. Full records, with licences and checksums: github.com/Peshawa-LH/bumelerze-engine

### What this is, and what it is not

An automatic estimate of shaking and building damage from the earthquake's location and magnitude, adjusted with whatever station and felt-report data existed at the time.

Cite as: Hasan P. L. (2026) Bumelerze SHAKEmap and damage report, event bml202600rx, version 3, generated 19 Oct 2026, 13:43 UTC.