

Axial piston units for variable speed drives **A10FZO, A10VZO, A10FZG and A10VZG**



Features

- ▶ Variable and fixed pumps with axial piston rotary group in swashplate design for hydrostatic drives in open and closed circuits
- ▶ Suitable for start/stop operation
- ▶ Suitable for long pressure holding operation
- ▶ Proven A10 rotary group technology
- ▶ Through drive possibility
- ▶ High efficiency
- ▶ For use in one-, two- and four-quadrant operation

- ▶ Suitable for variable-speed operation with synchronous and asynchronous motors
- ▶ Sizes 3 to 180
- ▶ Nominal pressure/maximum pressure see technical data
- ▶ Open and closed circuit

Contents

Function and layout of variable-speed drives	2
Hydraulic fluids	3
Type code A10FZO	6
Technical data A10FZO size 3 to 63	10
Dimensions A10FZO sizes 3 to 63	13
Type code A10VZO	24
Technical data A10VZO size 3 to 180	31
Dimensions A10VZO sizes 3 to 180	42
Type code A10FZG	76
Technical data A10FZG size 3 to 63	81
Dimensions A10FZG sizes 3 to 63	84
Type code A10VZG	94
Technical data A10VZG	99
Dimensions A10 VZG, sizes 3 to 63	103
Dimensions through drive for port plates	115
Overview of mounting options for A10VZO with port plate 22U	124
Combination pumps A10VZO + A10VZO, A10VZG, A10FZO or A10FZG	125
Connector for solenoids	126
Installation instructions A10FZO; A10VZO; A10FZG; A10VZG	127
Project planning notes	130
Safety instructions	131
Related documentation	132

Function and layout of variable-speed drives

Rexroth has further developed the proven axial piston units from the A10 product family for use in energy-efficient variable-speed drives and optimized the interplay between the electric motor and the pump. The especially robust units are employed for small to medium sizes and satisfy individual requirements with their numerous combination options.

Variable-speed pump drives featuring Rexroth technology reduce energy consumption in industrial applications, while also reducing noise emissions. At the same time, the familiar performance is retained or even improved. The extensive spectrum of different variable-speed pump drives from Rexroth includes ready-to-use solutions that are finely scalable in both function and power. The energy-efficient hydraulic drive can be realized with internal gear pumps, fixed or variable axial piston units. Equipped with a suitable controller, exactly the required flow and pressure are provided which are needed at the machine.


The proven axial piston units have been developed further for use in speed-controlled drives.

They are approved for start/stop operation and designed for a bi-directional direction of rotation. Even at the lowest rotational speed between 0 and 200 rpm, they provide a constant pressure and offer extremely high efficiency in pressure holding operation. Efficiency optimization is achieved by either a fixed or variable displacement, depending on the requirements of the cycle.

The A10 units can be used as pumps and as motors in one-, two- or four-quadrant operation.


For the implementation of variable-speed drives, the new axial piston units offer numerous combination options. The axial piston fixed displacement units A10FZO and A10FZG cover nominal sizes from 3 to 63 cm³. The axial piston variable displacement units are available in nominal sizes from 3 to 180 cm³ (A10VZO) and 3 to 63 cm³ (A10VZG). Equipped with a torque controller and 2-point control, they allow for a smaller dimensioning of the electric drive. The numerous combination options allow a wide range of different customized system requirements to be satisfied.

A10FZO

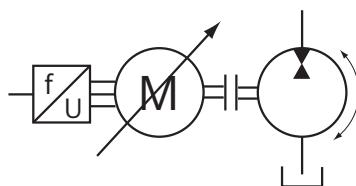


Axial piston fixed displacement units in open circuit with bi-directional direction of rotation and unchanging pressure side (depending on the principal direction of rotation of the pump).
One- or two-quadrant operation
For type code, see page 6
For technical data, see page 10 and 11

A10VZO

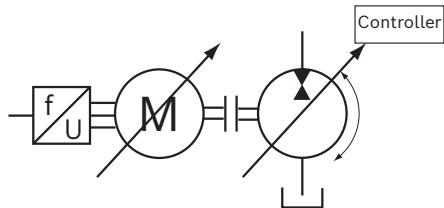


Axial piston variable displacement units in open circuit with bi-directional direction of rotation and unchanging pressure side (depends on the principal direction of rotation of the pump).
One- or two-quadrant operation
For type code, see page 24 and 25
For technical data, see page 31

A10FZG

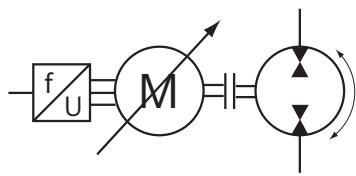

Axial piston fixed displacement units in open and closed circuit with bi-directional direction of rotation and two pressure sides.
One-, two- and four-quadrant operation
For type code, see page 76
For technical data, see page 81 and 82

A10VZG

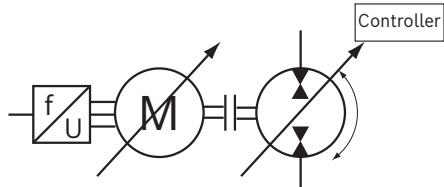

Axial piston variable displacement unit in open and closed circuit with bi-directional direction of rotation and two pressure sides.
One-, two- and four-quadrant operation
For type code, see page 94
For technical data, see page 99

Hydraulic fluids

The fixed displacement units A10FZO and A10FZG and variable displacement units A10VZO and 10VZG are designed for operation with HLP mineral oil according to DIN 51524.

See the following data sheet for application instructions and requirements for selecting hydraulic fluid, behavior during operation, as well as disposal and environmental protection before you begin project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons

Selection of hydraulic fluid

Bosch Rexroth rates hydraulic fluids on the basis of the Fluid Rating according to the technical data sheet 90235. Hydraulic fluids with positive evaluation in the Fluid Rating are listed in the following data sheet:


- ▶ 90245: Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)

Selection of hydraulic fluid shall make sure that the operating viscosity in the operating temperature range is within the optimum range (ν_{opt} ; see selection diagram).

Viscosity and temperature of hydraulic fluids

	Viscosity	Shaft seal	Temperature ²⁾	Comment
Cold start	$\nu_{\text{max}} \leq 1000 \text{ mm}^2/\text{s}$	FKM	$\vartheta_{\text{St}} \geq -25^\circ\text{C}$	$t \leq 3 \text{ min}$, without load ($p \leq 30 \text{ bar}$), $n \leq 1000 \text{ rpm}$ Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 13 K
Warm-up phase	$\nu = 1000 \dots 400 \text{ mm}^2/\text{s}$		$\vartheta = \leq -25^\circ\text{C}$	$t \leq 15 \text{ min}$, $p \leq 0.7 \times p_{\text{nom}}$, $n \leq 0.5 n_{\text{nom}}$
Permissible operating range	$\nu = 400 \dots 16 \text{ mm}^2/\text{s}$ $\nu_{\text{opt}} = 36 \dots 16 \text{ mm}^2/\text{s}$	FKM	$\vartheta \leq +85^\circ\text{C}$	measured at port L, L ₁ optimal operating viscosity and efficiency range
Short-term operation	$\nu_{\text{min}} = 16 \dots 10 \text{ mm}^2/\text{s}$	FKM	$\vartheta \leq +85^\circ\text{C}$	$t \leq 3 \text{ min}$, $p \leq 0.3 \times p_{\text{nom}}$, measured at port L, L ₁

▼ Selection diagram

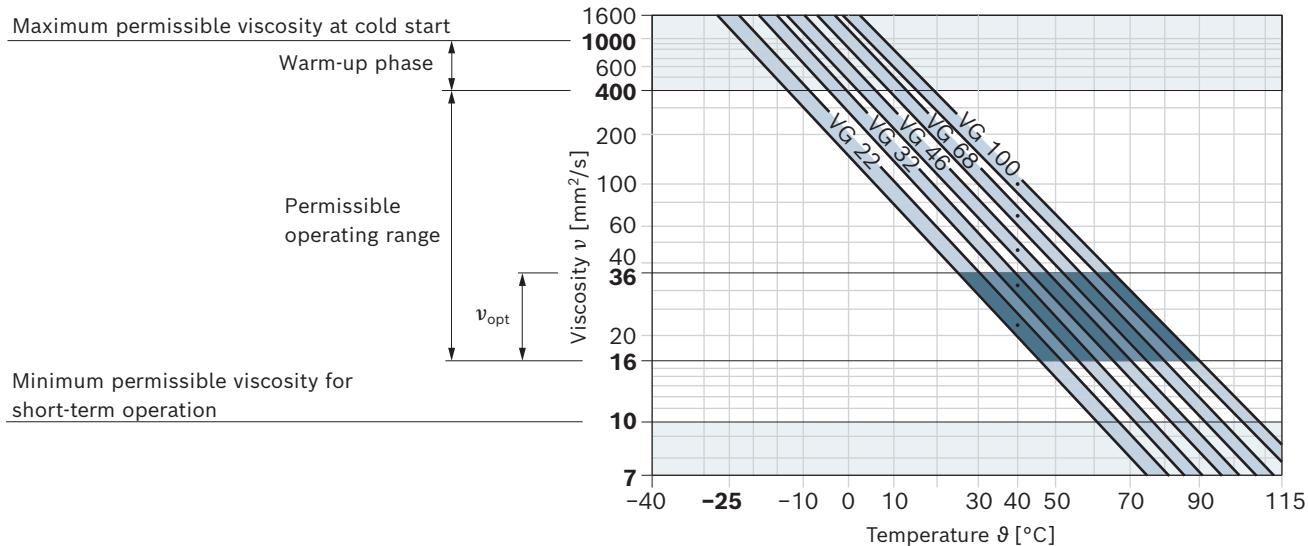

¹⁾ On e.g. VG 46 this corresponds to a temperature range of $+4^\circ\text{C}$ to $+70^\circ\text{C}$ (see selection diagram)

²⁾ If the temperature at extreme operating parameters cannot be adhered to, please contact us.

Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 under ISO 4406 should be maintained.

At a hydraulic fluid viscosity of 16 mm²/s to 10 mm²/s (e.g. due to high temperatures during short-term operation) at the drain port, a cleanliness level of at least 19/17/14 is required according to ISO 4406.

Examples of temperatures of hydraulic fluids at a viscosity of 10 mm²/s:

- ▶ 73 °C at HLP 32
- ▶ 85 °C at HLP 46

Axial piston fixed displacement units

A10FZO



Features

- ▶ For use in one and two-quadrant operation
- ▶ Suitable for start/stop operation
- ▶ Suitable for long pressure holding operation
- ▶ Well-tried A10 rotary group technology
- ▶ Through drive possibility

Product description

The proven axial piston units from the A10 product family have now been further developed for use in speed-controlled drives. They are approved for start/stop operation and designed for a bi-directional direction of rotation. Even at the lowest rotational speed between 0 and 200 rpm, they provide a constant pressure and offer extremely high efficiency in pressure holding operation. The A10FZO units can be used as pumps in one- and two-quadrant operation.

- ▶ Suitable for variable-speed operation with synchronous and asynchronous motors
- ▶ Sizes 3 to 63
- ▶ Nominal pressure 315 bar
- ▶ Maximum pressure 350 bar
- ▶ Open circuit

Contents

Type code A10FZO	6
Preferred program A10FZO	7
Working pressure range A10FZO	8
Technical data A10FZO size 3 to 63	10
Dimensions A10FZO sizes 3 to 63	13
Dimensions through drive for port plate 02 (A10FZO and FZG)	121
Overview of mounting options for A10VZO with port plates 07 and 12 or A10FZO, A10FZG with port plate 02	124
Combination pumps A10VZO + A10VZO, A10VZG, A10FZO or A10FZG	125
Connector for solenoids	126
Installation instructions A10FZO; A10VZO; A10FZG; A10VZG	127
Project planning notes	130
Safety instructions	131

Type code A10FZO

01	02	03	04		05	06		07	08	09	10	11
A10F	Z	O		/	10		-	V		C	02	

Axial piston unit

01	Swashplate design, fixed, nominal pressure 315 bar, maximum pressure 350 bar	A10F
----	--	-------------

Application area

02	Variable-speed drives	Z
----	-----------------------	----------

Operating mode

03	Pump, open circuit	O
----	--------------------	----------

Size (NG) Geometric displacement, see table of values on page 10 and 11

04	Superordinate size	010	018	028	045	063
	Other available intermediate sizes	003, 006, 008	012, 014, 016	021, 022, 023, 025, 026, 027	032, 035, 037, 039, 040, 042	051, 058

Series

05	Series 1, index 0	10
----	-------------------	-----------

Direction of rotation¹⁾

		010	018	028	045	063
06	Viewed on drive shaft	• •	• •	• •	• •	• •

clockwise

counter-clockwise

R

L

Sealing material

		010	018	028	045	063
07	FKM (fluorocarbon rubber)	•	•	•	•	•

V

Drive shaft

		010	018	028	045	063
08	Splined shaft	•	-	-	-	-
	ISO 3019-1	-	•	•	•	•

S

R

Mounting flange

		010	018	028	045	063
09	Based on ISO 3019-1 (SAE)	•	•	•	•	•

C

Working port

		010	018	028	045	063
10	SAE flange ports ISO 6162 A and B , opposite sides, metric fastening thread	•	•	•	•	•

02

Through drive (for mounting options, see page 124)

11	For flange ISO 3019-1 Diameter	Hub for splined shaft ²⁾ Mounting ³⁾ Diameter					
			010	018	028	045	063
	without through drive		•	•	•	•	•
82-2 (A)	∞	5/8 in 9T 16/32DP	•	•	•	•	•
		3/4 in 11T 16/32DP	•	•	•	•	•
101-2 (B)	∞	7/8 in 13T 16/32DP	-	-	•	•	•
		1 in 15T 16/32DP	-	-	-	•	•
		1 1/4 in 14T 12/24DP	-	-	-	-	•

N00

K01

K52

K68

K04

K06

• = Available o = On request - = Not available

Notice

- Note the project planning notes on page 130.
- In addition to the type code, please specify the relevant technical data when placing your order.

¹⁾ Bi-directional direction of rotation permissible with the same pressure side for decompression.

²⁾ According to ANSI B92.1a (splined shaft according to ISO 3019-1)

³⁾ Mounting hole pattern viewed on drive shaft through drive and position of ports **A** and **B** horizontal.

Preferred program A10FZO


Overview of common configurations

Material number	Type
R902546689	A10FZO003/10R-VSC02N00
R902544386	A10FZO006/10R-VSC02N00
R902518485	A10FZO008/10R-VSC02N00
R902518486	A10FZO010/10R-VSC02N00
R902551828	A10FZO012/10R-VRC02N00
R902544053	A10FZO014/10R-VRC02N00
R902544054	A10FZO016/10R-VRC02N00
R902544056	A10FZO018/10R-VRC02N00
R902564368	A10FZO021/10R-VRC02N00
R902557864	A10FZO022/10R-VRC02N00
R902557865	A10FZO023/10R-VRC02N00
R902557866	A10FZO025/10R-VRC02N00
R902557867	A10FZO026/10R-VRC02N00
R902557868	A10FZO027/10R-VRC02N00
R902534669	A10FZO028/10R-VRC02N00
R902557869	A10FZO032/10R-VRC02N00
R902557870	A10FZO035/10R-VRC02N00
R902557871	A10FZO037/10R-VRC02N00
R902557872	A10FZO039/10R-VRC02N00
R902557873	A10FZO040/10R-VRC02N00
R902557874	A10FZO041/10R-VRC02N00
R902557875	A10FZO042/10R-VRC02N00
R902548015	A10FZO045/10R-VRC02N00
R902557876	A10FZO051/10R-VRC02N00
R902557877	A10FZO058/10R-VRC02N00
R902550737	A10FZO063/10R-VRC02N00

Working pressure range A10FZO

Pressure on the working port (see table Denomination of working port)		Definition
Nominal pressure p_{nom}	315 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	350 bar	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Single operating period	2.0 ms	
Total operating period	300 h	
Rate of pressure change $R_{\text{A max}}$	16000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at the suction port (see table Denomination of working port)		
Minimum pressure p_{min}	Standard	0.8 bar absolute
Maximum pressure p_{max}		10 bar absolute
Case pressure at port L		
Maximum pressure $p_{\text{L max}}$	2 bar absolute ²⁾	Maximum 0.5 bar higher than inlet pressure at the suction port (see table), but no higher than $p_{\text{L max}}$. The case pressure must always be higher than the ambient pressure at the shaft seal ring. A drain line to the reservoir is required.


▼ Rate of pressure change $R_{\text{A max}}$

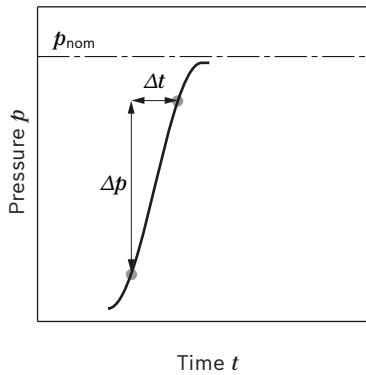

Notice

- Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

▼ Pressure definition

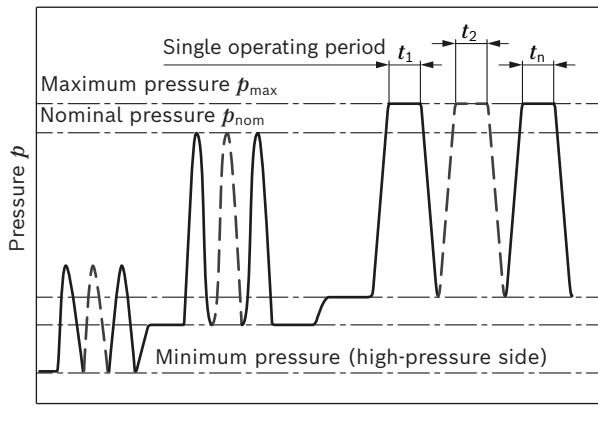

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

Denomination of working port for corresponding direction of rotation


Direction of rotation, viewed on drive shaft	Suction port	Working port
Type code "R"	A	B
Type code "L"	B	A

Flow direction

Direction of rotation, viewed on drive shaft	Direction of rotation	Flow
Type code "R"	clockwise	A to B
	counter-clockwise ¹⁾	B to A
Type code "L"	counter-clockwise	B to A
	clockwise ¹⁾	A to B

¹⁾ Only permissible in decompression operation, a pressure side switch is not permitted

²⁾ Higher values on request

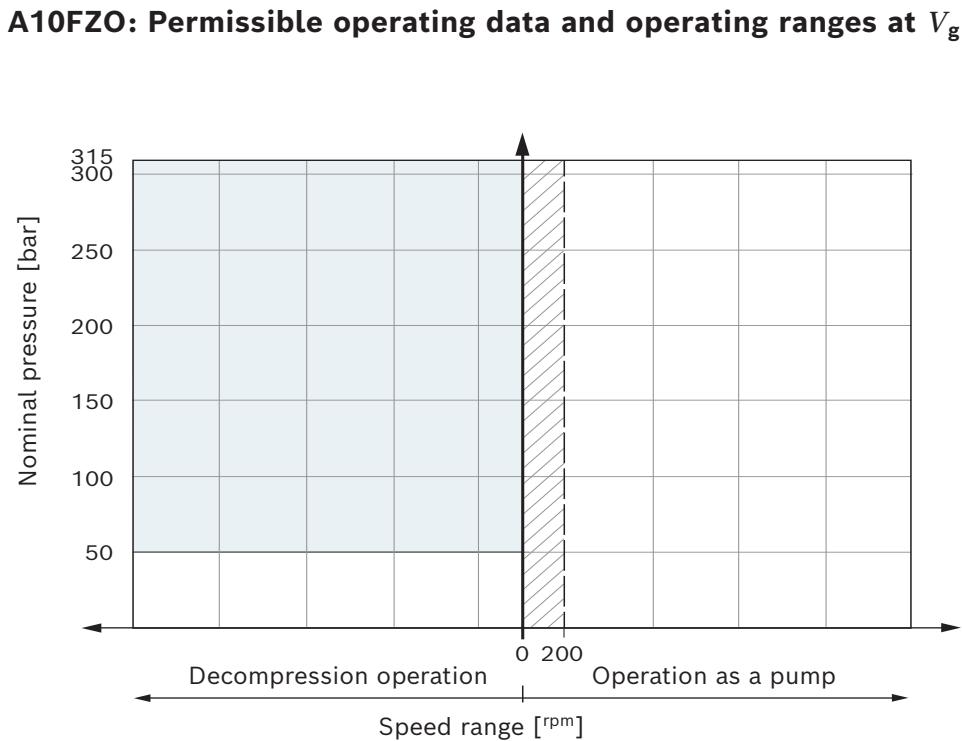**Operating range**

- Operation without restriction
- Permissible with single operating period $t \leq 3 \text{ min}$;
maximum cycle proportion 80%.
For longer time shares $t > 3 \text{ min}$, please use A10VZO.
- Operation as a motor possible with restrictions,
please contact us. Permissible for short-term
decompression operation $t \leq 200 \text{ ms}$

Technical data A10FZO size 3 to 63

Superordinate size	NG	10				18				28					
Available intermediate sizes	NG	3	6	8	10	12	14	16	18	21	22	23	25		
Geometric displacement, per revolution	$V_{g\max}$ cm ³	3	6	8.1	10.6	12	14	16	18	21	22	23	25		
Maximum rotational speed at $V_{g\max}$															
Suction speed operation as a pump ¹⁾	n_{nom} rpm				3600			3300			3000				
Max. rotational speed decompression operation ²⁾	n_{nom} rpm				3600			3300			3000				
Flow	at n_{nom} and $V_{g\max}$	q_v	l/min	10.8	21.6	29	38.2	39.6	46.2	52.8	59.4	63	66	69	75
Pump operation power	at n_{nom} , $V_{g\max}$ and $\Delta p = 315$ bar	P	kW	5.6	11.3	15.3	20	21	24.2	27.7	31.2	33	34	36.3	39
Torque	at $V_{g\max}$ and $\Delta p = 315$ bar	M	Nm	15	30	40	53	60	70	80	90.3	105	110	116	125
	at $V_{g\max}$ and $\Delta p = 100$ bar	M	Nm	5	9.5	12.7	16.8	19.1	22.3	25.5	28.7	33.4	35	36.6	40
Rotary stiffness of drive shaft	S	c	Nm/rad		9200				-			-	-	-	
	R	c	Nm/rad			-			14800			26300			
Moment of inertia of the rotary group	J_{TW}	kgm ²			0.0006			0.0009			0.0017				
Maximum angular acceleration ²⁾³⁾	α	rad/s ²			14000			12600			11200				
Case volume	V	l			0.11			0.19			0.6				
Weight (approx.)	m	kg			9			10			15.5				

Determination of the characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{hm}}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

Key

- V_g Displacement per revolution [cm³]
 Δp Differential pressure [bar]
 n Rotational speed [rpm]
 η_v Volumetric efficiency
 η_{hm} Hydraulic-mechanical efficiency
 η_t Total efficiency ($\eta_t = \eta_v \times \eta_{\text{hm}}$)

Notice

- ▶ Theoretical values, without efficiency and tolerances; values rounded
- ▶ Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation/simulation, and comparison with the permissible values.

Additional information about inlet pressure and rotational speed can be found on page 33

¹⁾ The values are applicable:

- at absolute pressure $p_{\text{abs}} = 1$ bar at the suction port
- for the optimum viscosity range from $\nu_{\text{opt}} = 36$ to 16 mm²/s
- with hydraulic fluid based on mineral oils

²⁾ Higher values on request


³⁾ The limit value is only valid for a single pump, multiple pump version available on request. The load capacity of the connection parts must be considered.

45												63		
26	27	28	32	35	37	39	40	42	45	51	58	63		
26	27	28	32	35	37	39	40	42	45	51	58	63		
3000		3000					2600							
3000		3000					2600							
78	81	84	96	105	111	117	120	126	135	133	151	164		
41	42	44	50	55	58.3	61	63	66	71	70	79	86		
130.4	135	140.4	160	175	185.6	195	200	210	225.7	256	291	316		
41.4	43	44.6	51	56	59	62	64	67	71.6	81	92	100		
-		-					-							
26300		41000					69400							
0.0017		0.003					0.0056							
11200		9500					8000							
0.6		0.7					0.8							
15.5		21					26							

Permissible input and through-drive torques

Superordinate size		10	18	28	45	63
Torque at $V_g \max$ and $\Delta p = 315 \text{ bar}^1)$	M_{max}	Nm	For values of the individual sizes, see table of values on page 10 and 11			
Maximum input torque on drive shaft ²⁾	S	$M_{E\ max}$	Nm	126	-	-
	\emptyset	in	3/4	-	-	-
	R	$M_{E\ max}$	Nm	-	160	250
		\emptyset	in	-	3/4	7/8
Maximum through-drive torque	S	$M_{D\ max}$	Nm	42	-	-
	R	$M_{D\ max}$	Nm	-	120	176
					365	484


▼ Distribution of torques

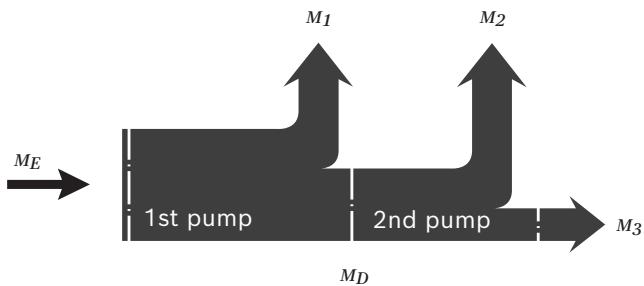

Torque at 1st pump	M_1
Torque at 2nd pump	M_2
Torque at 3rd pump	M_3
Input torque	$M_E = M_1 + M_2 + M_3$
	$M_E < M_{E\ max}$
Through-drive torque	$M_D = M_2 + M_3$
	$M_D < M_{D\ max}$

¹⁾ Efficiency not considered


²⁾ For drive shafts with no radial force

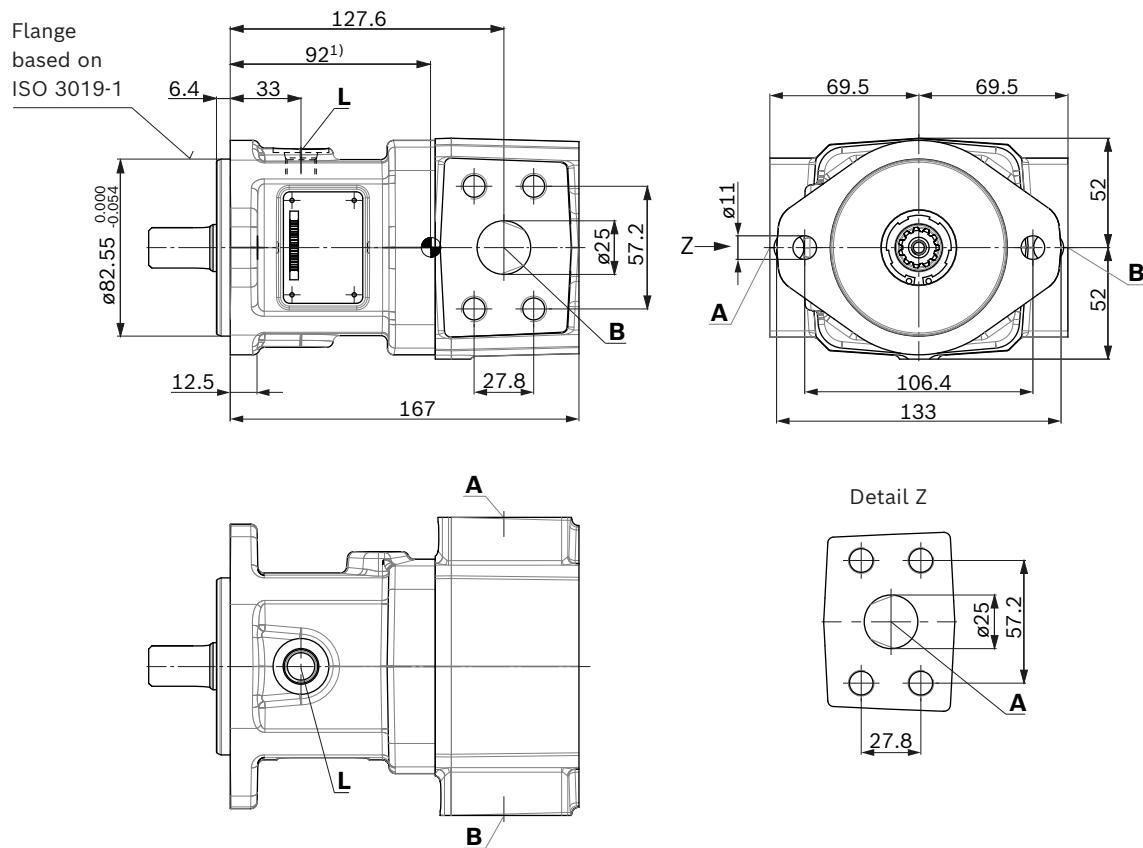Dimensions A10FZO sizes 3 to 10**Clockwise and counter-clockwise rotation (flow direction see table page 8)**

1) Center of gravity

▼ Splined shaft 3/4 in (19-4, ISO 3019-1)

S - 11T 16/32DP¹⁾

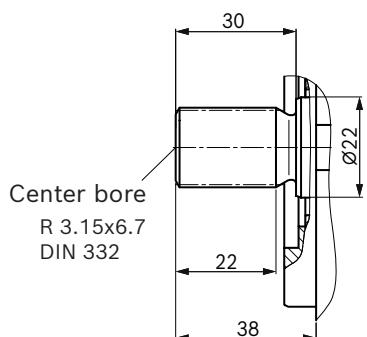

Connection table A10FZO

Ports		Standard	Size	p_{max} [bar] ²⁾	State ⁴⁾
B(A)	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 in M12 × 1.75; 17 deep	350	O
A(B)	Suction port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 in M12 × 1.75; 17 deep	10	O
L	Drain port	DIN 11926 ³⁾	9/16-18UNF-2B; 13 deep	2	O

Denomination of working port for the corresponding direction of rotation


Direction of rotation, Suction port viewed on drive shaft		Working port
Type code "R"	A	B
Type code "L"	B	A

1) Involute spline according to ANSI B92.1a, 30° pressure angle,
flat root, side fit, tolerance class 5

2) Depending on the application, momentary pressure peaks can occur.
Keep this in mind when selecting measuring devices and fittings.

3) The countersink may be deeper than specified in the standard.


4) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

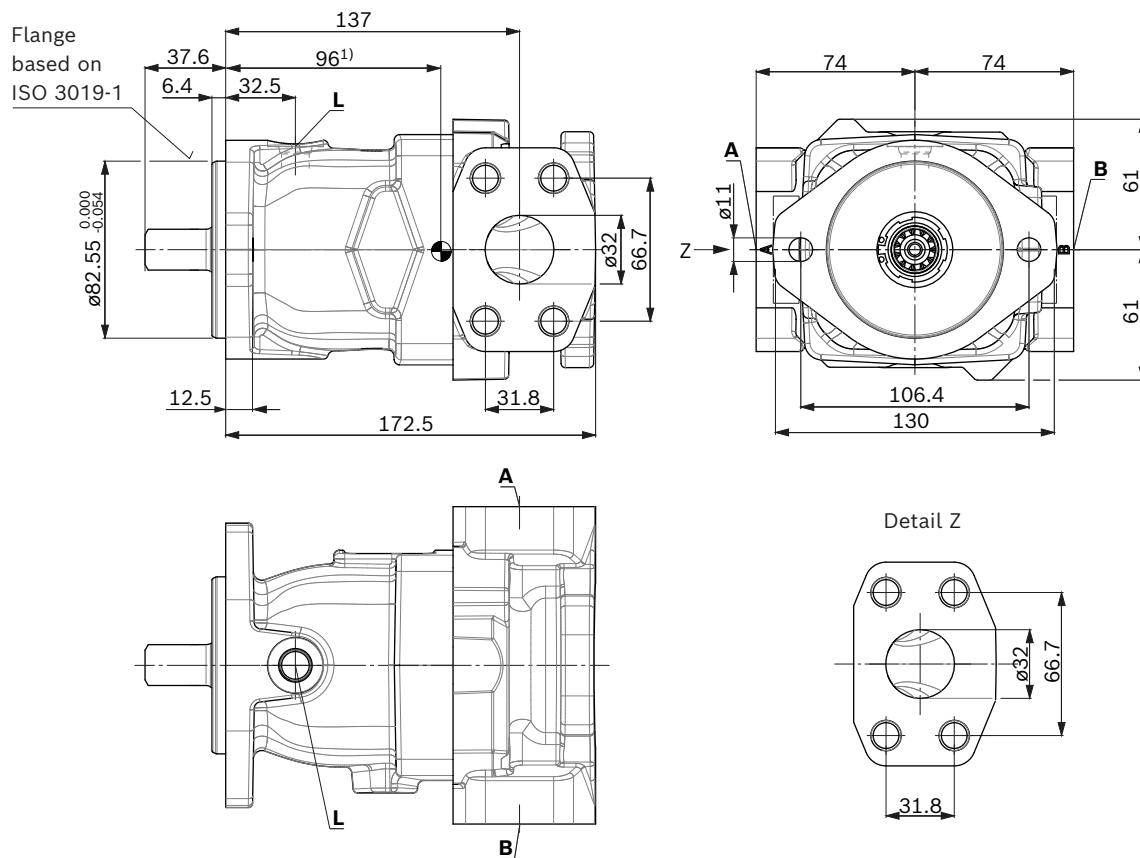Dimensions A10FZO sizes 12 to 18**Clockwise and counter-clockwise rotation (flow direction see table page 8)**

¹) Center of gravity

▼ Splined shaft 3/4 in (similar to ISO 3019-1)

R - 11T 16/32DP¹⁾²⁾



Connection table A10FZO

Ports	Standard	Size	p_{max} [bar] ⁴⁾	State ⁶⁾
B(A) Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
A(B) Suction port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	10	O
L Drain port	DIN 11926 ⁵⁾	9/16-18UNF-2B; 12.5 deep	2	O

Denomination of working port for the corresponding direction of rotation

Direction of rotation, viewed on drive shaft	Suction port	Working port
Type code "R"	A	B
Type code "L"	B	A

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.




3) Thread according to ASME B1.1

4) Depending on the application, momentary pressure peaks can occur.
Keep this in mind when selecting measuring devices and fittings.


5) The countersink may be deeper than specified in the standard.

6) O = Must be connected (plugged on delivery)

X = plugged (in normal operation)

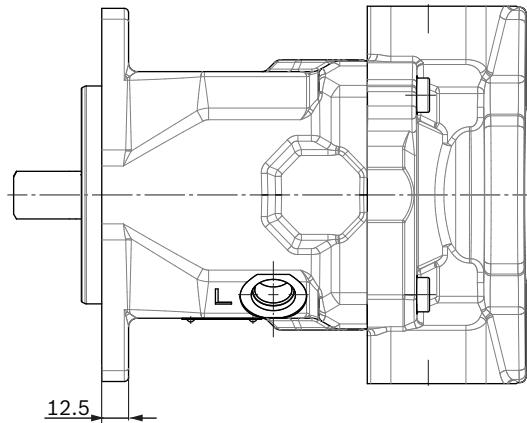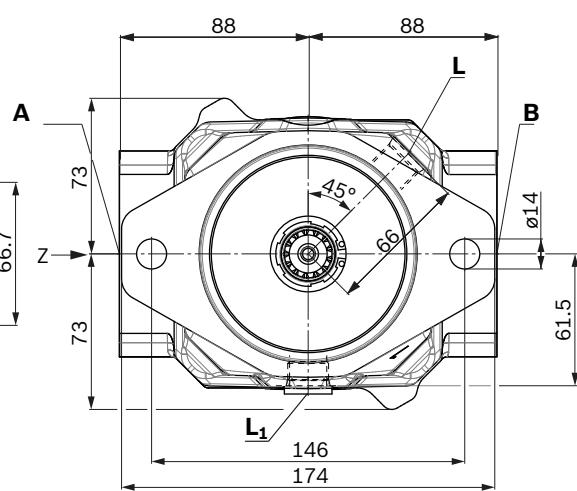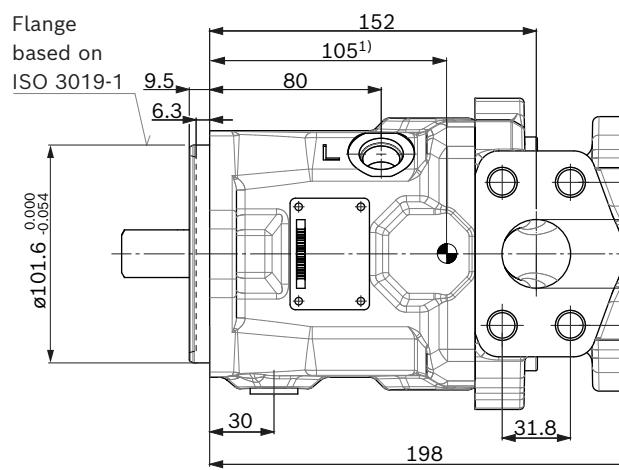
Dimensions A10FZO sizes 21 to 28**Clockwise and counter-clockwise rotation (flow direction see table page 8)**

Detail Z

¹⁾ Center of gravity

▼ Splined shaft 7/8 in (similar to ISO 3019-1)

R - 13T 16/32DP¹⁾²⁾

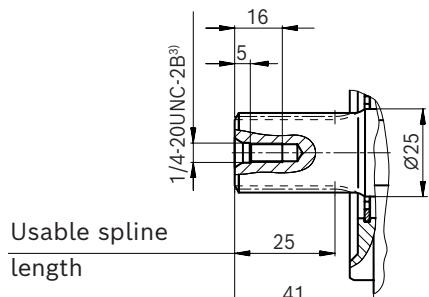

Connection table A10FZO


Ports	Standard	Size	p_{\max} [bar] ⁴⁾	State ⁷⁾
B(A) Working port (high-pressure series)	ISO 6162-2	1 1/4 in	350	O
Fastening thread	DIN 13	M14 × 2; 19 deep		
A(B) Suction port (high-pressure series)	ISO 6162-2	1 1/4 in	10	O
Fastening thread	DIN 13	M14 × 2; 19 deep		
L Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2	O ⁶⁾
L ₁ Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2	X ⁶⁾

Denomination of working port for the corresponding direction of rotation

Direction of rotation, viewed on drive shaft	Suction port	Working port
Type code "R"	A	B
Type code "L"	B	A


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
- 6) Depending on the installation position, L or L₁ must be connected (also see installation instructions on page 127).
- 7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

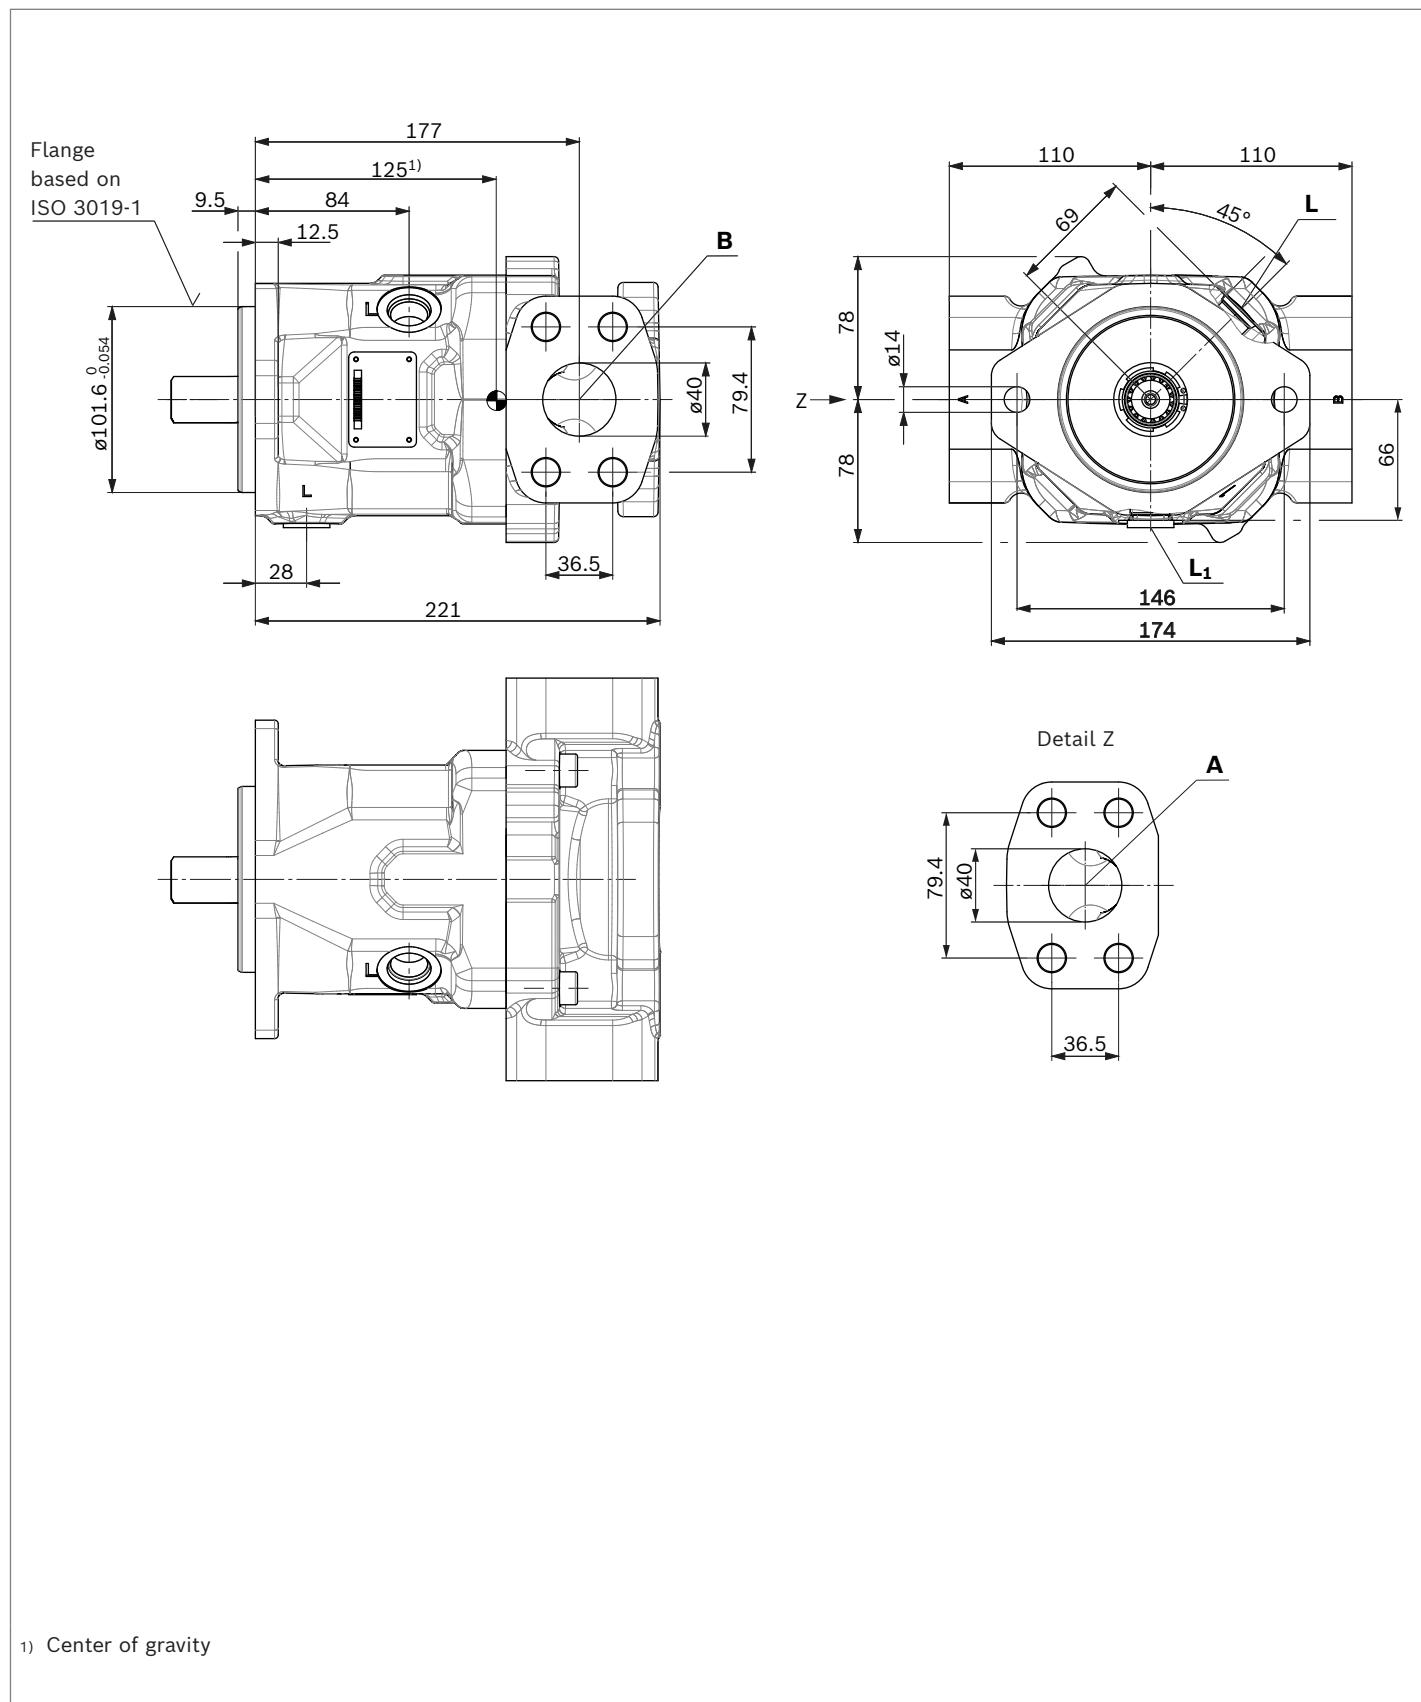Dimensions A10 FZO, sizes 32 to 45**Clockwise and counter-clockwise rotation (flow direction see table page 8)**¹⁾ Center of gravity

▼ Splined shaft 1 in (similar to ISO 3019-1)

R - 15T 16/32DP¹⁾²⁾

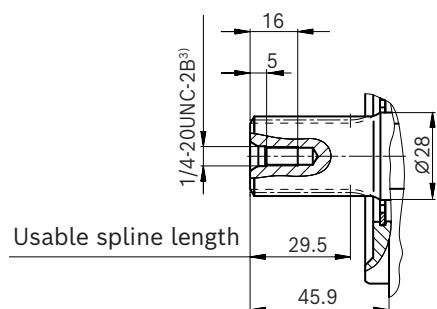

Connection table A10FZO


Ports	Standard	Size	p_{\max} [bar] ⁴⁾	State ⁷⁾
B(A) Working port (high-pressure series)	ISO 6162-2	1 1/2 in	350	O
Fastening thread	DIN 13	M16 × 2; 21 deep		
A(B) Suction port (high-pressure series)	ISO 6162-2	1 1/2 in	10	O
Fastening thread	DIN 13	M16 × 2; 21 deep		
L Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	O ⁶⁾
L ₁ Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	X ⁶⁾

Denomination of working port for the corresponding direction of rotation

Direction of rotation, viewed on drive shaft	Suction port	Working port
Type code "R"	A	B
Type code "L"	B	A


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
- 6) Depending on the installation position, L, L₁ or L₂ must be connected (also see installation instructions starting on page 127).
- 7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

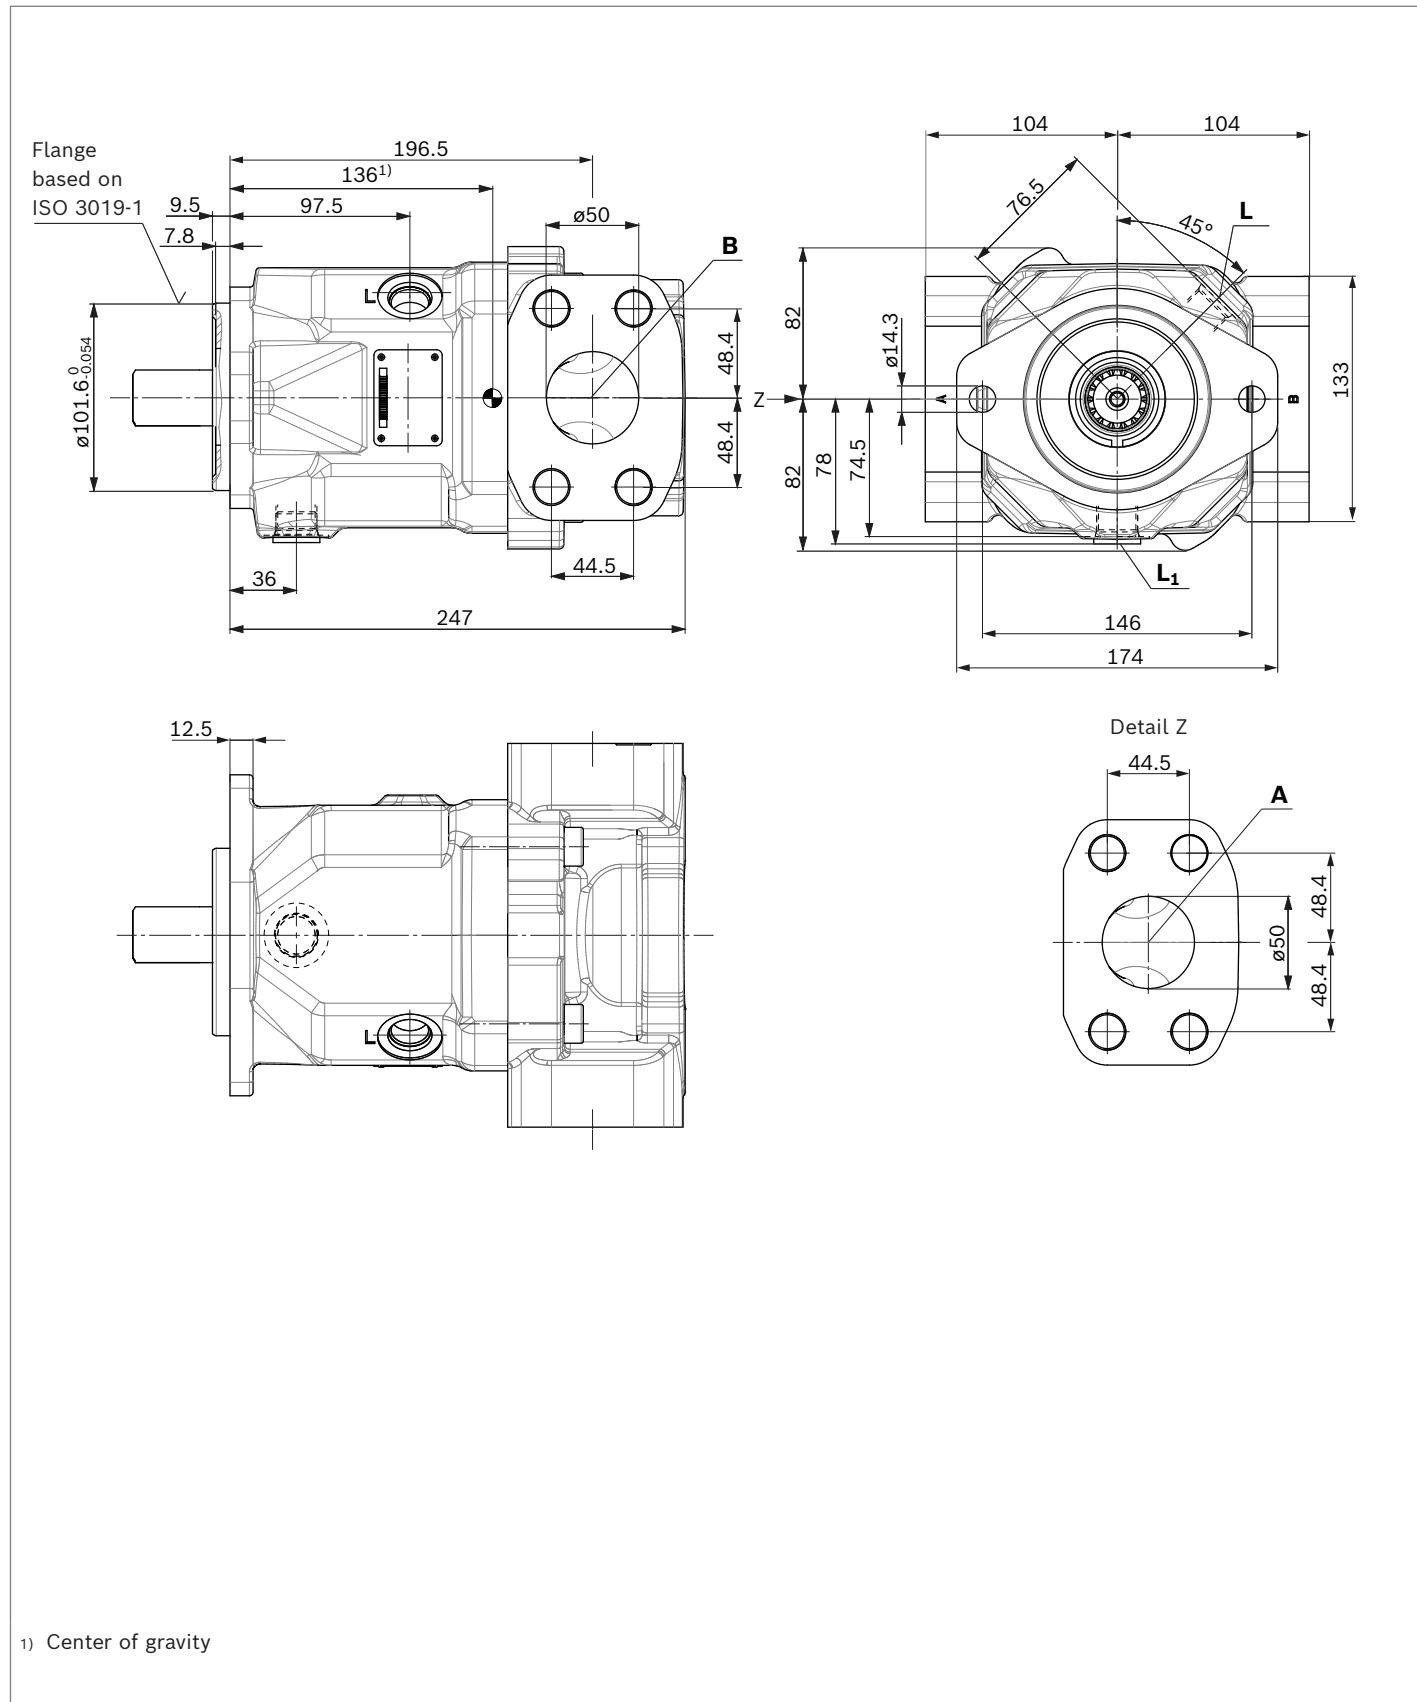Dimensions A10 FZO size 51/58/63**Clockwise and counter-clockwise rotation (flow direction see table page 8)**

▼ Splined shaft 1 1/4 in (similar to ISO 3019-1)

R - 14T 12/24DP¹⁾²⁾



Connection table A10FZO

Ports	Standard	Size	p_{\max} [bar] ⁴⁾	State ⁷⁾
B(A) Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	2 in M20 × 2.5; 24 deep	350	O
A(B) Suction port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	2 in M20 × 2.5; 24 deep	10	O
L Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	O ⁶⁾
L ₁ Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	X ⁶⁾

Denomination of working port for the corresponding direction of rotation

Direction of rotation, viewed on drive shaft	Suction port	Working port
Type code "R"	A	B
Type code "L"	B	A

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
- 6) Depending on the installation position, L, L₁ or L₂ must be connected (also see installation instructions starting on page 127).
- 7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

Axial piston variable displacement unit A10VZO



Features

- ▶ For use in one and two-quadrant operation
- ▶ Suitable for start/stop operation
- ▶ Suitable for long pressure holding operation
- ▶ Well-tried A10 rotary group technology
- ▶ Through drive possibility

Product description

The proven axial piston units from the A10 product family have now been further developed for use in speed-controlled drives. They are approved for start/stop operation and designed for a bi-directional direction of rotation. Even at the lowest rotational speed between 0 and 200 rpm, they provide a constant pressure and offer extremely high efficiency in pressure holding operation. The A10VZO units can be used as pumps in one- and two-quadrant operation.

- ▶ Suitable for variable-speed operation with synchronous and asynchronous motors
- ▶ Size 10
Nominal pressure/maximum pressure 250/315 bar
- ▶ Sizes 18 to 45
Nominal pressure/maximum pressure 315/350 bar
Sizes 71 to 180
Nominal pressure/maximum pressure 280/350 bar
- ▶ Open circuit

Contents

Type code A10VZO	24
Preferred program A10VZO	26
Setting ranges for stop $V_{g \min}$ / $V_{g \max}$	26
Working pressure range A10VZO – size 3 to 180	27
A10VZO, size 003 to 71: Permissible operating data and operating ranges	30
Technical data A10VZO size 3 to 180	31
EZ300/EZ400 – Two-point control, electric	34
DG000 – Two-point control, hydraulic	35
DR – Pressure controller	36
DRG – Pressure controller, remote controlled	38
LA.D – Pressure and torque controller	40
LA.D – Pressure and torque controller, characteristic curve	41
Dimensions A10VZO sizes 3 to 180	42
Dimensions through drive for port plates 07 and 12 (A10VZO)	115
Dimensions through drive for port plates 22U and 32U (A10VZO)	117
Overview of mounting options	124
Combination pumps A10VZO + A10VZO, A10VZG, A10FZO or A10FZG	125
Connector for solenoids	126
Installation instructions A10FZO; A10VZO; A10FZG; A10VZG	127
Project planning notes	130
Safety instructions	131

Type code A10VZO

01	02	03	04	05	06	07	08	09	10	11	12	13
A10V	Z	O		/	10	-	V					

Axial piston unit

01	Swashplate design, variable	A10V
----	-----------------------------	------

Application area

02	Variable-speed drives	Z
----	-----------------------	---

Operating mode

03	Pump, open circuit	O
----	--------------------	---

Size (NG)

04	Geometric displacement, see table of values on page 31	010	018	028	045	071	100	140	180
	Other available intermediate sizes	003, 006, 008							

Control device

			003 to 010	018	028	045	071	100	140	180	
05	Two-point control	electric	U = 12 V	●	●	●	●	●	●	●	EZ300 ¹⁾
			U = 24 V	●	●	●	●	●	●	●	EZ400 ¹⁾
		hydraulic		●	●	●	●	●	●	●	DG000 ¹⁾
				●	●	●	●	●	●	●	DR000
	Pressure controller	hydraulic		●	●	●	●	●	●	●	DRG00
		remote controlled hydraulically		●	●	●	●	●	●	●	
	Torque controller		NG 018 to 180								
	Beginning of control		up to 50 bar	-	●	●	●	●	●	●	LA5D0
			51 to 90 bar	-	●	●	●	●	●	●	LA6D0
			91 to 160 bar	-	●	●	●	●	●	●	LA7D0
			161 to 240 bar	-	●	●	●	●	●	●	LA8D0
			over 240 bar	-	●	●	●	●	●	●	LA9D0

Series

06	Series 1, index 0	10
----	-------------------	----

Direction of rotation²⁾

			003 to 010	018	028	045	071	100	140	180	
07	Viewed on drive shaft	clockwise	●	●	●	●	●	●	●	●	R
		counter-clockwise	●	●	●	●	●	●	●	●	L

Sealing material

			003 to 010	018	028	045	071	100	140	180	
08	FKM (fluorocarbon rubber)		●	●	●	●	●	●	●	●	V

Drive shaft

			003 to 010	018	028	045	071	100	140	180	
09	Splined shaft	standard shaft	●	-	-	-	-	●	●	●	S
		ISO 3019-1 similar to shaft "S" however for higher torque	-	●	●	●	●	-	-	-	R

Mounting flange

			003 to 010	018	028	045	071	100	140	180	
10	Based on ISO 3019-1 (SAE)	2-hole	●	●	●	-	-	-	-	-	C
		4-hole	-	-	-	●	●	●	●	●	D

● = Available o = On request - = Not available

Notice

- Note the project planning notes on page 130.
- In addition to the type code, please specify the relevant technical data when placing your order.

¹⁾ Please specify mechanical flow control $V_{g\ max}$ and $V_{g\ min}$ in the order text.

²⁾ Bi-directional direction of rotation permissible with the same pressure side for decompression

01	02	03	04	05	06	07	08	09	10	11	12	13
A10V	Z	0			/	10		-	V			

Working port³⁾

							003 ... 010	018	028	045	071	100	140	180	
11	SAE flange ports ISO 6162 at top and bottom, on opposite sides, metric fastening thread with universal through drive without pulsation damping						-	-	-	-	●	●	●	●	22⁵⁾
	SAE flange ports ISO 6162 at top and bottom, on opposite sides, metric fastening thread with universal through drive with pulsation damping						-	-	-	● ⁸⁾	●	●	●	●	32⁵⁾
	SAE flange ports ISO 6162 at top and bottom, on opposite sides, metric fastening thread						-	●	●	●	●	●	●	●	12³⁾⁵⁾
	DIN 3852 threaded ports at rear, not for through drive						●	-	-	-	-	-	-	-	14
	DIN 3852 threaded ports on opposite side, only for through drive						●	-	-	-	-	-	-	-	07

Through drive (for dimensions and mounting options, see page 115 onwards)

							003 ... 010	018	028	045	071	100	140	180	
12	With through-drive shaft, without hub, without intermediate flange; fastening thread metric, with universal through drive, only port plate 22 or 32						-	-	-	● ⁸⁾	●	●	●	●	U00⁴⁾⁵⁾
	Without through drive, only port plates 12 and 14						●	●	●	●	●	●	●	●	N00⁵⁾

Port plate 12 and 07

For flange ISO 3019-1 Hub for splined shaft⁶⁾

Diameter	Mounting ⁷⁾	Diameter		003 ... 010	018	028	045	071	100	140	180	
82-2 (A)	∅, ∞	5/8 in	9T 16/32DP	●	●	●	●	-	-	-	-	K01
		3/4 in	11T 16/32DP	●	●	●	●	-	-	-	-	K52
101-2 (B)	∅, ∞	7/8 in	13T 16/32DP	-	-	●	●	-	-	-	-	K68
		1 in	15T 16/32DP	-	-	-	●	-	-	-	-	K04

Port plate 22U/32U

For flange ISO 3019-1 Hub for splined shaft⁶⁾

Diameter	Mounting ⁷⁾	Diameter		003 ... 010	018	028	045	071	100	140	180	
82-2 (A)	∅, ½, ∅, ∞	5/8 in	9T 16/32DP	-	-	-	○	●	●	●	●	U01
		3/4 in	11T 16/32DP	-	-	-	●	●	●	●	●	U52
101-2 (B)	∅, ½, ∅, ∞	7/8 in	13T 16/32DP	-	-	-	●	●	●	●	●	U68
		1 in	15T 16/32DP	-	-	-	●	●	●	●	●	U04
		1 1/4 in	14T 12/24DP	-	-	-	-	○	○	○	●	U06
127-4 (C)	∅∅	1 in	15T 16/32DP	-	-	-	-	●	●	●	●	UE2
		1 1/4 in	14T 12/24DP	-	-	-	-	●	●	●	●	U15
152-4 (D)	∅∅	1 1/2 in	17T 12/24DP	-	-	-	-	-	●	●	●	U96
		1 3/4 in	13T 8/16DP	-	-	-	-	-	●	●	●	U17

Connector for solenoids

							003 ... 010	018	028	045	071	100	140	180	
13	Without, with hydraulic controllers						●	●	●	●	●	●	●	●	0
	HIRSCHMANN connector – without suppressor diode						●	●	●	●	●	●	●	●	H

3) A stepless mechanical flow control is only standard on version 12 N00 in sizes 018 to 140

V_g max: Setting range V_g max to approx. 50% V_g max stepless

V_g min: Setting range V_g min to approx. 40% V_g max stepless
Specify the settings in plain text.

V_g max and V_g min limitations on through drives with port plates 12K.. and 22U/32U.. can only be carried out via fixed setting values, this should also be specified in plain text. For setting range, see page 26

4) See data sheet 95581 Universal through drive

5) When ordering sizes 045 to 180 with port plate 22 and 32, please order the relevant through drive "U"

Example: A10VZO071DR000/10R-VSD22U01

When ordering sizes 003 to 010 with port plate 07 and sizes 018 to 045 with port plate 12, please order the corresponding through drive with "K"

Example: A10VZO010DR000/10R-VSC07K01

6) ANSI B92.1a (splined shaft according to ISO 3019-1)

7) Mounting holes pattern viewed on drive shaft through drive with control at top

8) Only at max working pressure of 280 bar.

Preferred program A10VZO

Overview of common configurations

Material number	Type and setting data
R902557878	A10VZO003EZ400/10R-VSC14N00H $V_g \text{ max}=3 \text{ cm}^3$, $V_g \text{ min}=1 \text{ cm}^3$ (3600 rpm)
R902557885	A10VZO003DR000/10R-VSC14N000 DR=250 bar, $V_g \text{ max}=3 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (3600 rpm)
R902557879	A10VZO006EZ400/10R-VSC14N00H $V_g \text{ max}=6 \text{ cm}^3$, $V_g \text{ min}=1 \text{ cm}^3$ (3600 rpm)
R902557886	A10VZO006DR000/10R-VSC14N000 DR=250 bar, $V_g \text{ max}=6 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (3600 rpm)
R902557880	A10VZO008EZ400/10R-VSC14N00H $V_g \text{ max}=8 \text{ cm}^3$, $V_g \text{ min}=2 \text{ cm}^3$ (3600 rpm)
R902557887	A10VZO008DR000/10R-VSC14N000 DR=250 bar, $V_g \text{ max}=8 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (3600 rpm)
R902544384	A10VZO010EZ400/10R-VSC14N00H $V_g \text{ max}=10 \text{ cm}^3$, $V_g \text{ min}=2 \text{ cm}^3$ (3600 rpm)
R902557888	A10VZO010DR000/10R-VSC14N000 DR=250 bar, $V_g \text{ max}=10 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (3600 rpm)
R902544060	A10VZO018EZ400/10R-VRC12N00H $V_g \text{ max}=18 \text{ cm}^3$, $V_g \text{ min}=4 \text{ cm}^3$ (3300 rpm)
R902557889	A10VZO018DR000/10R-VRC12N000 DR=315 bar, $V_g \text{ max}=18 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (3300 rpm)
R902547871	A10VZO028EZ400/10R-VRC12N00H $V_g \text{ max}=28 \text{ cm}^3$, $V_g \text{ min}=6 \text{ cm}^3$ (3000 rpm)
R902557890	A10VZO028DR000/10R-VRC12N000 DR=315 bar, $V_g \text{ max}=28 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (3000 rpm)
R902548677	A10VZO045EZ400/10R-VRD12N00H $V_g \text{ max}=45 \text{ cm}^3$, $V_g \text{ min}=9 \text{ cm}^3$ (3000 rpm)
R902557891	A10VZO045DR000/10R-VRD12N000 DR=315 bar, $V_g \text{ max}=45 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (3000 rpm)
R902557881	A10VZO071EZ400/10R-VRD12N00H $V_g \text{ max}=71 \text{ cm}^3$, $V_g \text{ min}=15 \text{ cm}^3$ (2550 rpm)
R902557892	A10VZO071DR000/10R-VRD12N000 DR=280 bar, $V_g \text{ max}=71 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (2550 rpm)
R902557882	A10VZO100EZ400/10R-VSD12N00H $V_g \text{ max}=100 \text{ cm}^3$, $V_g \text{ min}=20 \text{ cm}^3$ (2300 rpm)
R902557893	A10VZO100DR000/10R-VSD12N000 DR=280 bar, $V_g \text{ max}=100 \text{ cm}^3$, $V_g \text{ min}=0 \text{ cm}^3$ (2300 rpm)
R902557883	A10VZO140EZ400/10R-VSD12N00H $V_g \text{ max}=140 \text{ cm}^3$, $V_g \text{ min}=28 \text{ cm}^3$ (2200 rpm)
R902557894	A10VZO140DR000/10R-VSD12N000 DR=280 bar, $V_g \text{ max}=140 \text{ cm}^3$, $V_g \text{ min}=20 \text{ cm}^3$ (2200 rpm)

Setting ranges for stop $V_g \text{ min}$ / $V_g \text{ max}$

NG	$V_g \text{ min}$ [cm ³]	cm ³ per revolution	$V_g \text{ max}$ [cm ³]	cm ³ per revolution
3	0 to 3	0.9	3	
6	0 to 4	0.9	6	
8	0 to 4	0.9	8	
10	0 to 6	0.9	10	
18	0 to 10	1.1	9 to 18	1.1
28	0 to 12	1.6	14 to 28	1.6
45	0 to 19	3.2	25 to 45	3.2
71	0 to 28	4.7	45 to 71 ³	4.7
100	0 to 51	6.2	50 to 100 ³	6.2
140	0 to 78	7.1	70 to 140	7.1
180	0 to 75	10	90 to 180	10

Only fixed stop possible with sizes 18 to 180 for port plates with through drive/universal through drive.

- Please specify setting $V_g \text{ min}$ and $V_g \text{ max}$ in plain text.


Notice

- Observe the operating conditions for $V_g \text{ min}$ 0 in connection with the controls DG and EZ on the respective pages 34 and 35.
- A $V_g \text{ min}$ 0 cm³ setting is not permissible.

Working pressure range A10VZO – size 3 to 10

Pressure at working port B		Definition
Nominal pressure p_{nom}	250 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	315 bar	
Single operating period	2.0 ms	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Total operating period	300 h	
Minimum pressure $p_{\text{B absolute}}$ (high-pressure side)	10 bar	Minimum pressure on the high-pressure side (B) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{\text{A max}}$	16000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{\text{A min}}$	Standard 0.8 bar absolute	Minimum pressure at suction port S (inlet) which is required to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Maximum pressure $p_{\text{S max}}$	10 bar absolute	
Leakage pressure at port L, L_1		
Maximum pressure $p_{\text{L max}}$	2 bar absolute ²⁾	Maximum 0.5 bar higher than inlet pressure at port S , but not higher than $p_{\text{L max}}$. The case pressure must always be higher than the ambient pressure at the shaft seal ring. A drain line to the reservoir is required.
Pilot pressure port X with external high pressure		
Maximum pressure p_{max}	315 bar	For the design of all control lines pressurized with external high pressure, the values for the rate of pressure change, maximum single operating period and total operating period applicable to port B must not be exceeded.


▼ Rate of pressure change $R_{\text{A max}}$

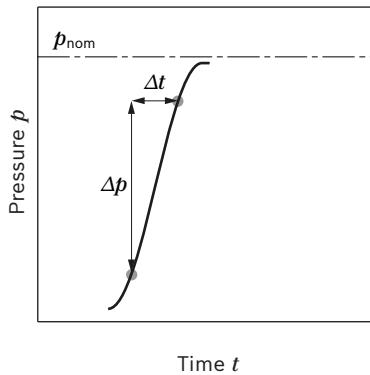

Notice

- Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

▼ Pressure definition

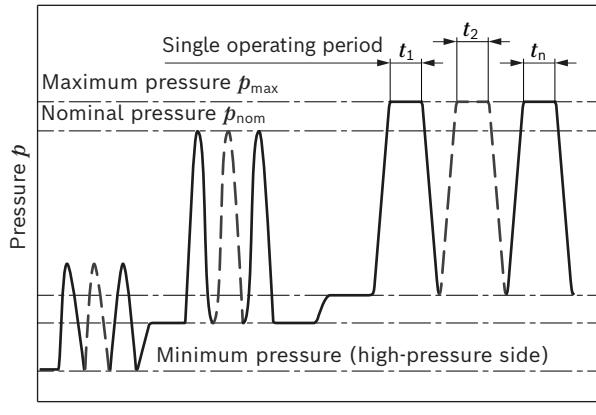

$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$

Flow direction

Direction of rotation, viewed on drive shaft	Direction of rotation	Flow
Type code "R"	clockwise	S to B
	Counter-clockwise ¹⁾	B to S
Type code "L" ³⁾	Counter-clockwise	S to B
	Clockwise ¹⁾	B to S

1) Only permissible in decompression operation, a pressure side switch is not permitted.
 2) Higher values on request
 3) Position **S** and **B** observe installation drawing during counter-clockwise rotation

Working pressure range A10VZO – size 18 to 45

Pressure at working port B		Definition
Nominal pressure p_{nom}	315 bar ¹⁾	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	350 bar	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Single operating period	2.5 ms	
Total operating period	300 h	
Minimum pressure $p_{\mathbf{B} \text{ absolute}}$ (high-pressure side)	10 bar ²⁾	Minimum pressure on the high-pressure side (B) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{\mathbf{A} \text{ max}}$	16000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{\mathbf{S} \text{ min}}$	Standard	0.8 bar absolute
		Minimum pressure at suction port S (inlet) which is required to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Maximum pressure $p_{\mathbf{S} \text{ max}}$		10 bar absolute
Case pressure at port L, L ₁		
Maximum pressure $p_{\mathbf{L} \text{ max}}$		2 bar absolute ³⁾
		Maximum 0.5 bar higher than inlet pressure at port S , but not higher than $p_{\mathbf{L} \text{ max}}$. The case pressure must always be higher than the ambient pressure at the shaft seal ring. A drain line to the reservoir is required.
Pilot pressure port X with external high pressure		
Maximum pressure p_{max}	350 bar	For the design of all control lines pressurized with external high pressure, the values for the rate of pressure change, maximum single operating period and total operating period applicable to port B must not be exceeded.

For information on the rate of pressure change and pressure definition, please refer to page 27

Notice

- Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

Flow direction

Direction of rotation, viewed on drive shaft	Direction of rotation	Flow
Type code "R"	clockwise	S to B
	counter-clockwise ⁴⁾	B to S
Type code "L"	counter-clockwise	S to B
	clockwise ³⁾	B to S

¹⁾ For NG 45 and use of port plate 32, only possible with a nominal pressure of 280 bar.

²⁾ Please contact us about lower pressures.

³⁾ Higher values on request

⁴⁾ Only permissible in decompression operation, a pressure side switch is not permitted.

Working pressure range A10VZO – size 71 to 180


Pressure at working port B		Definition
Nominal pressure p_{nom}	280 bar ²⁾	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	350 bar	
Single operating period	2.5 ms	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Total operating period	300 h	
Minimum pressure $p_{\mathbf{B} \text{ absolute}}$ (high-pressure side)	10 bar	Minimum pressure on the high-pressure side (B) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{\mathbf{A} \text{ max}}$	16000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{\mathbf{S} \text{ min}}$	Standard 0.8 bar absolute	Minimum pressure at suction port S (inlet) which is required to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Maximum pressure $p_{\mathbf{S} \text{ max}}$	10 bar absolute	
Case pressure at port L, L_1		
Maximum pressure $p_{\mathbf{L} \text{ max}}$	2 bar absolute ²⁾	Maximum 0.5 bar higher than inlet pressure at port S , but not higher than $p_{\mathbf{L} \text{ max}}$. The case pressure must always be higher than the ambient pressure at the shaft seal ring. A drain line to the reservoir is required.
Pilot pressure port X with external high pressure		
Maximum pressure p_{max}	350 bar	For the design of all control lines pressurized with external high pressure, the values for the rate of pressure change, maximum single operating period and total operating period applicable to port B must not be exceeded.
For information of the rate of pressure change and pressure definition, please refer to page 27		
Notice		
► Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.		
Flow direction		
Direction of rotation, viewed on drive shaft	Direction of rotation	Flow
Type code "R"	clockwise	S to B
	counter-clockwise ¹⁾	B to S
Type code "L"	counter-clockwise	S to B
	clockwise ¹⁾	B to S

1) Only permissible in decompression operation, a pressure side switch is not permitted.

2) Higher values on request

A10VZO, size 003 to 71: Permissible operating data and operating ranges

For NG100 to 180, the corresponding minimum speed of 200 rpm applies, a decompression operation is not possible.

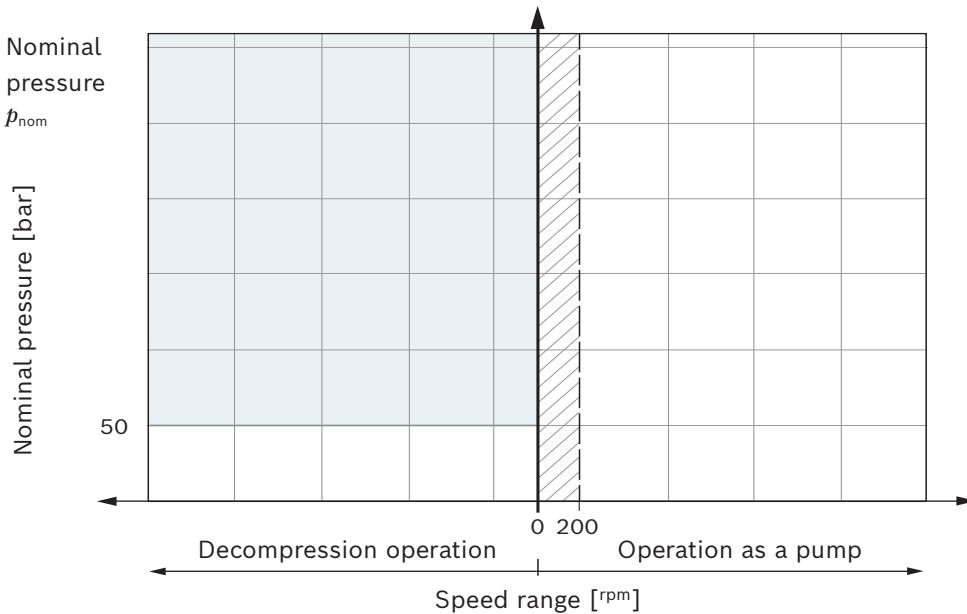

Operating range

Operation without restriction

At $V_g < 40\%$, no time restriction
At $V_g \text{ max}$ single operating period $t < 3 \text{ min}$, maximum cycle proportion 80%

Operation as a motor possible with restrictions, please contact us.
At $V_g < 40\%$, no time restriction
At $V_g \text{ max}$ permissible for short-term decompression operation
 $t \leq 200 \text{ ms}$

Technical data A10VZO size 3 to 45

Size	NG	3	6	8	10	18	28	45
Geometric displacement, per revolution	$V_{g \text{ max}}$ cm ³	3.5	6	8	10.5	18	28	45
Maximum rotational speed ¹⁾ at $V_{g \text{ max}}$								
Suction speed operation as a pump ¹⁾	n_{nom}	rpm	3960	3960	3960	3600	3300	3000
Maximum rotational speed at $V_g < V_{g \text{ max}}$ and at $p_{\text{nom}} = 280$ bar	$n_{\text{max perm}}$	rpm	3960	3960	3960	3960	3600	3300
Minimum speed (see diagram on page: 30)	n_{min}	rpm	0	0	0	0	0	0
Max. rotational speed decompression operation ²⁾	n_{nom}	rpm	3600	3600	3600	3600	3300	3000
Flow at n_{nom} and $V_{g \text{ max}}$	q_v	l/min	12.6	21.6	28.8	38	59	84
Pump operation performance at n_{nom} , $V_{g \text{ max}}$ and $\Delta p = 250$ bar	P	kW	5	10	15	16	—	—
Pump operation performance at n_{nom} , $V_{g \text{ max}}$ and $\Delta p = 315$ bar	P	kW	—	—	—	—	34	39
Torque at $V_{g \text{ max}}$ and $\Delta p = 250$ bar	M	Nm	14	24	32	42	—	—
Torque at $V_{g \text{ max}}$ and $\Delta p = 315$ bar	M	Nm	—	—	—	—	90	140
Torque at $V_{g \text{ max}}$ and $\Delta p = 100$ bar	M	Nm	6	9	13	17	29	45
Rotary stiffness of drive shaft S	c	Nm/rad	8100	8100	8100	8100	—	—
Rotary stiffness of drive shaft R	c	Nm/rad	—	—	—	—	14800	26300
Moment of inertia of the rotary group	J_{TW}	kgm ²	0.0006	0.0006	0.0006	0.0006	0.00093	0.0017
Maximum angular acceleration ²⁾³⁾	α	rad/s ²	14000	14000	14000	14000	12600	11200
Case volume	V	l	0.2	0.2	0.2	0.2	0.25	0.3
Weight without through drive (14N00, 12N00 approx.)	m	kg	8	8	8	12	15	27
Weight without through drive (22U00 approx.)	m	kg	—	—	—	—	—	—
Weight with through drive (07K.., 12K..approx.)	m	kg	10.5	10.5	10.5	10.5	14	18
Weight with through drive (32U..approx.)	m	kg	—	—	—	—	—	32.6

Determination of the characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

Key

- V_g Displacement per revolution [cm³]
- Δp Differential pressure [bar]
- n Rotational speed [rpm]
- η_v Volumetric efficiency
- η_{hm} Hydraulic-mechanical efficiency
- η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation/simulation and comparison with the permissible values.

For further information on speed increase, see page 33

1) The values are applicable:

- at an absolute pressure $p_{\text{abs}} = 1$ bar at the suction port **S**
- for the optimum viscosity range from $\nu_{\text{opt}} = 36$ to 16 mm²/s
- with hydraulic fluid based on mineral oils

2) Higher values on request

3) The limit value is only valid for a single pump, multiple pump version available on request. The load capacity of the connection parts must be considered.

Technical data A10VZO size 71 to 180

Size	NG		71	100	140	180
Geometric displacement, per revolution	$V_{g \text{ max}}$	cm ³	71.1	100	140	180
Maximum rotational speed ¹⁾ at $V_{g \text{ max}}$						
Suction speed operation as a pump ¹⁾	n_{nom}	rpm	2550	2300	2200	1800
at $V_g < V_{g \text{ max}}$	$n_{\text{max perm.}}$	rpm	2800	2500	2200	1800
Maximum rotational speed ¹⁾ at $V_{g \text{ max}}$						
Suction speed version with port plate 32	n_{nom}	rpm	2550	2150	2200	1800
Maximum rotational speed ¹⁾ bei $V_g < V_{g \text{ max}}$	$n_{\text{max perm.}}$	rpm	2550	2150	2200	1800
Minimum speed (unrestricted in time)	n_{min}	rpm	0	200	200	200
Maximum speed decompression operation	n_{nom}	rpm			On request	
Flow at n_{nom} and $V_{g \text{ max}}$	q_v	l/min	181	230	308	324
Pump operation performance at $n_{\text{nom}}, V_{g \text{ max}}$	P	kW	84	107	143	151
Torque at $V_{g \text{ max}}$ and $\Delta p = 280$ bar	M	Nm	317	445	623	801
at $V_{g \text{ max}}$ and $\Delta p = 100$ bar	M	Nm	113	159	223	286
Rotary stiffness of drive shaft S	c	Nm/rad	–	121142	169537	171107
R	c	Nm/rad	76545	–	–	–
Moment of inertia of the rotary group	J_{TW}	kgm ²	0.0087	0.0185	0.0276	0.033
Maximum angular acceleration ²⁾³⁾	α	rad/s ²	7500	6200	5000	4000
Case volume	V	l	1.6	2.2	3.0	2.7
Weight without through drive (12N00, 42N00 approx.)	m	kg	36.5	55	70	75.2
Weight without through drive (22U00 approx.)	m	kg	51.8	76	90.2	89.4
Weight with through drive (12K..approx.)	m	kg	–	–	–	–
Weight with through drive (22U..approx.)	m	kg	51.8	76	90.2	89.4

Determination of the characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{\text{hm}}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

Key

- V_g Displacement per revolution [cm³]
- Δp Differential pressure [bar]
- n Rotational speed [rpm]
- η_v Volumetric efficiency
- η_{hm} Hydraulic-mechanical efficiency
- η_t Total efficiency ($\eta_t = \eta_v \times \eta_{\text{hm}}$)

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation/simulation and comparison with the permissible values.

For further information on speed increase, see page 33

1) The values are applicable:


- at an absolute pressure $p_{\text{abs}} = 1$ bar at the suction port **S**
- for the optimum viscosity range from $\nu_{\text{opt}} = 36$ to 16 mm²/s
- with hydraulic fluid based on mineral oils

2) Higher values on request

3) The limit value is only valid for a single pump, multiple pump version available on request. The load capacity of the connection parts must be considered.

Minimum permissible inlet pressure at suction port S with speed increase

In order to prevent damage to the pump (cavitation), a minimum inlet pressure must be ensured at the suction port **S**. The level of the minimum input pressure depends on the rotational speed and the displacement volume of the variable pump.

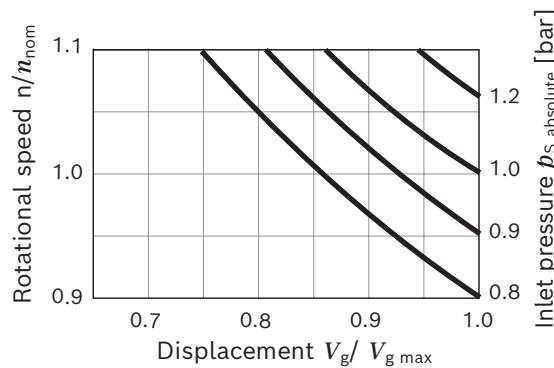


During continuous operation in overspeed over n_{nom} , a reduction in operational service life is to be expected due to cavitation erosion.

Permissible input and through-drive torques

Size		3 to 10	18	28	45	71	100	140	180	
Input torque										
at drive shaft, maximum ²⁾	S	$M_{E\ max}$ Nm	126	–	–	–	–	1104	1620	1620
		\emptyset in	3/4	–	–	–	–	1 1/2	1 3/4	1 3/4
	R	$M_{E\ max}$ Nm	–	160	250	400	650	–	–	–
		\emptyset in	–	3/4	7/8	1	1 1/4	–	–	–
Maximum through-drive torque										
	S	$M_{D\ max}$ Nm	41	–	–	–	–	778	1266	1266
	R	$M_{D\ max}$ Nm	–	120	176	365	480	–	–	–

▼ Distribution of torques

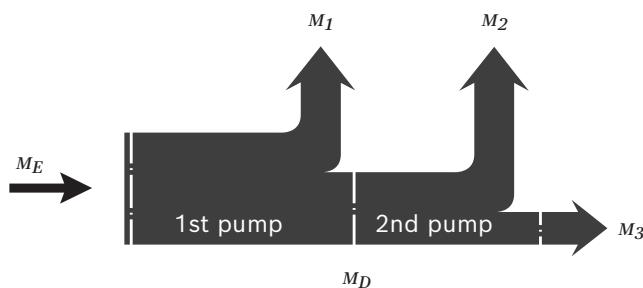

Torque at 1st pump	M_1
Torque at 2nd pump	M_2
Torque at 3rd pump	M_3
Input torque	$M_E = M_1 + M_2 + M_3$
	$M_E < M_{E\ max}$
Through-drive torque	$M_D = M_2 + M_3$
	$M_D < M_{D\ max}$

¹⁾ Efficiency not considered

²⁾ For drive shafts with no radial force

EZ300/EZ400 – Two-point control, electric


The variable displacement unit is set to the minimum swivel angle by actuating the switching solenoid. The control pressure is taken internally from the high-pressure side. A minimum system pressure depending on the operating data is required for the pump to be adjusted.

Notice

- ▶ Starting up to $V_g \text{ min}$ and switching from $V_g \text{ min}$ below a working pressure of 10 bar is not permissible.

The axial piston unit can only be switched between $V_g \text{ max}$ and $V_g \text{ min}$.
Please specify the presetting in plain text.
A $V_g \text{ min } 0 \text{ cm}^3$ setting is not permissible.

▼ Characteristic curve EZx00

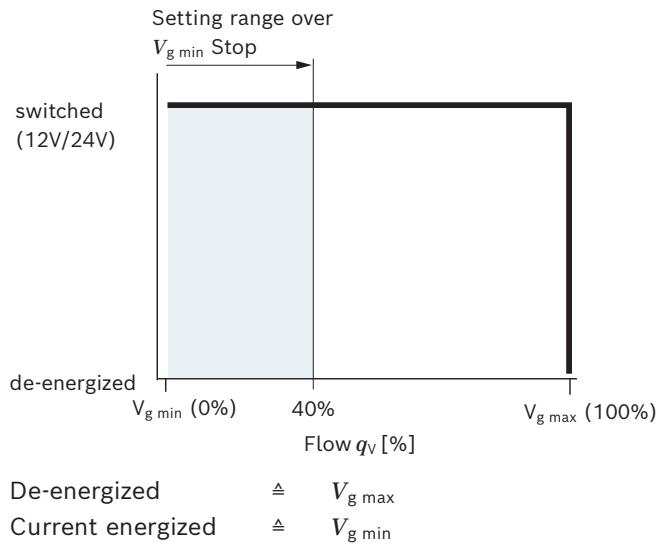


Technical data, solenoid	EZ300	EZ400
Voltage	12 V ($\pm 15\%$)	24 V ($\pm 15\%$)
Position $V_g \text{ max}$	de-energized	de-energized
Position $V_g \text{ min}$	current energized	current energized
Nominal current at 20°C	1.5 A	0.8 A
Duty cycle	100%	100%
Type of protection: see connector version page 126		


Ambient temperature range -20 °C to +60 °C.

Please contact us if these temperatures cannot be observed

▼ Circuit diagram A10VZO...EZ3/4 sizes 3 to 10

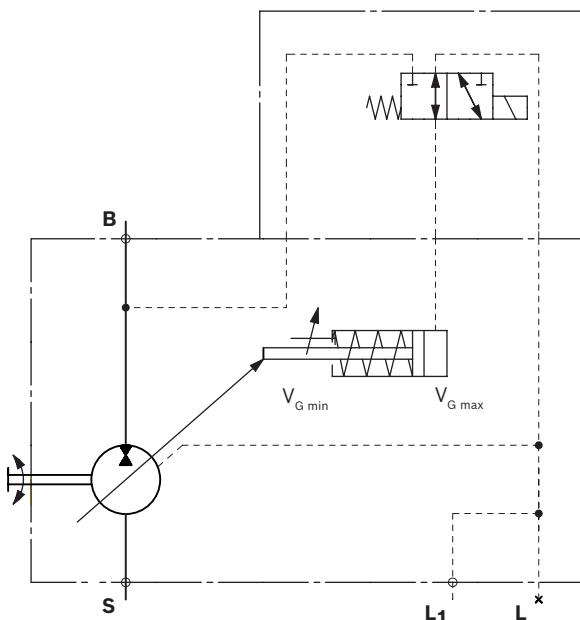

▼ Circuit diagram A10VZO...EZ3/4 sizes 18 to 180

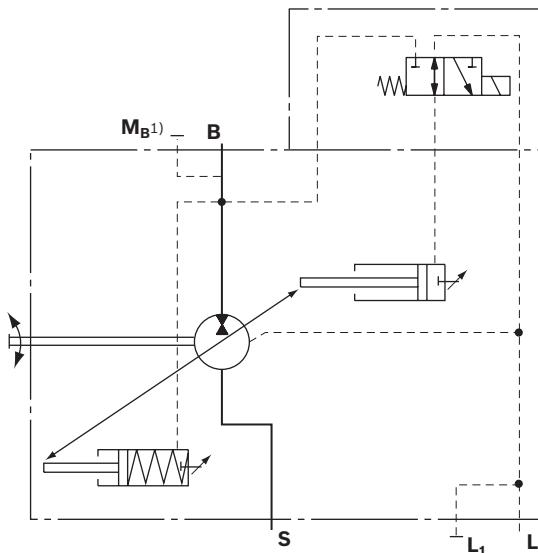

DG000 – Two-point control, hydraulic

The variable pump is set to minimum swivel angle by switching on an external switching pressure on the port **X**. This provides the stroking piston with direct control fluid power, requiring a minimum pressure of $p_{St} \geq 50$ bar. The variable pump is only switchable between $V_{g\ min}$ and $V_{g\ max}$. Specify the presetting in plain text. A $V_{g\ min} 0\ cm^3$ setting is not permissible.

Notice


- Starting up to $V_{g\ min}$ and switching from $V_{g\ min}$ below a working pressure of 10 bar is not permissible.

Please note that the required switching pressure at port **X** is directly dependent on the actual working pressure p_B at port **B**. (See switching pressure characteristic curve).

The maximum permissible switching pressure corresponds to the nominal pressure of the pump.


- Switching pressure p_{St} in $X= 0$ bar $\triangleq V_{g\ max}$
- Switching pressure p_{St} in $X \geq 50$ bar $\triangleq V_{g\ min}$

▼ Switching pressure characteristic curve

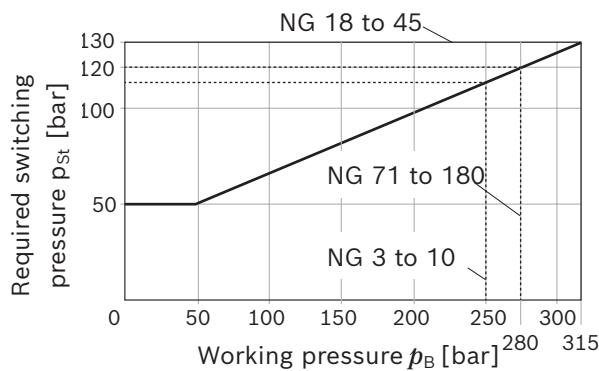


▼ Characteristic curve DG000

Setting range over $V_{g\ min}$ Stop

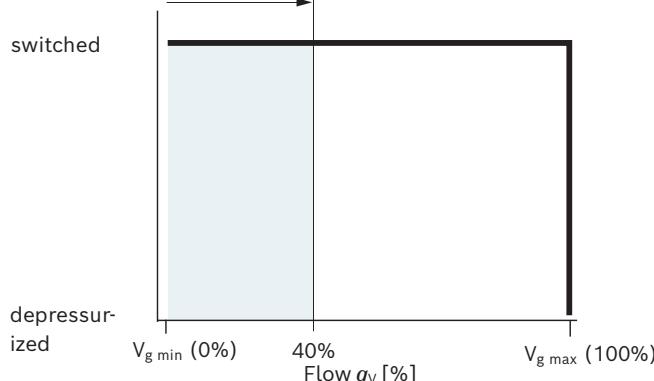


Depressurized $\triangleq V_{g\ max}$
 Pressure switched on $\triangleq V_{g\ min}$

▼ Circuit diagram DG000; A10VZO sizes 3 to 10

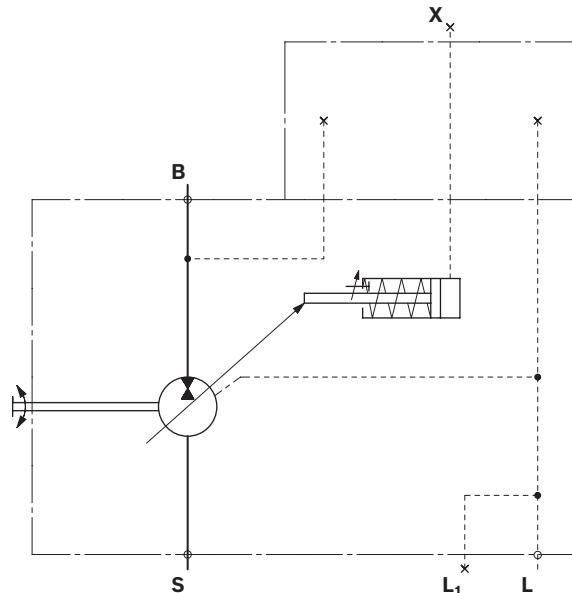

▼ Circuit diagram DG000; A10VZO sizes 18 to 180

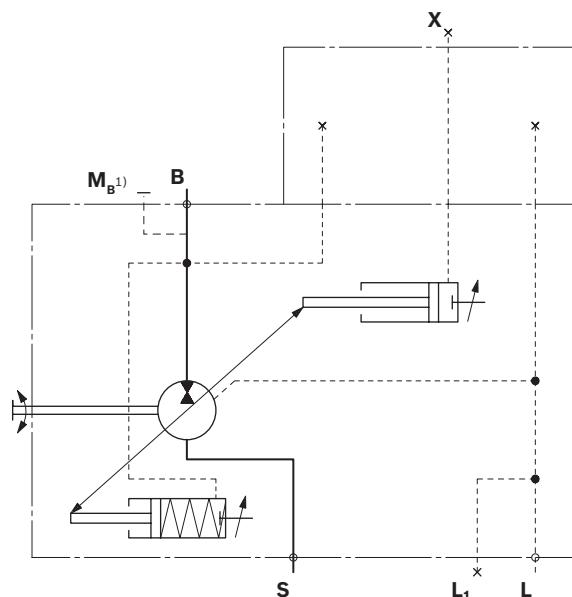

¹⁾ Only port plates 22 and 32

DR – Pressure controller

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers.


If the working pressure exceeds the pressure command value set at the pressure controller, the pump will regulate towards a minimum displacement $V_{g \text{ min}}$. The minimum displacement can either be preselected or be a fixed setting. At $V_{g \text{ min}} = 0 \text{ cm}^3$ (value for "pressure controller" function), the control deviation is reduced. If the displacement volume is $V_{g \text{ min}} > 0 \text{ cm}^3$ (value for "2-step controller" function), there is no pressure controller function. A separate pressure relief valve in the system must always be provided.

- ▶ Basic position in depressurized state: $V_{g \text{ max}}$.
- ▶ Setting range¹⁾ for pressure control, see characteristic curve DR and table.

Notice

- ▶ The described function is only available in the selected direction of rotation (type code R/L). Please contact us regarding switching the direction of rotation

▼ Characteristic curve DR

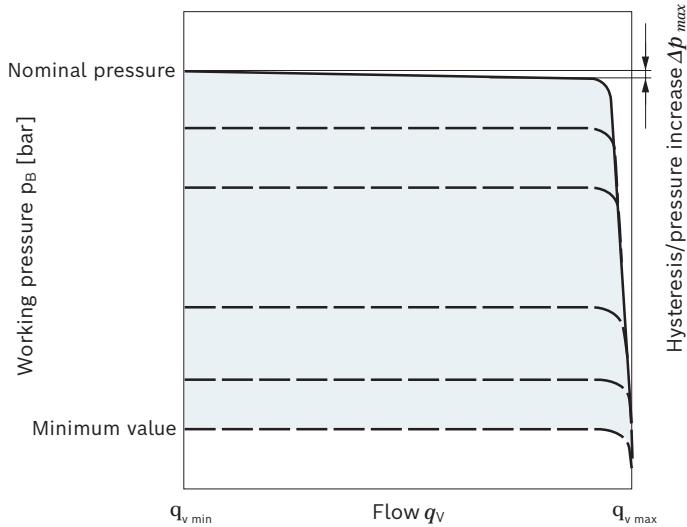

Characteristic curve valid at $n_1 = 1500 \text{ rpm}$ and $\theta_{\text{fluid}} = 50^\circ \text{C}$.

Setting range for pressure control


NG	10	18 to 45	71 to 180
Nominal pressure/ maximum value	[bar] 250	315	280
Minimum value	[bar] 50 ²⁾	50 ²⁾	50 ²⁾

Controller data DR


NG	10	18	28	45	71	100	140	180
Pressure increase	Δp [bar] 4	4	4	6	8	10	12	12
Hysteresis	Δp [bar] maximum	4						
Pilot fluid consumption	[l/min]	maximum approx. 3						

1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
2) For settings below 50 bar, please use the SO275 special pressure controller (setting range: 20 to 100 bar).

▼ Circuit diagram DR nominal size 3 to 10

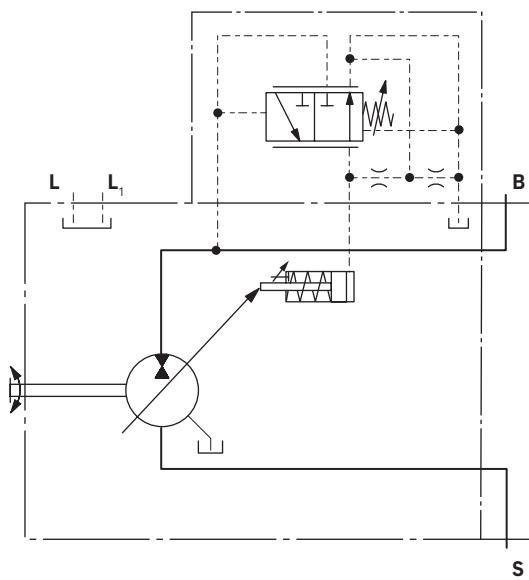

▼ Circuit diagram DR nominal size 18 to 180

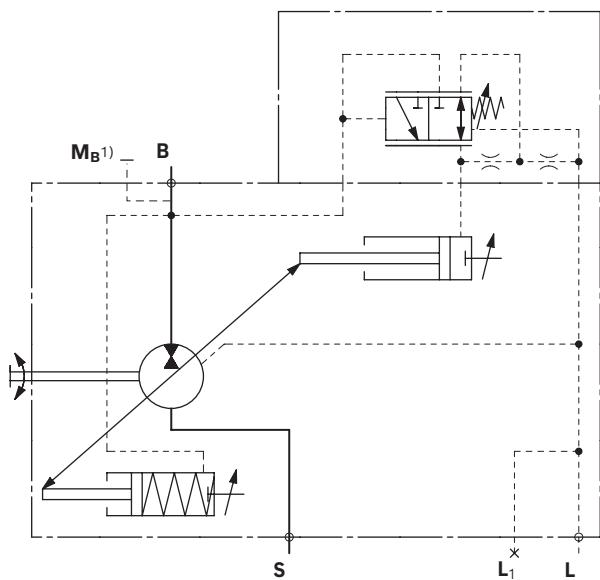

1) Only port plates 22 and 32

DRG – Pressure controller, remote controlled

For the remote controlled pressure controller, the pressure limitation is performed using a separately arranged pressure relief valve. Therefore, any pressure control value under the pressure set on the pressure controller can be regulated. Pressure controller DR see page 36.

A pressure relief valve is externally piped up to port **X** for remote control. This relief valve is not included in the scope of delivery of the DRG control.

A differential pressure of 20 bar Δp (standard setting) results in a control fluid quantity of approx. 1.5 l/min at port **X**. If another setting is required (range from 14–22 bar) please state in plain text.

As a separate pressure relief valve (**1**) we recommend:


- ▶ Directly operated, hydraulically or electrically proportional, suitable for the control fluid quantity mentioned above. The maximum line length should not exceed 2 m.
- ▶ Basic position in depressurized state: $V_g \max$.
- ▶ Setting range¹⁾ for the pressure controller see table "Setting range for pressure controller" on page 36. (**3**)
- ▶ Setting range for differential pressure 14 – 22 bar (**2**). Standard is 20 bar.

Unloading port **X** to the reservoir results in a zero stroke pressure (standby) which is approx. 1 to 2 bar higher than the defined differential pressure Δp , in which system influences are not taken into account.

Notice

- ▶ The described function is only available in the selected direction of rotation (type code R/L). Please contact us regarding switching the direction of rotation


▼ Characteristic curve DRG

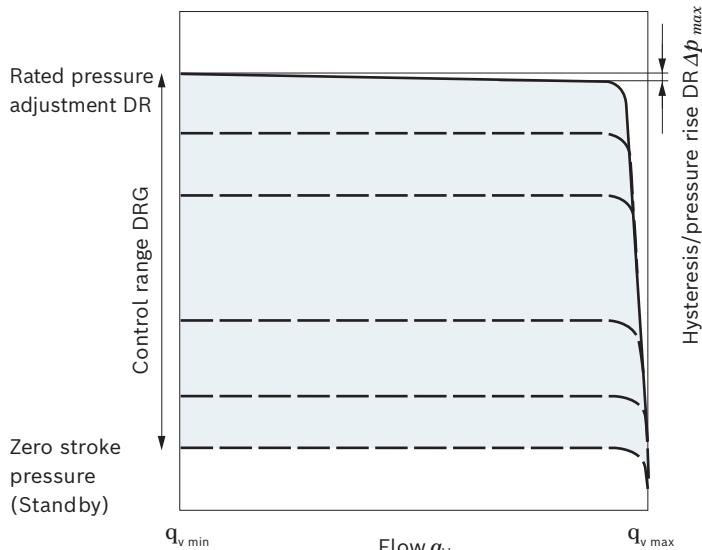

Characteristic curve valid at $n_1 = 1500$ rpm and $\theta_{fluid} = 50$ °C.


¹⁾ In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

▼ Circuit diagram DRG A10VZO NG 3 to 10

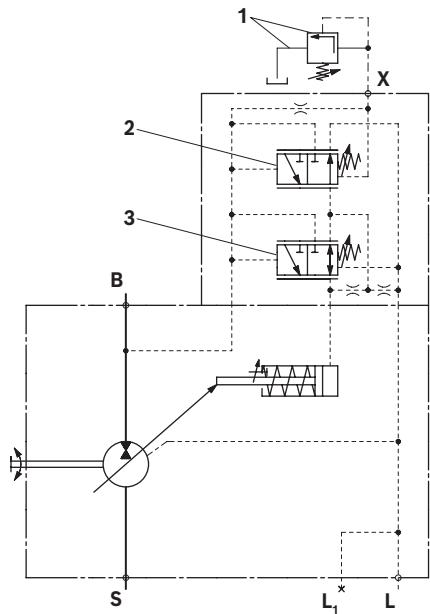

- 1 The separate pressure relief valve and the line are not included in the scope of delivery.
- 2 Remote controlled pressure cut-off (**G**)
- 3 Pressure controller (**DR**)

▼ Circuit diagram base unit A10VZO NG 18 to 180; valve setup, see NG 3 to 10

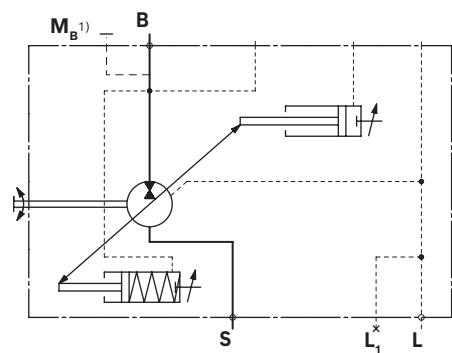

Controller data DRG

NG	10	18	28	45	71	100	140	180
Hysteresis	Δp [bar]	maximum 4						
Pilot fluid consumption	[l/min]	maximum approx. 4.5						

¹⁾ Only port plates 22 and 32

LA.D – Pressure and torque controller

Pressure controller equipped like DR, see page 36.
In order to achieve a constant drive torque, the swivel angle of the axial piston pump is varied depending on the working pressure so that the drive torque remains constant. When ordering please state the torque characteristics to be set at the factory in plain text, e.g. 50 Nm.

Notice

- The described function is only available in the selected direction of rotation (type code R/L). Please contact us regarding switching the direction of rotation.

Controller data


For technical data of pressure controller DR see page 36.
Pilot fluid consumption max. approx. 5.5 l/min.

Reference values	Torque M [Nm] for size							
Beginning of control	18	28	45	71	100	140	180	Code
up to 50 bar	to 17.0	to 26.0	to 42.0	to 67.0	to 94.0	to 132.0	to 170.0	LA5 ¹⁾
51 to 90	17.1 - 30.0	26.1 - 47.0	42.1 - 76.0	67.1 - 121.0	94.1 - 169.0	132.1 - 237.0	170.1 - 305.0	LA6
91 to 160	30.1 - 54.0	47.1 - 84.0	76.1 - 134.0	121.1 - 213.0	169.1 - 299.0	237.1 - 418.0	305.1 - 537.0	LA7
161 to 240	54.1 - 81.0	84.1 - 126.0	134.1 - 202.0	213.1 - 319.0	299.1 - 449.0	418.1 - 629.0	537.1 - 809.0	LA8
over 240	over 81.1	over 126.1	over 202.1	over 319.1	over 449.1	over 629.1	over 809.1	LA9


Conversion of the torque values in power [kW]

$$P = \frac{M}{6.4} \text{ [kW]} \quad (\text{At } 1500 \text{ rpm}) \quad \text{or} \quad P = \frac{2\pi \times M \times n}{60000} \text{ [kW]} \quad (\text{For rotational speeds see page 31 onwards})$$

▼ Circuit diagram LA.D

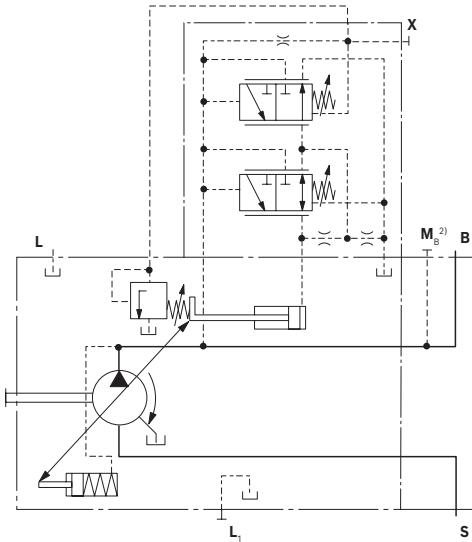

▼ Characteristic curve LA.D

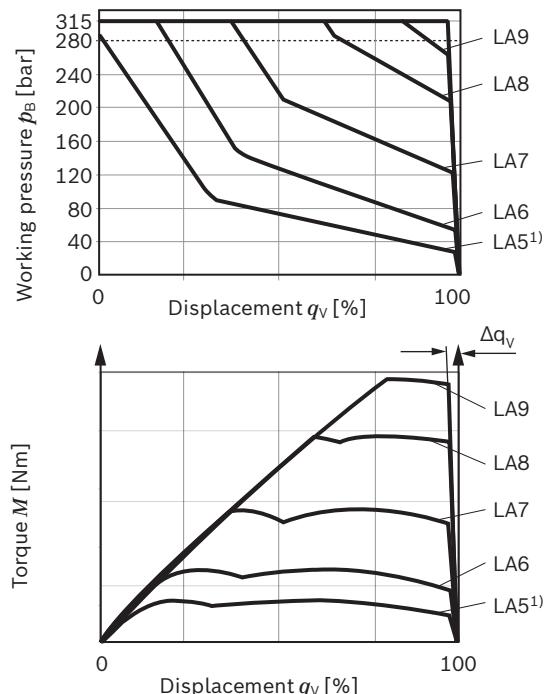


¹⁾ Please contact us

²⁾ Only with port plates 22 and 32


LA.D – Pressure and torque controller, characteristic curve

Torque characteristic curve in Nm


Size 18

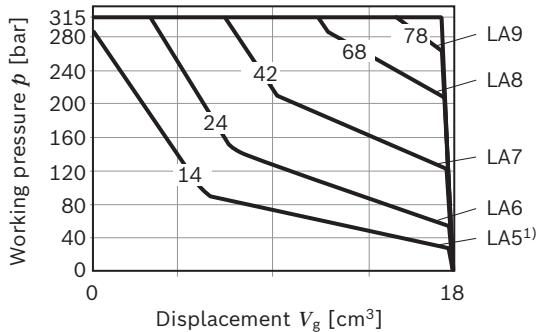


Size 100

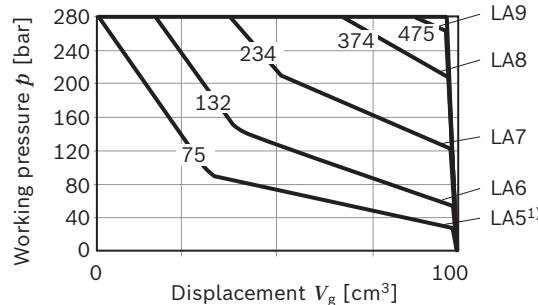


Size 28

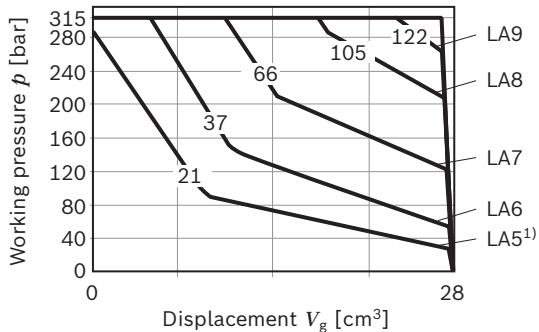


Size 140

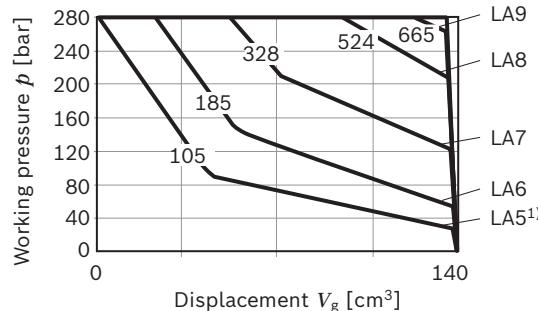


Size 45

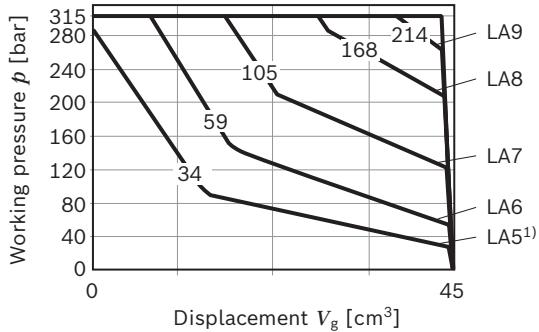

Size 180

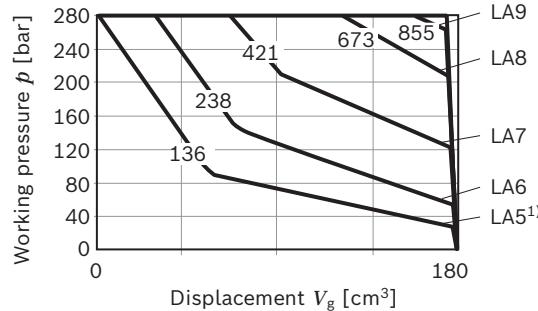


Size 71

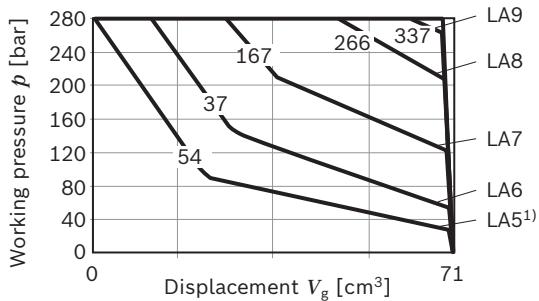


¹⁾ Please contact us

Dimensions A10VZO sizes 3 to 10

EZ3/4 - Two-point control electric, port plate 14 and 07, clockwise rotation

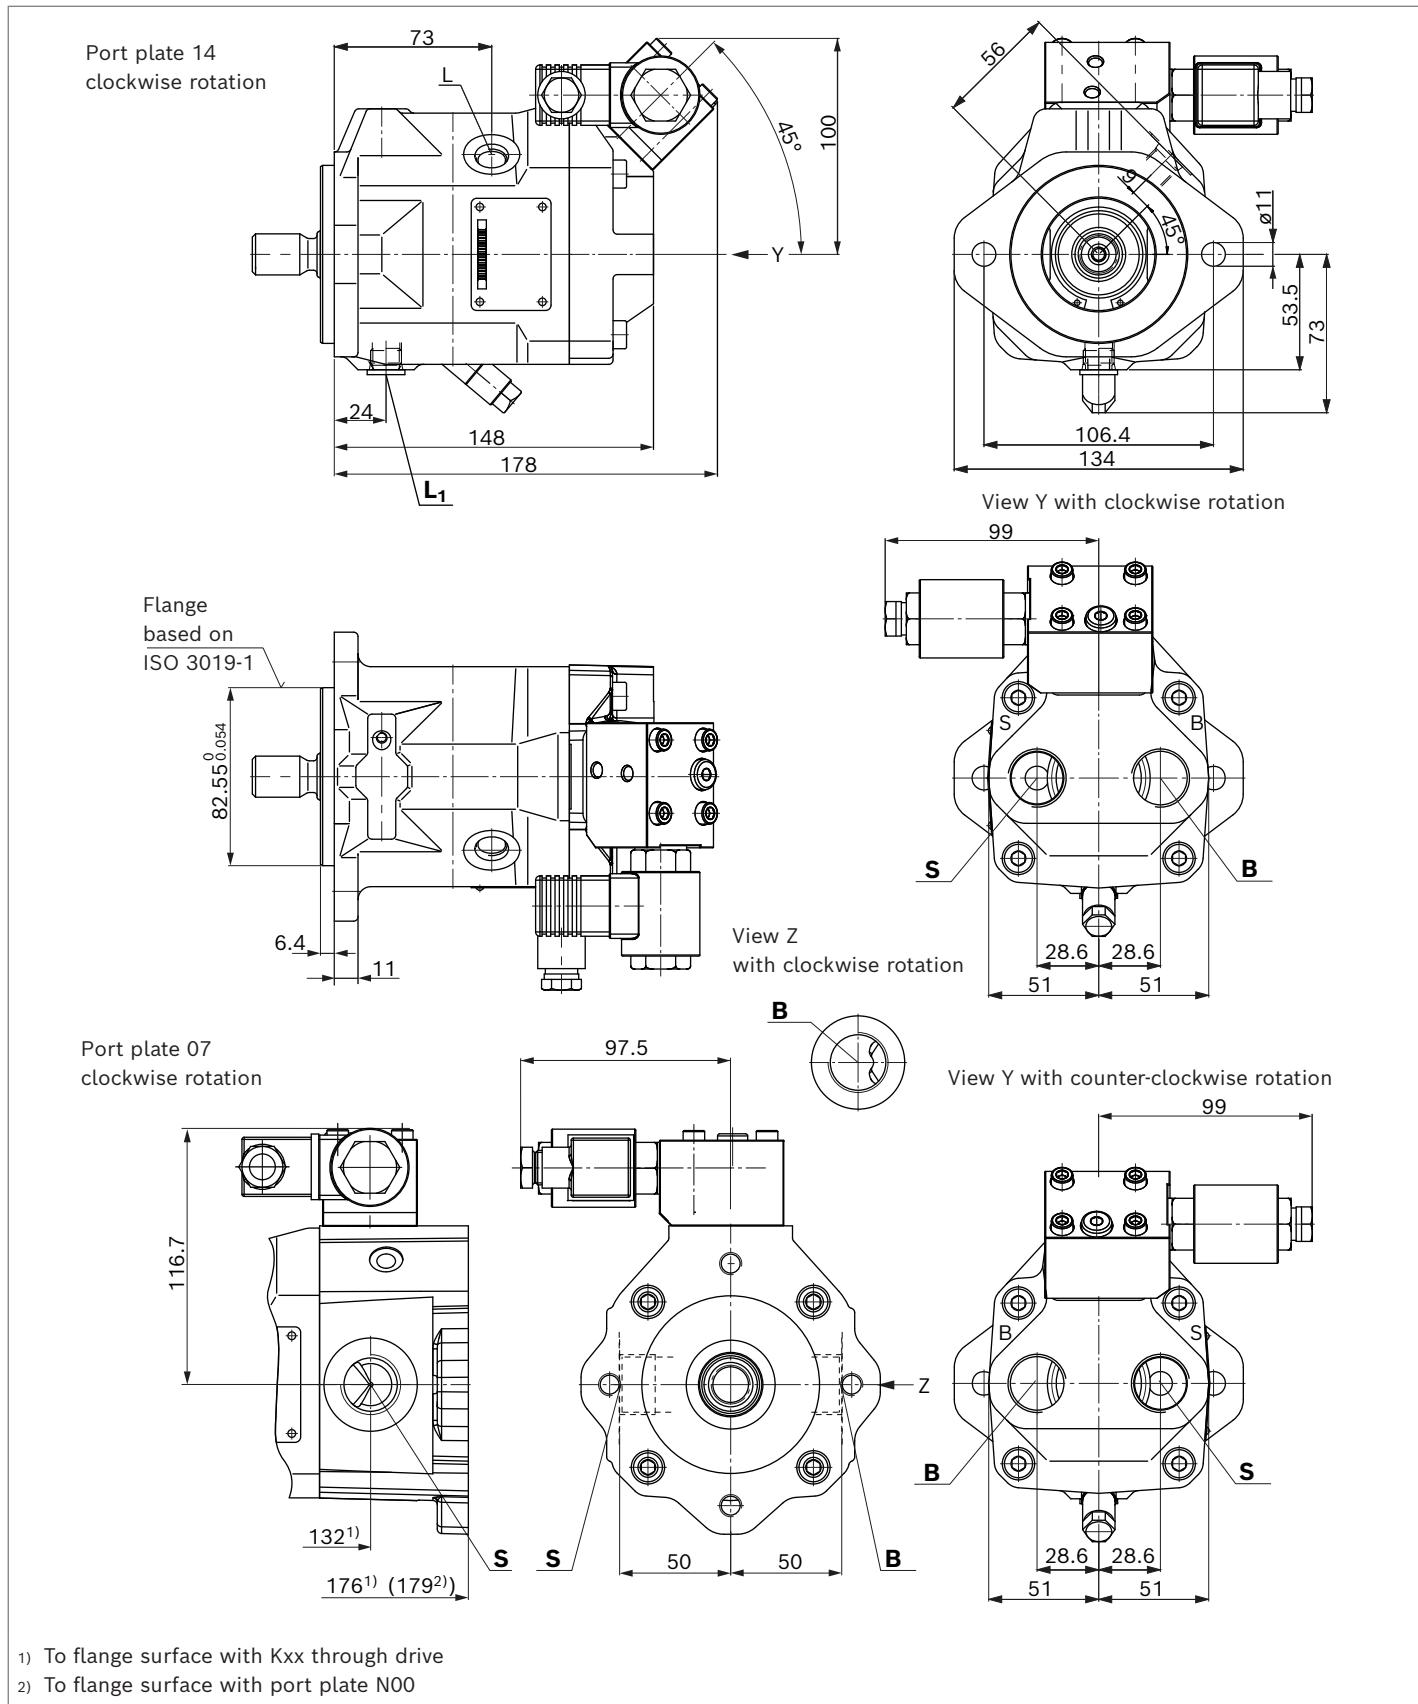

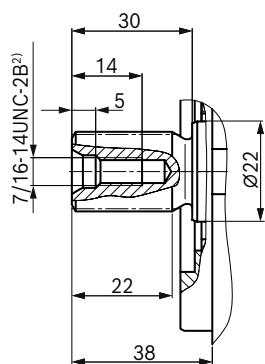▼ Splined shaft 3/4 in (19-4, ISO 3019-1)**S - 11T 16/32DP¹⁾****Connection table A10VZO**

Ports		Standard	Size	p_{\max} [bar] ³⁾	State⁶⁾
B	Working port	DIN 3852-1	M27 x 2; 16 deep	315	O
S	Suction port	DIN 3852-1	M27 x 2; 16 deep	5	O
L	Drain port	ISO 11926 ⁴⁾	9/16-18UNF-2B; 13 deep	2	O ⁵⁾
L₁	Drain port	ISO 11926 ⁴⁾	9/16-18UNF-2B; 13 deep	2	X ⁵⁾
X	Pilot pressure port with pressure controller, remotely controlled	ISO 11926	7/16-20UNF-2B; 11.5 deep	315	O
X	Pilot pressure port with DG	DIN 3852-2	G 1/4	315	O

¹⁾ Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

²⁾ Thread according to ASME B1.1


³⁾ Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

⁴⁾ The countersink may be deeper than specified in the standard.


⁵⁾ Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).

⁶⁾ O = Must be connected (plugged on delivery)
X = plugged (in normal operation)


▼ DG – Two-point control, direct operated, hydraulic

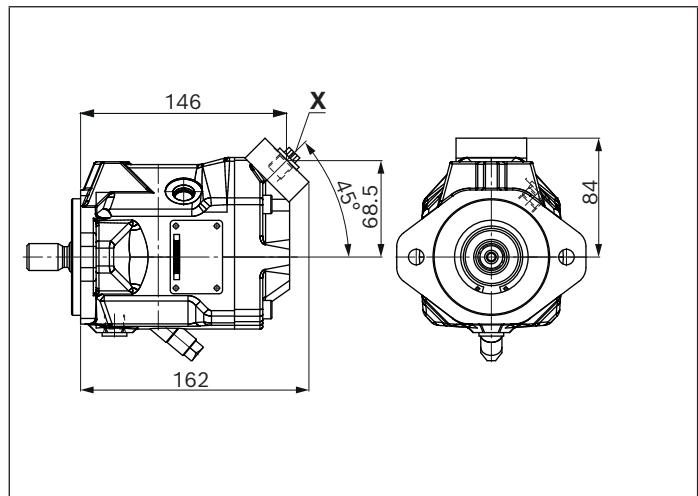

▼ DR – Pressure controller, hydraulic

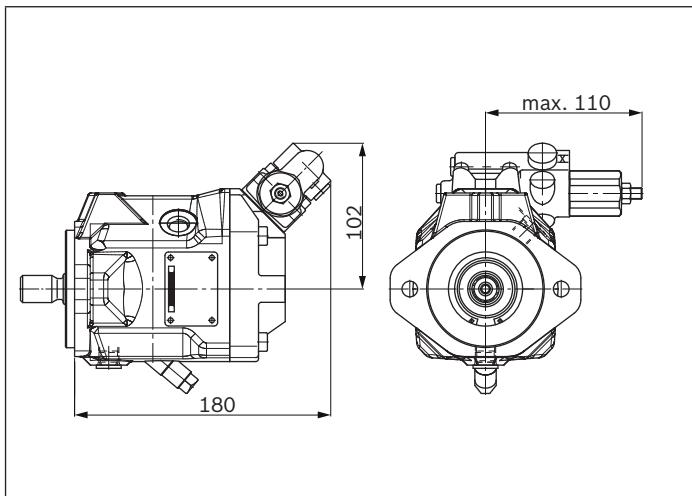

▼ DRG – Pressure controller, remote controlled, hydraulic

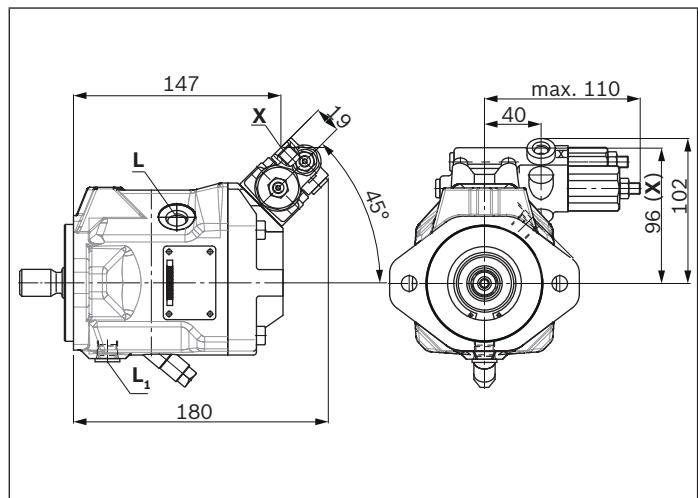


Notice

- ▶ Valve mounting for counter-clockwise rotation,
see overall dimensions on page 42.


Dimensions A10 VZO size 18

EZ3/4 - Two-point control electric, port plate 12, clockwise rotation

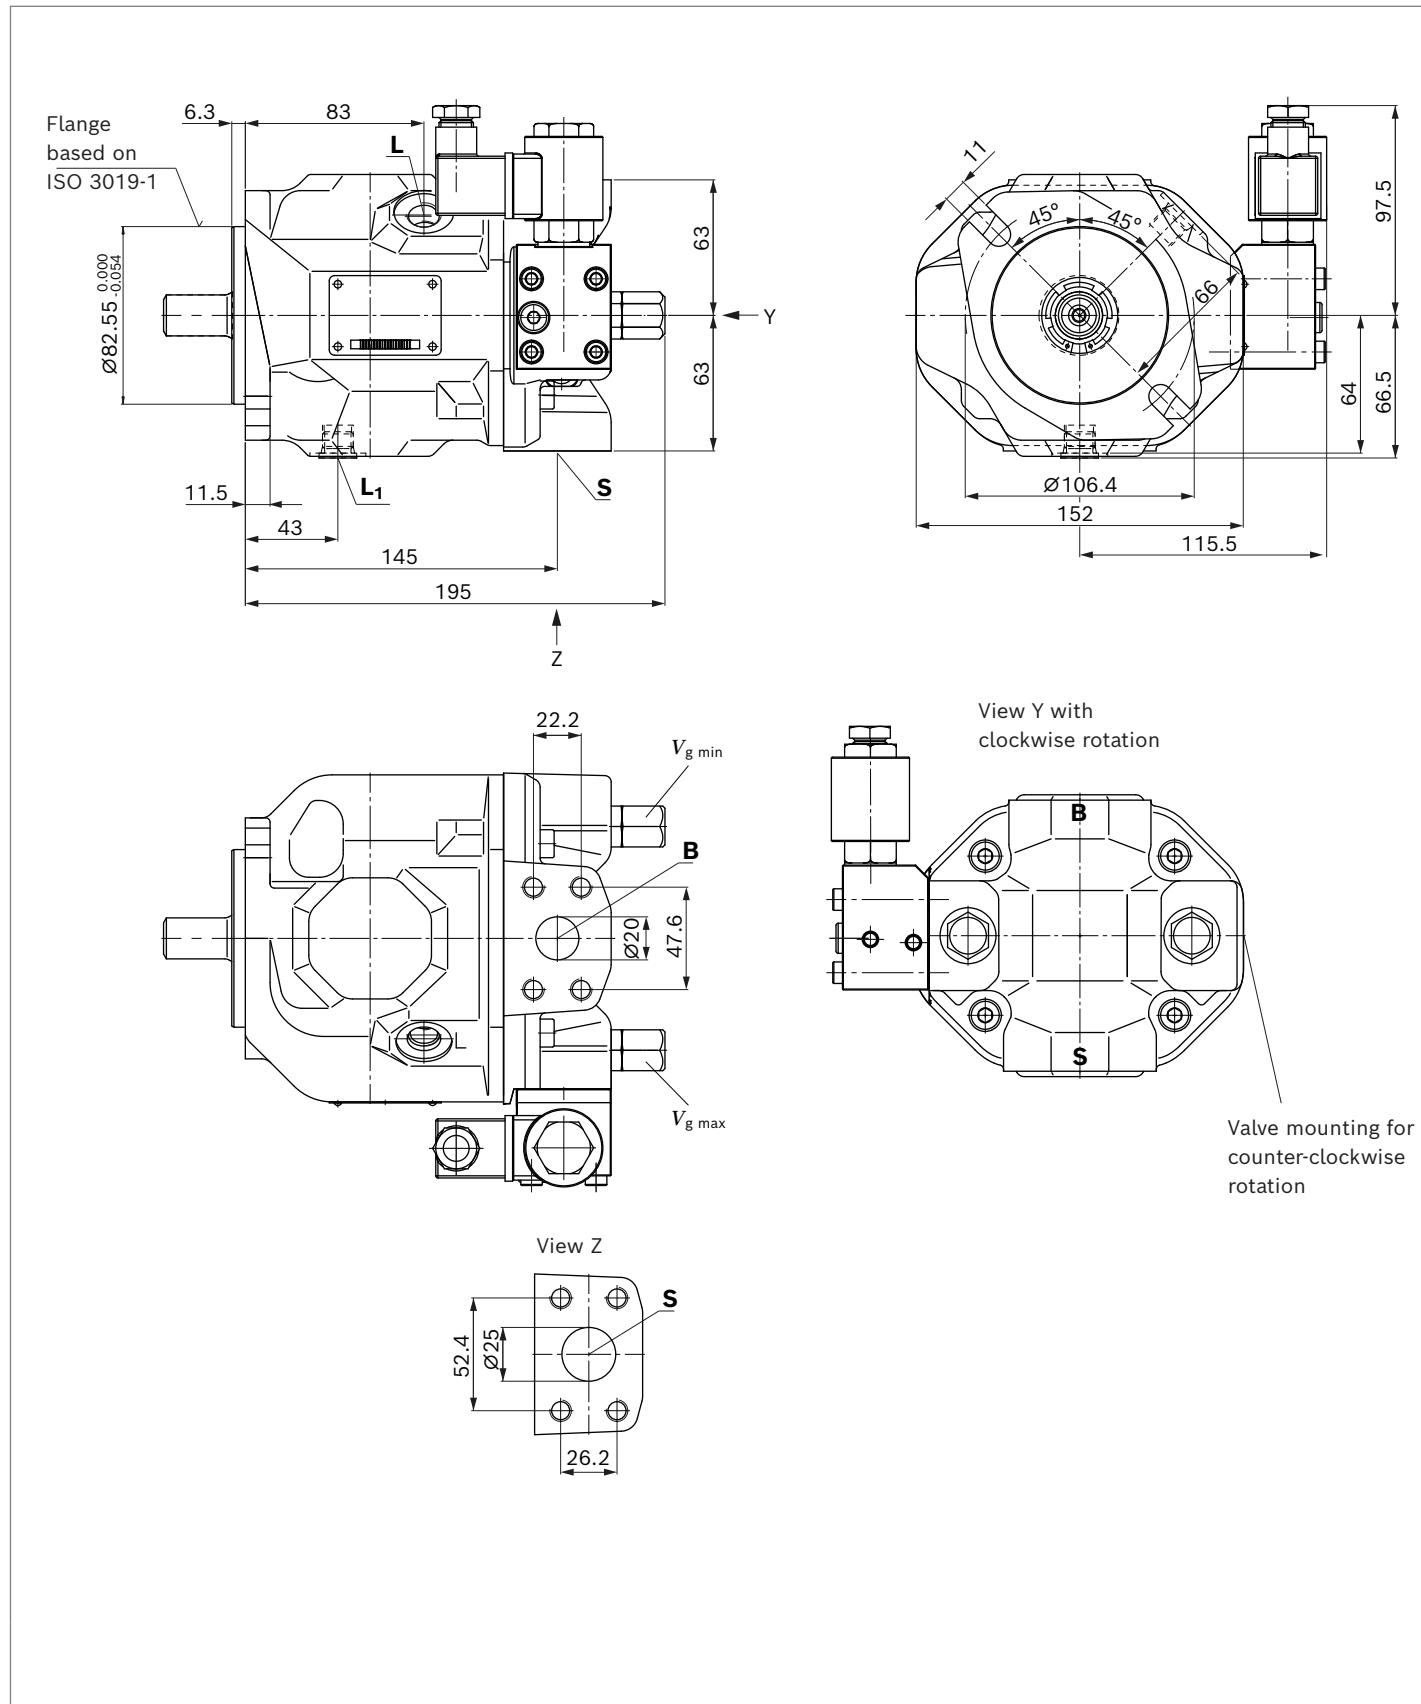

▼ Splined shaft 3/4 in (similar to ISO 3019-1)

R - 11T 16/32DP¹⁾²⁾



Connection table A10VZO

Ports	Standard	Size	p_{\max} [bar] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	3/4 in M10 × 1.5; 17 deep	350 O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	1 in M10 × 1.5; 17 deep	10 O
L	Drain port	ISO 11926 ⁵⁾	9/16-18UNF-2B; 13 deep	2 O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	9/16-18UNF-2B; 13 deep	2 X ⁶⁾
X	Pilot pressure port with pressure controller, remotely controlled	ISO 11926	9/16-18UNF-2B; 13 deep	350 O
X	Pilot pressure port with DG	DIN 3852-2 ⁵⁾	G1/4; 12 deep	350 O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.

3) Thread according to ASME B1.1


4) Depending on the application, momentary pressure peaks can occur.
Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.


6) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).

7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

▼ DG – Two-point control, direct operated, hydraulic


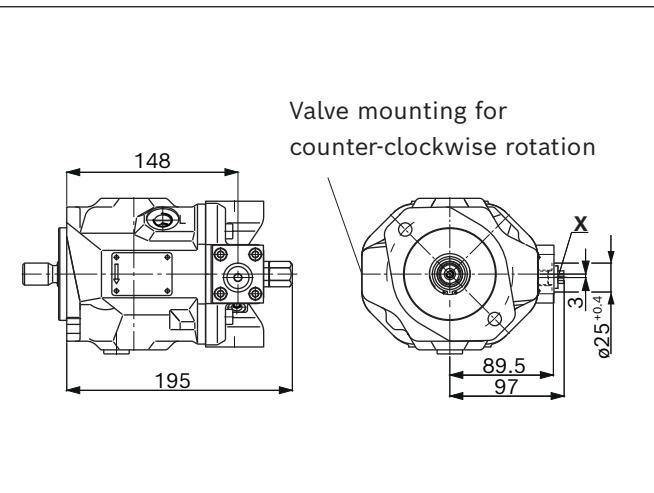


▼ DR – Pressure controller, hydraulic

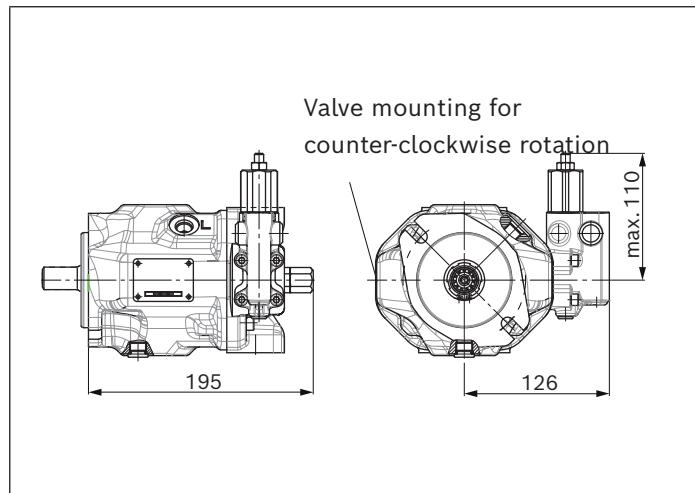





▼ DRG – Pressure controller, remote controlled, hydraulic

▼ LAxD – Torque controller, hydraulic

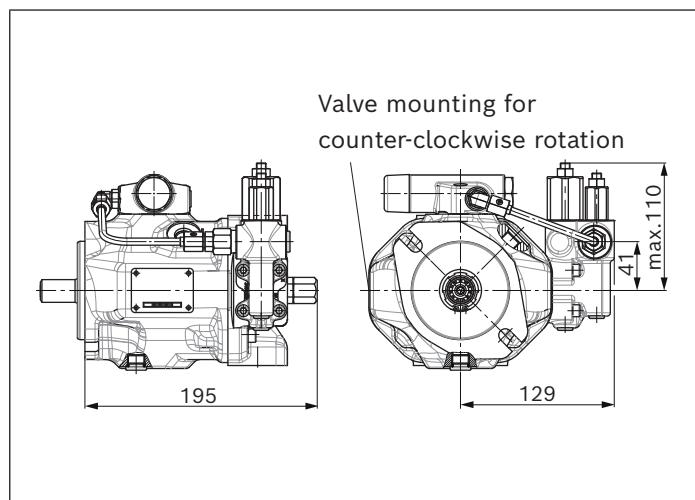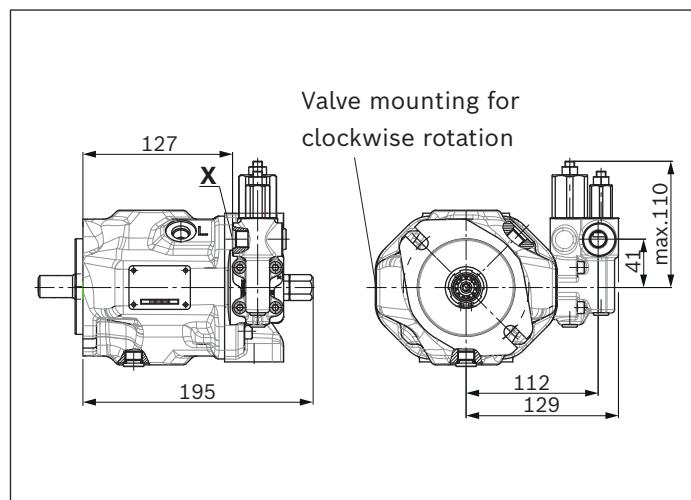


Dimensions A10VZO size 28

EZ3/4 - Two-point control electric, port plate 12, clockwise rotation

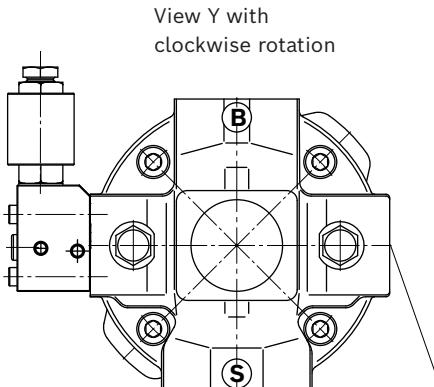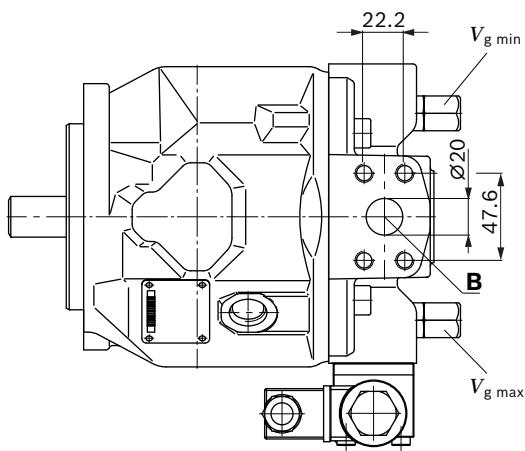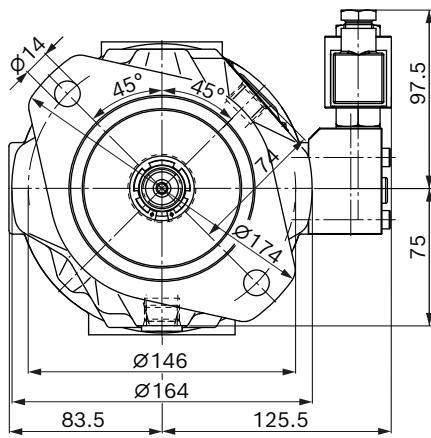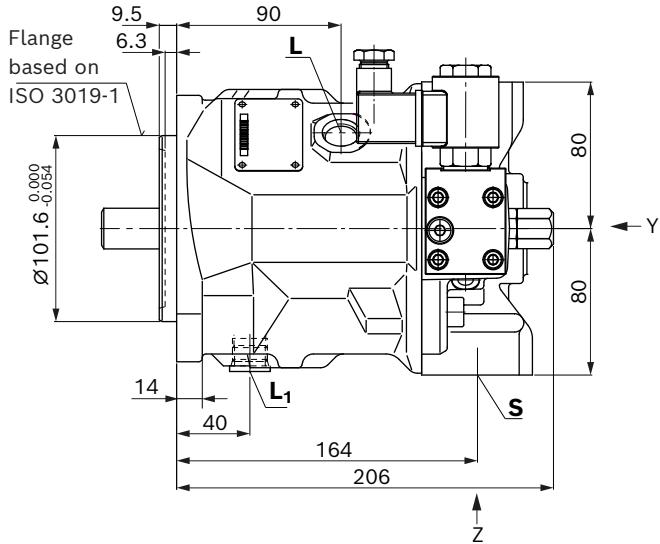


Valve mounting for counter-clockwise rotation

View Z



▼ **Splined shaft 7/8 in (similar to ISO 3019-1)**

R - 13T 16/32DP¹⁾²⁾



Connection table **A10VZO**

Ports	Standard	Size ⁴⁾	p_{\max} [bar] ⁴⁾	State ⁷⁾
B	Working port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	3/4 in M10 × 1.5; 17 deep	350 O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	1 1/4 in M10 × 1.5; 17 deep	10 O
L	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2 O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2 X ⁶⁾
X	Pilot pressure port with pressure controller, remotely controlled	ISO 11926	9/16-18UNF-2B; 13 deep	350 O
X	Pilot pressure port with DG	DIN 3852-2 ⁵⁾	G1/4; 12 deep	350 O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.

3) Thread according to ASME B1.1

4) Depending on the application, momentary pressure peaks can occur.
Keep this in mind when selecting measuring devices and fittings.


5) The countersink may be deeper than specified in the standard.

6) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).

7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)


▼ DG – Two-point control, direct operated, hydraulic

Valve mounting for
counter-clockwise rotation

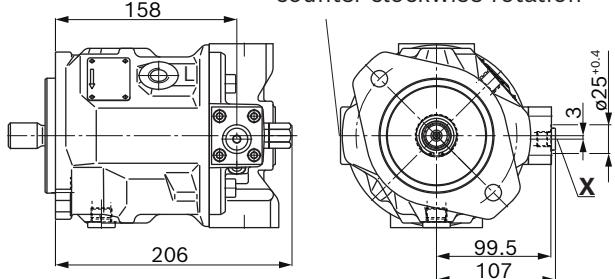


▼ DR – Pressure controller, hydraulic

Valve mounting for
counter-clockwise rotation

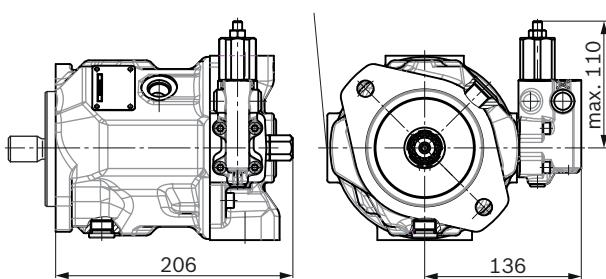


▼ DRG – Pressure controller, remote controlled, hydraulic

Valve mounting for
counter-clockwise rotation

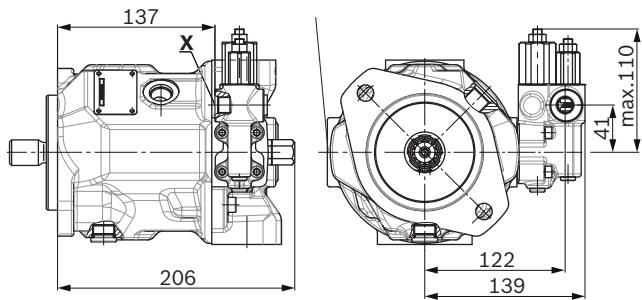





▼ LAXD – Torque controller, hydraulic

Valve mounting for
counter-clockwise rotation

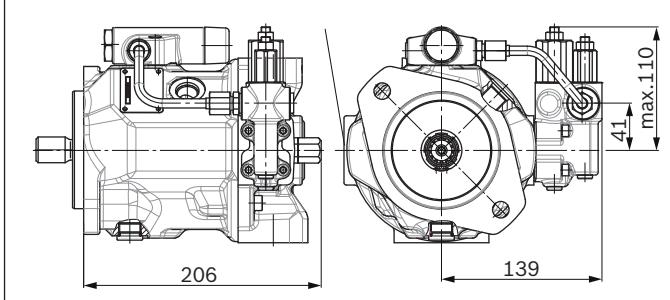


Dimensions A10VZO size 45

EZ3/4 - Two-point control electric, port plate 12, clockwise rotation

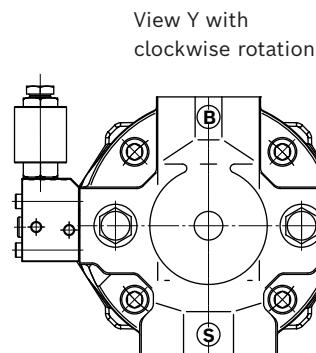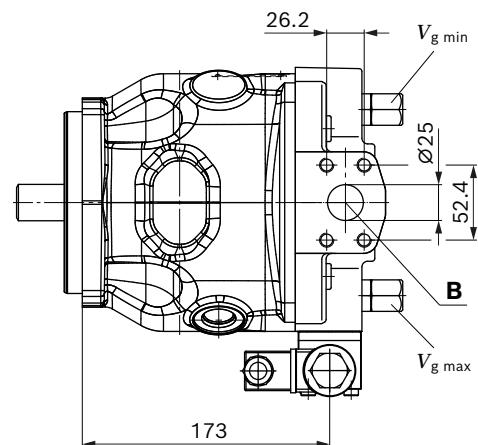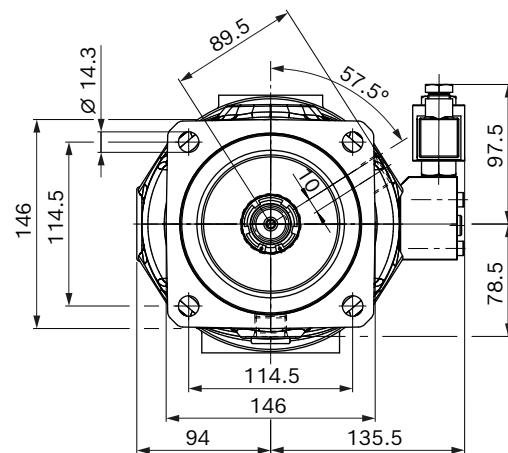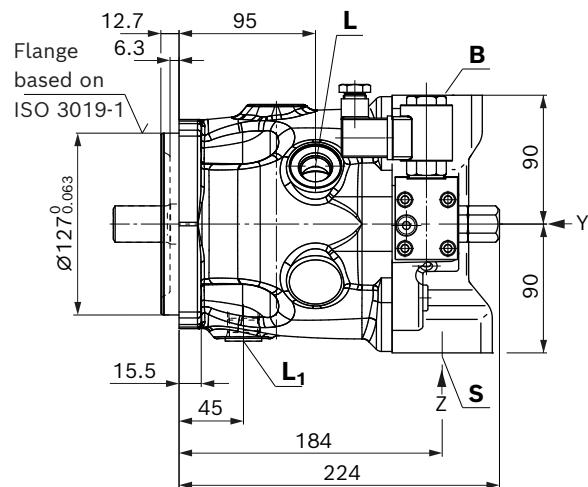


View Z



Valve mounting for counter-clockwise rotation

▼ Splined shaft 1 in (similar to ISO 3019-1)

R - 15T 16/32DP¹⁾²⁾



Connection table A10VZO

Ports	Standard	Size ⁴⁾	p_{\max} [bar] ⁴⁾	State ⁷⁾
B Working port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	1 in M10 × 1.5; 17 deep	350	O
S Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	1 1/2 in M12 × 1.75; 20 deep	10	O
L Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	O ⁶⁾
L₁ Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	X ⁶⁾
X Pilot pressure port with pressure controller, remotely controlled	ISO 11926	9/16-18UNF-2B; 13 deep	350	O
X Pilot pressure with DG	DIN 3852-2 ⁵⁾	G1/4; 12 deep	315	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.

3) Thread according to ASME B1.1


4) Depending on the application, momentary pressure peaks can occur.
Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.


6) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).

7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)


▼ DG – Two-point control, direct operated, hydraulic

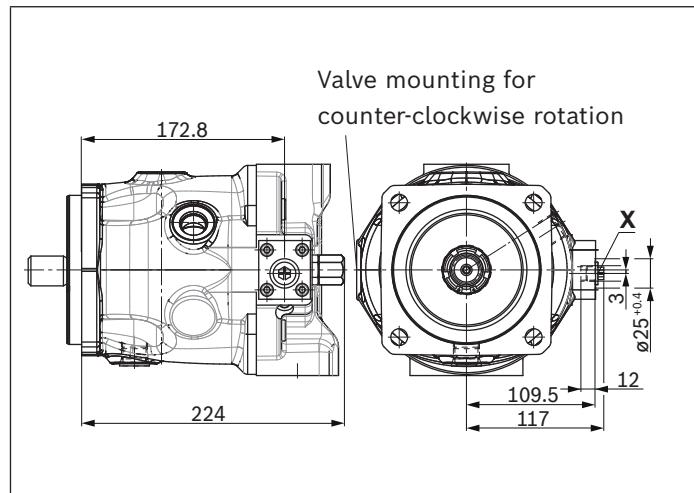


▼ DR – Pressure controller, hydraulic

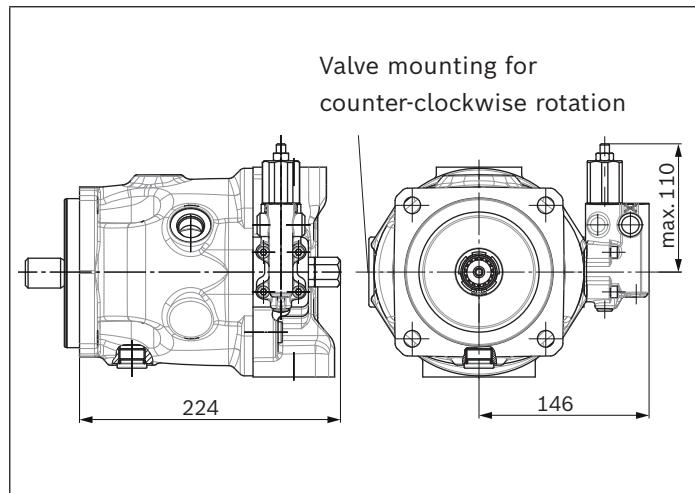

▼ DRG – Pressure controller, remote controlled, hydraulic

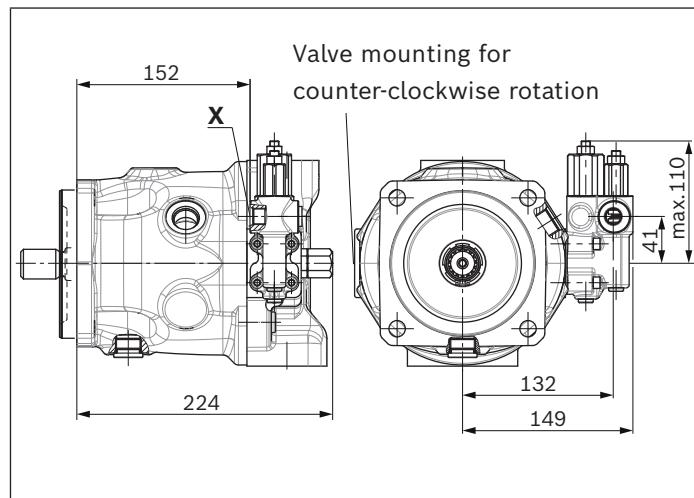


▼ LAxD – Torque controller, hydraulic

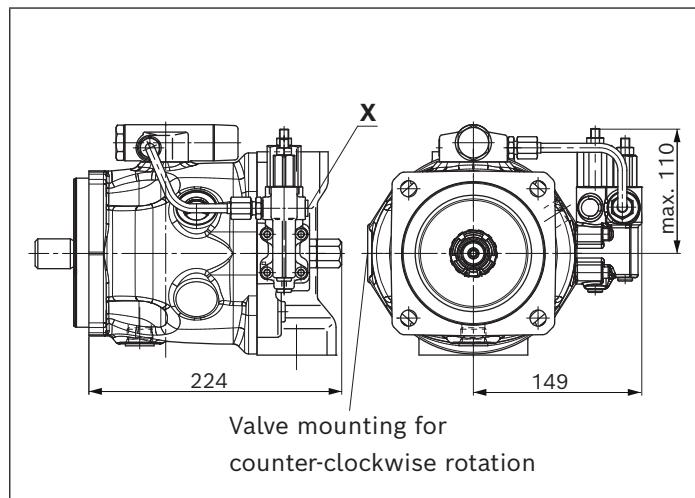


Dimensions A10VZO size 71

EZ3/4 - Two-point control electric, port plate 12, clockwise rotation

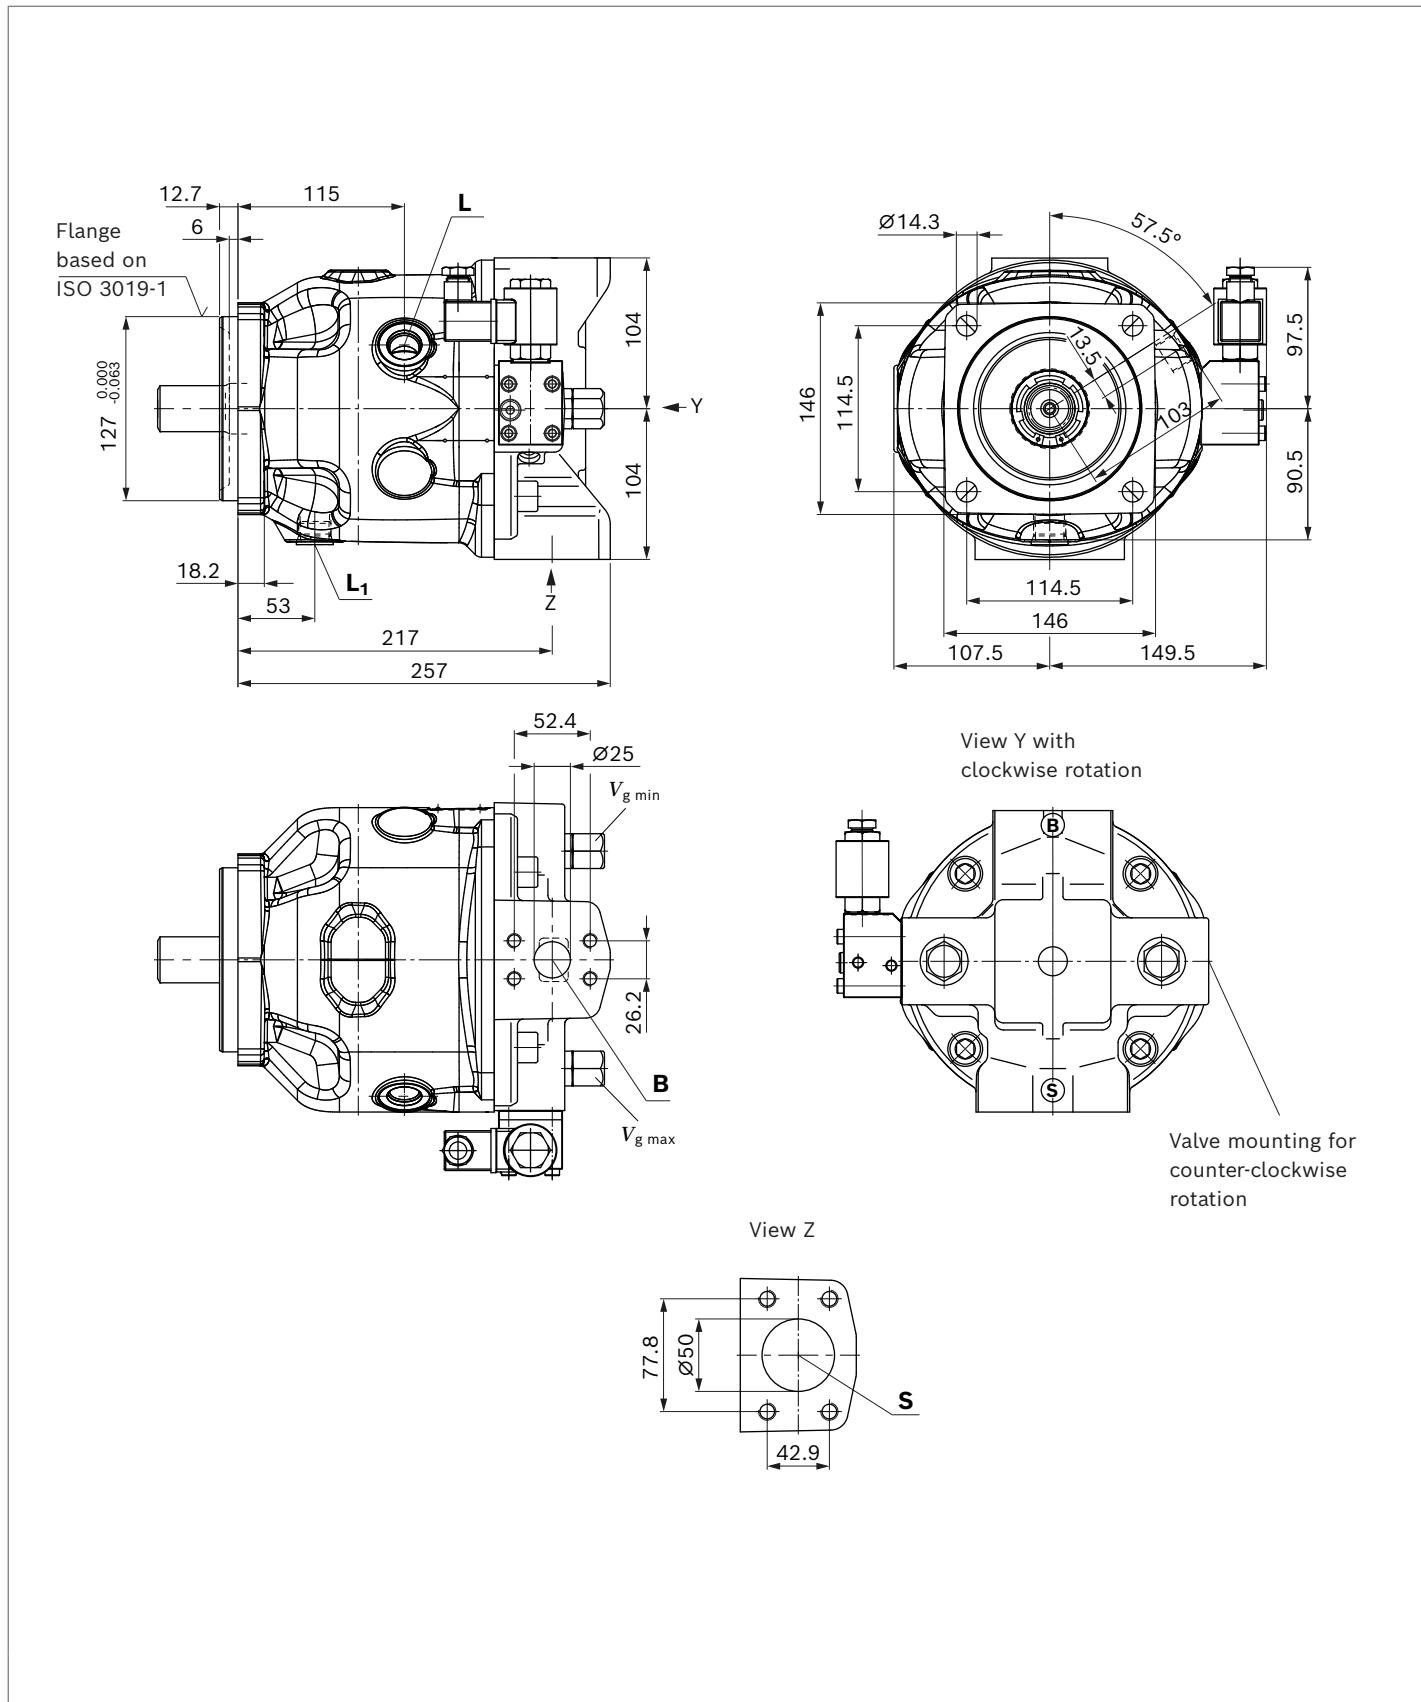


Dimensions A10VZO size 71

EZ3/4 - Two-point control electric, port plate 22/32, clockwise rotation

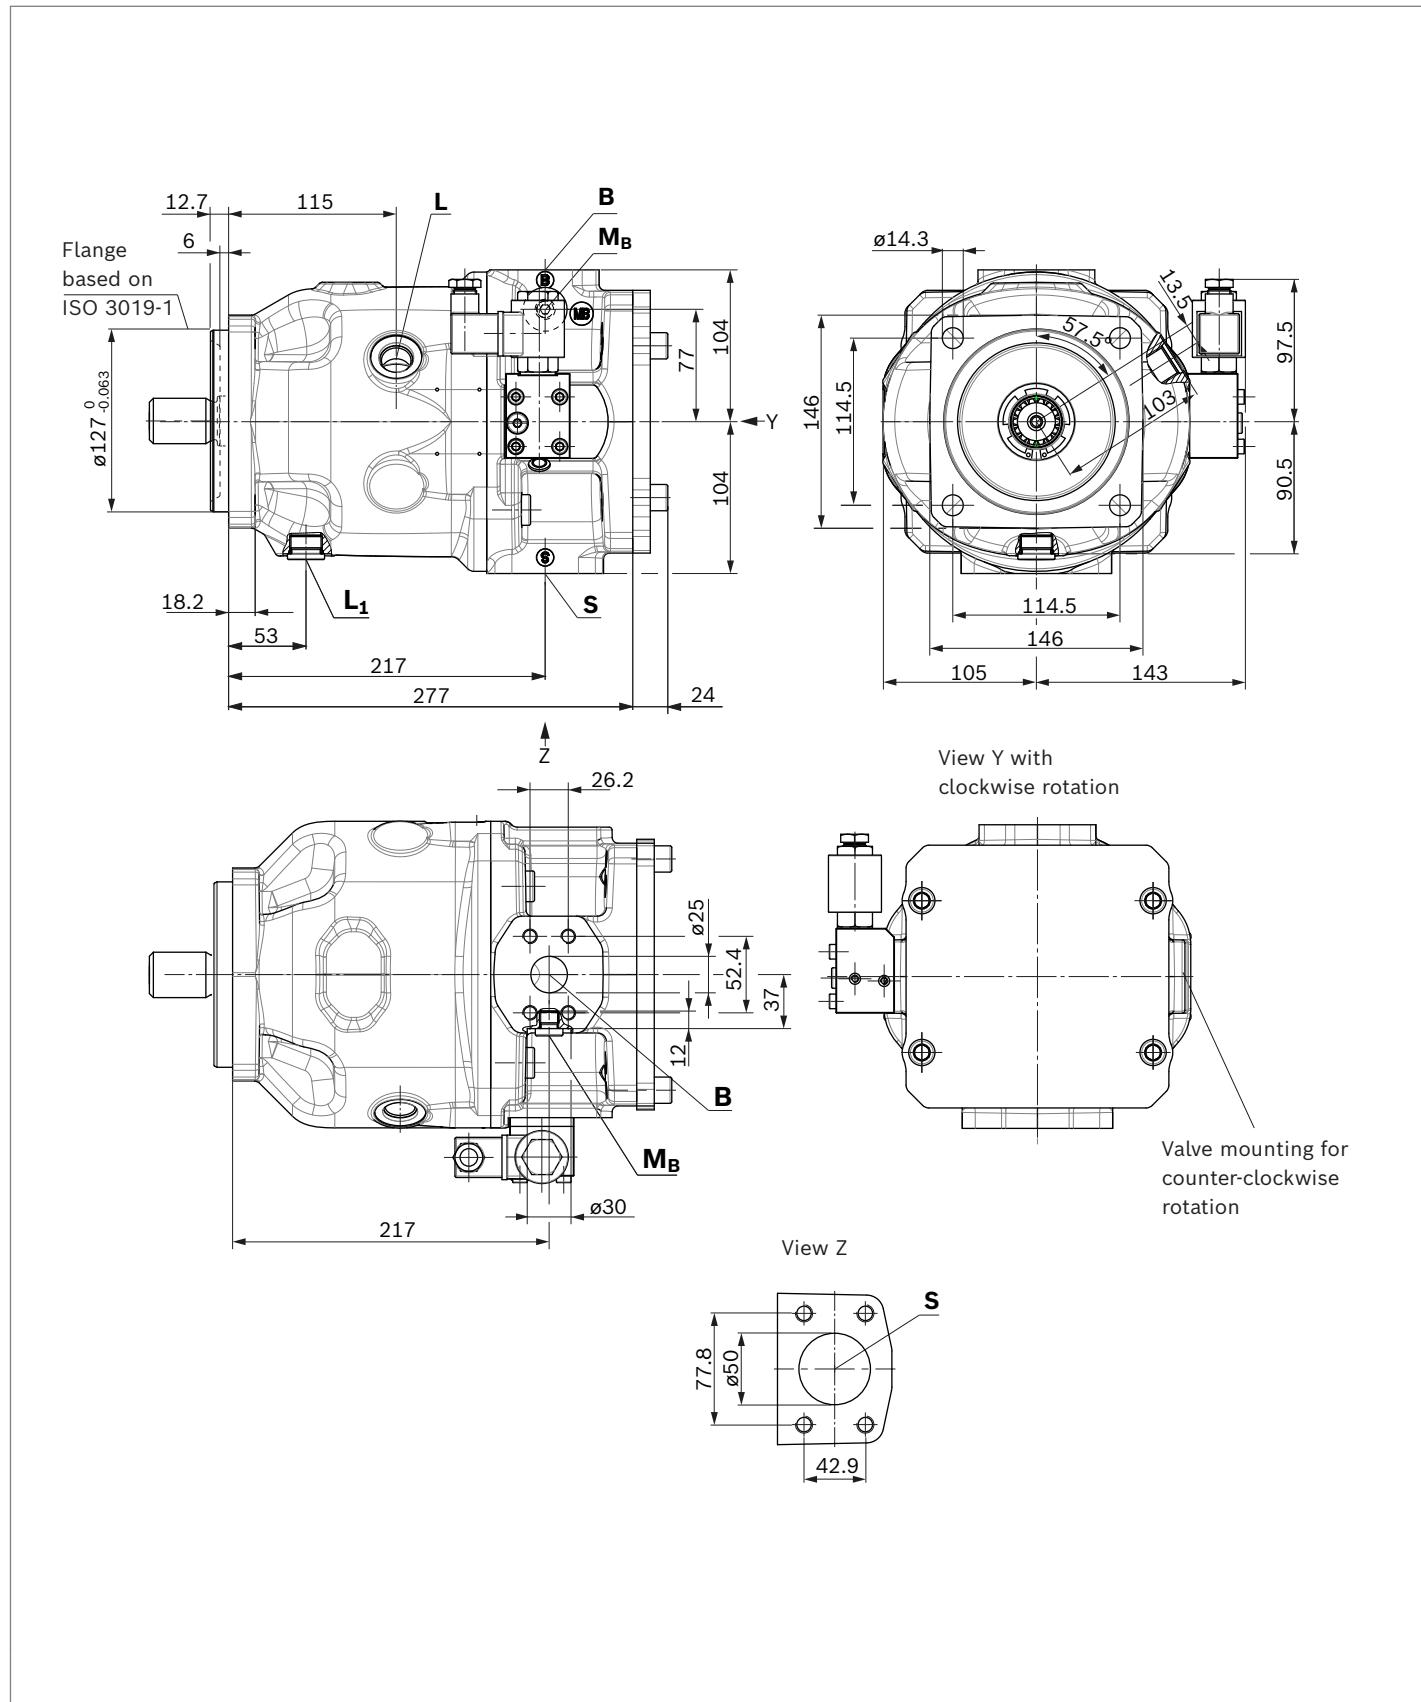

▼ Splined shaft 1 1/4 in (similar to ISO 3019-1)

R - 14T 12/24DP¹⁾²⁾



Connection table A10VZO


Ports	Standard	Size	p_{\max} [bar] ⁴⁾	State ⁷⁾
B Working port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	1 in M10 × 1.5; 17 deep	350	O
S Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	2 in M12 × 1.75; 20 deep	10	O
L Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	O ⁶⁾
L₁ Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	X ⁶⁾
X Pilot pressure port with pressure controller, remotely controlled	ISO 11926	7/16-20UNF-2B; 11.5 deep	350	O
X Pilot pressure with DG	DIN 3852-2 ⁵⁾	G1/4; 12 deep	315	O
M_B Measuring port pressure in B only with port plates 22 and 32	DIN 3852-2 ⁵⁾	G1/4; 12 deep	350	X

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
- 6) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).
- 7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)


▼ **DG – Two-point control, direct operated, hydraulic**

Port plate 12; clockwise rotation

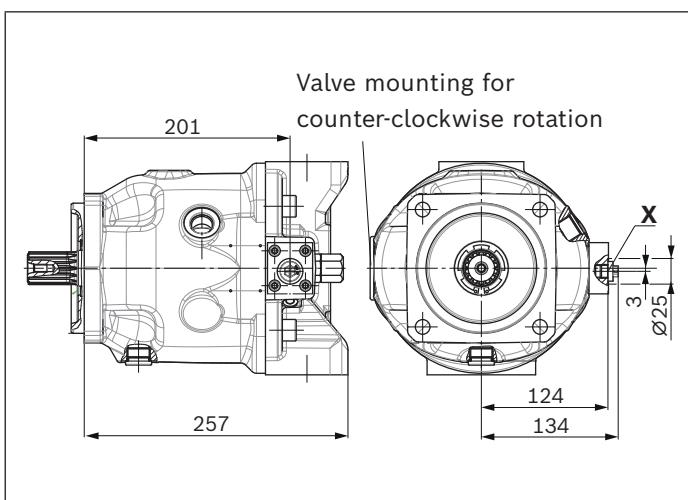


▼ **DR – Pressure controller, hydraulic**

Port plate 12; clockwise rotation

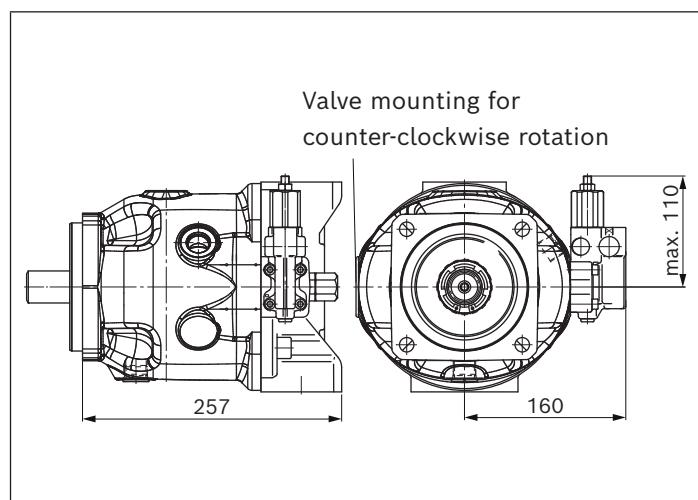


▼ **DRG – Pressure controller, remote controlled, hydraulic**

Port plate 12; clockwise rotation

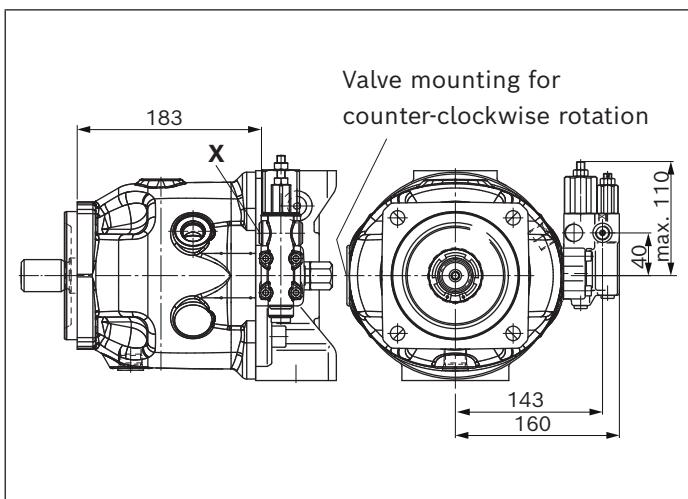


▼ **LAxD – Torque controller, hydraulic**

Port plate 12; clockwise rotation

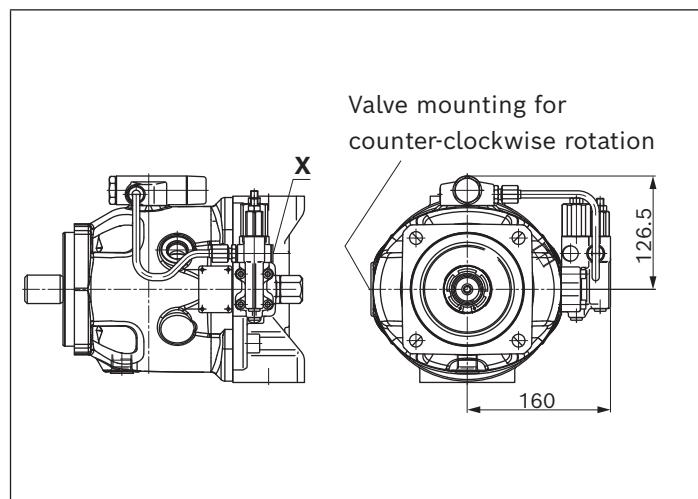


▼ DG – Two-point control, direct operated, hydraulic

Port plate 22/32; clockwise rotation

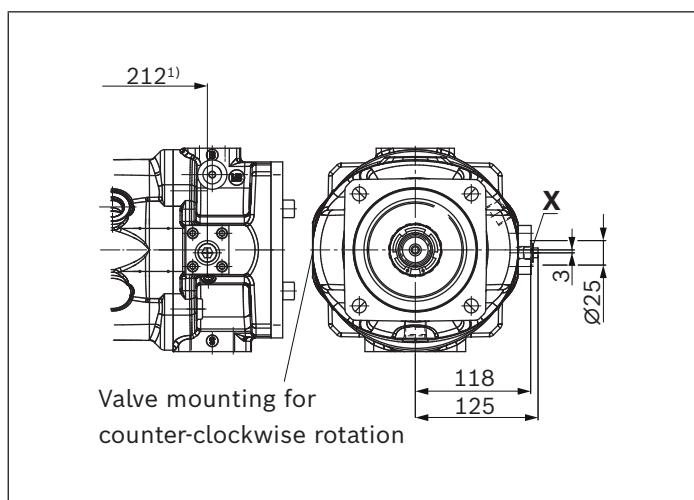


▼ DRG – Pressure controller, remote controlled, hydraulic

Port plate 22/32; clockwise rotation

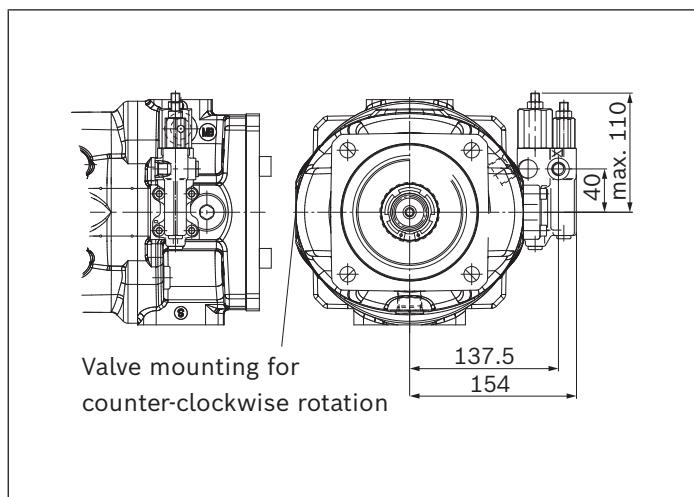


▼ DR – Pressure controller, hydraulic

Port plate 22/32; clockwise rotation

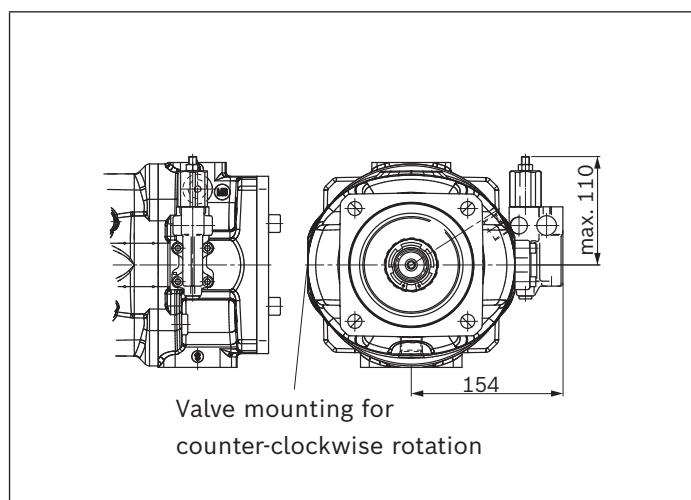

▼ LAxD – Torque controller, hydraulic


Port plate 22/32; clockwise rotation

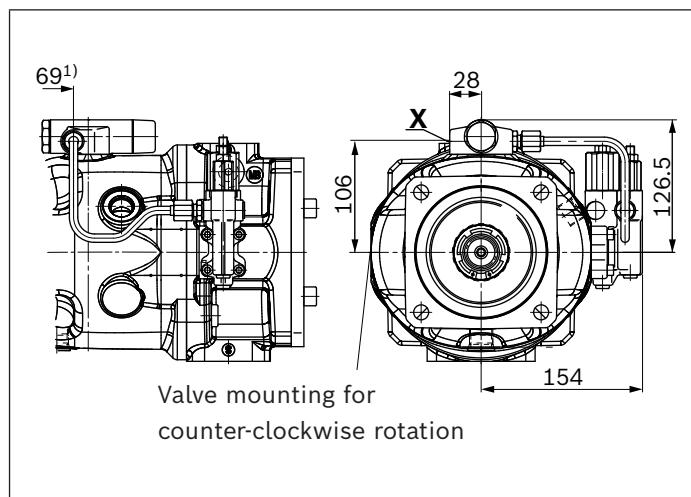

1) To mounting flange


Dimensions A10VZO size 100

EZ3/4 - Two-point control electric, port plate 12, clockwise rotation

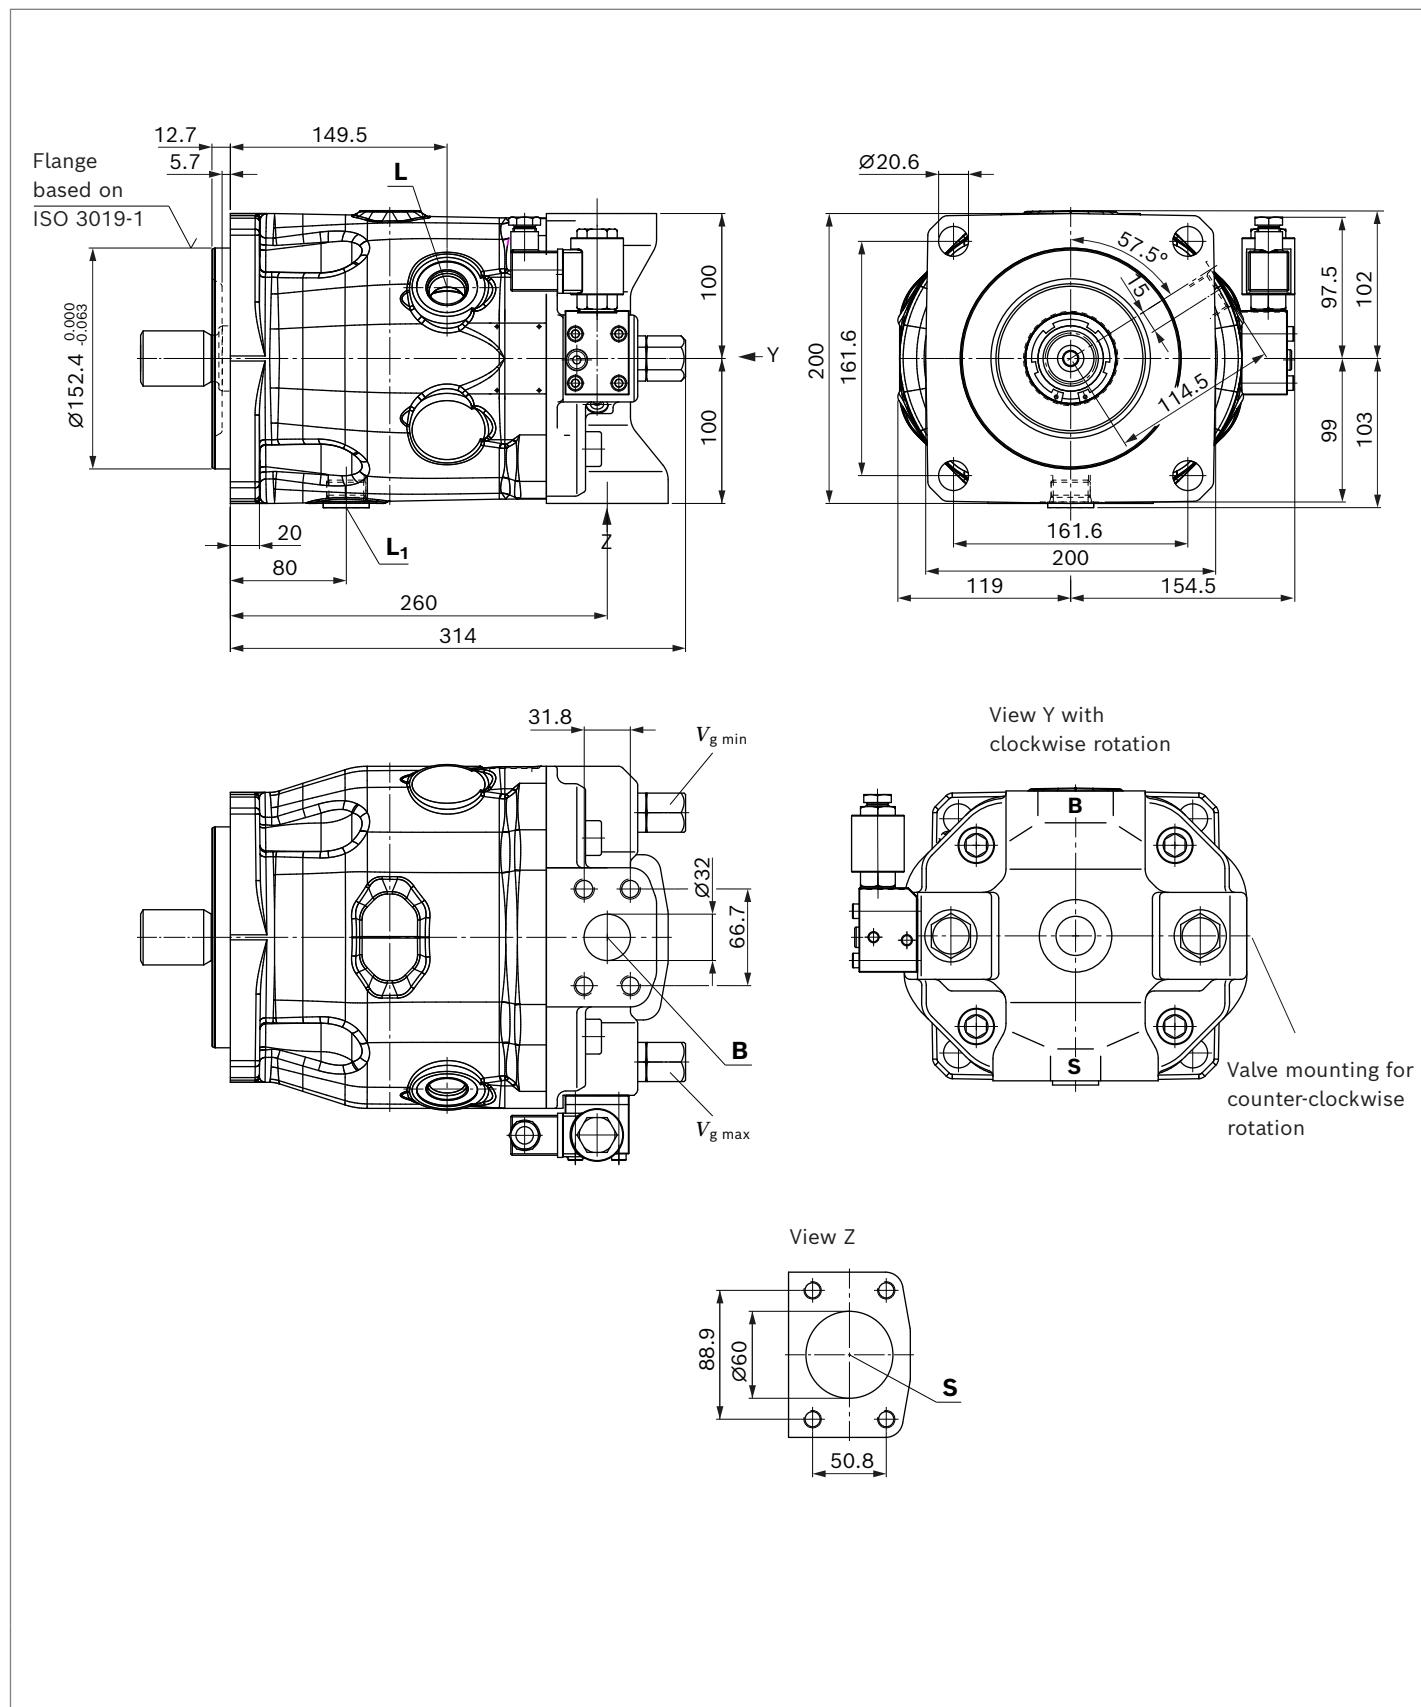


Dimensions A10VZO size 100

EZ3/4 - Two-point control electric, port plate 22/32, clockwise rotation

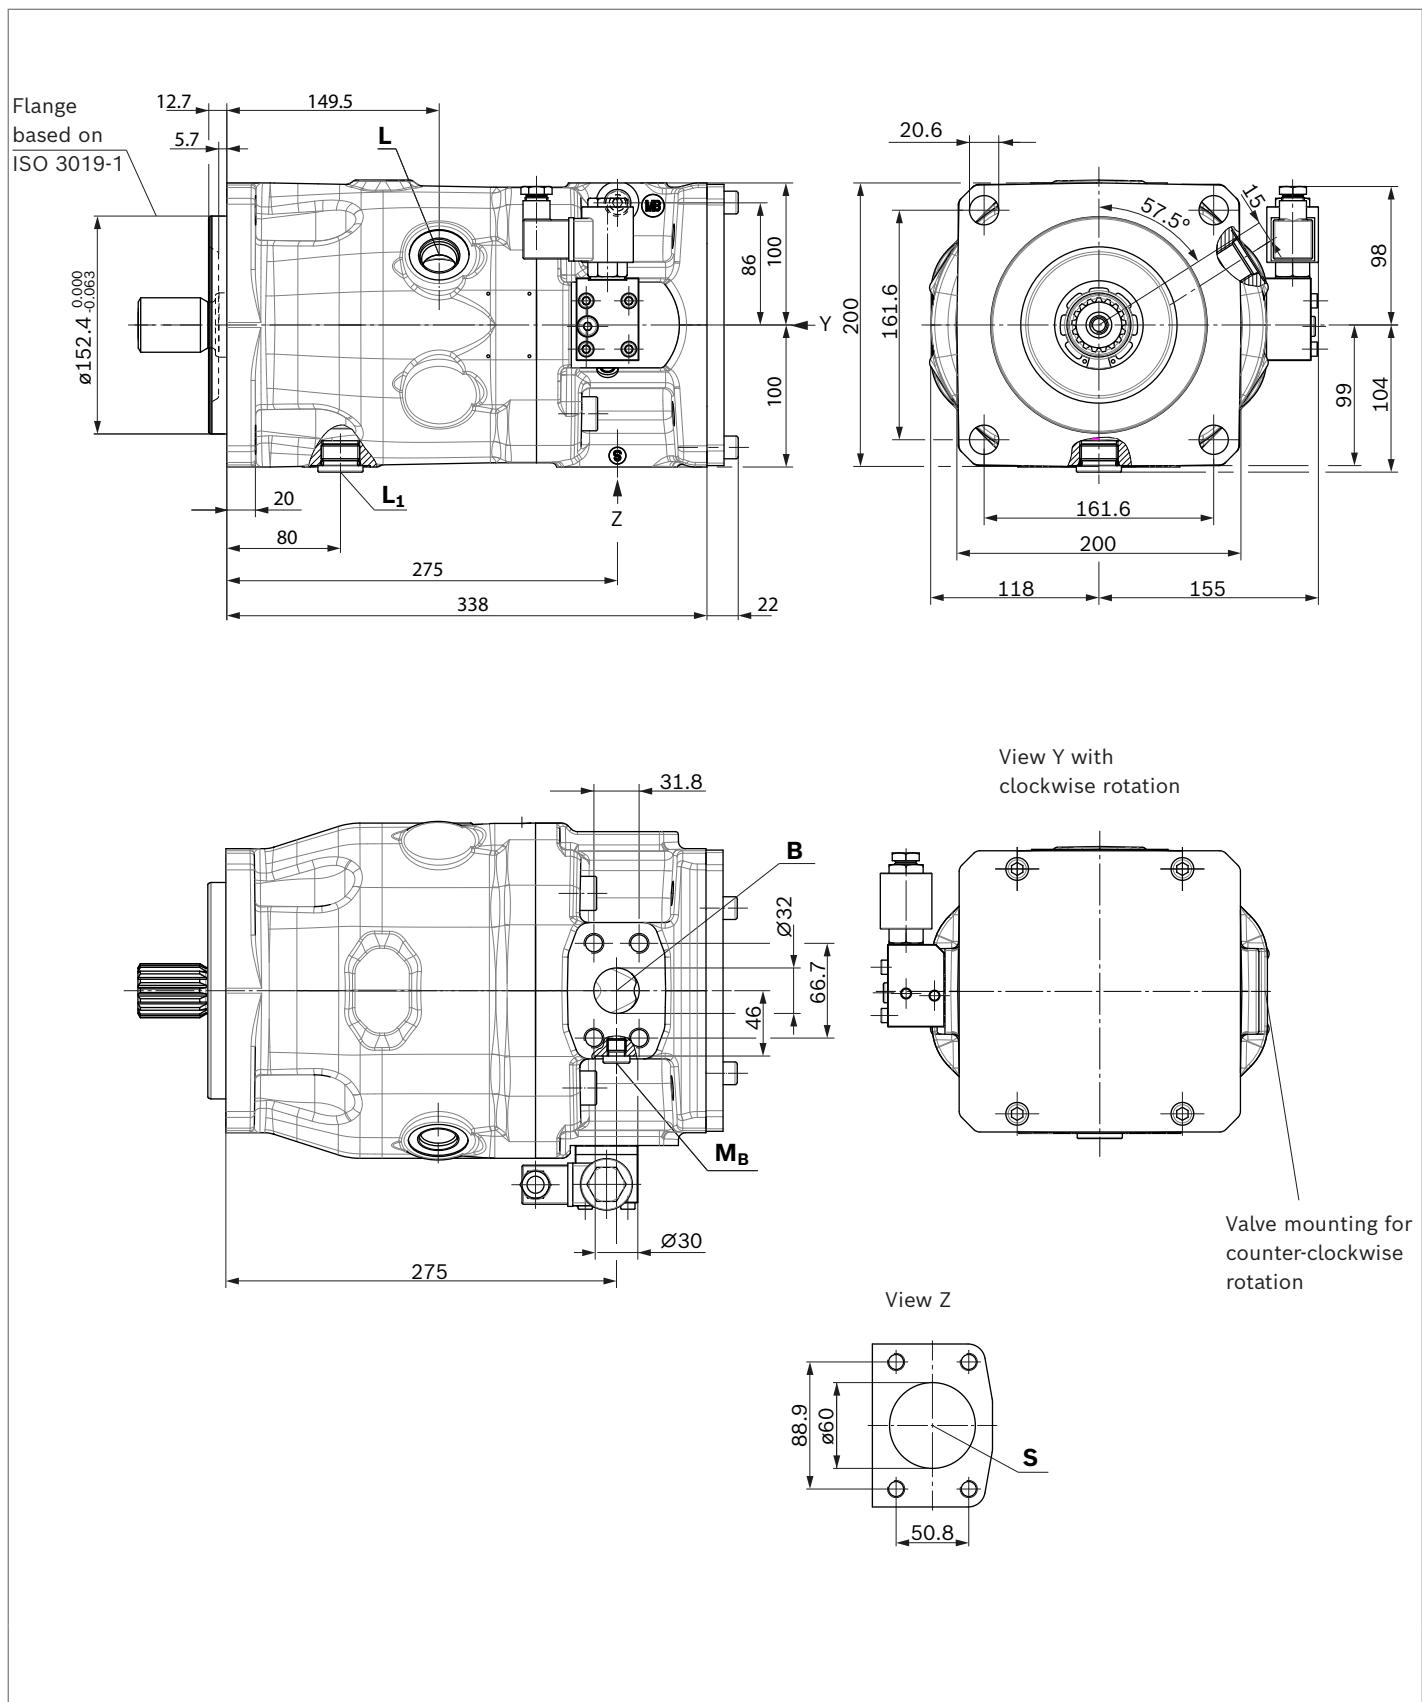

▼ Splined shaft 1 1/2 in (38-4, ISO 3019-1)

S – 17T 12/24DP¹⁾

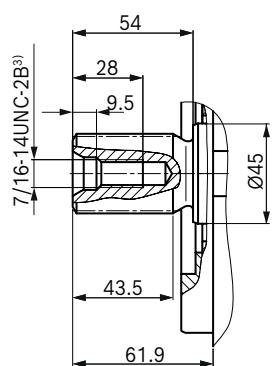


Connection table **A10VZO**

Ports		Standard	Size	p_{\max} [bar] ³⁾	State ⁶⁾
B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	2 1/2 in M12 × 1.75; 17 deep	10	O
L	Drain port	ISO 11926 ⁴⁾	1 1/16-12UNF-2B; 20 deep	2	O ⁵⁾
L₁	Drain port	ISO 11926 ⁴⁾	1 1/16-12UNF-2B; 20 deep	2	X ⁵⁾
X	Pilot pressure port with pressure controller, remotely controlled	ISO 11926	7/16-20UNF-2B; 11.5 deep	350	O
X	Pilot pressure with DG	DIN 3852-2 ⁴⁾	G1/4; 12 deep	315	O
M_B	Measuring port pressure in B only with port plates 22 and 32	DIN 3852-2 ⁴⁾	G1/4; 12 deep	350	X


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 4) The countersink may be deeper than specified in the standard.
- 5) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).
- 6) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)


▼ DG – Two-point control, direct operated, hydraulic
Port plate 12; clockwise rotation

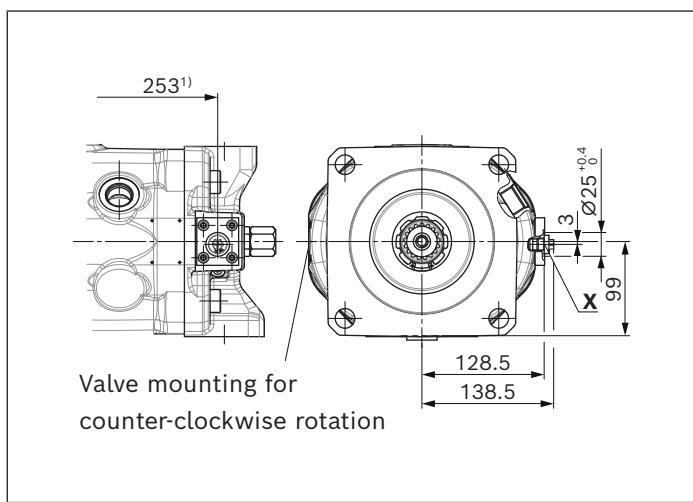


▼ DR – Pressure controller, hydraulic
Port plate 12; clockwise rotation

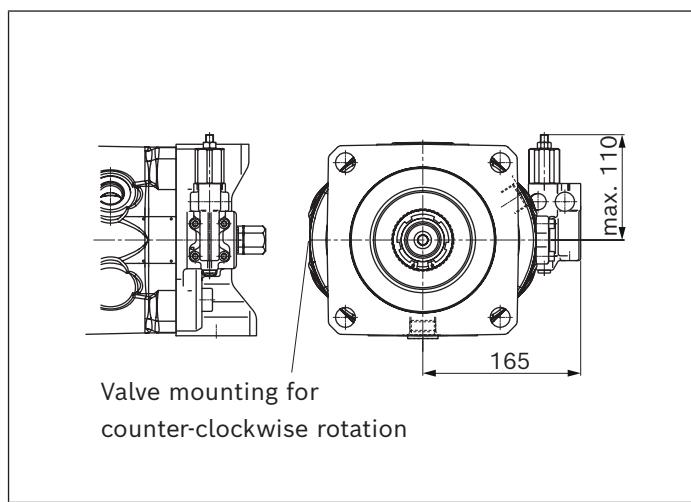

▼ DRG – Pressure controller, remote controlled, hydraulic
Port plate 12; clockwise rotation

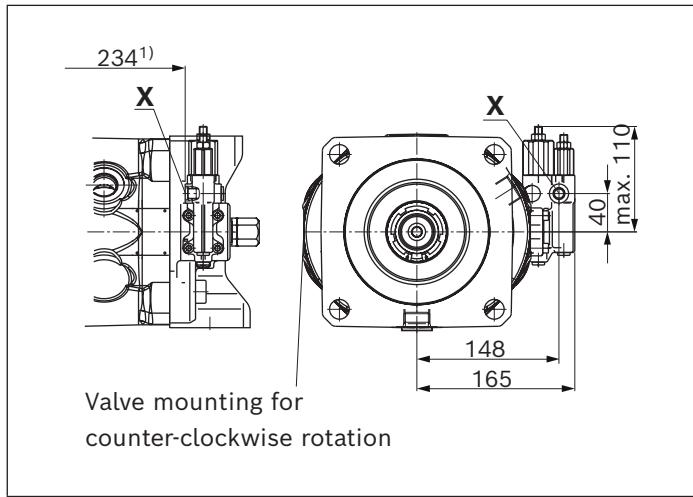


▼ LAXD – Torque controller, hydraulic
Port plate 12; clockwise rotation

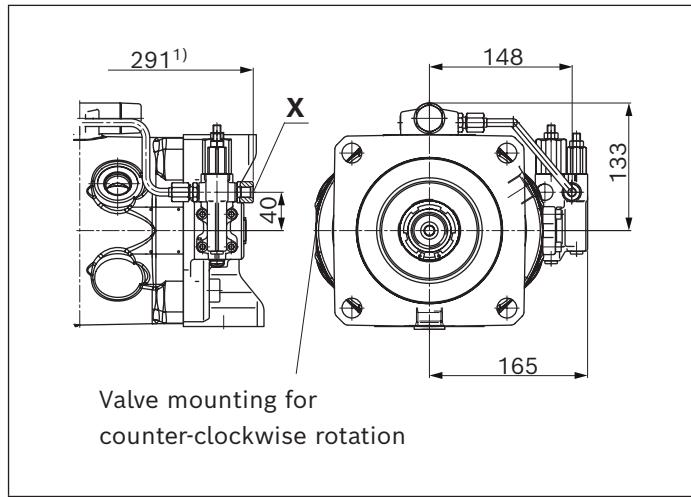

1) To mounting flange


▼ **DG – Two-point control, direct operated, hydraulic**

Port plate 22/32; clockwise rotation

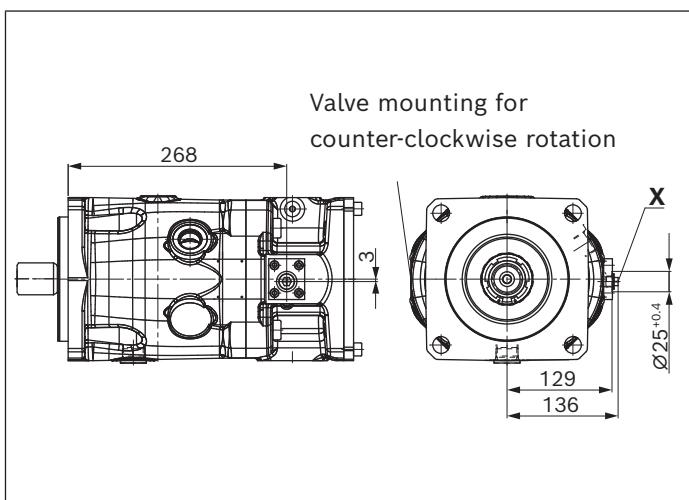


▼ **DRG – Pressure controller, remote controlled, hydraulic**

Port plate 22/32; clockwise rotation

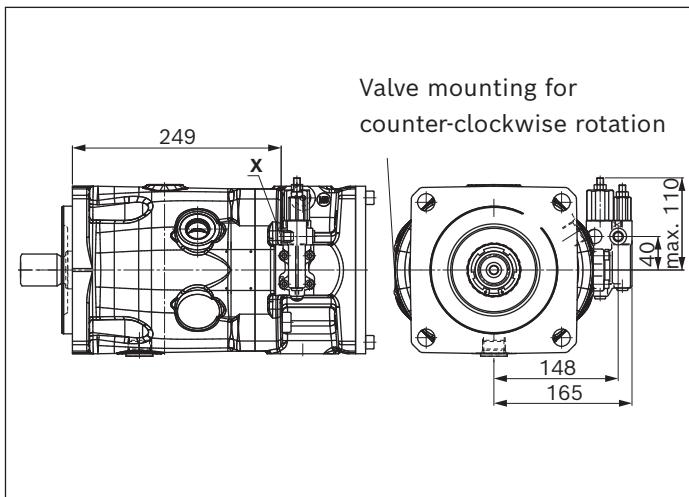


▼ **DR – Pressure controller, hydraulic**

Port plate 22/32; clockwise rotation

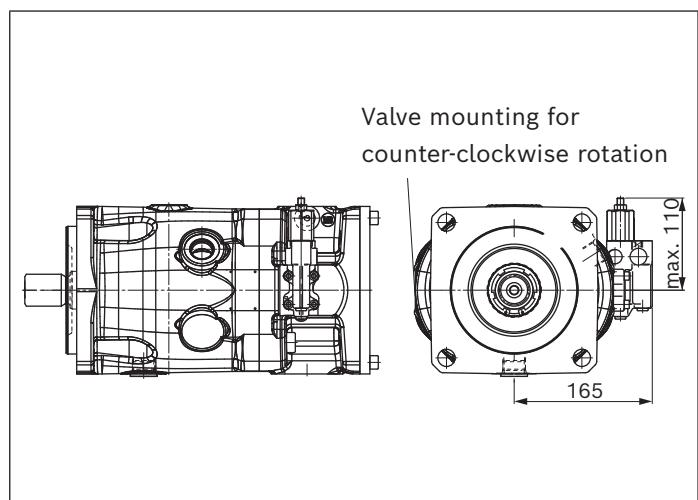


▼ **LAXD – Torque controller, hydraulic**

Port plate 22/32; clockwise rotation

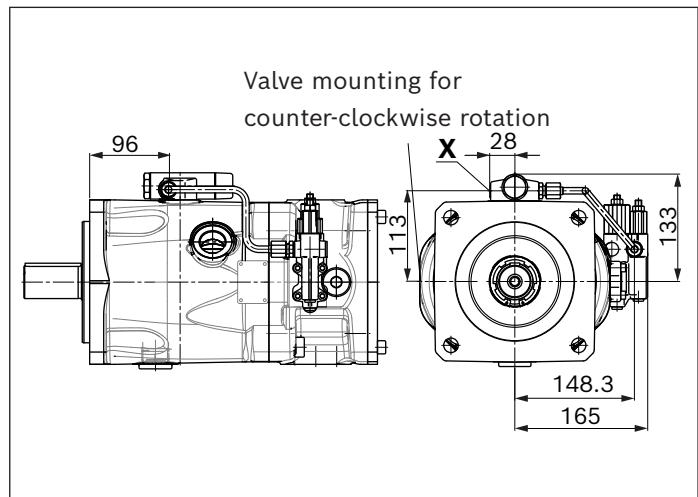


Dimensions A10VZO size 140

EZ3/4 - Two-point control electric, port plate 12, clockwise rotation

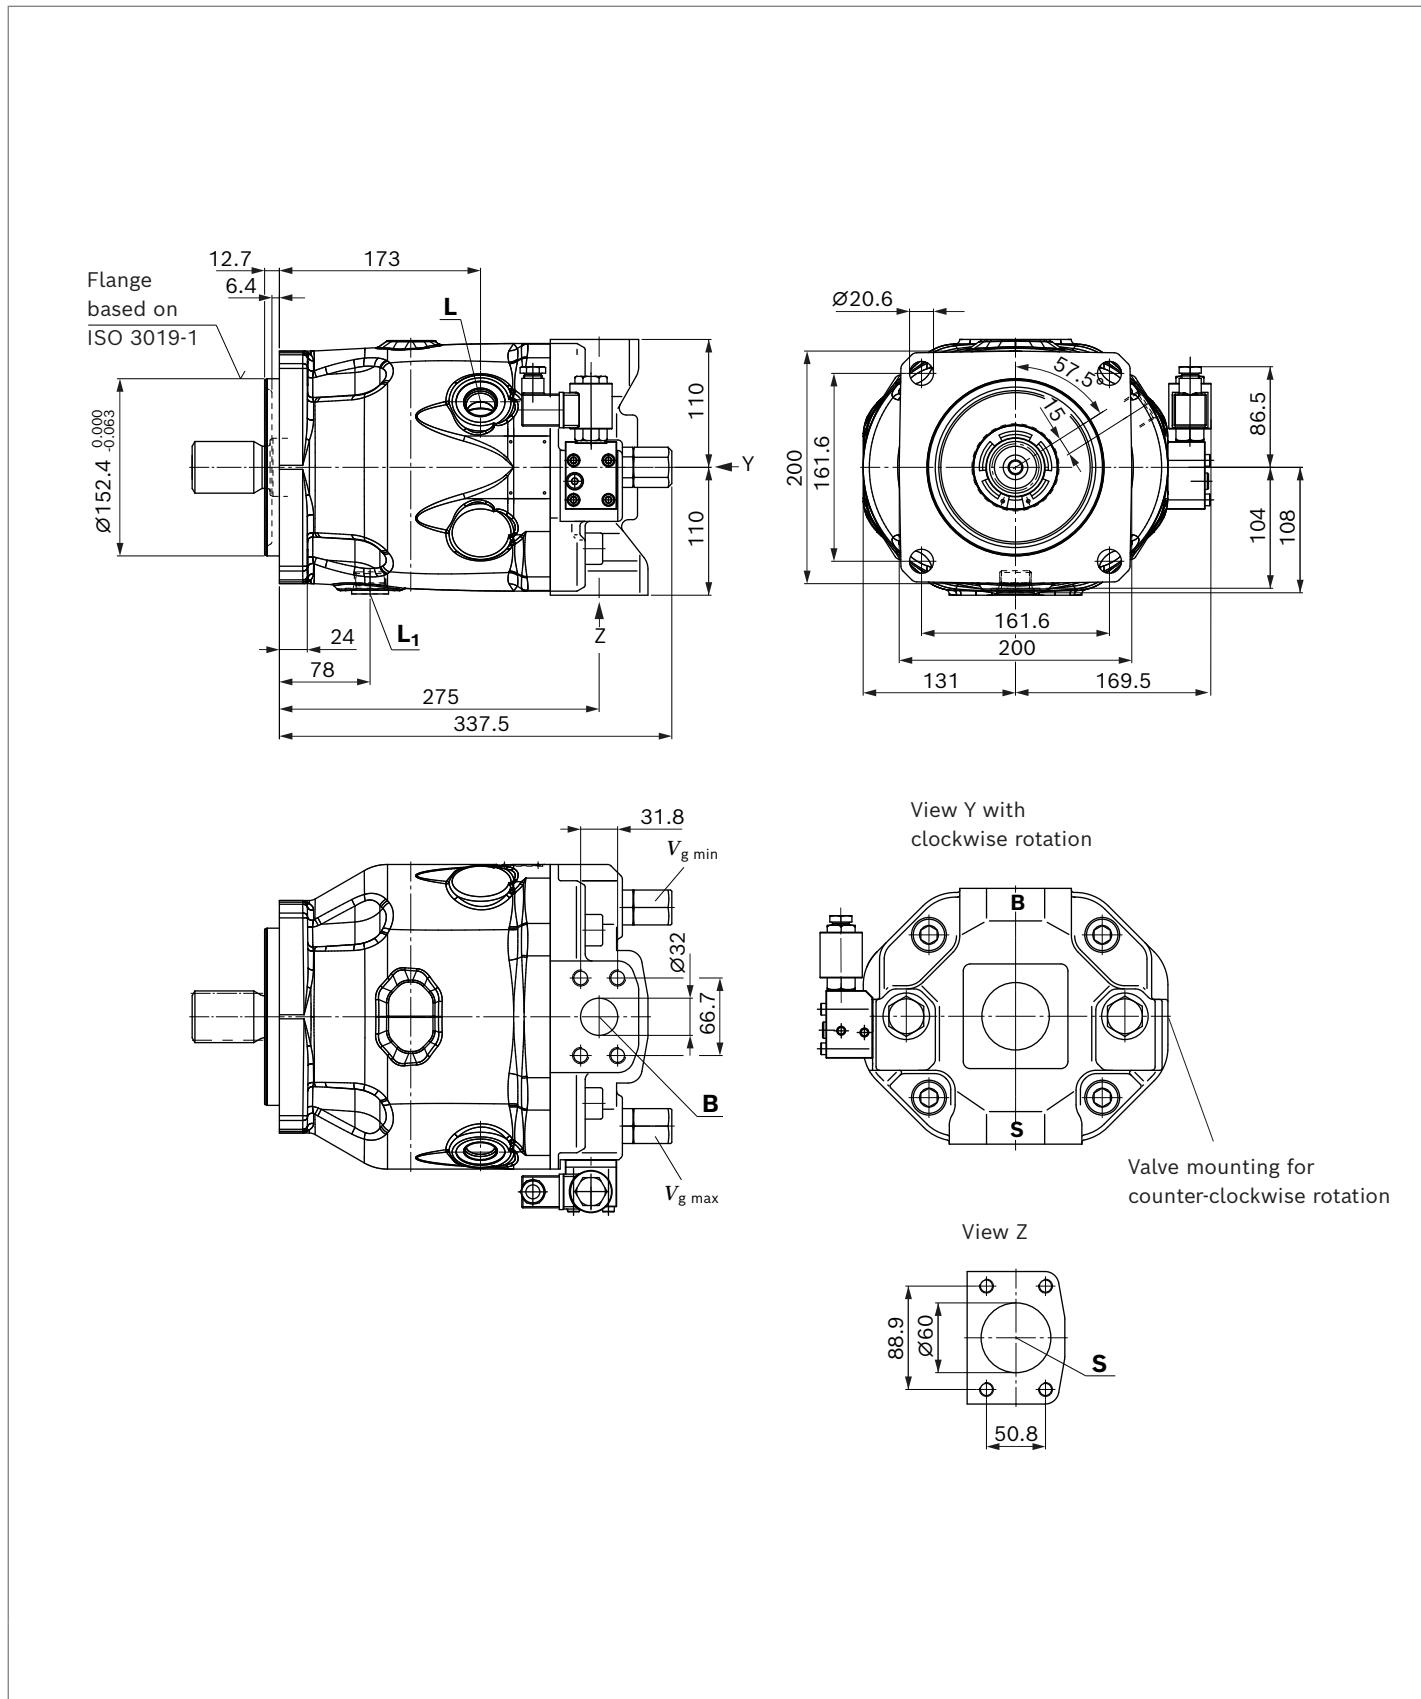


Dimensions A10VZO size 140

EZ3/4 - Two-point control electric, port plate 22/32, clockwise rotation

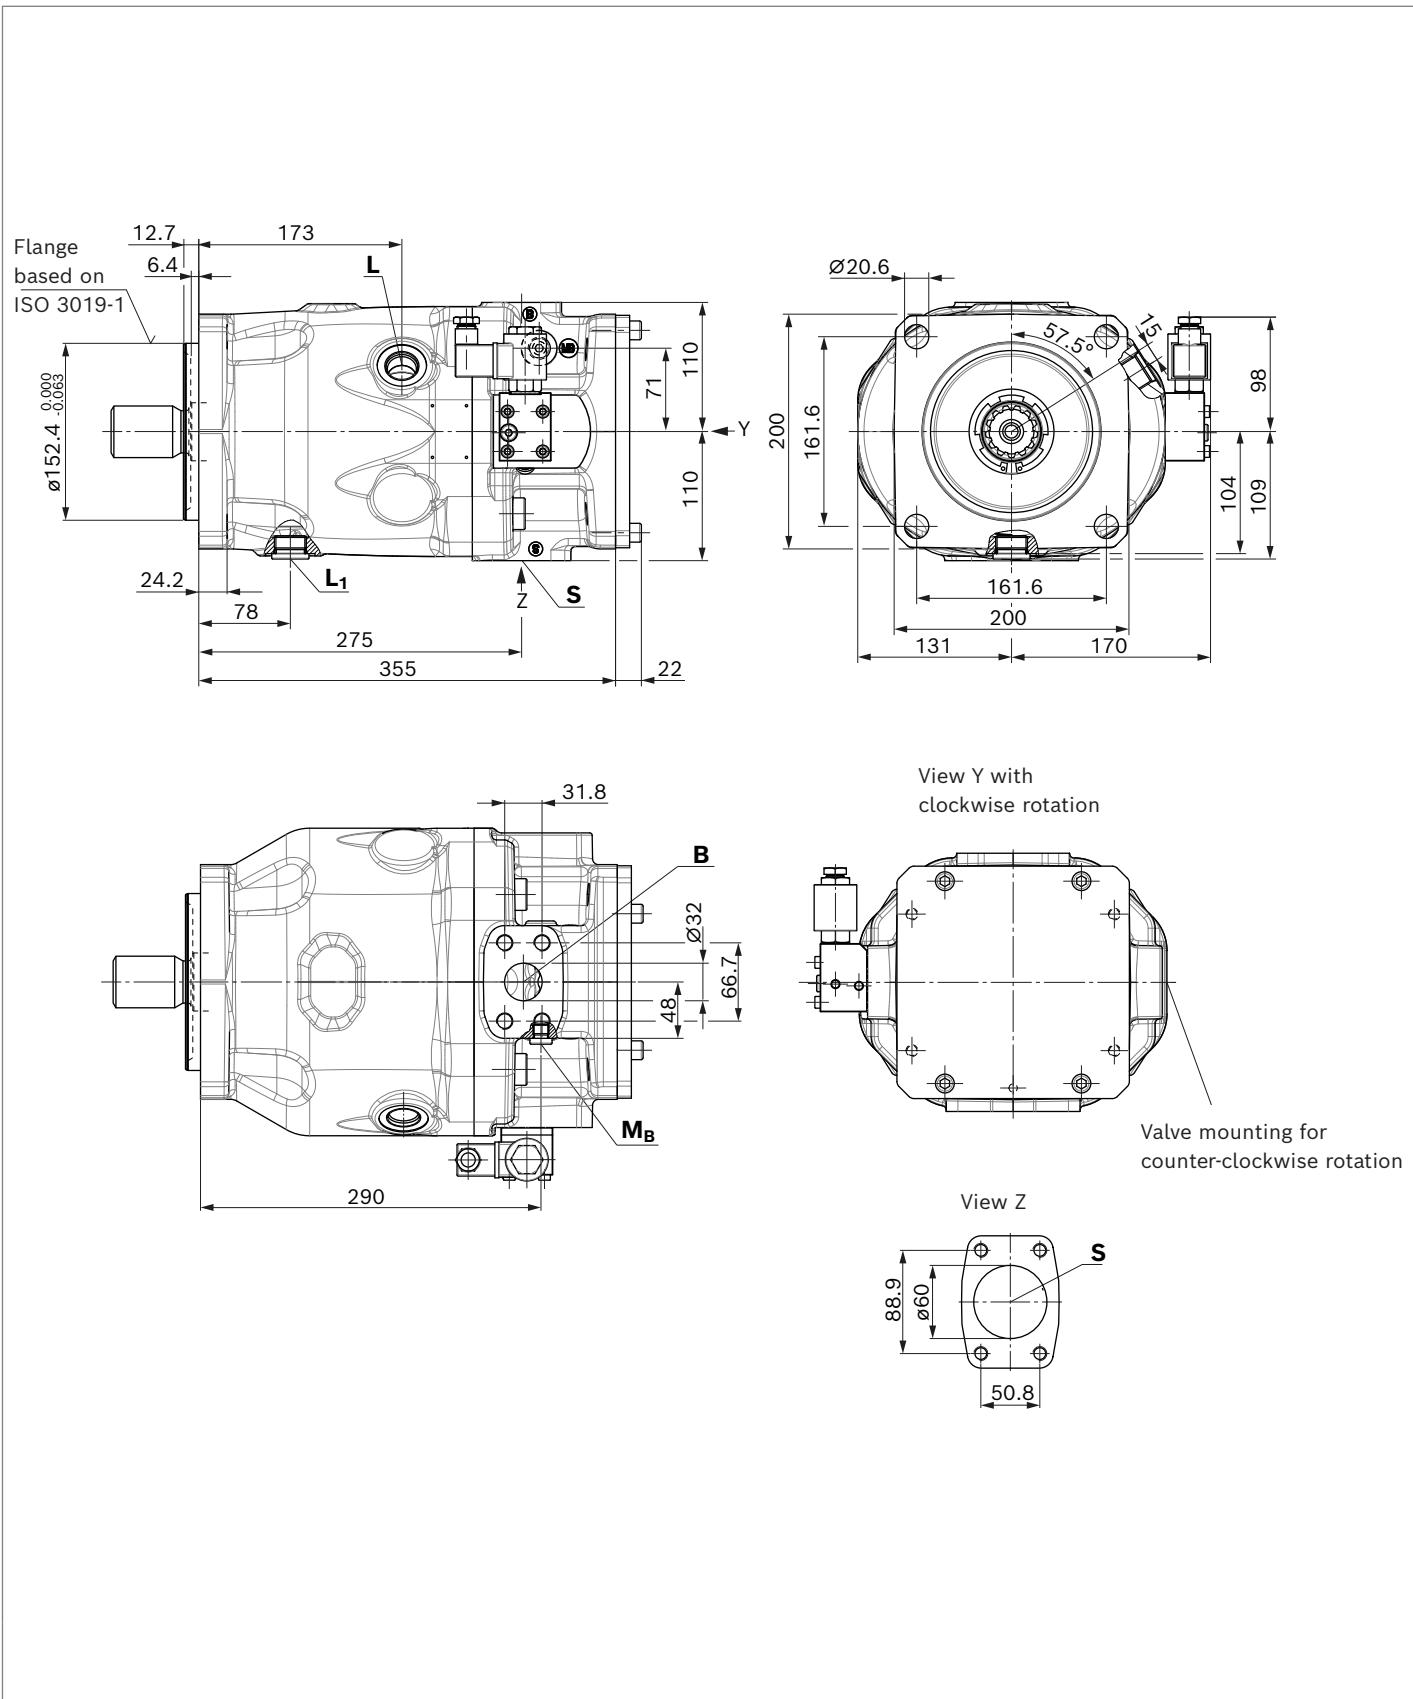

▼ Splined shaft 1 3/4 in (44-4, ISO 3019-1)

S - 13T 8/16DP¹⁾

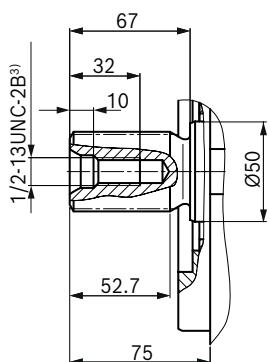

Connection table A10VZO

Ports	Standard	Size	p_{\max} [bar] ³⁾	State ⁶⁾
B Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
S Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	2 1/2 in M12 × 1.75; 17 deep	10	O
L Drain port	ISO 11926 ⁴⁾	1 1/16-12UNF-2B; 20 deep	2	O ⁵⁾
L₁ Drain port	ISO 11926 ⁴⁾	1 1/16-12UNF-2B; 20 deep	2	X ⁵⁾
X Pilot pressure port with pressure controller, remotely controlled	ISO 11926	7/16-20UNF-2B; 11.5 deep	350	O
X Pilot pressure with DG	DIN 3852-2 ⁴⁾	G1/4; 12 deep	315	O
M_B Measuring port pressure in B only with port plates 22 and 32	DIN 3852-2 ⁴⁾	G1/4; 12 deep	350	X

¹⁾ Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

²⁾ Thread according to ASME B1.1

³⁾ Depending on the application, momentary pressure peaks can occur.
Keep this in mind when selecting measuring devices and fittings.


⁴⁾ The countersink may be deeper than specified in the standard.

⁵⁾ Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).

⁶⁾ O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

▼ **DG – Two-point control, direct operated, hydraulic**


Port plate 12; clockwise rotation

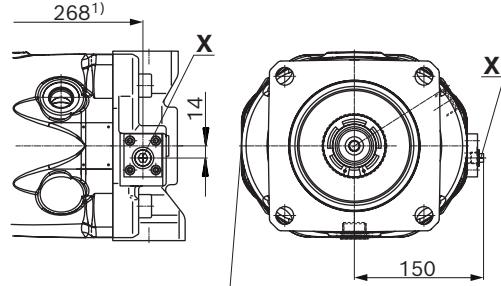

Valve mounting for
counter-clockwise rotation

▼ **DR – Pressure controller, hydraulic**


Port plate 12; clockwise rotation

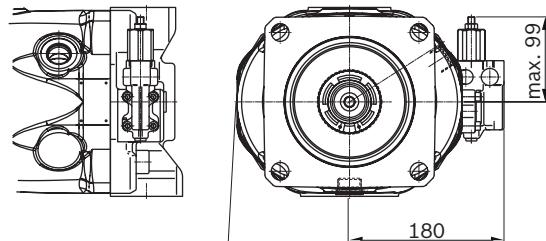

Valve mounting for
counter-clockwise rotation

▼ **DRG – Pressure controller, remote controlled, hydraulic**


Port plate 12; clockwise rotation

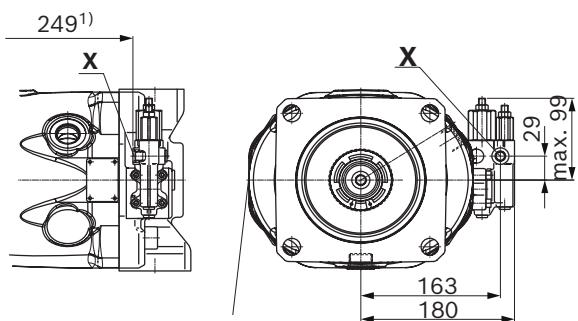

Valve mounting for
counter-clockwise rotation

▼ **LAXD – Torque controller, hydraulic**

Port plate 12; clockwise rotation

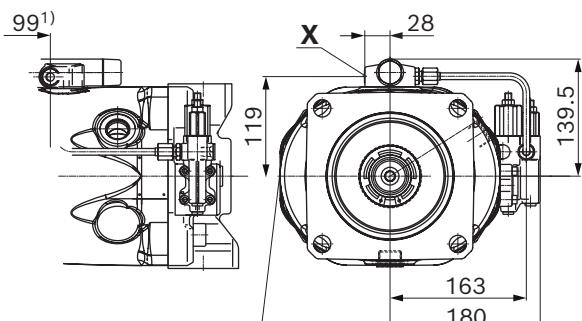


Valve mounting for
counter-clockwise rotation

¹⁾ To mounting flange


▼ DG – Two-point control, direct operated, hydraulic

Port plate 22/32; clockwise rotation

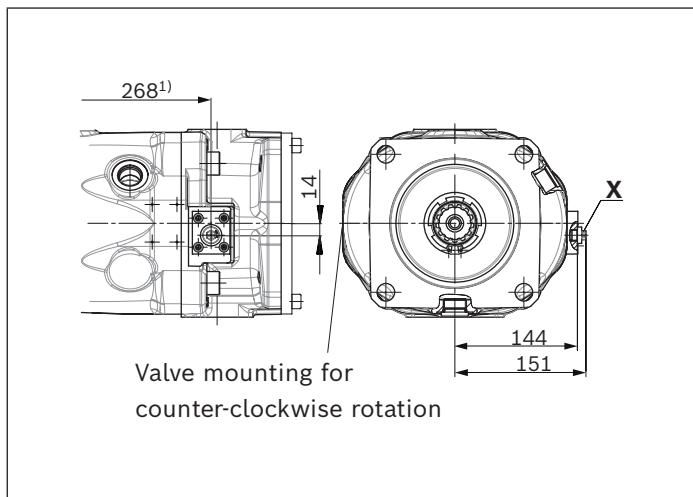


▼ DR – Pressure controller, hydraulic

Port plate 22/32; clockwise rotation

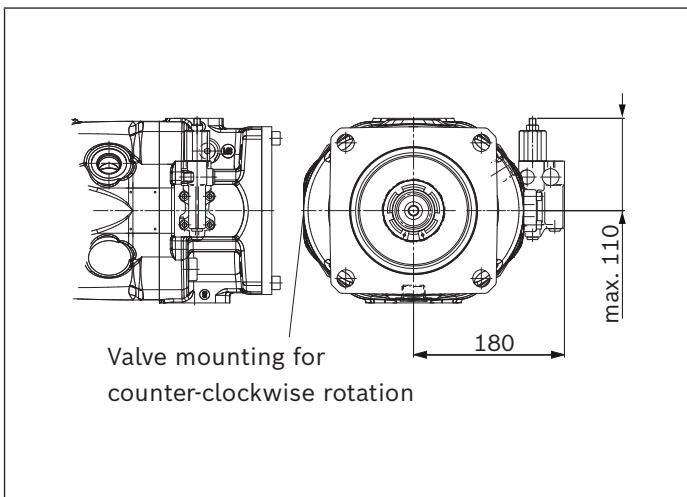


▼ DRG – Pressure controller, remote controlled, hydraulic

Port plate 22/32; clockwise rotation

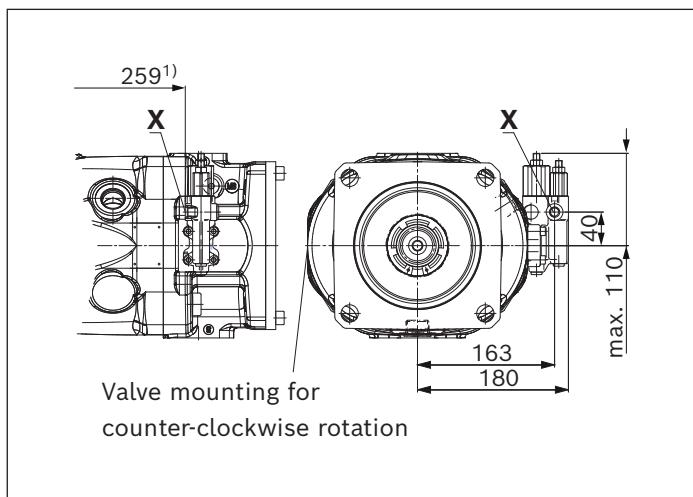

▼ LAXD – Torque controller, hydraulic





Port plate 22/32; clockwise rotation

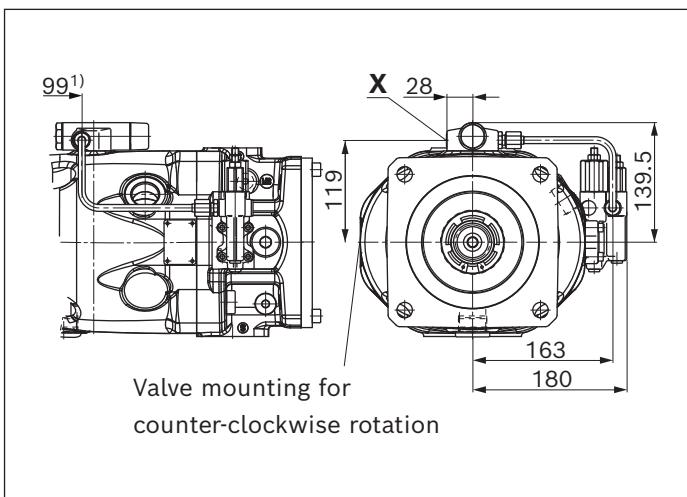


1) To mounting flange

Dimensions A10VZO size 180

EZ3/4 - Two-point control electric, port plate 12, clockwise rotation

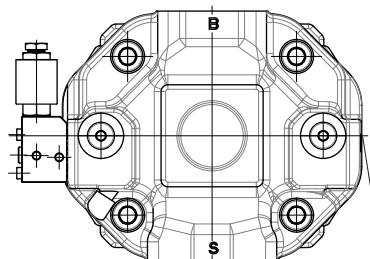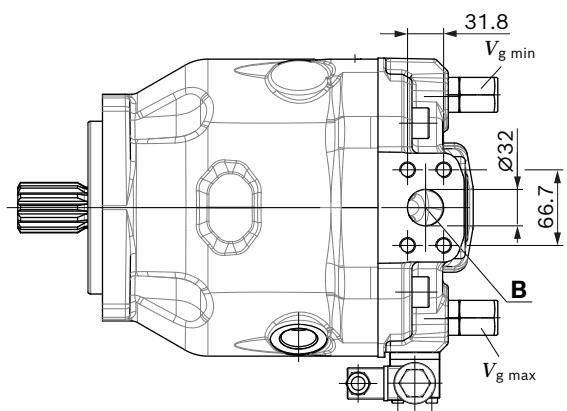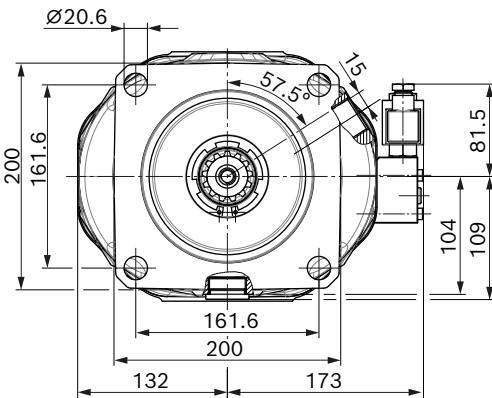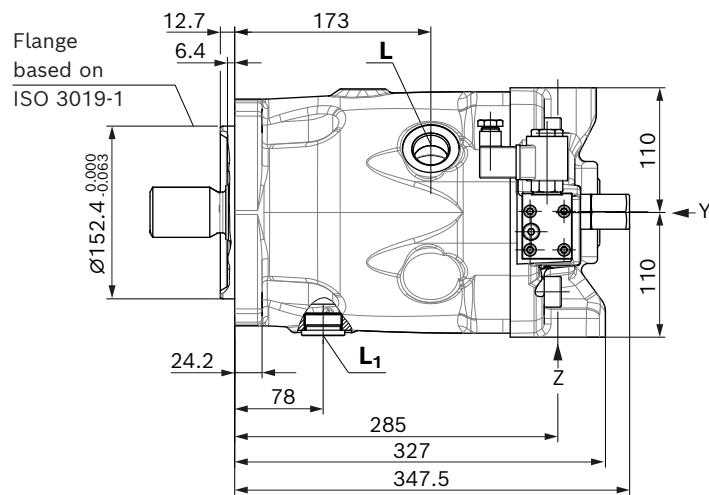



Valve mounting for counter-clockwise rotation



Dimensions A10VZO size 180

EZ3/4 - Two-point control electric, port plate 22/32, clockwise rotation

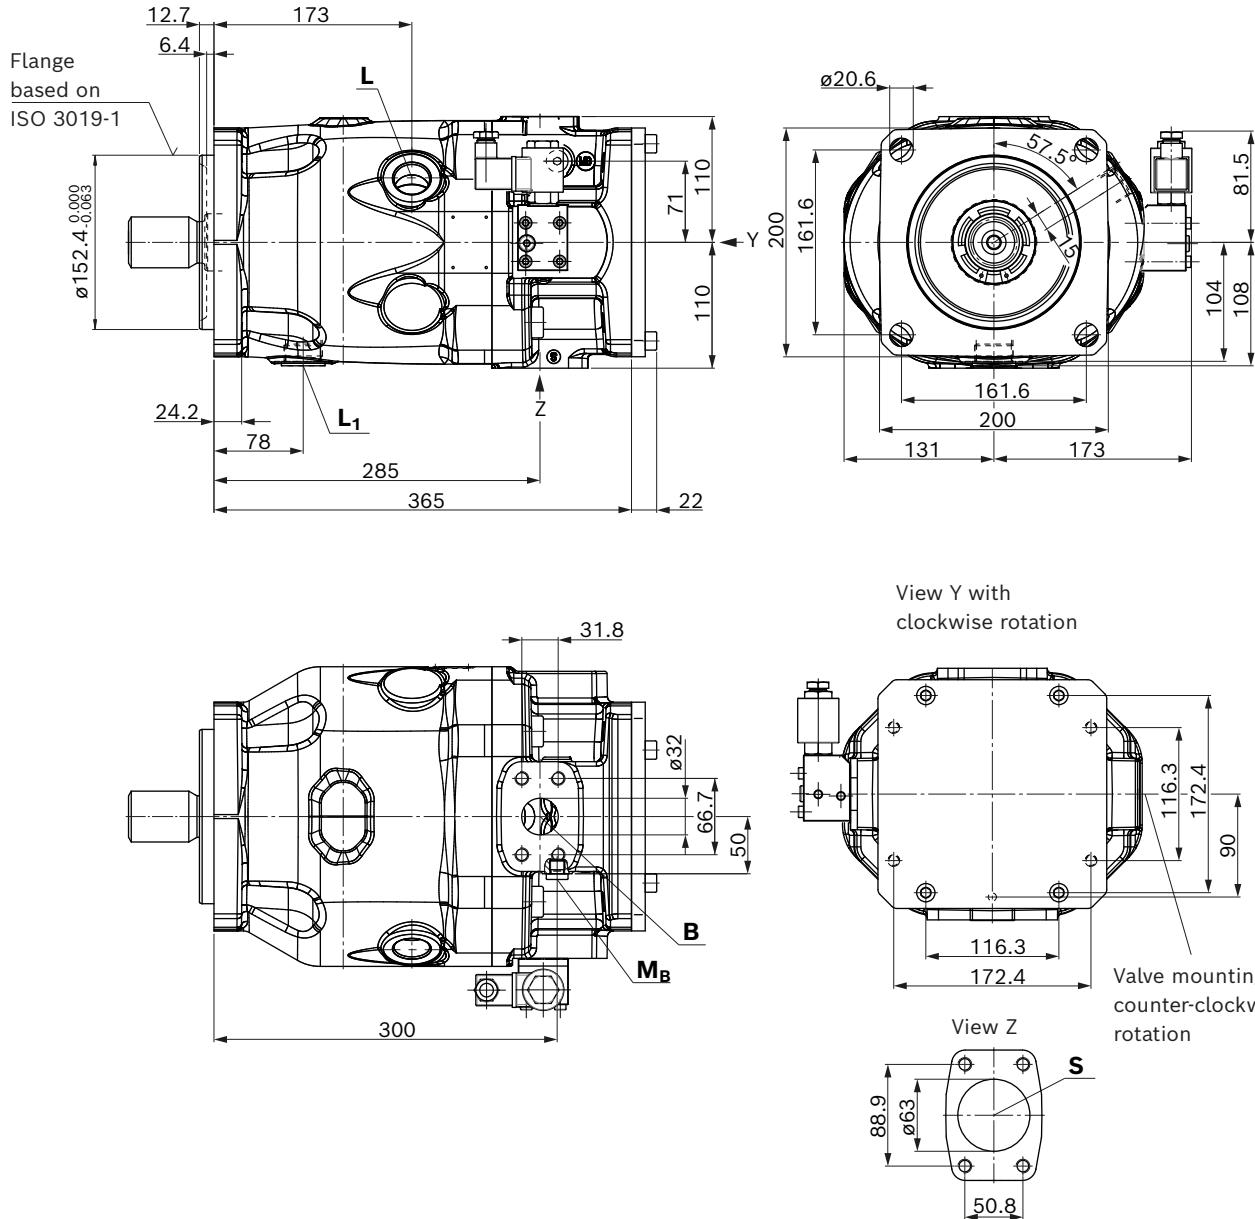

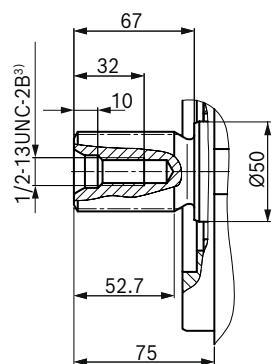▼ Splined shaft 1 3/4 in (44-4, ISO 3019-1)**S - 13T 8/16DP¹⁾****Connection table A10VZO**


Ports		Standard	Size	p_{\max} [bar] ³⁾	State⁶⁾
B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
S	Suction port (standard pressure series) Fastening thread	ISO 6162-1 DIN 13	2 1/2 in M12 × 1.75; 17 deep	10	O
L	Drain port	ISO 11926 ⁴⁾	1 5/16-12UNF-2B; 20 deep	2	O ⁵⁾
L₁	Drain port	ISO 11926 ⁴⁾	1 5/16-12UNF-2B; 20 deep	2	X ⁵⁾
X	Pilot pressure port with pressure controller, remotely controlled	ISO 11926	7/16-20UNF-2B; 11.5 deep	350	O
X	Pilot pressure with DG	DIN 3852-2 ⁴⁾	G1/4; 12 deep	315	O
M_B	Measuring port pressure in B only with port plates 22 and 32	DIN 3852-2 ⁴⁾	G1/4; 12 deep	350	X

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Thread according to ASME B1.1
- 3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 4) The countersink may be deeper than specified in the standard.
- 5) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).
- 6) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)


▼ DG – Two-point control, direct operated, hydraulic

Port plate 12; clockwise rotation

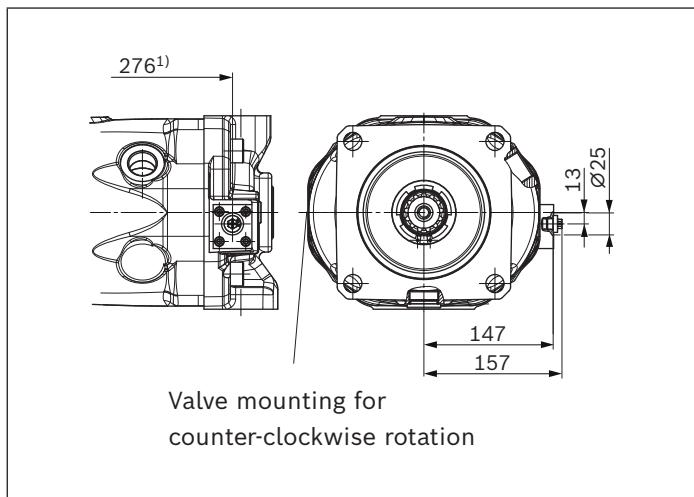


▼ DRG – Pressure controller, remote controlled, hydraulic

Port plate 12; clockwise rotation

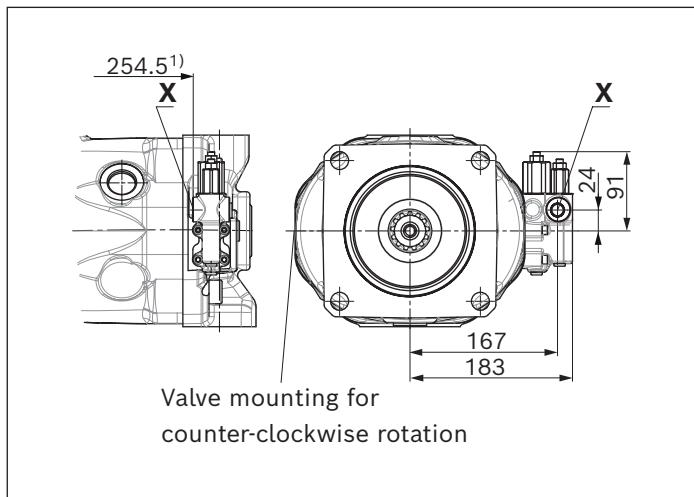


▼ DR – Pressure controller, hydraulic

Port plate 12; clockwise rotation

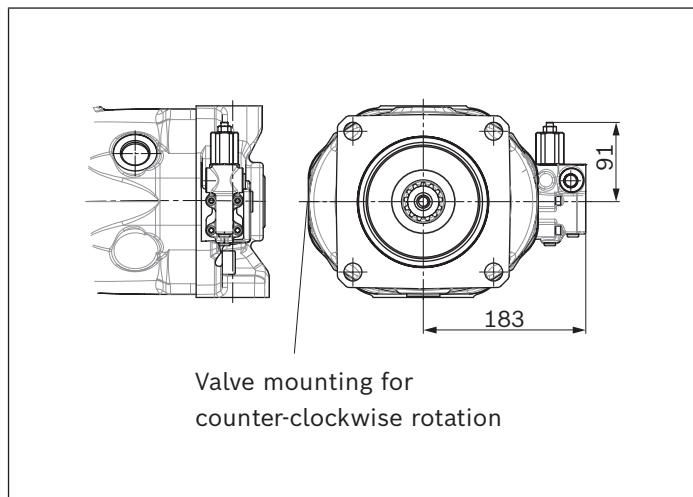

▼ LAXD – Torque controller, hydraulic


Port plate 12; clockwise rotation

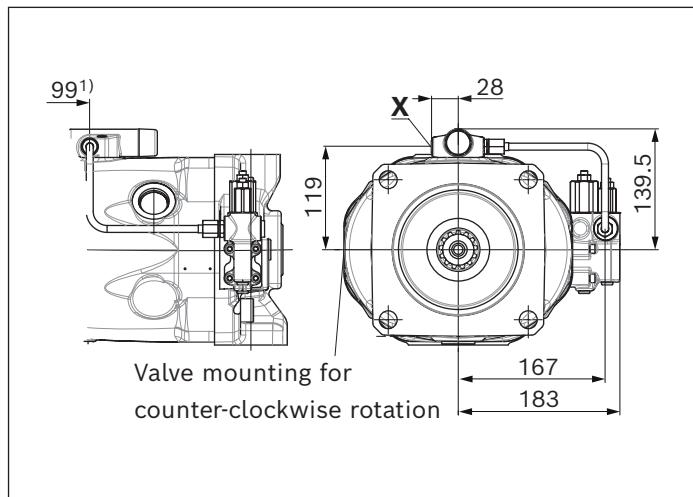

1) To mounting flange


▼ **DG – Two-point control, direct operated, hydraulic**

Port plate 22/32; clockwise rotation

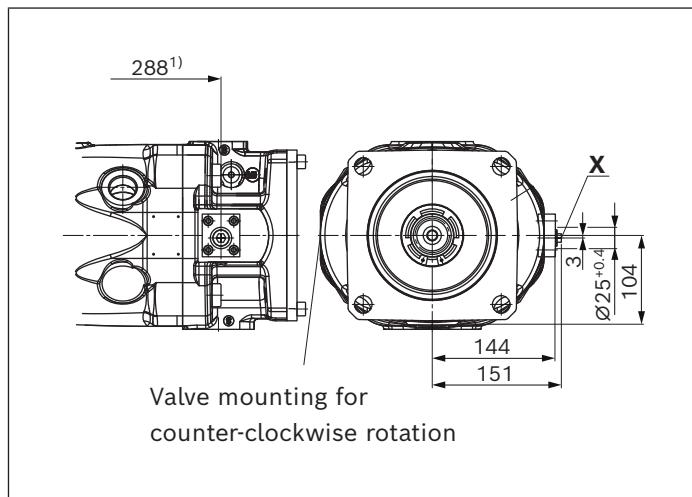


▼ **DRG – Pressure controller, remote controlled, hydraulic**

Port plate 22/32; clockwise rotation

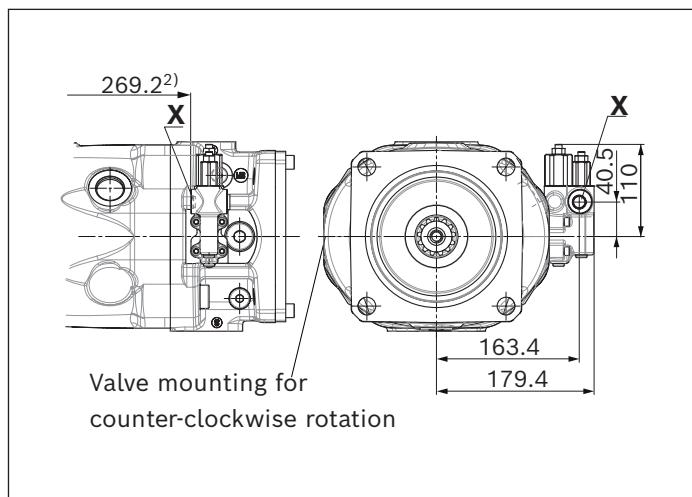


▼ **DR – Pressure controller, hydraulic**

Port plate 22/32; clockwise rotation

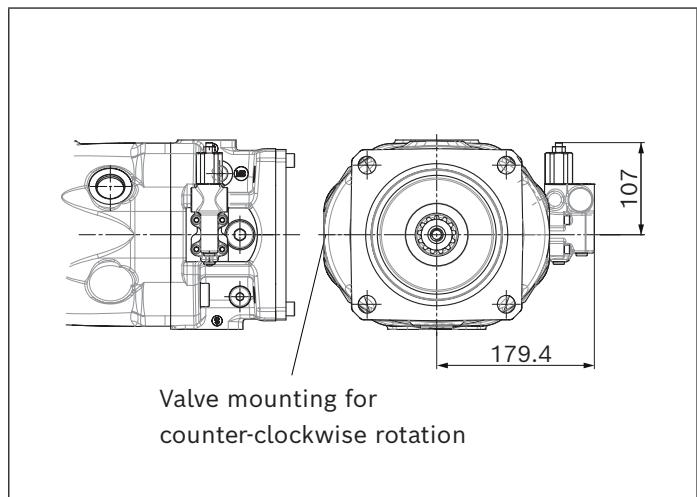

▼ **LAxD – Torque controller, hydraulic**


Port plate 22/32; clockwise rotation

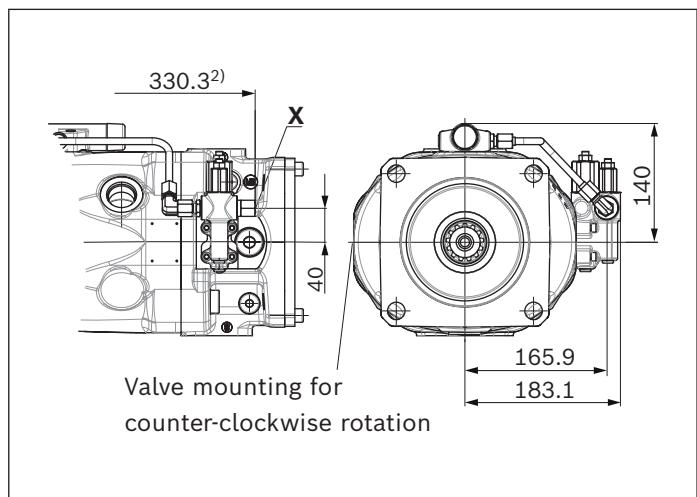

¹⁾ To mounting flange

Axial piston fixed displacement units

A10FZG

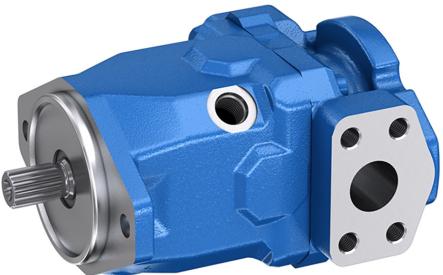

- ▶ Suitable for variable-speed operation with synchronous and asynchronous motors
- ▶ Sizes 3 to 63
- ▶ Nominal pressure 315 bar
- ▶ Maximum pressure 350 bar
- ▶ Open and closed circuit

Features

- ▶ For use in one-, two- or four-quadrant operation
- ▶ Suitable for start/stop operation
- ▶ Suitable for long pressure holding operation
- ▶ Well-tried A10 rotary group technology
- ▶ Through drive possibility

Product description

The proven axial piston units from the A10 product family have now been further developed for use in speed-controlled drives. They are approved for start/stop operation and designed for a bi-directional direction of rotation. Even at the lowest rotational speed between 0 and 200 rpm, they provide a constant pressure and offer extremely high efficiency in pressure holding operation. The A10FZG units can be used as a pump in one, two and four-quadrant operation.

Contents

Type code A10FZG	76
Preferred program A10FZG	77
Working pressure range A10FZG	78
Technical data A10FZG size 3 to 63	81
Technical data A10FZG size 21 to 63	82
Dimensions A10FZG sizes 3 to 63	84
Dimensions through drive for port plate 02 (A10FZO and FZG)	121
Overview of mounting options	124
Combination pumps A10VZO + A10VZO, A10VZG, A10FZO or A10FZG	125
Installation instructions A10FZO; A10VZO; A10FZG; A10VZG	127
Project planning notes	130
Safety instructions	131

Type code A10FZG

01	02	03	04		05	06		07	08	09	10	11
A10F	Z	G		/	10	W	-	V		C	02	

Axial piston unit

01	Swashplate design, fixed, nominal pressure 315 bar, maximum pressure 350 bar	A10F
----	--	-------------

Application area

02	Variable-speed drives	Z
----	-----------------------	----------

Operating mode

03	Pump, open and closed circuit	G
----	-------------------------------	----------

Size (NG) Geometric displacement, see table of values on page 66 and 67

04	Superordinate sizes	010	018	028	063
	Other available intermediate sizes	003, 006, 008	012, 014, 016	021, 022, 023, 025, 026, 027	051, 058

Series

05	Series 1, index 0	10
----	-------------------	-----------

Direction of rotation

06	Viewed on drive shaft	bi-directional	010	018	028	063
			•	•	•	•

Sealing material

07	FKM (fluorocarbon rubber)	010	018	028	063
		•	•	•	•

Drive shaft

08	Splined shaft	standard shaft	010	018	028	063
	ISO 3019-1	similar to shaft "S" however for higher torque	-	•	•	•

08	ISO 3019-1	similar to shaft "R" however for higher torque	010	018	028	063
			-	•	•	•

09	Based on ISO 3019-1 (SAE)	010	018	028	063
		•	•	•	•

10	SAE flange ports ISO 6162 A and B , opposite sides, metric fastening thread	010	018	028	063
		•	•	•	•

10	02
----	----

Through drive (for mounting options, see page 124)

11	For flange	Hub for splined shaft ²⁾	010	018	028	063
	ISO 3019-1					
	Diameter	Mounting ¹⁾ Diameter	010	018	028	063
	without through drive		•	•	•	•
	82-2 (A)	∞ 5/8 in 9T 16/32DP	•	•	•	•
		∞ 3/4 in 11T 16/32DP	•	•	•	•
	101-2 (B)	∞ 7/8 in 13T 16/32DP	-	-	•	•
		∞ 1 in 15T 16/32DP	-	-	-	•
		∞ 1 1/4 in 14T 12/24DP	-	-	-	•

• = Available o = On request - = Not available

Notice

- Note the project planning notes on page 130.
- In addition to the type code, please specify the relevant technical data when placing your order.

¹⁾ Mounting holes pattern viewed from through drive

²⁾ Splined shaft according to ANSI B92.1a (splined shafts according to ISO 3019-1)

Preferred program A10FZG


Overview of common configurations

Material number	Type
R902544378	A10FZG003/10W-VSC02N00
R902544475	A10FZG006/10W-VSC02N00
R902544393	A10FZG008/10W-VSC02N00
R902544389	A10FZG010/10W-VSC02N00
R902530960	A10FZG012/10W-VRC02N00
R902530961	A10FZG014/10W-VRC02N00
R902530962	A10FZG016/10W-VRC02N00
R902530963	A10FZG018/10W-VRC02N00
R902536290	A10FZG021/10W-VRC02N00
R902557896	A10FZG022/10W-VRC02N00
R902557897	A10FZG023/10W-VRC02N00
R902557898	A10FZG025/10W-VRC02N00
R902557899	A10FZG026/10W-VRC02N00
R902557900	A10FZG027/10W-VRC02N00
R902534818	A10FZG028/10W-VRC02N00

Working pressure range A10FZG

Pressure at working port B or A		Definition
Nominal pressure p_{nom}	315 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	350 bar	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Single operating period	2.0 ms	
Total operating period	300 h	
Rate of pressure change $R_{\text{A max}}$	16000 bar/s	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at port A or B (low-pressure side)		
Minimum pressure p_{min}	Standard	0.8 bar absolute Minimum pressure on the low-pressure side A or B (depending on direction of rotation) that is required in order to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Summation pressure		The sum of the pressures on ports A and B must not rise above 400 bar.
Case pressure at port L		
Maximum pressure $p_{\text{L max}}$	2 bar absolute ¹⁾	Maximum 0.5 bar higher than inlet pressure at low pressure port A or B (depending on direction of rotation), but not higher than $p_{\text{L max}}$. The case pressure must always exceed the ambient pressure at the shaft seal ring. A drain line to the reservoir is required.

▼ Rate of pressure change $R_{\text{A max}}$

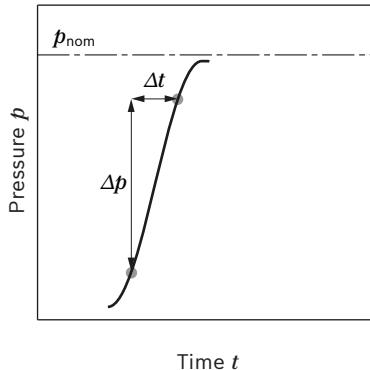


Notice

- Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

Flow direction

Direction of rotation, viewed on drive shaft	Direction of rotation	Flow
Type code "W"	clockwise	A to B
	counter-clockwise	B to A


▼ Pressure definition

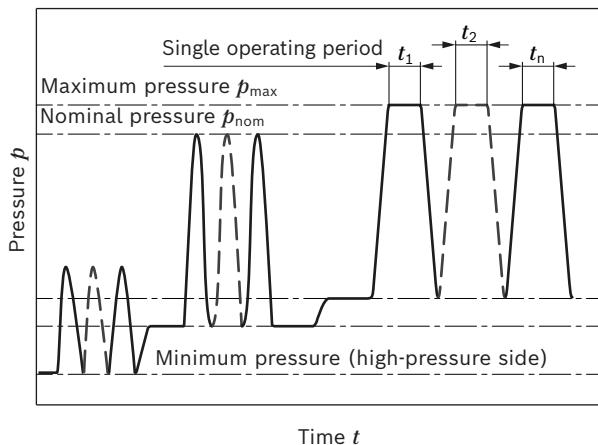


Total operating period = $t_1 + t_2 + \dots + t_n$

¹⁾ Higher values on request

A10FZG 003 to 018: Permissible operating data and operating ranges at $V_{g \max}$

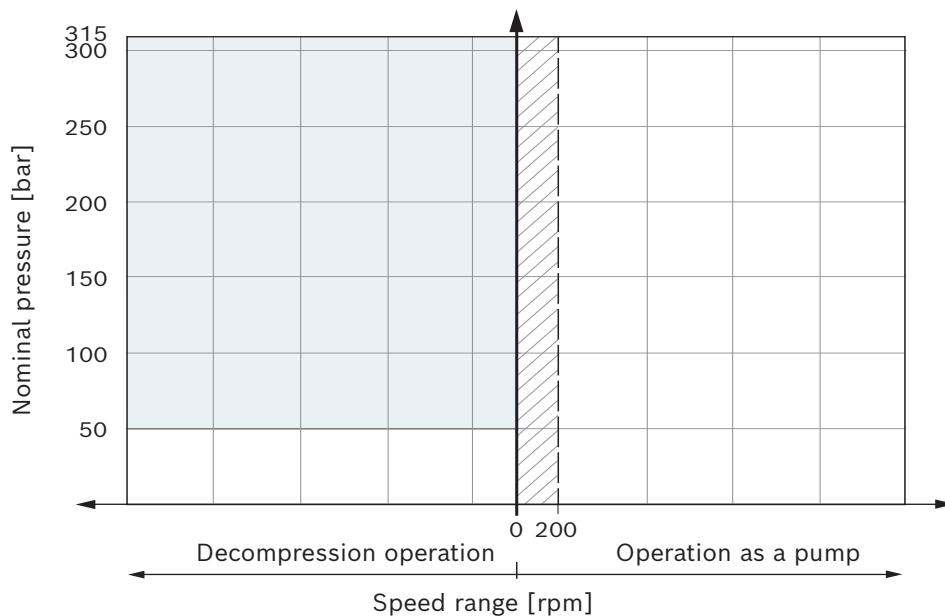

A10FZG 028: Permissible operating data and operating ranges at $V_{g \max}$

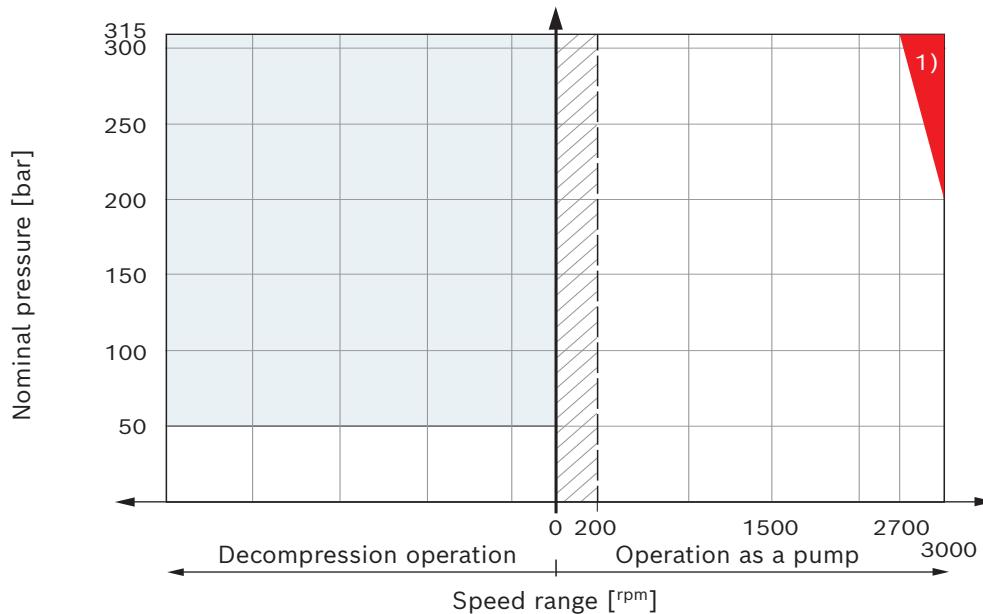


Operating range

- Operation without restriction
- Permissible with single operating period $t \leq 3$ min;
maximum cycle proportion 80%.
For longer time share $t > 3$ min, please use A10VZG.
- Operation as a motor possible with restrictions, please contact us.
Permissible for short-term decompression operation $t \leq 200$ ms

¹⁾ This range may only be operated at an inlet pressure of 2.5 bar absolute at port **A/B**.

A10FZG 063: Permissible operating data and operating ranges at $V_g \text{ max}$

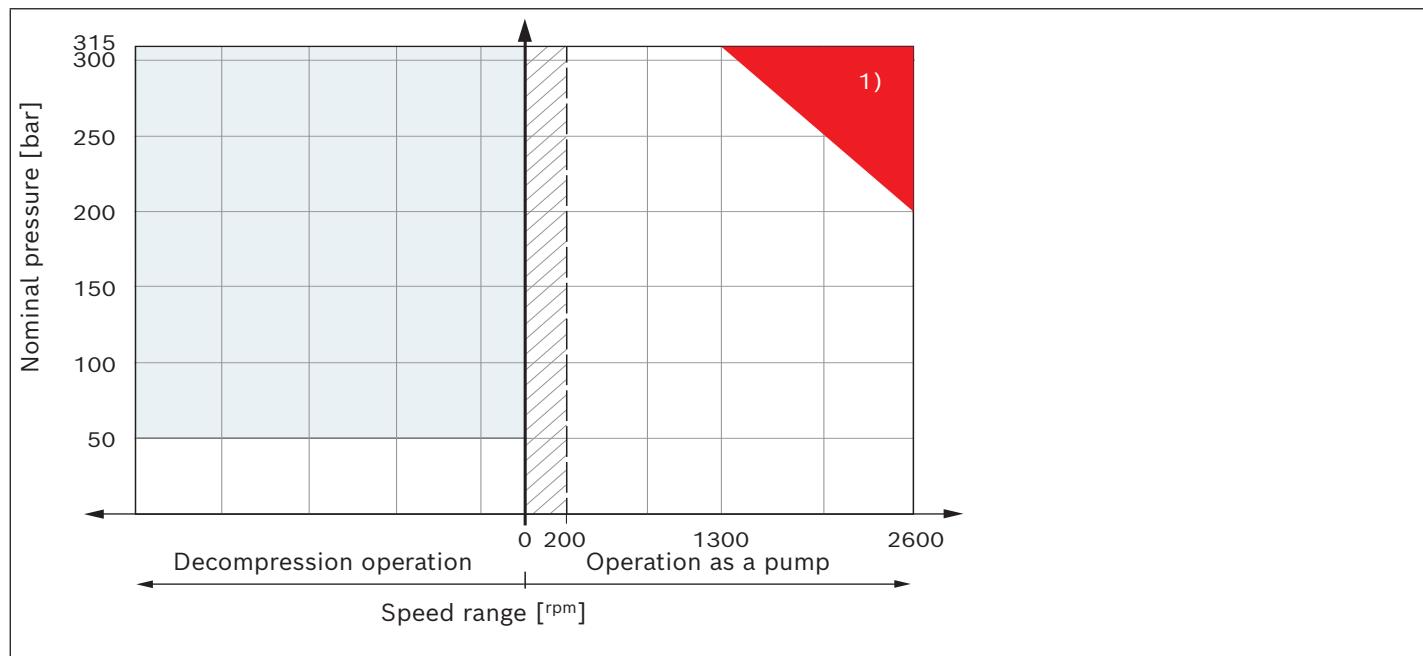

Operating range

Operation without restriction

Permissible with single operating period $t \leq 3 \text{ min}$;
maximum cycle proportion 80%.

For longer time share $t > 3 \text{ min}$, please use A10VZG.

Operation as a motor possible with restrictions,
please contact us. Permissible for short-term
decompression operation $t \leq 200 \text{ ms}$

1) This range may only be operated at an inlet pressure of 2.5 bar
absolute at port **A/B**.

Technical data A10FZG size 3 to 18

Superordinate size	NG		10				18					
Available intermediate sizes	NG		3	6	8	10	12	14	16	18		
Geometric displacement, per revolution	$V_{g\ max}$	cm ³		3	6	8.1	10.6	12	14	16	18	
Maximum rotational speed at $V_{g\ max}$												
Suction speed operation as a pump ¹⁾	n_{nom}	rpm				3600				3300		
Max. rotational speed decompression operation ²⁾	n_{nom}	rpm				3600				3300		
Flow	at n_{nom} and $V_{g\ max}$	q_v	l/min		10.8	21.6	29	38.2	39.6	46.2	52.8	59.4
Pump operation power	at n_{nom} , $V_{g\ max}$ and $\Delta p = 315$ bar	P	kW		5.6	11.3	15.3	20	21	24.2	27.7	31.2
Torque	at $V_{g\ max}$ and $\Delta p = 315$ bar	M	Nm		15	30	40.5	53	60.2	70.2	80.2	90.3
	at $V_{g\ max}$ and $\Delta p = 100$ bar	M	Nm		5	9.5	12.7	16.8	19.1	22.3	25.5	28.7
Rotary stiffness of drive shaft	S	c	Nm/rad				9200				-	
	R	c	Nm/rad				-				14800	
Moment of inertia of the rotary group	J_{TW}	kgm ²				0.0006				0.0009		
Maximum angular acceleration ²⁾⁽³⁾	α	rad/s ²				14000				12600		
Case volume	V	l				0.11				0.19		
Weight (approx.)	m	kg				9				10		

Determination of the characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

Key

- V_g** Displacement per revolution [cm³]
 Δp Differential pressure [bar]
 n Rotational speed [rpm]
 η_v Volumetric efficiency
 η_{hm} Hydraulic-mechanical efficiency
 η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation/simulation, and comparison with the permissible values.

¹⁾ The values are applicable:

- at an absolute pressure $p_{abs} \geq 1$ bar at the low-pressure side (inlet)
- for the optimum viscosity range from $\nu_{opt} = 36$ to 16 mm²/s
- with hydraulic fluid based on mineral oils

²⁾ Higher values on request

³⁾ The limit value is only valid for a single pump, multiple pump version available on request. The load capacity of the connection parts must be considered.

Technical data A10FZG size 21 to 63

Superordinate size	NG	28							63		
Available intermediate sizes	NG	21	22	23	25	26	27	28	51	58	63
Geometric displacement, per revolution	$V_{g\max}$ cm ³	21	22	23	25	26	27	28	51	58	63
Maximum rotational speed at $V_{g\max}$											
Suction speed operation as a pump ¹⁾	n_{nom} rpm				3000			3000			2600
Max. rotational speed decompression operation ²⁾	n_{nom} rpm				3000			3000			2600
Flow at n_{nom} and $V_{g\max}$	q_v l/min	63	66	69	75	78	81	84	133	151	164
Pump operation power at n_{nom} , $V_{g\max}$ and $\Delta p = 315$ bar	P kW	33	34	36.3	39	41	42	44	70	79	86
Torque at $V_{g\max}$ and $\Delta p = 315$ bar	M Nm	105	110	116	125	130.4	135	140.4	256	291	316
	M Nm	33.4	35	36.6	40	41.4	43	44.6	81	92	100
Rotary stiffness of drive shaft S	c Nm/rad				–			–			–
	R	c Nm/rad			26300			26300			69400
Moment of inertia of the rotary group	J_{TW} kgm ²				0.0017			0.0017			0.0056
Maximum angular acceleration ²⁽³⁾	α rad/s ²				11200			11200			8000
Case volume	V l				0.6			0.6			0.8
Weight (approx.)	m kg				15.5			15.5			26

Determination of the characteristics	
Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$ [l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$ [Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$ [kW]

Key V_g Displacement per revolution [cm³] Δp Differential pressure [bar] n Rotational speed [rpm] η_v Volumetric efficiency η_{hm} Hydraulic-mechanical efficiency η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)

Additional information about inlet pressure and rotational speed can be found on page 33

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation/simulation, and comparison with the permissible values.

¹⁾ The values are applicable:


- at an absolute pressure $p_{abs} \geq 1$ bar at the low-pressure side (inlet)
- for the optimum viscosity range from $\nu_{opt} = 36$ to 16 mm²/s
- with hydraulic fluid based on mineral oils

²⁾ Higher values on request³⁾ The limit value is only valid for a single pump, multiple pump version available on request. The load capacity of the connection parts must be considered.

Permissible input and through-drive torques

Superordinate size		10	18	28	63
Torque at $V_g \max$ and $\Delta p = 315 \text{ bar}^1)$	M_{max}	Nm	For values of the individual sizes, see table of values on page 81 and 82		
Maximum input torque on drive shaft ²⁾	S $M_{E\ max}$	Nm	126	-	-
	Ø in		3/4	-	-
	R $M_{E\ max}$	Nm	-	160	250
	Ø in		-	3/4	7/8
Maximum through-drive torque	S $M_{D\ max}$	Nm	42	-	-
	R $M_{D\ max}$	Nm	-	120	176
					484

▼ Distribution of torques

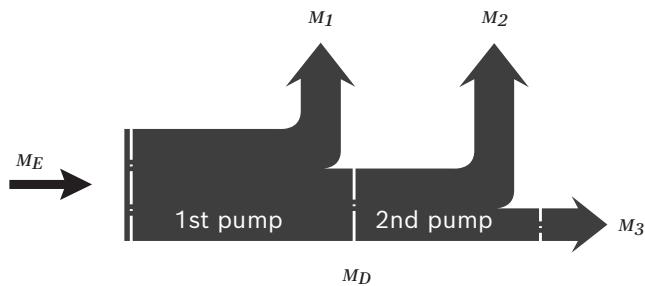


Torque at 1st pump	M_1
Torque at 2nd pump	M_2
Torque at 3rd pump	M_3
Input torque	$M_E = M_1 + M_2 + M_3$
	$M_E < M_{E\ max}$
Through-drive torque	$M_D = M_2 + M_3$
	$M_D < M_{D\ max}$

¹⁾ Efficiency not considered

²⁾ For drive shafts free of radial force


Dimensions A10FZG sizes 3 to 10

Direction of rotation bi-directional (flow direction see table page 78)

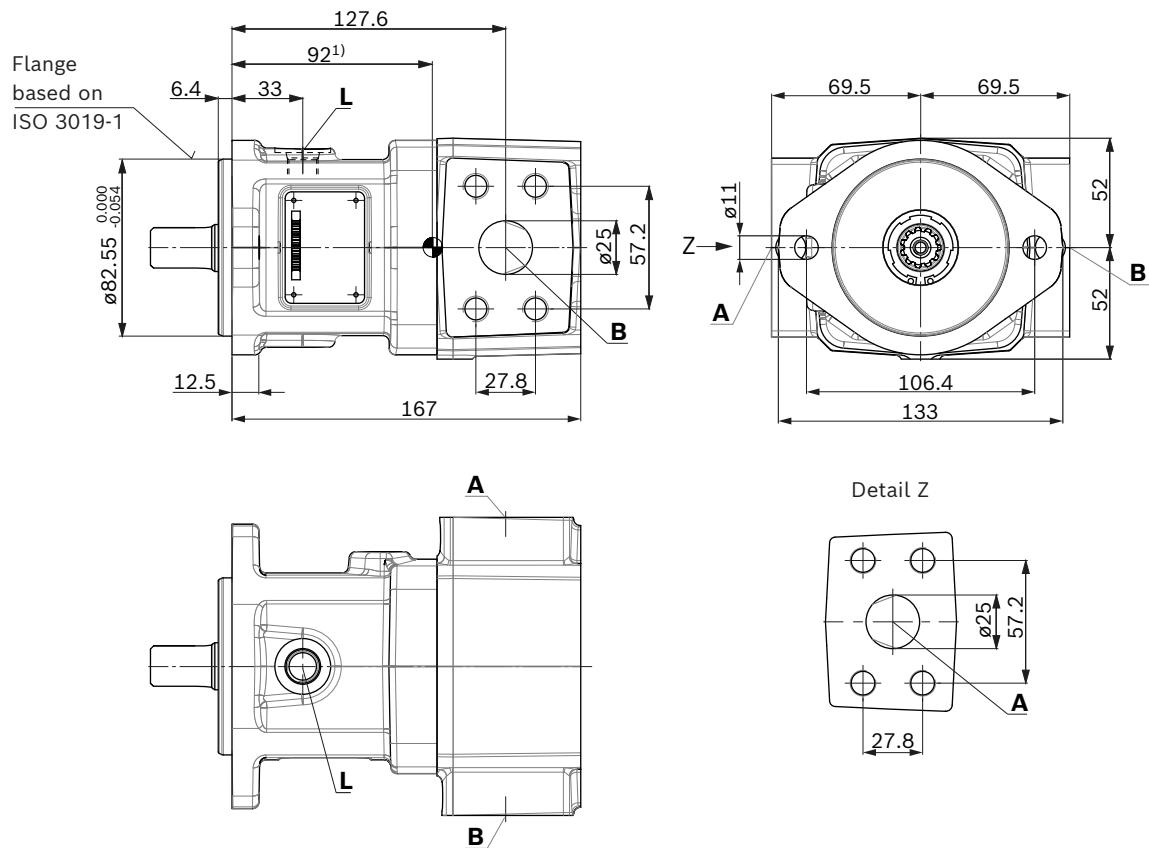

¹) Center of gravity

▼ Splined shaft 3/4 in (19-4, ISO 3019-1)

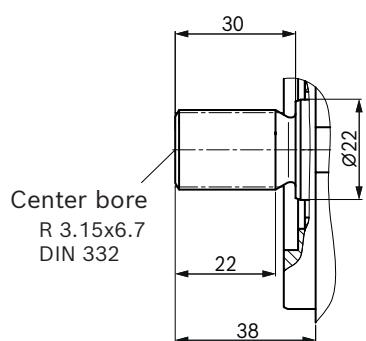S – 11T 16/32DP¹⁾Connection table **A10FZG**

Ports		Standard	Size	$p_{\max \text{ absolute}}$ [bar] ²⁾	State ⁴⁾
A/B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 in M12 × 1.75; 17 deep	350	O
L	Drain port	DIN 11926 ³⁾	9/16-18UNF-2B; 13 deep	2	O

¹⁾ Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5


²⁾ Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

³⁾ The countersink may be deeper than specified in the standard.

⁴⁾ O = Must be connected (plugged on delivery)

Dimensions A10FZG sizes 12 to 18


Direction of rotation bi-directional (flow direction see table page 78)

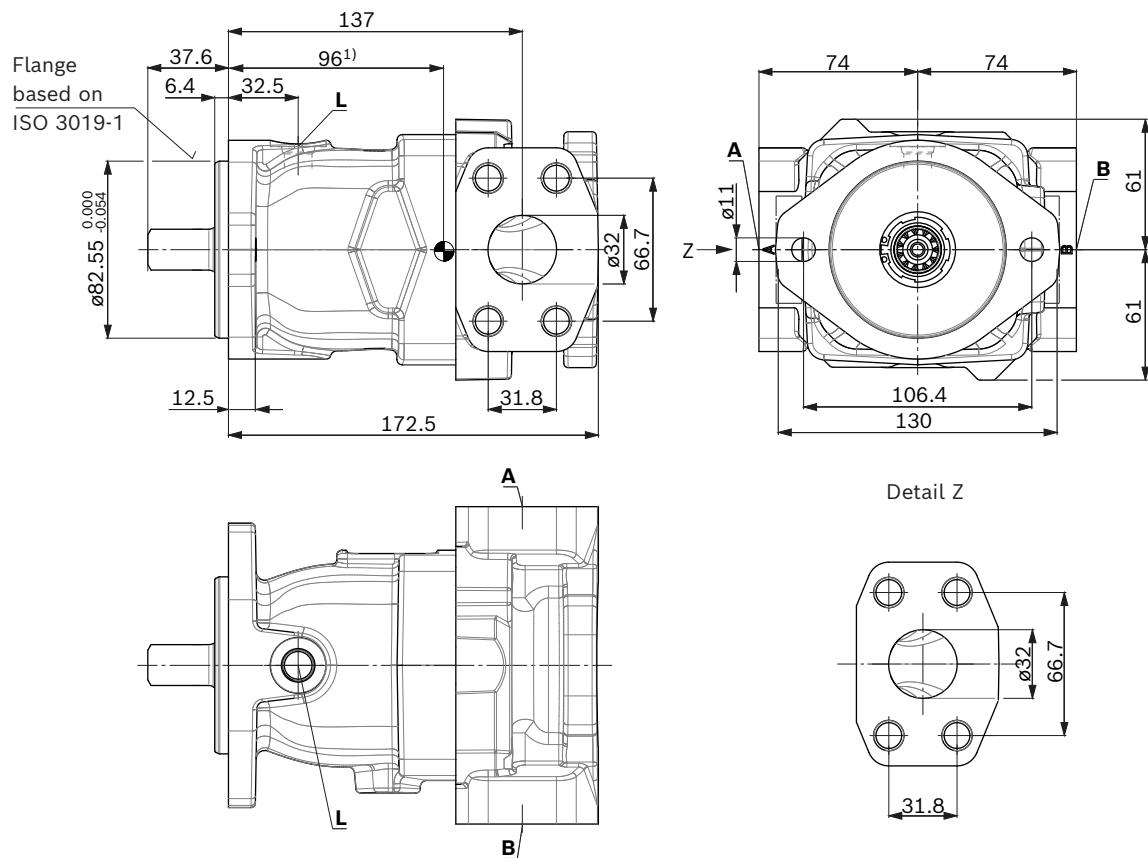

¹⁾ Center of gravity

▼ **Splined shaft 3/4 in (similar to ISO 3019-1)**

R – 11T 16/32DP¹⁾²⁾

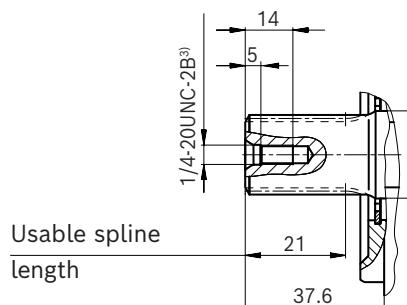

Connection table **A10FZG**

Ports		Standard	Size	p_{max} [bar] ⁴⁾	State ⁶⁾
A/B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
L	Drain port	DIN 11926 ⁵⁾	9/16-18UNF-2B; 12.5 deep	2	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.

3) Thread according to ASME B1.1

4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.


5) The countersink may be deeper than specified in the standard.

6) O = Must be connected (plugged on delivery)

X = plugged (in normal operation)


Dimensions A10FZG sizes 21 to 28

Direction of rotation bi-directional (flow direction see table page 78)

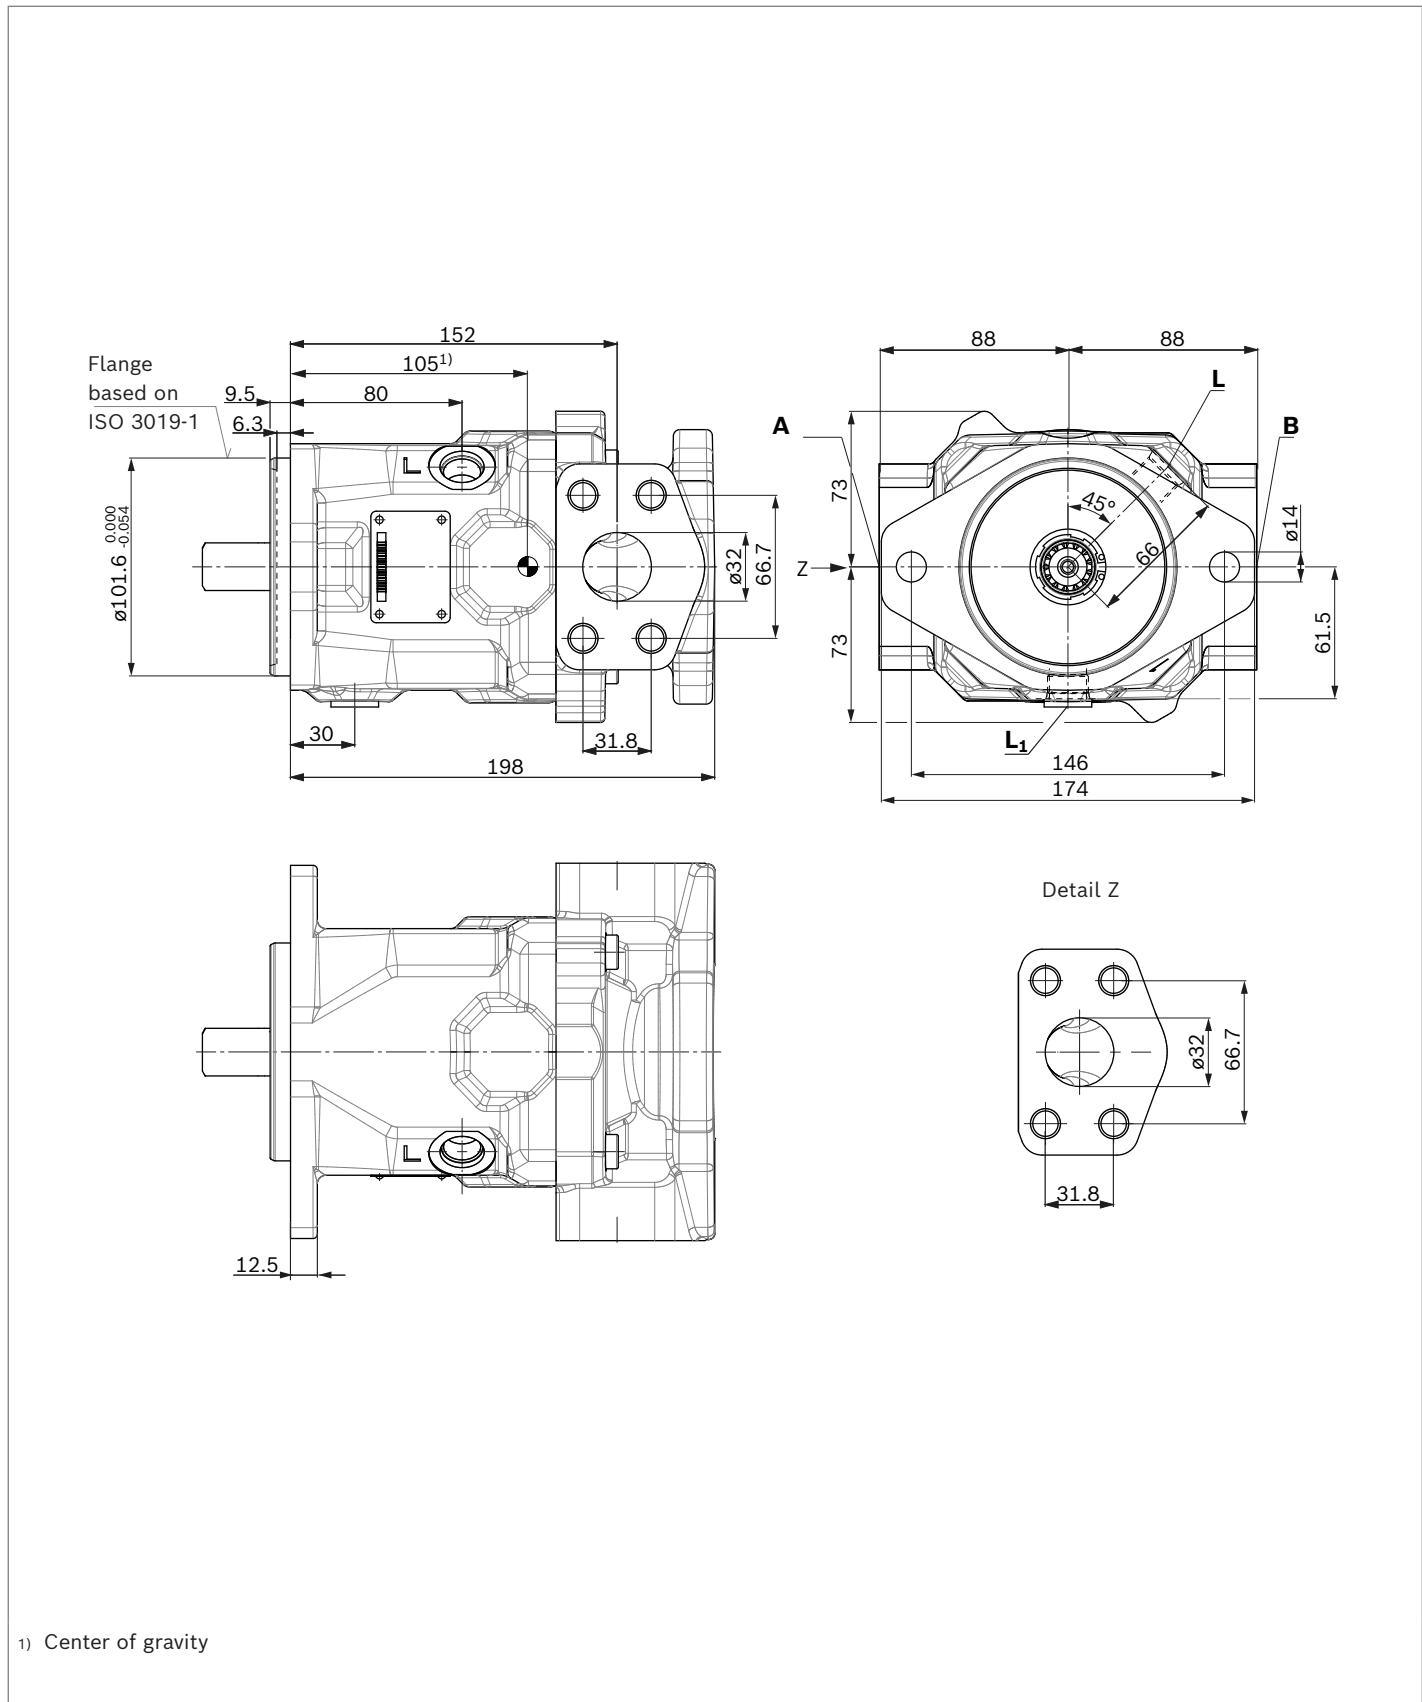

▼ **Splined shaft 7/8 in (similar to ISO 3019-1)**

R - 13T 16/32DP¹⁾²⁾

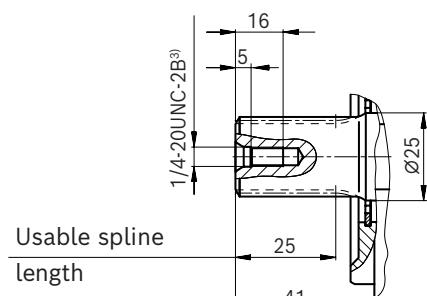

Connection table **A10FZG**

Ports		Standard	Size	p_{max} [bar] ⁴⁾	State ⁷⁾
A/B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	350	O
L	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2	X ⁶⁾

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.

3) Thread according to ASME B1.1

4) Depending on the application, momentary pressure peaks can occur.
Keep this in mind when selecting measuring devices and fittings.


5) The countersink may be deeper than specified in the standard.


6) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).

7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

Dimensions A10 FZG size 63

Direction of rotation bi-directional (flow direction see table page 78)

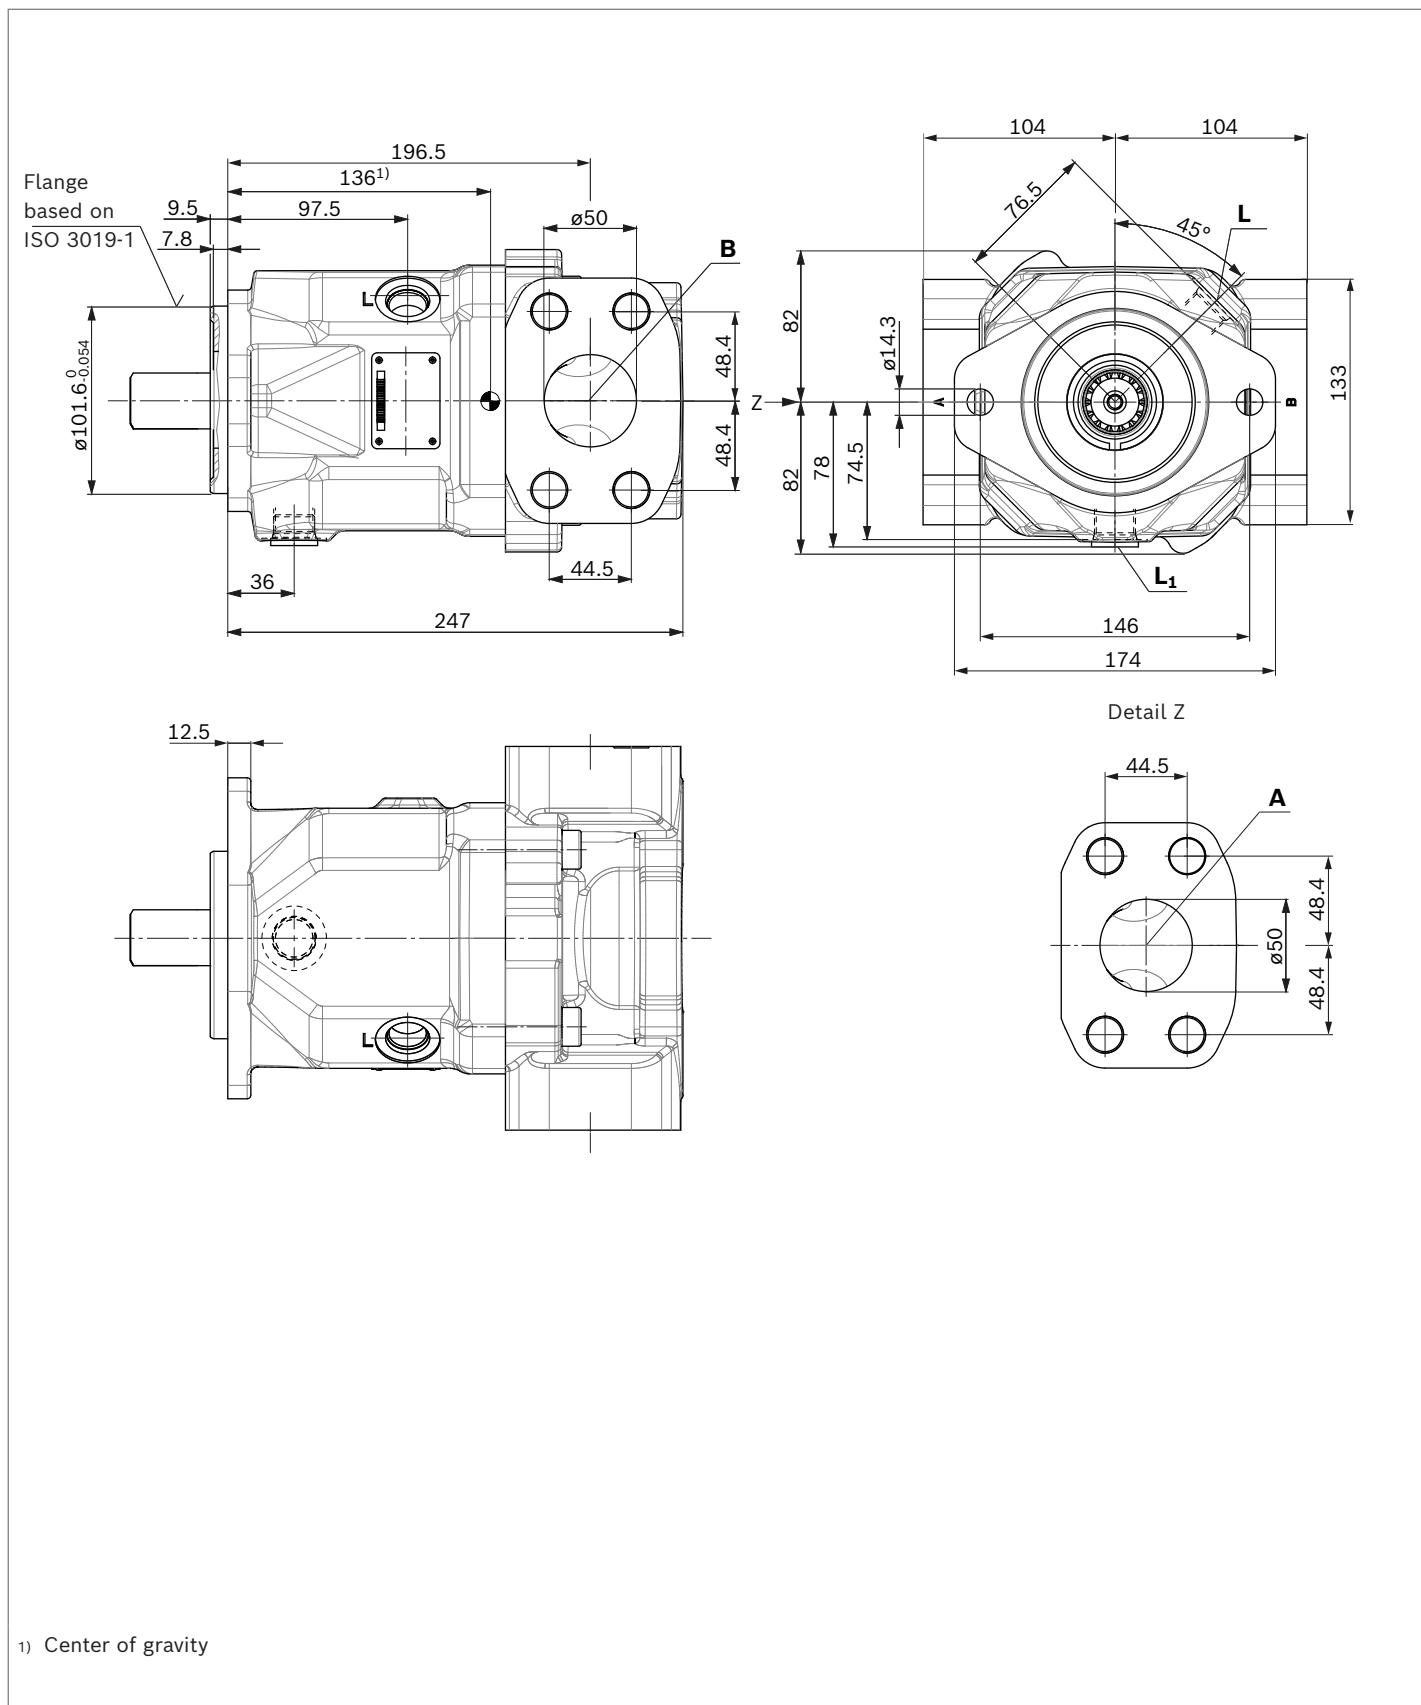

▼ Splined shaft 1 1/4 in (similar to ISO 3019-1)**R** – 14T 12/32DP¹⁾²⁾**Connection table A10FZG**


Ports		Standard	Size	p_{\max} [bar] ⁴⁾	State ⁷⁾
A/B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	2 in M20 × 2; 24 deep	350	O
L	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	O ⁶⁾
L₁	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	X ⁶⁾

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
 3) Thread according to ASME B1.1
 4) Depending on the application, momentary pressure peaks can occur.
 Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
 6) Depending on the installation position, **L** or **L₁** must be connected (also see installation instructions on page 127).
 7) O = Must be connected (plugged on delivery)
 X = plugged (in normal operation)

Axial piston variable displacement unit

A10VZG

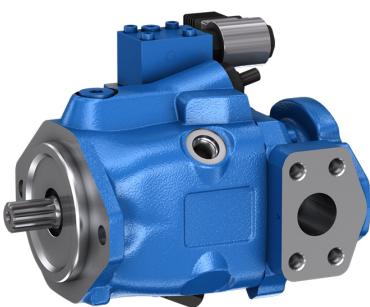

Features

- ▶ For use in one-, two- or four-quadrant operation
- ▶ Suitable for start/stop operation
- ▶ Suitable for long pressure holding operation
- ▶ Well-tried A10 rotary group technology

Product description

The proven axial piston units from the A10 product family have now been further developed for use in speed-controlled drives. They are approved for start/stop operation and designed for a bi-directional direction of rotation. Even at the lowest rotational speed between 0 and 200 rpm, they provide a constant pressure and offer extremely high efficiency in pressure holding operation. The A10VZG units can be used as a pump in one-, two- and four-quadrant operation.

- ▶ Suitable for variable-speed operation with synchronous and asynchronous motors
- ▶ Sizes 3 to 10
Nominal pressure 250 bar
Maximum pressure 315 bar
- ▶ Sizes 18 to 63
Nominal pressure 280 bar
Maximum pressure 315 bar
- ▶ Open and closed circuit

Contents

Type code A10VZG	94
Setting ranges for stop $V_g \text{ min} / V_g \text{ max}$	95
Working pressure range A10VZG	96
Technical data A10VZG	99
EZ300/EZ400 – Two-point control, electric	101
DG000 – Two-point control, hydraulic	102
Dimensions A10 VZG, sizes 3 to 63	103
Dimensions, through drive	115
Overview of mounting options	124
Combination pumps A10VZO + A10VZO, A10VZG, A10FZO or A10FZG	125
Connector for solenoids	126
Installation instructions A10FZO; A10VZO; A10FZG; A10VZG	127
Project planning notes	129
Safety instructions	131

Type code A10VZG

01	02	03	04	05	06	07	08	9	10	11	12	13
A10V	Z	G		/	10	W	-	V		C		N00

Axial piston unit

01	Swashplate design, variable, nominal pressure 250/315 bar, maximum pressure 315 bar	A10V
----	---	-------------

Application area

02	Variable-speed drives	Z
----	-----------------------	----------

Operating mode

03	Pump, closed circuit	G
----	----------------------	----------

Size (NG)

04	Geometric displacement, see table of values on page 99	003 006 008 010 018 028 063
----	--	------------------------------------

Control device²⁾

05	Two-point control, electric	U = 12 V	● ● ● ● ● ● ●	EZ300¹⁾
		U = 24 V	● ● ● ● ● ● ●	EZ400¹⁾
	Two-point control, hydraulic		● ● ● ● ● ● ●	DG000¹⁾

Series

06	Series 1, index 0	10
----	-------------------	-----------

Direction of rotation

07	Viewed on drive shaft	bi-directional	● ● ● ● ● ● ●	W
----	-----------------------	----------------	---------------	----------

Sealing material

08	FKM (fluorocarbon rubber)		● ● ● ● ● ● ●	V
----	---------------------------	--	---------------	----------

Drive shaft

9	Splined shaft	standard shaft	● ● ● ● - - -	S
	ISO 3019-1	similar to shaft "S" however for higher torque	- - - - ● ● ●	R

Mounting flange

10	Based on ISO 3019-1 (SAE)		● ● ● ● ● ● ●	C
----	---------------------------	--	---------------	----------

Working port

11	SAE flange ports ISO 6162 A and B , opposite sides, metric fastening thread		- - - - ● ● ●	02
	DIN 3852 threaded ports A and B , opposite sides		● ● ● ● - - -	03

Through drive

12	without through drive		● ● ● ● ● ● ●	N00
----	-----------------------	--	---------------	------------

Connector for solenoids

13	Without, with hydraulic controllers		● ● ● ● ● ● ●	0
	HIRSCHMANN connector – without suppressor diode		● ● ● ● ● ● ●	H

● = Available ○ = On request - = Not available

Notice

- Note the project planning notes on page 130.
- In addition to the type code, please specify the relevant technical data when placing your order.

¹⁾ Please specify mechanical flow control $V_{g\max}$ and $V_{g\min}$ in the order text.

²⁾ Further controllers on request

Setting ranges for stop V_g min / V_g max

NG	V_g min [cm ³]	cm ³ per revolution	V_g max [cm ³]	cm ³ per revolution
3	0 to 3	0.9	3	
6	0 to 4	0.9	6	
8	0 to 4	0.9	8	
10	0 to 6	0.9	10	
18	0 to 7	1.3	9 to 18	1.3
28	0 to 11	1.7	14 to 28	1.7
63	0 to 25	3.0	37 to 63	3.0

- Please specify settings V_g min and V_g max in plain text.


Notice

- Observe the operating conditions for V_g min 0 in connection with the controls DG and EZ on the respective pages 101 and 102

Working pressure range A10VZG

Pressure at working port B or A			Definition
Nominal pressure p_{nom}	NG 10 NG 18 to 63	250 bar 280 bar	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	NG 10 NG 18 to 63	315 bar 315 bar	The maximum pressure corresponds to the maximum working pressure within a single operating period. The sum of single operating periods must not exceed the total operating period.
Single operating period	2.0 ms		
Total operating period	300 h		
Minimum pressure p_{absolute} (high-pressure side)	10 bar ¹⁾		Minimum pressure on the high-pressure side required to prevent damage to the axial piston unit.
Rate of pressure change $R_A \text{ max}$	16000 bar/s		Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at port A or B (low-pressure side)			
Minimum pressure p_{min}	Standard	0.8 bar absolute	Minimum pressure on the low-pressure side A or B (depending on direction of rotation) that is required in order to prevent damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Summation pressure			
			The sum of the pressures on ports A and B must not rise above 280 bar.
Case pressure at port L			
Maximum pressure $p_L \text{ max}$	2 bar absolute ²⁾		Maximum 0.5 bar higher than inlet pressure at low pressure port A or B (depending on direction of rotation), but not higher than $p_L \text{ max}$. The case pressure must always exceed the ambient pressure at the shaft seal ring. A drain line to the reservoir is required.
Pilot pressure port X with external high pressure			
Maximum pressure p_{max}	315 bar		When designing all control lines pressurized with external high pressure, the values for the rate of pressure change, maximum single operating period and total operating period applicable to working port A or B (depending on direction of rotation) must not be exceeded.

▼ Rate of pressure change $R_A \text{ max}$

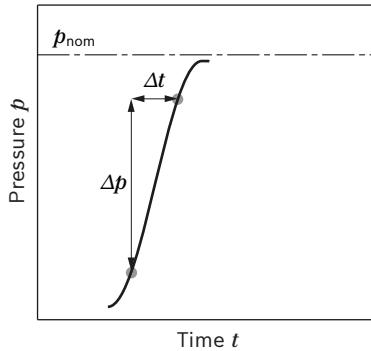


Flow direction

Direction of rotation, viewed on drive shaft	Direction of rotation	Flow
Type code "W"	clockwise	A to B
	counter-clockwise	B to A

¹⁾ Please contact us about lower pressures

²⁾ Higher values on request

▼ Pressure definition

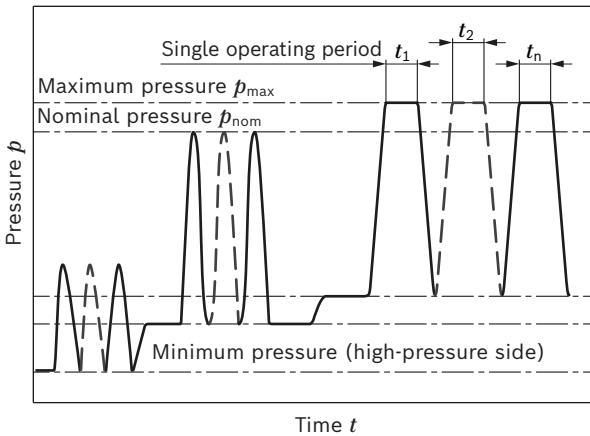


$$\text{Total operating period} = t_1 + t_2 + \dots + t_n$$


Notice

- Working pressure range applies when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

A10VZG 010 to 018: Permissible operating data and operating ranges at $V_g \max$

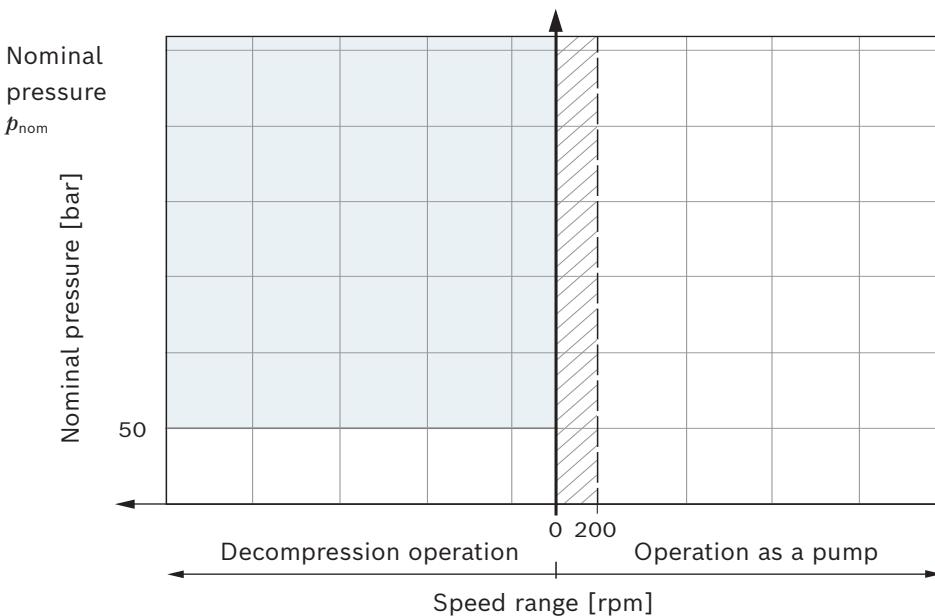

A10VZG 028: Permissible operating data and operating ranges at $V_g \max$

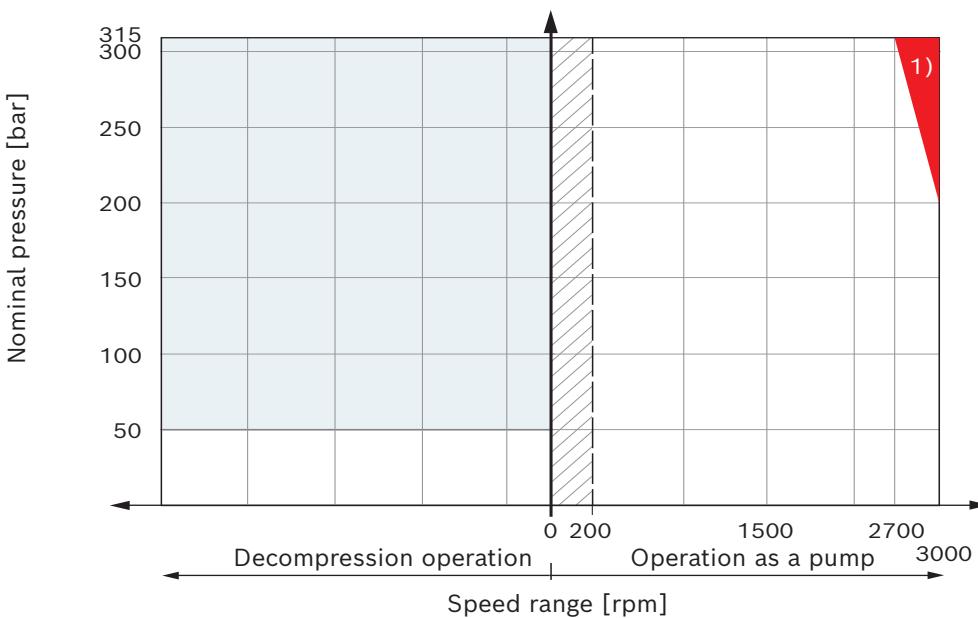


Operating range

- Operation without restriction
- At $V_g < 40\%$, no time restriction
At $V_g \max$ single operating period $t < 3$ min, maximum cycle proportion 80%
- Operation as a motor possible with restrictions,
please contact us.
At $V_g < 40\%$, no time restriction
At $V_g \max$ permissible for short-term decompression operation
 $t \leq 200$ ms

¹⁾ This range may only be operated at an inlet pressure of 2.5 bar absolute at port **A/B**.

A10VZG 063: Permissible operating data and operating ranges at $V_g \text{ max}$

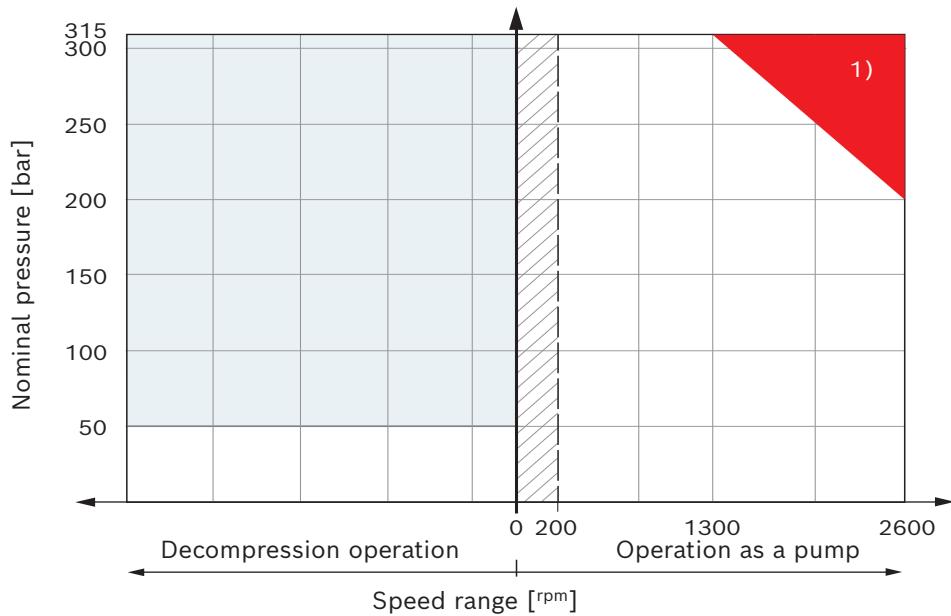

Operating range

- Operation without restriction
- At $V_g < 40\%$, no time restriction
At $V_g \text{ max}$ single operating period $t < 3 \text{ min}$, maximum cycle proportion 80%
- Operation as a motor possible with restrictions,
please contact us.
At $V_g < 40\%$, no time restriction
At $V_g \text{ max}$ permissible for short-term decompression operation
 $t \leq 200 \text{ ms}$

1) This range may only be operated at an inlet pressure of 2.5 bar absolute at port **A/B**.

Technical data A10VZG

Size	NG	3	6	8	10	18	28	63
Geometric displacement, per revolution	$V_{g\max}$ cm ³	3.5	6	8	10.5	18	28	63
Maximum rotational speed ¹⁾ at $V_{g\max}$								
Operation as a pump ¹⁾	n_{nom} rpm	3300	3300	3300	3300	3300	3000	2600
Decompression operation ²⁾	n_{nom} rpm	3300	3300	3300	3300	3300	3000	2600
Flow operation as a pump at n_{nom} and $V_{g\max}$	q_v l/min	12	20	26	35	59	84	164
Performance operation as a pump	at n_{nom} , $V_{g\max}$ and $\Delta p = 250$ bar	P kW	5	8	11	14	–	–
	at n_{nom} , $V_{g\max}$ and $\Delta p = 280$ bar	P kW	–	–	–	–	28	39
Torque	at $V_{g\max}$ and $\Delta p = 250$ bar	M Nm	14	24	32	42	–	–
	at $V_{g\max}$ and $\Delta p = 280$ bar	M Nm	–	–	–	–	80	125
	at $V_{g\max}$ and $\Delta p = 100$ bar	M Nm	6	10	13	17	29	45
Rotary stiffness of drive shaft	S	c Nm/rad	9200	9200	9200	9200	–	–
	R	c Nm/rad	–	–	–	–	14800	26300
Moment of inertia of the rotary group		J_{TW} kgm ²	0.0006	0.0006	0.0006	0.0006	0.0009	0.0017
Maximum angular acceleration ²⁾³⁾	α rad/s ²	14000	14000	14000	14000	12600	11200	8000
Case volume	V l	0.2	0.2	0.2	0.2	0.32	0.5	0.8
Weight (approx.)	m kg	11.3	11.3	11.3	11.3	13.5	20	32

Determination of the characteristics

Flow	$q_v = \frac{V_g \times n \times \eta_v}{1000}$	[l/min]
Torque	$M = \frac{V_g \times \Delta p}{20 \times \pi \times \eta_{hm}}$	[Nm]
Power	$P = \frac{2 \pi \times M \times n}{60000} = \frac{q_v \times \Delta p}{600 \times \eta_t}$	[kW]

Key

- V_g Displacement per revolution [cm³]
- Δp Differential pressure [bar]
- n Rotational speed [rpm]
- η_v Volumetric efficiency
- η_{hm} Hydraulic-mechanical efficiency
- η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends testing the loads by means of experiment or calculation/simulation and comparison with the permissible values.

Additional information about inlet pressure and rotational speed can be found on page 33

¹⁾ The values are applicable:

- at an absolute pressure $p_{\text{abs}} \geq 1$ bar at the low-pressure side (inlet)
- for the optimum viscosity range from $\nu_{\text{opt}} = 36$ to 16 mm²/s
- with hydraulic fluid based on mineral oils

²⁾ Higher values on request

³⁾ The limit value is only valid for a single pump, multiple pump version available on request. The load capacity of the connection parts must be considered.

Permissible input torque

Size			10	18	28	63
Torque at $V_{g\max}$ and $\Delta p = 250 \text{ bar}^1)$	M_{max}	Nm	42	–	–	–
Torque at $V_{g\max}$ and $\Delta p = 280 \text{ bar}^1)$	M_{max}	Nm	–	80	125	280
Maximum input torque on drive shaft ²⁾						
S	$M_{E\max}$	Nm	126	–	–	–
	\emptyset	in	3/4	–	–	–
R	$M_{E\max}$	Nm	–	160	250	650
	\emptyset	in	–	3/4	7/8	1 1/4

¹⁾ Efficiency not considered

²⁾ For drive shafts with no radial force

EZ300/EZ400 – Two-point control, electric

The variable displacement unit is set to the minimum swivel angle by actuating the switching solenoid. The control pressure is taken internally via the on/off valve of the relevant high-pressure side. A minimum system pressure depending on the operating data is required for the pump to be adjusted.


Notice

- Starting up to $V_g \text{ min}$ and switching from $V_g \text{ min}$ below a working pressure of 10 bar is not permissible.

The axial piston unit can only be switched between $V_g \text{ max}$ and $V_g \text{ min}$.

Please specify the presetting in plain text.
 A $V_g \text{ min } 0 \text{ cm}^3$ setting is not permissible.

▼ Characteristic curve EZx00

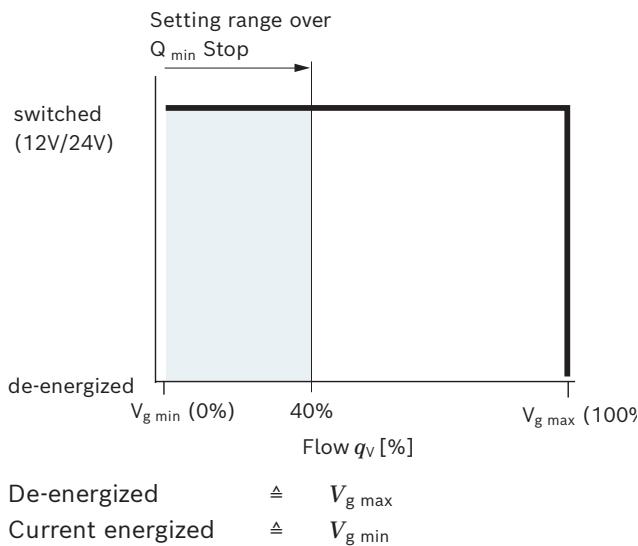


Technical data, solenoid	EZ300	EZ400
Voltage	12 V ($\pm 15\%$)	24 V ($\pm 15\%$)
Position $V_g \text{ max}$	de-energized	de-energized
Position $V_g \text{ min}$	current energized	current energized
Nominal current at 20°C	1.5 A	0.8 A
Duty cycle	100%	100%
Type of protection: see connector version page 126		


Ambient temperature range -20 °C to +60 °C.

Please contact us if these temperatures cannot be observed

▼ Circuit diagram A10VZG...EZ 3/4 sizes 3 to 10

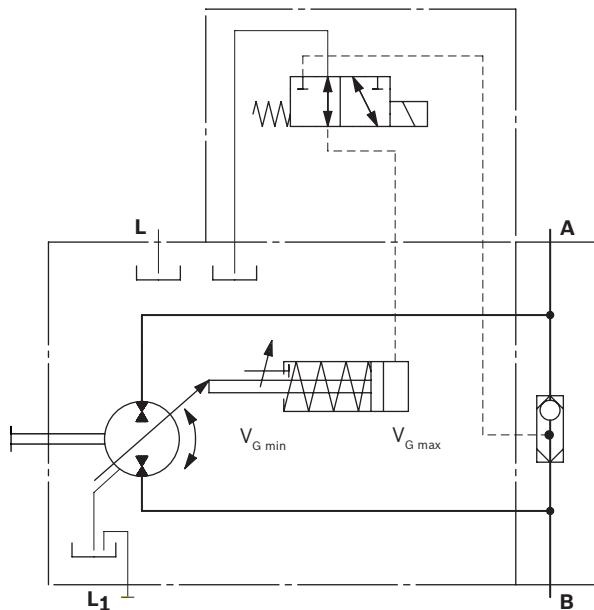

▼ Circuit diagram A10VZG...EZ 3/4 sizes 18 to 63

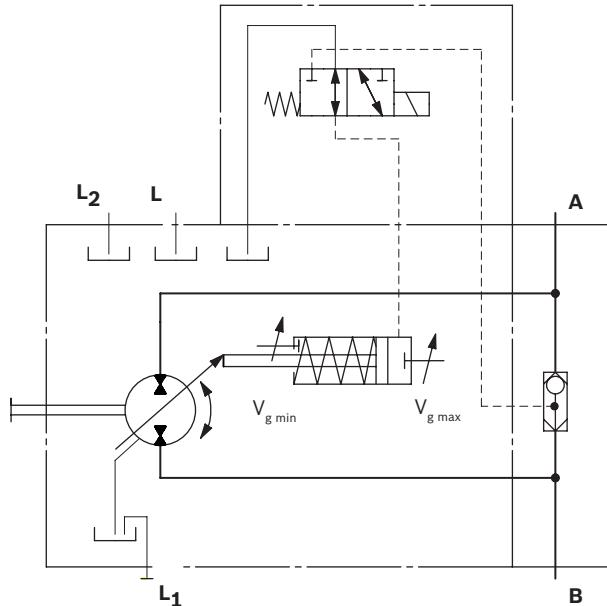

DG000 – Two-point control, hydraulic

The variable pump is set to minimum swivel angle by switching on an external switching pressure on the port **X**. This provides the stroking piston with direct control fluid power, requiring a minimum pressure of $p_{St} \geq 50$ bar.

Notice

- ▶ Starting up to $V_g \text{ min}$ and switching from $V_g \text{ min}$ below a working pressure of 10 bar is not permissible.

The variable pump is only switchable between $V_g \text{ min}$ and $V_g \text{ max}$. Specify the presetting in plain text.


A $V_g \text{ min } 0 \text{ cm}^3$ setting is not permissible.

Please note that the required switching pressure at port **X** is directly dependent on the actual working pressure p_B on working port **A** or **B**. (See switching pressure characteristic curve).

The maximum permissible switching pressure corresponds to the nominal pressure of the pump.


- ▶ Switching pressure p_{St} in $X = 0$ bar $\triangleq V_g \text{ max}$
- ▶ Switching pressure p_{St} in $X \geq 50$ bar $\triangleq V_g \text{ min}$

▼ Switching pressure characteristic curve

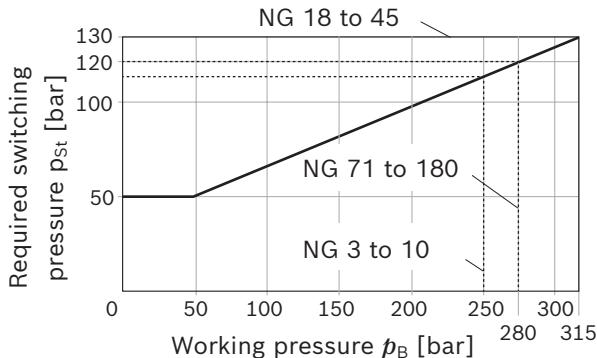

▼ Characteristic curve DG000


Setting range over $V_g \text{ min}$ Stop

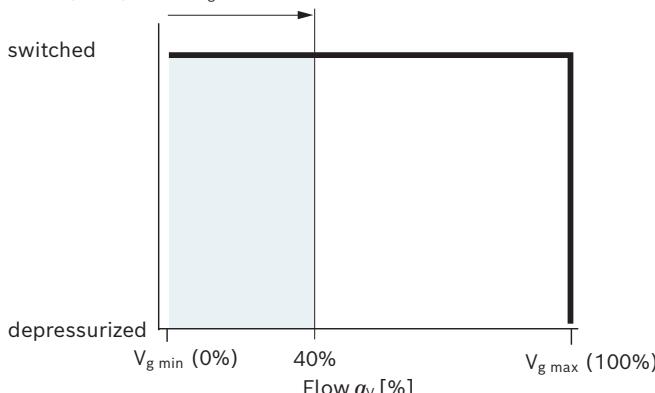


Depressurized $\triangleq V_g \text{ max}$



Pressure switched on $\triangleq V_g \text{ min}$

▼ Circuit diagram DG; A10VZG size 3 to 10


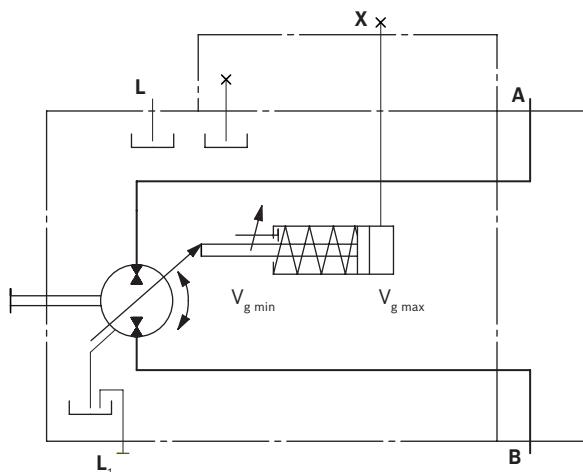


▼ Circuit diagram DG; A10VZG size 18 to 63

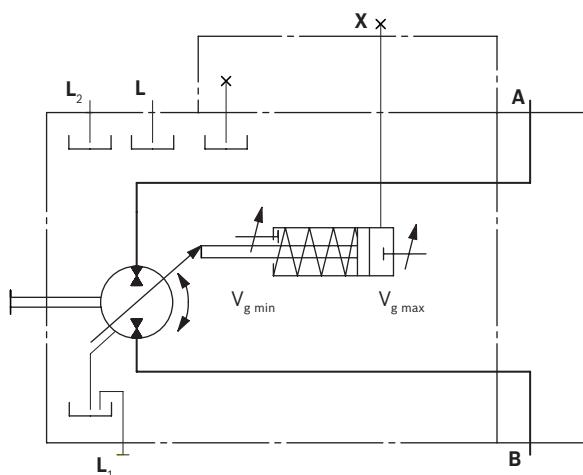


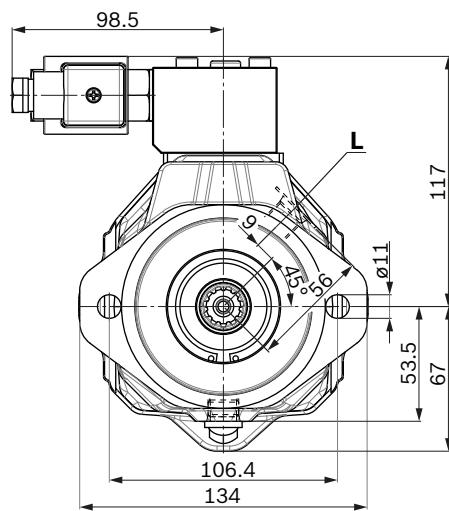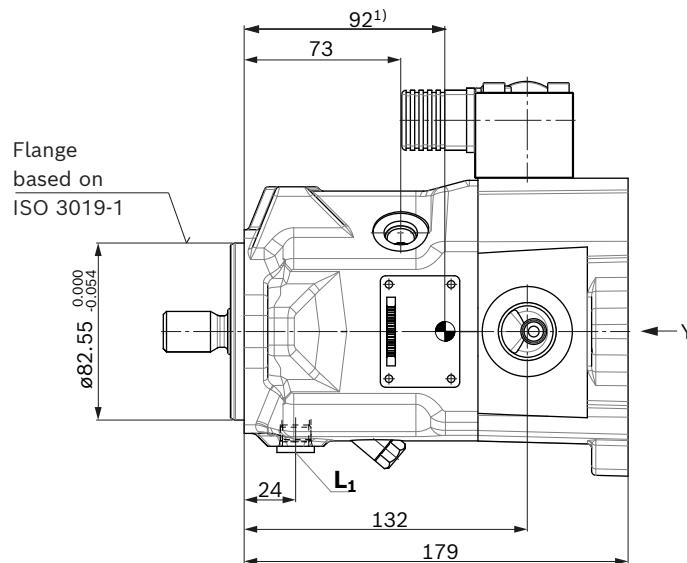Dimensions A10 VZG, sizes 3 to 10**EZx – two-point control electric, direction of rotation bi-directional (flow direction see table page 96)**

View Y

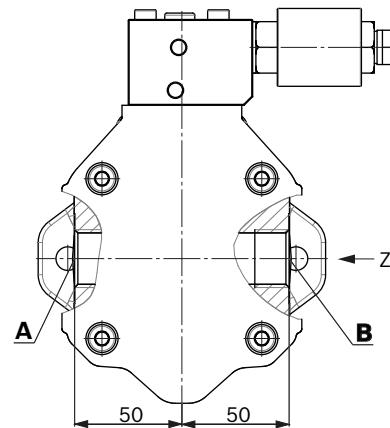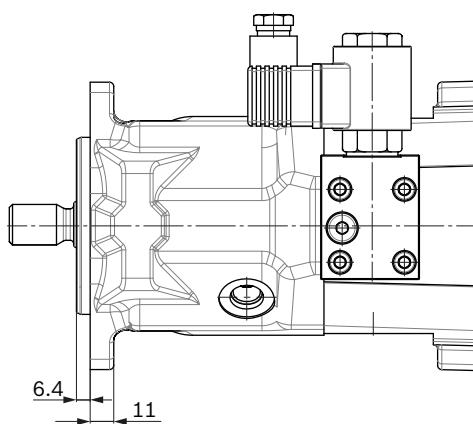


Detail Z



¹) Center of gravity

▼ Splined shaft 3/4 in (19-4, ISO 3019-1)

S – 11T 16/32DP¹⁾

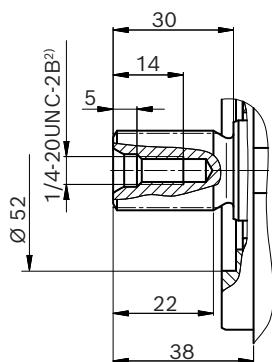

Connection table A10VZG

Ports		Standard	Size	p_{\max} [bar] ³⁾	State ⁶⁾
A/B	Working port	DIN 3852-1	M27 × 2; 16 deep	315	O
L	Drain port	ISO 11926 ⁴⁾	9/16-18UNF-2B; 13 deep	2	O ⁵⁾
L ₁	Drain port	ISO 11926 ⁴⁾	9/16-18UNF-2B; 13 deep	2	X ⁵⁾
X	Pilot pressure port (DG only)	DIN 3852-2 ⁴⁾	G 1/4; 12 deep	315	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5


2) Thread according to ASME B1.1

3) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

4) The countersink may be deeper than specified in the standard.





5) Depending on the installation position, L or L₁ must be connected (also see installation instructions on page 127).

6) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

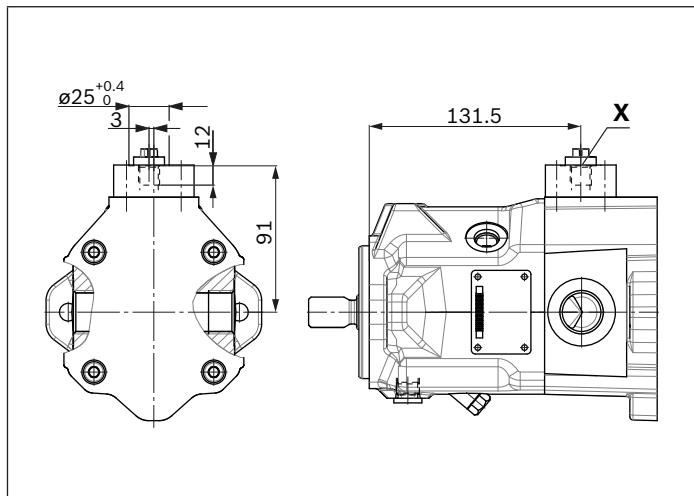▼ DG – Two-point control, direct operated


Dimensions A10 VZG size 18

EZx – two-point control electric, direction of rotation bi-directional (flow direction see table page 96)

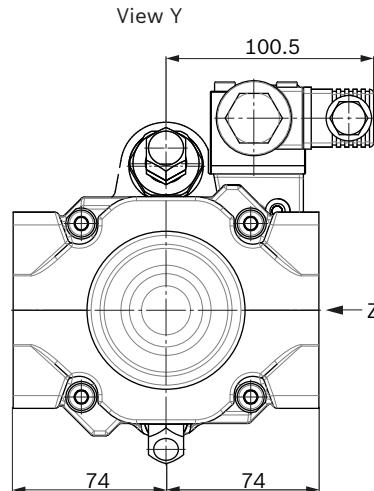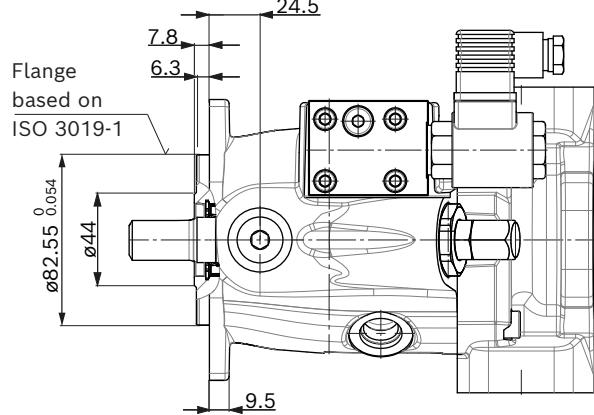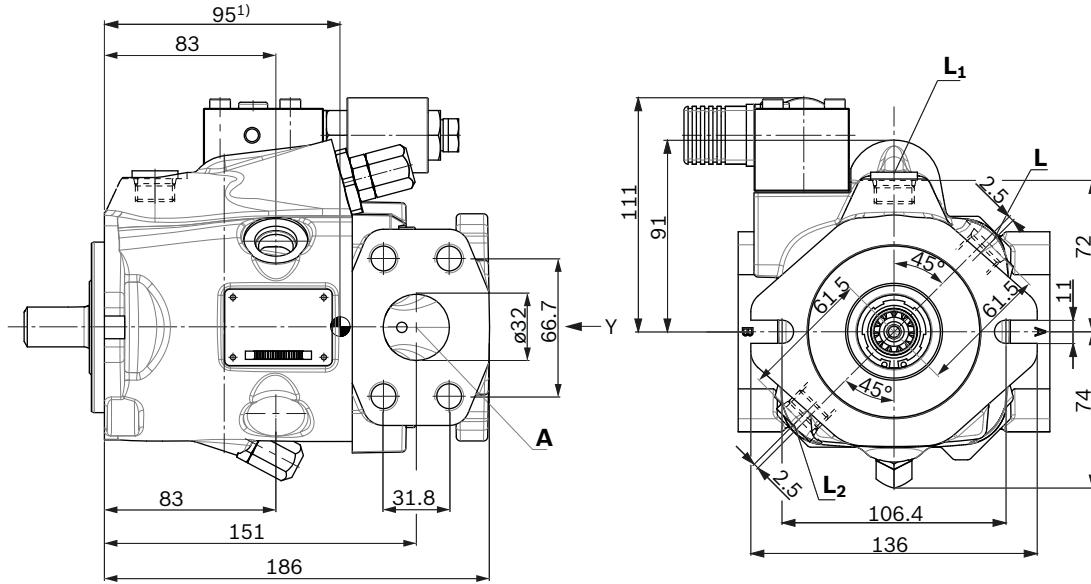

1) Center of gravity

▼ Splined shaft 3/4 in (similar to ISO 3019-1)

R - 11T 16/32DP¹⁾²⁾

Connection table A10VZG

Ports		Standard	Size	p_{max} [bar] ⁴⁾	State ⁷⁾
A/B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	315	O
L	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 14 deep	2	O ⁶⁾
L₁, L₂	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 14 deep	2	X ⁶⁾
X	Pilot pressure port (DG only)	DIN 3852-2 ⁵⁾	G 1/4; 12 deep	315	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.

3) Thread according to ASME B1.1


4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.

6) Depending on the installation position, **L**, **L₁** or **L₂** must be connected (also see installation instructions starting on page 127).





7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

▼ DG – Two-point control, direct operated

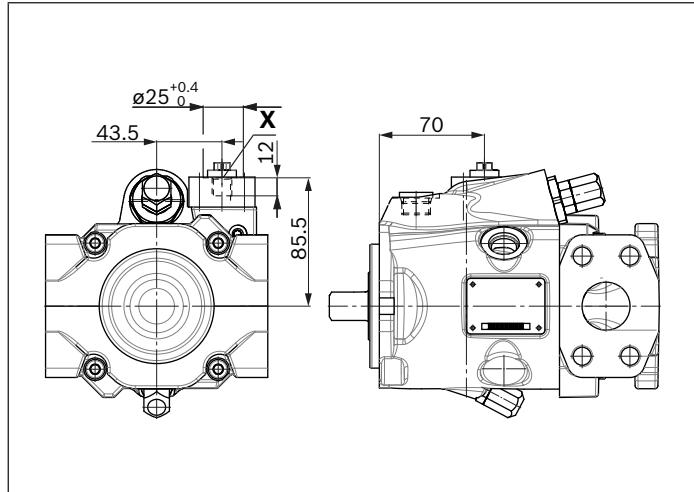

Dimensions A10 VZG size 28


EZx – two-point control electric, direction of rotation bi-directional (flow direction see table page 96)

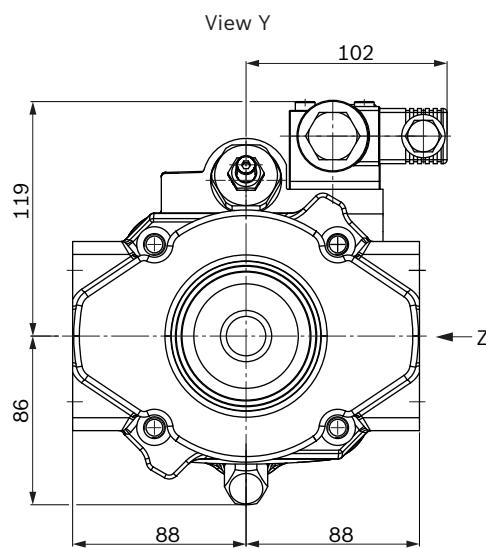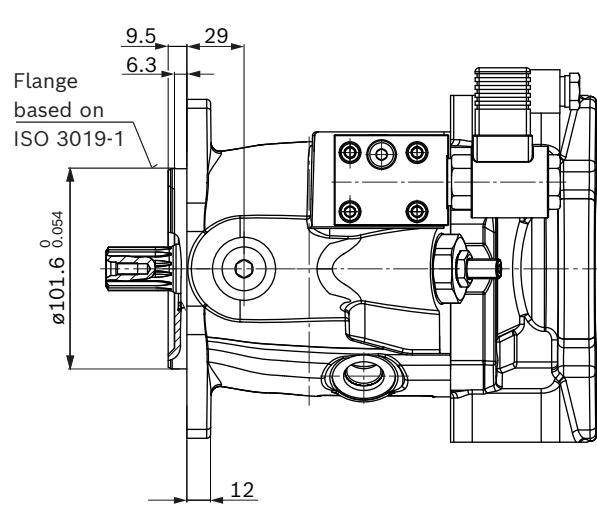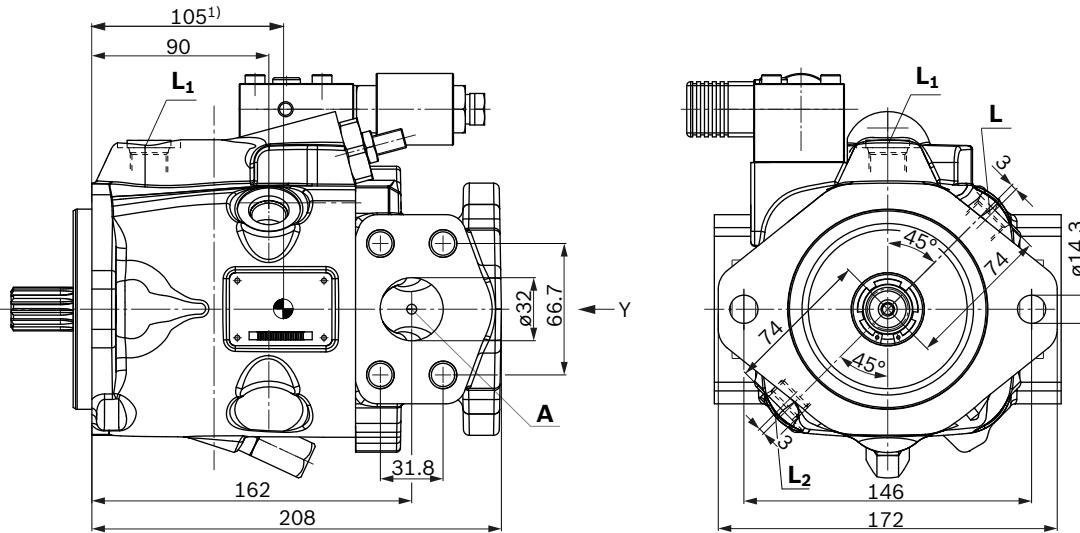

¹⁾ Center of gravity

▼ **Splined shaft 7/8 in (similar to ISO 3019-1)**

R - 13T 16/32DP¹⁾²⁾



Connection table **A10VZG**

Ports		Standard	Size	p_{\max} [bar] ⁴⁾	State ⁷⁾
A/B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	1 1/4 in M14 × 2; 19 deep	315	O
L	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2	O ⁶⁾
L₁, L₂	Drain port	ISO 11926 ⁵⁾	3/4-16UNF-2B; 15 deep	2	X ⁶⁾
X	Pilot pressure port (DG only)	DIN 3852-2 ⁵⁾	G 1/4; 12 deep	315	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.

3) Thread according to ASME B1.1


4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink may be deeper than specified in the standard.

6) Depending on the installation position, **L**, **L₁** or **L₂** must be connected (also see installation instructions starting on page 127).


7) O = Must be connected (plugged on delivery)

X = plugged (in normal operation)

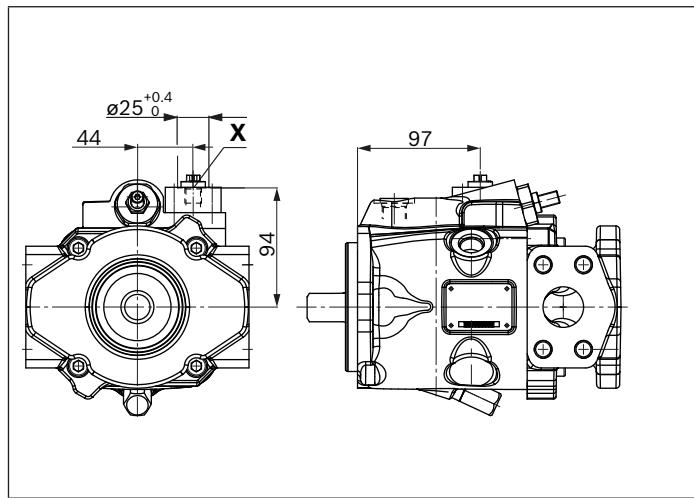▼ DG – Two-point control, direct operated


Dimensions A10 VZG size 63

EZx – two-point control electric, direction of rotation bi-directional (flow direction see table page 96)

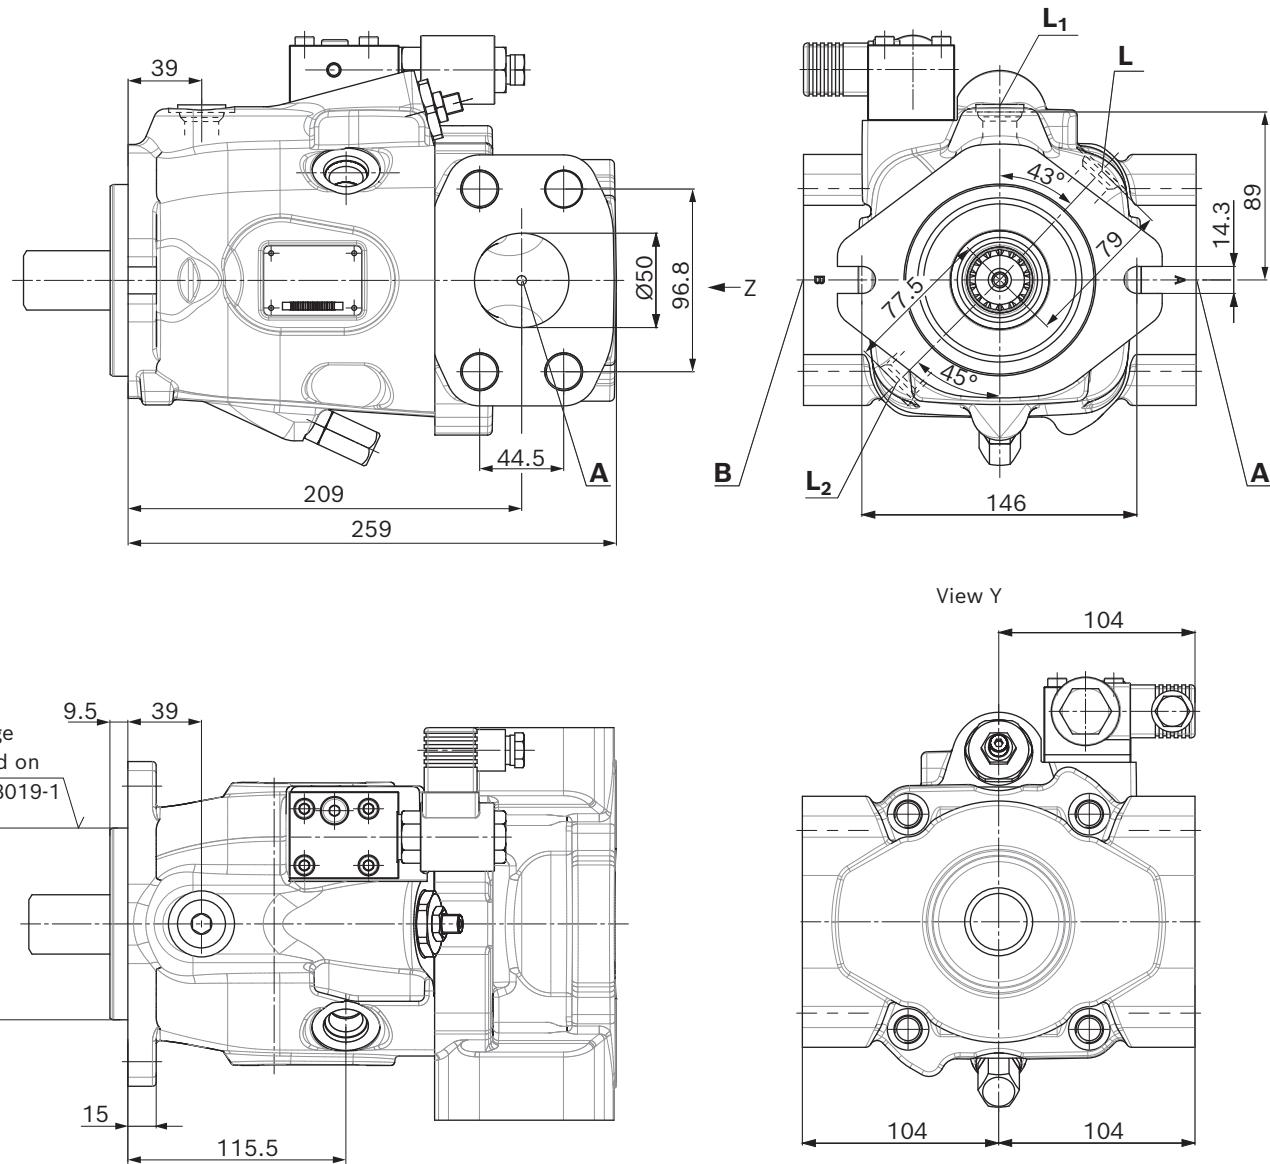

1) Center of gravity

▼ Splined shaft 1 1/4 in (similar to ISO 3019-1)

R - 14T 12/24DP¹⁾²⁾


Connection table A10VZG

Ports		Standard	Size	p_{max} [bar] ⁴⁾	State ⁷⁾
A/B	Working port (high-pressure series) Fastening thread	ISO 6162-2 DIN 13	2 in M20 × 2; 24 deep	315	O
L	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	O ⁶⁾
L₁, L₂	Drain port	ISO 11926 ⁵⁾	7/8-14UNF-2B; 17 deep	2	X ⁶⁾
X	Pilot pressure port (DG only)	DIN 3852-2 ⁵⁾	G 1/4; 12 deep	315	O

- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard ISO 3019-1.
- 3) Thread according to ASME B1.1
- 4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

- 5) The countersink may be deeper than specified in the standard.
- 6) Depending on the installation position, L, L₁ or L₂ must be connected (also see installation instructions starting on page 127).
- 7) O = Must be connected (plugged on delivery)
X = plugged (in normal operation)

▼ DG – Two-point control, direct operated

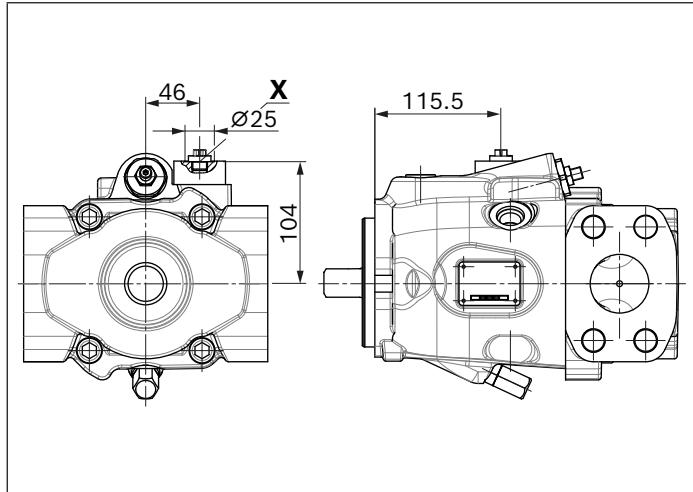


Dimensions through drive for port plates 07 and 12 (A10VZO)

For flanges and shafts according to ISO 3019-1


Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾	Availability across sizes				Code	
Diameter	Mounting ²⁾	Diameter	3 to 10	18	28	45		
82.2 (A)	8, 8°, 0°	5/8 in	9T 16/32DP	●	●	●	●	K01
		3/4 in	11T 16/32DP	●	●	●	●	K52

● = Available ○ = On request - = Not available

▼ 82-2

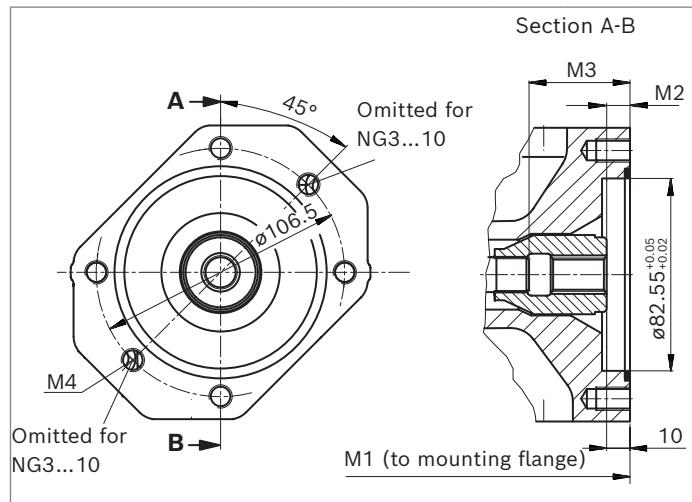

▼ 82-2

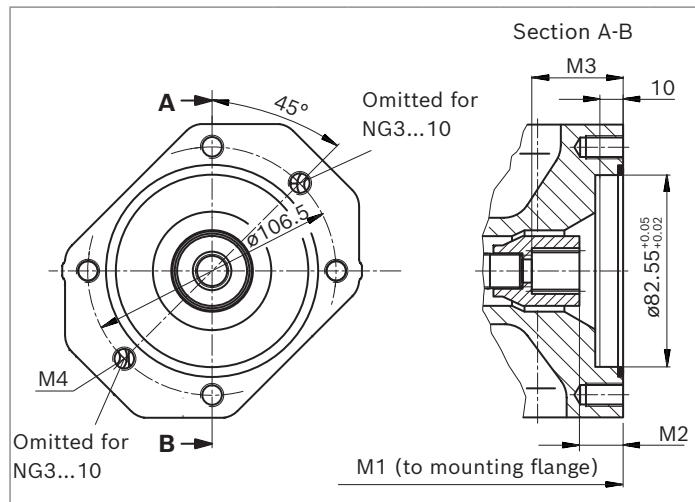

K01 (ISO 3019-1 16-4 (A))	NG	M1	M2 ⁴⁾	M3 ⁴⁾	M4 ³⁾⁵⁾
	10	176	9.6	32.1	M10 × 1.5; 14.5 deep
	18	182	9.3	42.5	M10 × 1.5; 14.5 deep
	28	204	9.2	36.2	M10 × 1.5; 16 deep
	45	229	10.1	52.7	M10 × 1.5; 16 deep

K52 (ISO 3019-1 19-4 (A-B))	NG	M1	M2 ⁴⁾	M3 ⁴⁾	M4 ³⁾⁵⁾
	10	176	16.4	38.4	M10 × 1.5; 14.5 deep
	18	182	18.3	39.2	M10 × 1.5; 14.5 deep
	28	204	18.4	39.4	M10 × 1.5; 16 deep
	45	229	18.4	38.8	M10 × 1.5; 16 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting holes pattern viewed on through drive with control at top

3) Thread according to DIN 13

4) Minimum dimension

5) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1


For flanges and shafts according to ISO 3019-1

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability across sizes				Code
Diameter	Mounting ²⁾	Diameter		3 to 10	18	28	45	
101-2 (B)	$\emptyset 8, \emptyset 9, \infty$	7/8 in	13T 16/32DP	-	-	●	●	K68
		1 in	15T 16/32DP	-	-	-	●	K04


● = Available ○ = On request

- = Not available

▼ 101-2

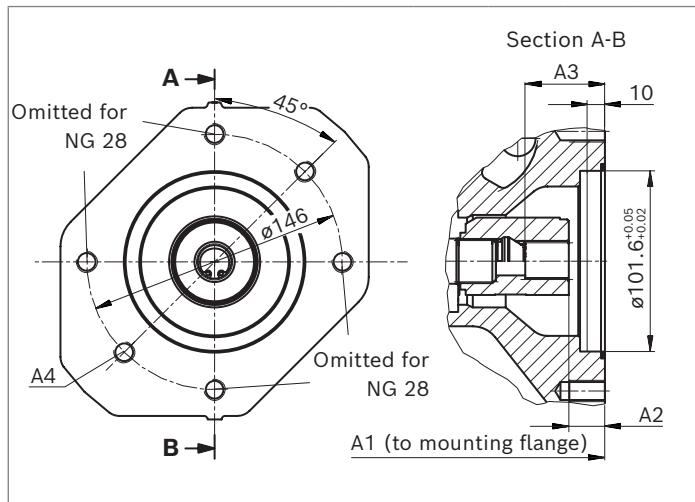

▼ 101-2

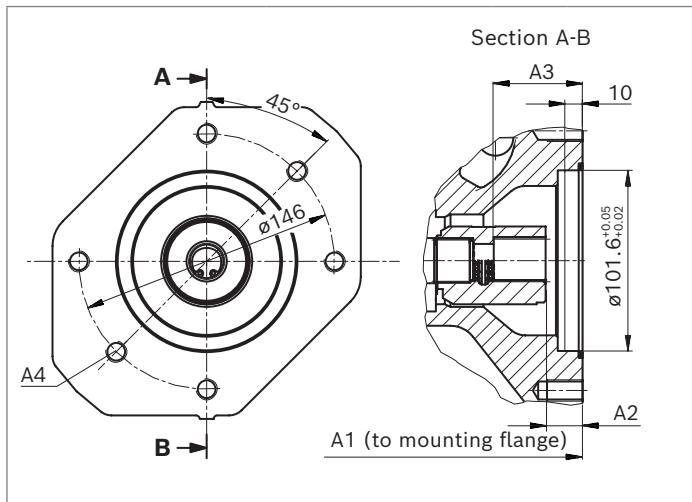

K68 (ISO 3019-1 22-4 (B))	NG	A1	A2	A3	A4 ³⁾⁵⁾
	28	204	17.4	42.4	M12 × 1.75; 18 deep
	45	229	17.4	41.8	M12 × 1.75; 18 deep

K04 (ISO 3019-1 25-4 (B-B))	NG	A1	A2	A3	A4 ³⁾⁵⁾
	45	229	17.9	47.4	M12 × 1.75; 18 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting holes pattern viewed on through drive with control at top

3) Thread according to DIN 13

4) Minimum dimension

5) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1

Dimensions through drive for port plates 22U and 32U (A10VZO)


For flanges and shafts according to ISO 3019-1

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾ Diameter	Availability across sizes					Code
Diameter	Mounting ²⁾		45	71	100	140	180	
82.2 (A)	ø, 8, ø, ø	5/8 in	9T 16/32DP	○	●	●	●	●
		3/4 in	11T 16/32DP	●	●	●	●	●


● = Available ○ = On request

- = Not available

▼ 82-2 (A)

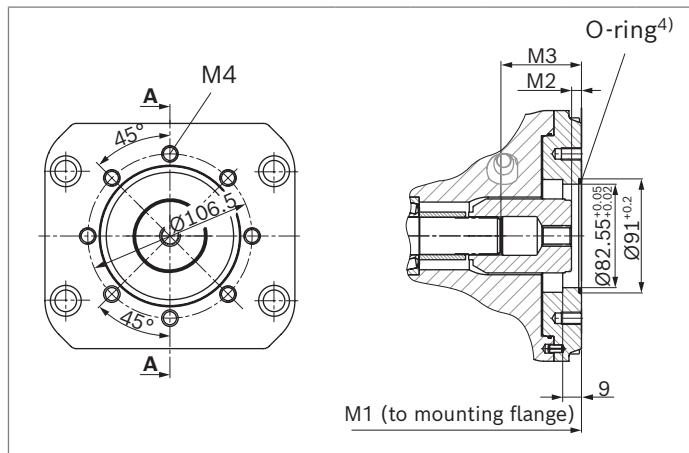

▼ 82-2 (A)

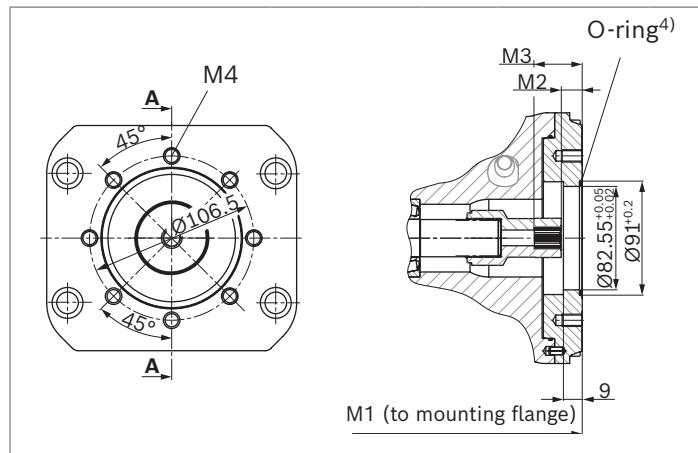

U01 (ISO 3019-1 16-4 (A))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁶⁾
	71	299	8.4	60.6	M10 × 1.5; 16 deep
	100	360	9.7	64.7	M10 × 1.5; 16 deep
	140	377	9.7	76.8	M10 × 1.5; 16 deep
	180	387	10.8	77.1	M10 × 1.5; 16 deep

U52 (ISO 3019-1 19-4 (A-B))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁶⁾
	45	264	19	39.4	M10 × 1.5; 16 deep
	71	299	20.8	41.2	M10 × 1.5; 16 deep
	100	360	19	40	M10 × 1.5; 16 deep
	140	377	18.6	39.6	M10 × 1.5; 16 deep
	180	387	18.9	39.9	M10 × 1.5; 16 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting holes pattern viewed on through drive with control at top

3) Thread according to DIN 13

4) O-ring included in the scope of delivery

5) Minimum dimension

6) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1


For flanges and shafts according to ISO 3019-1

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾	Availability across sizes					Code
Diameter	Mounting ²⁾	Diameter	45	71	100	140	180	
101-2 (B)	∅ _o , 8°, 6°, ∞	7/8 in	13T 16/32DP	●	●	●	●	U68
		1 in	15T 16/32DP	●	●	●	●	U04


● = Available ∞ = On request

- = Not available

▼ 101-2 (B)

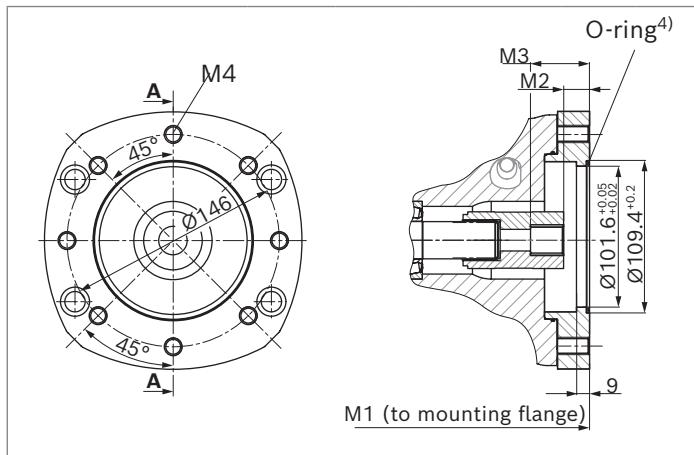

▼ 101-2 (B)

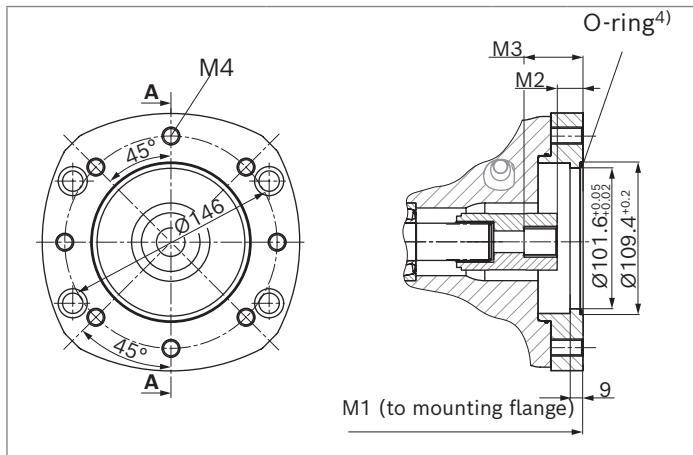

U68 (ISO 3019-1 22-4 (B))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁶⁾
	45	264	18	42.4	M12 × 1.75; 22 deep
	71	299	19.8	44.2	M12 × 1.75; 22 deep
	100	360	18	42.3	M12 × 1.75; 22 deep
	140	377	17.6	41.9	M12 × 1.75; 22 deep
	180	387	17.9	42.2	M12 × 1.75; 22 deep

U04 (ISO 3019-1 25-4 (B-B))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁶⁾
	45	264	18.5	48	M12 × 1.75; 22 deep
	71	299	20.3	49.2	M12 × 1.75; 22 deep
	100	360	18.2	47.0	M12 × 1.75; 22 deep
	140	377	18.1	47.6	M12 × 1.75; 22 deep
	180	387	18.4	47.9	M12 × 1.75; 22 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting holes pattern viewed on through drive with control at top

3) Thread according to DIN 13

4) O-ring included in the scope of delivery

5) Minimum dimension



6) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1

For flanges and shafts according to ISO 3019-1

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability across sizes				Code
Diameter	Mounting ²⁾	Diameter		71	100	140	180	
101-2 (B)	\emptyset , \diamond , \circ	1 1/4 in	14T 12/24DP	○	○	○	●	U06
127-4 (C)	$\diamond\diamond$	1 in	15T 16/32DP	●	●	●	●	UE2
		1 1/4 in	14T 12/24DP	●	●	●	●	U15

● = Available ○ = On request

- = Not available

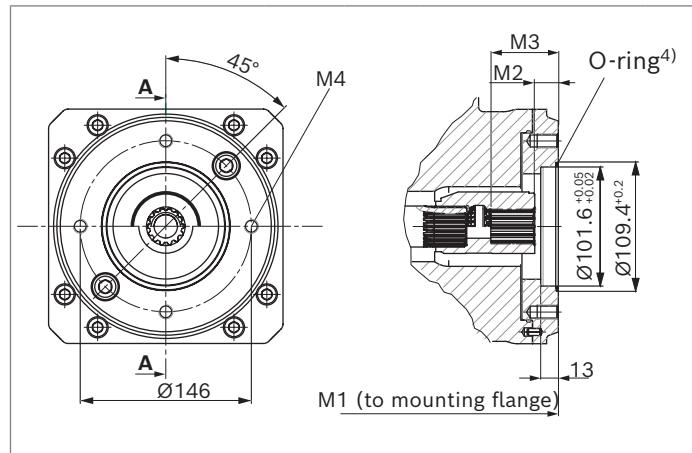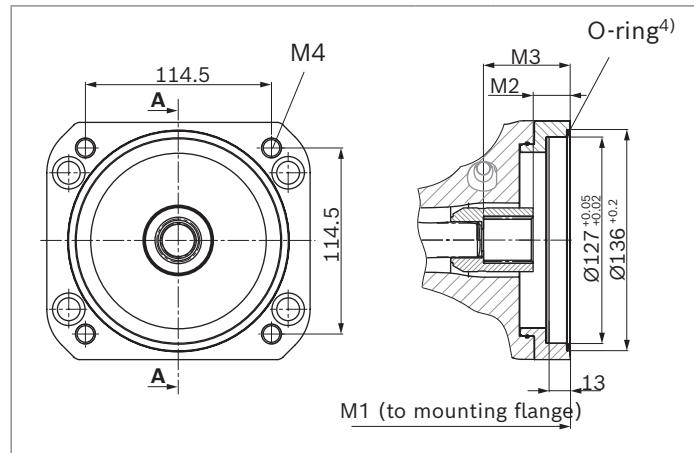▼ 101-2 (B)**▼ 127-4 (C)**

U06 (ISO 3019-1 32-4 (C))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁽⁶⁾
	71	299		M12 × 1.75; 22 deep	
	100	360	On request	M12 × 1.75; 22 deep	
	140	377		M12 × 1.75; 22 deep	
	180	387	19.4	56.7	M12 × 1.75; 22 deep

UE2 (ISO 3019-1 25-4 (B-B))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁽⁶⁾
	71	299	20.3	49.2	M12 × 1.75; 22 deep
	100	360	18.2	47.0	M12 × 1.75; 22 deep
	140	377	18.1	47.6	M12 × 1.75; 22 deep
	180	387	18.4	47.9	M12 × 1.75; 22 deep

U15 (ISO 3019-1 32-4 (C))	NG	M1	M2	M3	M4 ³⁾
	71	299	20.3	58.3	M12 × 1.75; 22 deep
	100	360	19.5	57.5	M12 × 1.75; 22 deep
	140	377	19.1	56.4	M12 × 1.75; 22 deep
	180	387	19.4	56.7	M12 × 1.75; 22 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting holes pattern viewed on through drive with control at top

3) Thread according to DIN 13

4) O-ring included in the scope of delivery

5) Minimum dimension

6) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1


For flanges and shafts according to ISO 3019-1

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾	Availability across sizes				Code
Diameter	Mounting ²⁾	Diameter	71	100	140	180	
152-4 (C)		1 1/2 in 17T 12/24DP	-	●	●	●	U96
		1 3/4 in 13T 8/16DP	-	-	●	●	U17


● = Available ○ = On request

- = Not available

▼ 152-4 (C)

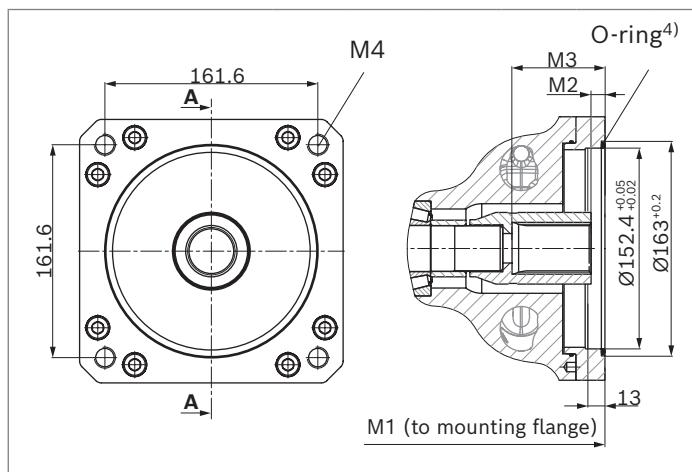

▼ 152-4 (C)

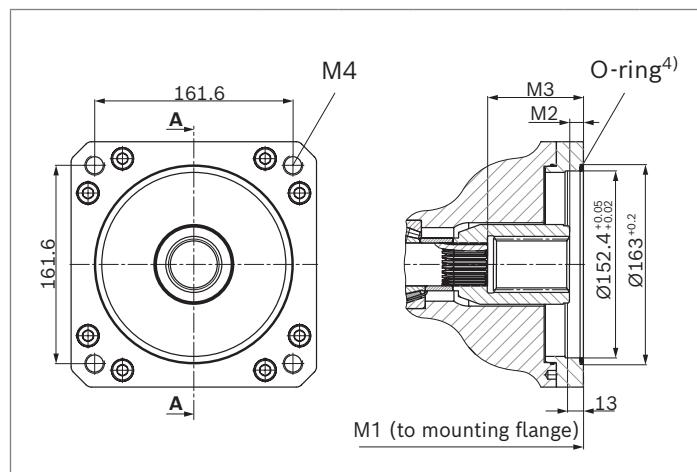

U96 (ISO 3019-1 38-4 (C-C))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁶⁾
	100	360	21	63	M16×2; 22 deep
	140	377	9.6	68.6	M16×2; 22 deep
	180	387	9.9	68.9	M16×2; 22 deep

U17 (ISO 3019-1 44-4 (D))	NG	M1	M2 ⁵⁾	M3 ⁵⁾	M4 ³⁾⁶⁾
	140	377	9.3	75.9	M16×2; 22 deep
	180	387	10.4	76.4	M16×2; 22 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting holes pattern viewed on through drive with control at top

3) Thread according to DIN 13

4) O-ring included in the scope of delivery

5) Minimum dimension

6) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1


Dimensions through drive for port plate 02 (A10FZO and FZG)

For flanges and shafts according to ISO 3019-1


Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability across sizes					Code
Diameter	Symbol ²⁾	Diameter		3 to 10	12 to 18	21 to 28	32 to 45 ⁴⁾	58 to 63	
82.2 (A)	○○	5/8 in	9T 16/32DP	●	●	●	●	●	K01
		3/4 in	11T 16/32DP	●	●	●	●	●	K52

● = Available ○ = On request - = Not available

▼ 82-2

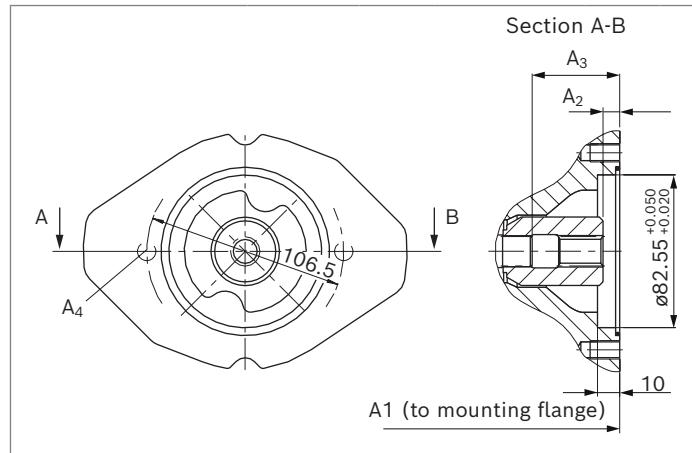

▼ 82-2

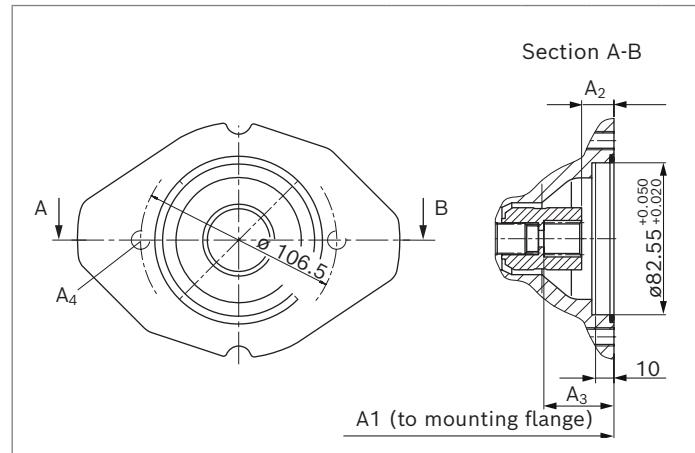

K01 (ISO 3019-1 16-4 (A))	NG	A1	A2 ⁵⁾	A3 ⁵⁾	A4 ³⁾⁽⁶⁾
3 to 10	163	10.6	33.1	M10 × 1.5; 14.5 deep	
12 to 18	168	9.7	42.9	M10 × 1.5; 14.5 deep	
21 to 28	194	9.1	36.2	M10 × 1.5; 16 deep	
32 to 45	217	10.0	52.6	M10 × 1.5; 16 deep	
58 to 63	243	8.7	58.2	M10 × 1.5; 16 deep	

K52 (ISO 3019-1 19-4 (A-B))	NG	A1	A2 ⁵⁾	A3 ⁵⁾	A4 ³⁾⁽⁶⁾
3 to 10	163	17.3	39.3	M10 × 1.5; 14.5 deep	
12 to 18	168	18.7	39.7	M10 × 1.5; 14.5 deep	
21 to 28	194	18.4	39.4	M10 × 1.5; 16 deep	
32 to 45	217	18.3	38.7	M10 × 1.5; 16 deep	
58 to 63	243	18.4	38.8	M10 × 1.5; 16 deep	

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting hole pattern viewed on drive shaft through drive and position of ports **A** and **B** horizontal.

3) Thread according to DIN 13

4) Only A10FZO

5) Minimum dimension


6) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1

For flanges and shafts according to ISO 3019-1


Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability across sizes					Code
Diameter	Symbol ²⁾	Diameter		3 to 10	12 to 18	21 to 28	32 to 45 ⁴⁾	58 to 63	
101-2 (B)	∞	7/8 in	13T 16/32DP	-	-	●	●	●	K68
		1 in	15T 16/32DP	-	-	-	●	●	K04

● = Available ○ = On request - = Not available

▼ 101-2

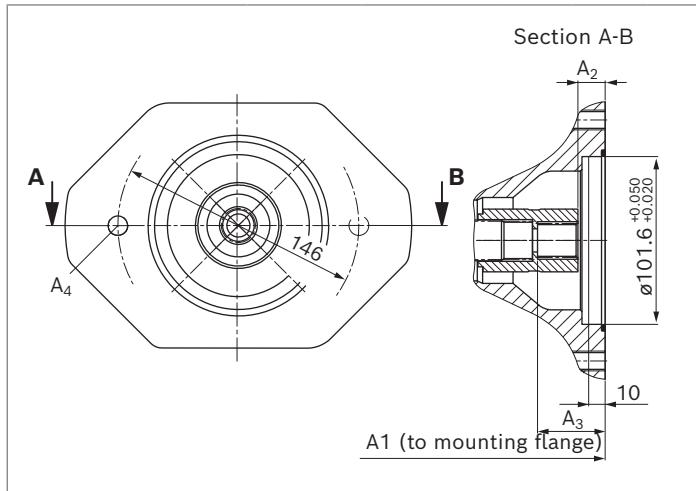

▼ 101-2

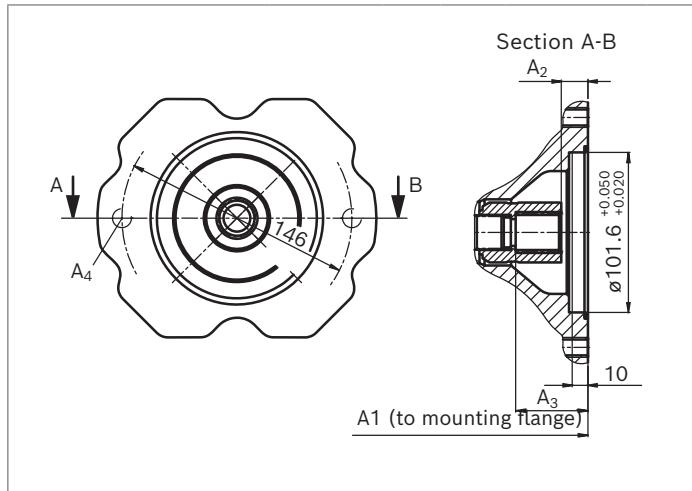

K68	NG	A1	A2 ⁵⁾	A3 ⁵⁾	A4 ³⁾
(ISO 3019-1 22-4 (B))		21 to 28	194	17.4	M12 × 1.75; 18 deep
		32 to 45	217	17.3	M12 × 1.75; 18 deep
		58 to 63	243	17.4	M12 × 1.75; 18 deep

K04	NG	A1	A2 ⁵⁾	A3 ⁵⁾	A4 ³⁾
(ISO 3019-1 25-4 (B-B))		32 to 45	217	17.8	M12 × 1.75; 18 deep
		58 to 63	243	17.9	M12 × 1.75; 18 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Mounting hole pattern viewed on drive shaft through drive and position of ports **A** and **B** horizontal.

3) Thread according to DIN 13

4) Only A10FZO

5) Minimum dimension


6) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1

For flanges and shafts according to ISO 3019-1

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾	Availability across sizes					Code
Diameter	Symbol ²⁾	Diameter	3 to 10	12 to 18	21 to 28	32 to 45 ⁴⁾	58 to 63	
101-2 (B)	∞	1 1/4 in 14T 12/24DP	-	-	-	-	●	K06

● = Available ○ = On request - = Not available

▼ 101-2

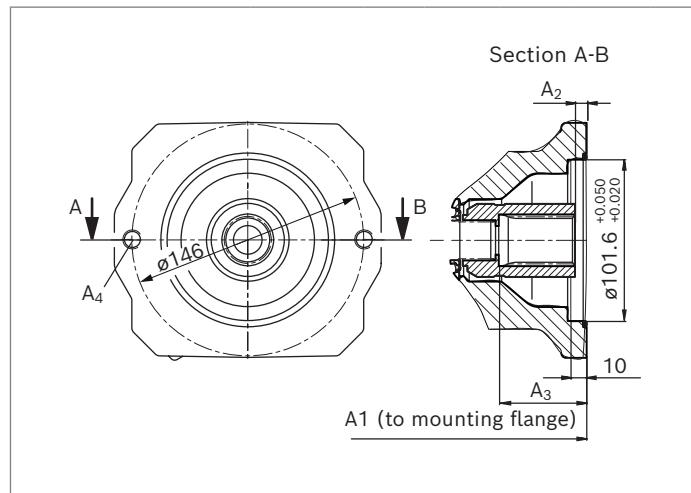

K06	NG	A1	A2 ⁵⁾	A3 ⁵⁾	A4 ³⁾
(ISO 3019-1 32-4 (C))	58 to 63	243	17.9	55.9	M12 × 1.75; 18 deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Mounting hole pattern viewed on drive shaft through drive and position of ports **A** and **B** horizontal.

3) Thread according to DIN 13
4) Only A10FZO
5) Minimum dimension
6) Design recommended according to VDI 2230, screw quality 8.8 according to ISO 898-1

Overview of mounting options for A10VZO with port plate 07 and 12 or A10FZO, A10FZG with port plate 02

Through drive			Mounting options – 2nd pump			
Flange (SAE) ISO 3019-1	Hub for splined shaft	Code	A10VZO/10 NG (shaft)	A10FZO	A10FZG	A10VZG
82-2 (A)	3/4 in	K52	3 to 10 (S) 18 (S) 18 (R)	3 to 10 (S) 11 to 18 (R)	3 to 10 (S) 11 to 18 (R)	3 to 10 (S) 18 (R)
101-2 (B)	7/8 in	K68	28 (R)	21 to 28 (R)	21 to 28 (R)	28 (R)
	1 in	K04	–	32 to 45 (R)	–	–
	1 1/4 in	K06	–	63 (R)	63 (R)	63 (R)

Overview of mounting options for A10VZO with port plate 22U

Through drive			Mounting options – 2nd pump			
Flange (SAE) ISO 3019-1	Hub for splined shaft	Code	A10VZO/10 NG (shaft)	A10FZO	A10FZG	A10VZG
82-2 (A)	3/4 in	U52	10 (S) , 18 (R)	3 to 10 (S) 11 to 18 (R)	3 to 10 (S) 11 to 18 (R)	3 to 10 (S) 18 (R)
101-2 (B)	7/8 in	U68	28 (R)	21 to 28 (R)	21 to 28 (R)	28 (R)
	1 in	U04	–	32 to 45 (R)	–	–
	1 1/4 in	U06	–	63 (R)	63 (R)	63 (R)
127-4 (C)	1 in	UE2	45 (R)	–	–	–
127-4 (C)	1 1/4 in	U15	71 (R)	–	–	–
152-4 (D)	1 1/2 in	U96	100 (S)	–	–	–
	1 3/4 in	U17	140, 180 (S)	–	–	–

Combination pumps A10VZO + A10VZO, A10VZG, A10FZO or A10FZG

By using combination pumps, the user can also have access to independent circuits without the need for splitter gearboxes. When ordering combination pumps the type designations for the 1st and the 2nd pump must be joined by a "+".

Order example:

A10VZO71LA5D/10R-VRD22UE2+

A10VZO45DRG/10R-VRD12N00


A tandem pump, with two pumps of equal size, is permissible without additional supports, assuming that the dynamic mass acceleration does not exceed a maximum 10 g ($= 98.1 \text{ m/s}^2$).

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque (please contact us).

The "**K..**" On delivery, through drives are plugged with a **non-pressure-resistant** cover. If a second pump is not mounted, the hub and spacer must be removed and provided with a pressure-resistant cover before commissioning. Through drives can also be ordered with a pressure-resistant cover, please specify in plain text.

The "**U..**" Through drives are plugged with a **non-pressure-resistant** cover. Therefore, single pumps must be equipped with a pressure-resistant cover before commissioning.

Through drives can also be ordered with a pressure-resistant cover, please specify in plain text.

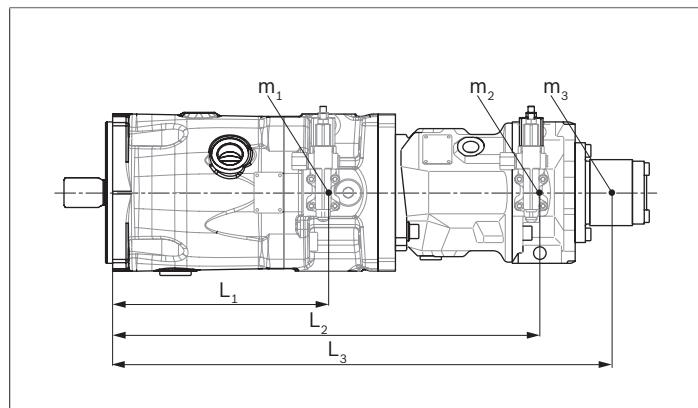

m_1, m_2, m_3	Weight of pump	[kg]
-----------------	----------------	------

l_1, l_2, l_3	Distance from center of gravity	[mm]
-----------------	---------------------------------	------

$$T_m = (m_1 \times l_1 + m_2 \times l_2 + m_3 \times l_3) \times \frac{1}{102} \quad [\text{Nm}]$$

U00 basic through drives (without hub and intermediate flange) are supplied with a pressure-resistant cover. This enables the utilization of various through drive options without mechanical machining of the port plate. Details of the assembled parts can be found in data sheet RE 95581.

Notice

► **K..** and **U..** Through drives with mounted hub are supplied with a spacer.

The spacer must be removed before installation of the 2nd pump and before commissioning.

For information on this, please refer to operating instructions 91485-01-B

Permissible mass moments of inertia A10VZO


Size			10	18	28	45	71	100	140	180
static	T_m	Nm	500	500	880	1370	3000	4500	4500	4500
dynamic at 10 g (98.1 m/s^2)	T_m	Nm	50	50	88	137	300	450	450	450
Weight without through drive plate (12N00, 14N00, 42N00 approx.)	m	kg	8	12	15	27	36.5	55	70.5	75.2
Weight with through drive plate (07K.., 12K.. approx.)			10.5	14	18	28	–	–	–	–
Weight without through-drive plate (22/32U00 approx.)			–	–	–	–	51.8	76	90.2	89.4
Weight with through-drive plate (22/32U.. approx.)			–	–	–	–	51.8	76	90.2	89.4
Center of gravity distance without through drive	l_1	mm	–	92	100	113	153	184	196	190
Center of gravity distance with through drive	l_1	mm	–	98	107	120	153	184	196	190

Permissible mass moments of inertia A10FZO, A10FZG

Size		3 to 10	12 to 18	21 to 28	37 to 45	58 to 63	
static	T_m	Nm	500	500	890	900	1370
dynamic at 10 g (98.1 m/s^2)	T_m	Nm	50	50	89	90	137
Weight (approx.)	m	kg	9	10	15.5	21	26
Distance from center of gravity	l_1	mm	92	96	105	125	136

Connector for solenoids

**Appliance plug on magnet (version H) according to
DIN EN 175301-803-A002M**



With correctly mounted mating connector, the following type of protection can be achieved:


- IP65 (DIN/EN 60529)

Notice

- If necessary, you can change the position of the connector by turning the solenoid body. The procedure can be found in the operating instructions 91485-01-B.
- Only the dead weight (<1 N) of the connection cable with a length of 150 mm may act on the plug-in connection and the solenoid coil with coil nut. Further forces and vibrations/oscillations are not permissible. This can be realized e.g. by fixing the cable to the same vibration system.

Fixing screw M3
tightening torque:
 $M_A = 0.5 \dots 0.6 \text{ Nm}$

Cable gland M16x1.5
Tightening torque:
 $M_A = 1.5 \dots 2.5 \text{ Nm}$

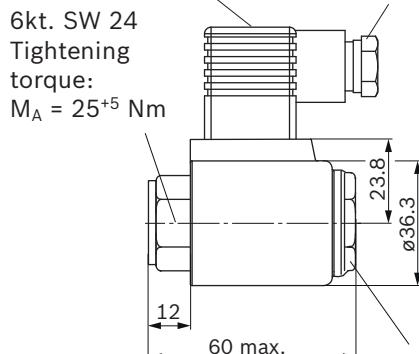

1 Device plug on the solenoid

2 Mating connector (not included in the scope of delivery)

The seal ring in the cable gland is suitable for lines of a diameter of 4.5mm to 10mm.


Mating connector

HIRSCHMANN DIN EN 175301-803-A002F

without bidirectional suppressor diode **H**

The mating connector (plug-in connector) is not included in the scope of delivery.

This can be supplied by Bosch Rexroth on request, under Bosch Rexroth material number: R902602623



Installation instructions A10FZO; A10VZO; A10FZG; A10VZG

General

The axial piston unit must be filled with hydraulic fluid and air bleed during commissioning and operation. This must also be observed during longer standstills, as the axial piston unit can empty itself via the hydraulic lines.

Particularly with the "drive shaft up/down" installation position, filling and air bleeding must be carried out completely as there is e.g. a danger of dry running.

The leakage in the housing area must be directed to the reservoir via the highest positioned drain port (**L**, **L₁**). For combination pumps, the leakage must be drained off at each single pump.

If a shared drain line is used for several units, make sure that the respective case pressure in each unit is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operating condition, particularly at cold start. If this is not possible, separate drain lines must be laid.

To prevent the transmission of structure-borne noise, use elastic elements to decouple all connecting lines from all vibration-capable components (e.g. reservoir, frame parts). Under all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level.

The permissible suction height h_s results from the total pressure loss, but must not be higher than

$h_{s\ max} = 800$ mm. The suction pressure at inlet **S(A/B)** must not fall below the minimum of 0.8 bar absolute even during operation and cold start. Above-reservoir installation reduces the permissible maximum speed.

When designing the reservoir, ensure that there is adequate distance between the suction line and the drain line. We recommend using a baffle (baffle plate) between suction line and drain line. A baffle improves the air separation ability as it gives the hydraulic fluid more time for desorption. In addition, this prevents the heated return flow from being drawn directly back into the suction line. The suction port must be supplied with filtered, cooled, calmed and degassed hydraulic fluid over a sufficient period of time.

For key, see page 129.

Installation position

See the following examples **1** to **8**.

Further installation positions are available upon request.

Recommended installation position: **1** and **4**

Key and assembly note

Key	
F	Filling / Air bleeding
S	Suction port (for A10VZO)
A or B	Suction port (for A10FZG; A10FZO and A10VZG A/B)
L; L₁	Drain port
SB	Baffle (baffle plate)
$h_{t\ min}$	Minimum required immersion depth (200 mm)
h_{min}	Minimum required distance to reservoir bottom (100 mm)
$h_{ES\ min}$	Minimum height required to prevent axial piston unit from draining (25 mm)
$h_{s\ max}$	Maximum permissible suction height (800 mm)


Notice

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.


Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir below the minimum fluid level.


▼ Installation position 1

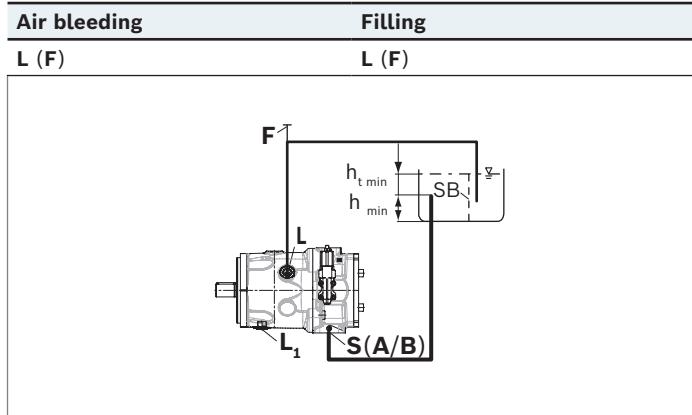

▼ Installation position 2¹⁾

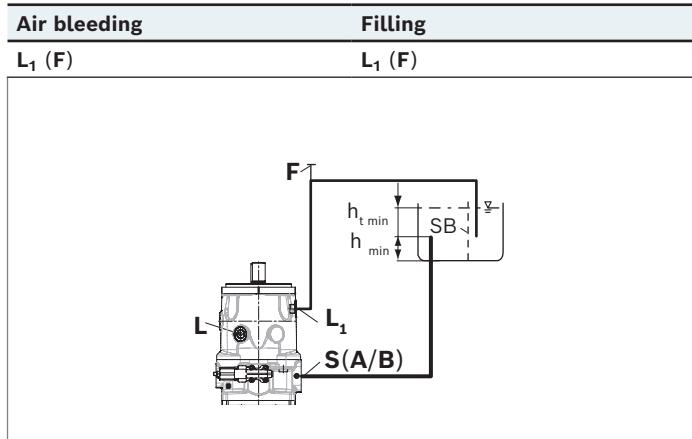

▼ Installation position 3¹⁾

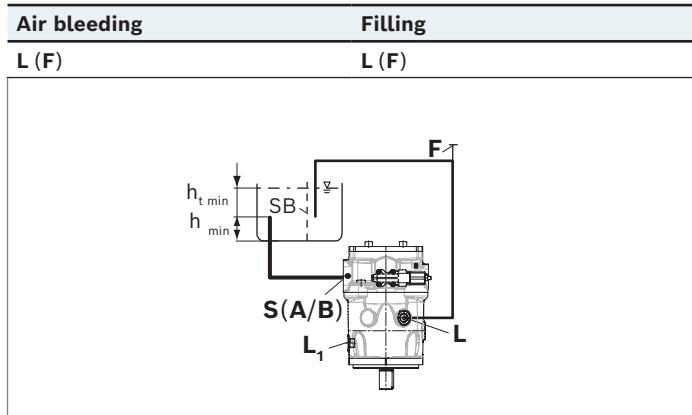

¹⁾ Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

Above-reservoir installation


Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. To prevent the axial piston unit from draining, a height difference $h_{ES\ min}$ of at least 25 mm is required in position 4 to 6.

Observe the maximum permissible suction height $h_{S\ max} = 800$ mm.


The maximum speed in above-reservoir installation is only permissible if at least 1 bar absolute is complied with at inlet **S(A/B)**.

A check valve in the drain line is only permissible in individual cases. Consult us for approval.


▼ Installation position 4

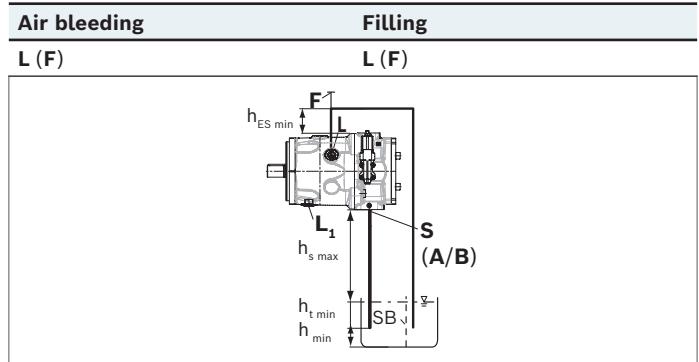

▼ Installation position 5¹⁾

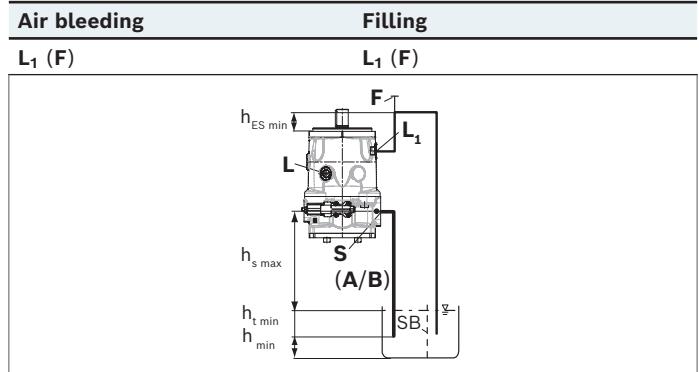

▼ Installation position 6¹⁾

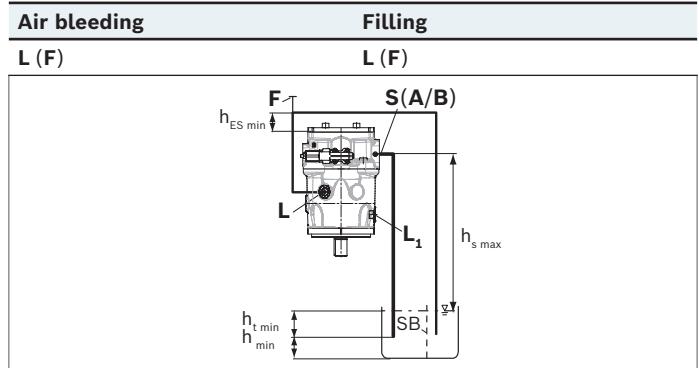

Inside-reservoir installation

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level.


The axial piston unit is completely below the hydraulic fluid.

If the minimum fluid level is equal to or below the upper edge of the pump, see chapter "Above-reservoir installation". Axial piston units with electrical components (e.g. electric control, sensors) may not be installed in a reservoir below the fluid level.


Notice

- Our advice is to fit a suction pipe to the suction port **S** and to fit a pipe to case drain port **L** or **L₁**. In this case, the other drain port must be plugged. The housing of the axial piston unit is to be filled via **L** or **L₁** (see installation positions 7 and 8) before the piping is fitted and the reservoir is filled with hydraulic fluid.

▼ Installation position 7

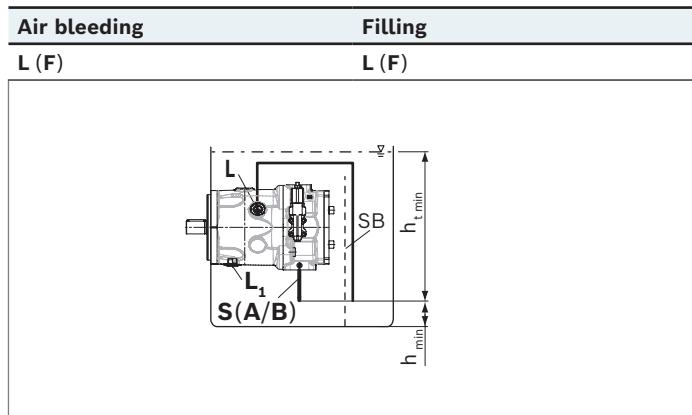

▼ Installation position 8¹⁾

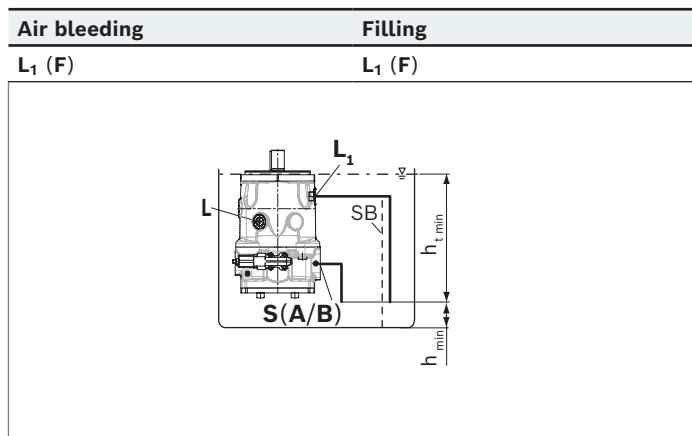

¹⁾ Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

Project planning notes

- ▶ The axial piston units A10FZO and A10VZO are intended to be used in an open circuit.
- ▶ The axial piston units A10FZG and A10VZG are intended to be used in open or closed circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding operating instructions completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curves may shift.
- ▶ The characteristic curve may also shift due to the dither frequency or control electronics.
- ▶ Preservation: Our axial piston units are supplied as standard with preservation protection for a maximum of 12 months. If longer preservation protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or the operating instructions.
- ▶ Not all configuration variants of the product are approved for use in safety functions according to ISO 13849. Please consult the responsible contact at Bosch Rexroth if you require reliability parameters (e.g., MTTF_d) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. Use of the recommended direct current (DC) on the electromagnet does not produce any electromagnetic interference (EMI) nor is the electromagnet influenced by EMI. Electromagnetic interference (EMI) potential exists when operating and controlling a solenoid with a modulated direct current (e.g. PWM signal). Appropriate testing and measures should be taken by the machine manufacturer to ensure other components or operators (e.g. with pacemaker) are not affected by this potential.
- ▶ Pressure control (hydraulic or electronic) is not an adequate safeguard against pressure overload. A pressure relief valve should therefore be provided in the hydraulic system. In this connection, observe the technical limits of the pressure relief valve.
- ▶ For drives in operation for a long period of time with a constant rotational speed, the natural frequency of the hydraulic system can be stimulated by the excitation frequency of the pump (rotational speed frequency ×9). This can be prevented with suitably designed hydraulic lines.
- ▶ Please note the information regarding the tightening torques of port threads and other screw connections in the operating instructions.
- ▶ The ports and fastening threads are designed for the p_{max} permissible pressures of the respective ports, see the connection tables. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
- ▶ The service ports and function ports are only intended to accommodate hydraulic lines.

Installation note for A10VZO NG 45 to 180

Due to the compact design of the housing, socket-head screws with a hexagon socket must be used to attach the axial piston pump. Please observe the maximum permissible surface pressure according to VDI 2230. Apart from this, you should take into account the information regarding tightening torques in the operating instructions 91485-01-B.

Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. contaminated hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.

Related documentation

Product-specific documentation

Document type	Title	Document number
Data sheet	Universal through drive for axial piston variable pumps A10VSO, A10VO, A10VZO, A4VSO, A4VBO, A15VSO/A15VLO and A15V(L)O	95581
	Storage and preservation of axial piston units	90312
Operating instructions	Axial piston units for variable speed drives A10FZO, A10VZO, A10FZG and A10VZG series 10	91485-01-B

Documentation for hydraulic fluids

Document type	Title	Document number
Data sheet	Hydraulic fluids based on mineral oils and related hydrocarbons	90220
	Rating of hydraulic fluids used in Rexroth hydraulic components (pumps and motors)	90235
	Bosch Rexroth Fluid Rating List for Rexroth hydraulic components (pumps and motors)	90245

Bosch Rexroth AG

An den Kelterwiesen 14
72160 Horb a.N.
Germany
Phone +49 7451 92-0
sales.industry.horb@boschrexroth.de
www.boschrexroth.com

© Bosch Rexroth AG 2011. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.