

FCC REPORT

Applicant: Nebra Ltd

Address of Applicant: Unit 4 Bells Yew Green Business Court, Bells Yew Green, Kent,
TN3 9BJ, United Kindgom

Equipment Under Test (EUT)

Product Name: JustBoom Amp

Model No.: v1.2

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 13 May 2019

Date of Test: 14 May to 20 Jul 2019

Date of report issued: 23 Jul 2019

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	23 Jul 2019	Original

Tested by:

Carey Chen
Test Engineer

Date:

23 Jul 2019

Reviewed by:

Winner Zhang
Project Engineer

Date:

23 Jul 2019

3 Contents

Page

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION.....	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF E.U.T.	5
5.3	TEST MODE.....	5
5.4	MEASUREMENT UNCERTAINTY	5
5.5	DESCRIPTION OF SUPPORT UNITS	5
5.6	RELATED SUBMITTAL(S) / GRANT (S).....	6
5.7	DESCRIPTION OF CABLE USED	6
5.8	LABORATORY FACILITY	6
5.9	LABORATORY LOCATION	6
5.10	TEST INSTRUMENTS LIST	6
6	TEST RESULTS AND MEASUREMENT DATA	7
6.1	RADIATED EMISSION	7
7	TEST SETUP PHOTO	13
8	EUT CONSTRUCTIONAL DETAILS	14

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part 15.107	N/A
Radiated Emission	Part 15.109	Pass
<i>Remark:</i> <i>Pass: The EUT complies with the essential requirements in the standard.</i> <i>N/A: The EUT not applicable of the test item.</i>		

5 General Information

5.1 Client Information

Applicant:	Nebra Ltd
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Kent, TN3 9BJ, United Kindgom
Manufacturer:	Nebra Ltd
Address:	Unit 4 Bells Yew Green Business Court, Bells Yew Green, Kent, TN3 9BJ, United Kindgom
Factory:	Sunsoar Tech Co. Ltd
Address:	9F, A block, Nanchang Huafeng The Second Industrial Zone, Hangkong Road, Xixiang Town, Bao'an District, Shenzhen City, China

5.2 General Description of E.U.T.

Product Name:	JustBoom Amp
Model No.:	v1.2
Power supply:	DC 3.3V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

5.3 Test Mode

Operating mode	Detail description
On mode	Keep the EUT in Play audio mode
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

5.4 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.54 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.84 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.5 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Power Pax	AC adapter	PA1065-150IB433	N/A	N/A
JustBoom	JustBoom DAC HAT	v1.1	N/A	N/A
Pi supply	Raspberry Pi 3 Model B	Raspberry Pi 3 Model B	N/A	DoC

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Description of Cable Used

Cable Type	Description	Length	From	To
N/A	N/A	N/A	N/A	N/A

5.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.9 Laboratory Location



Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.10 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-18-2019	03-17-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020

6 Test results and Measurement Data


6.1 Radiated Emission

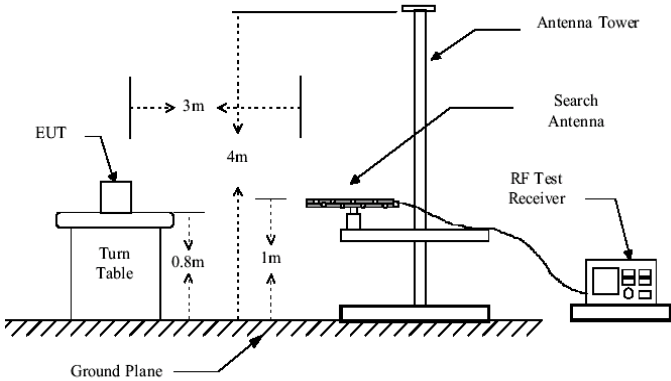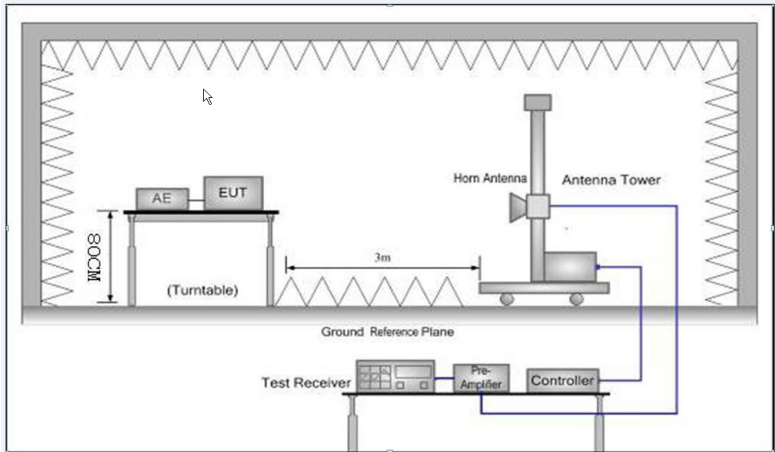Test Requirement:	FCC Part 15 B Section 15.109				
Test Method:	ANSI C63.4:2014				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak RMS	1MHz 1MHz	3MHz 3MHz	Peak Value Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0 74.0		Average Value Peak Value
Test setup:	Below 1GHz				
					
	Above 1GHz				
					

Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All of the observed value above 6GHz were the noise floor, which were not recorded

Below 1GHz:


Product Name:	JustBoom Amp	Product Model:	v1.2
Test By:	Carey	Test mode:	On mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Huni: 57%

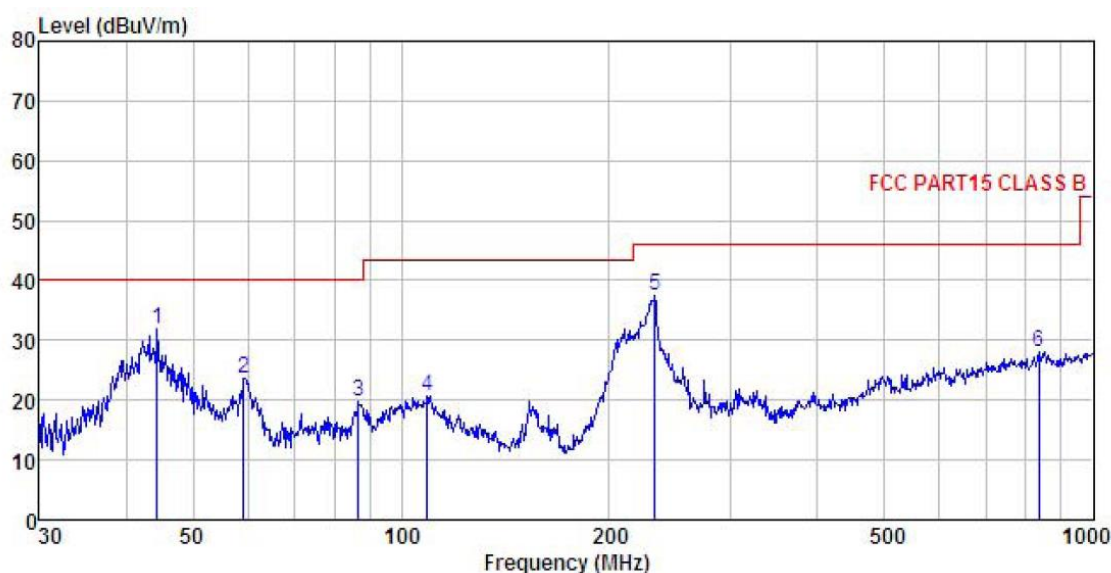

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	44.431	48.02	12.31	1.28	29.86	31.75	40.00	-8.25	QP
2	59.232	40.72	11.43	1.38	29.77	23.76	40.00	-16.24	QP
3	86.807	38.16	9.16	1.91	29.59	19.64	40.00	-20.36	QP
4	109.029	36.43	11.75	2.04	29.46	20.76	43.50	-22.74	QP
5	232.532	51.25	12.03	2.83	28.64	37.47	46.00	-8.53	QP
6	836.244	29.58	22.29	4.23	28.06	28.04	46.00	-17.96	QP

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Product Name:	JustBoom Amp	Product Model:	v1.2
Test By:	Carey	Test mode:	On mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

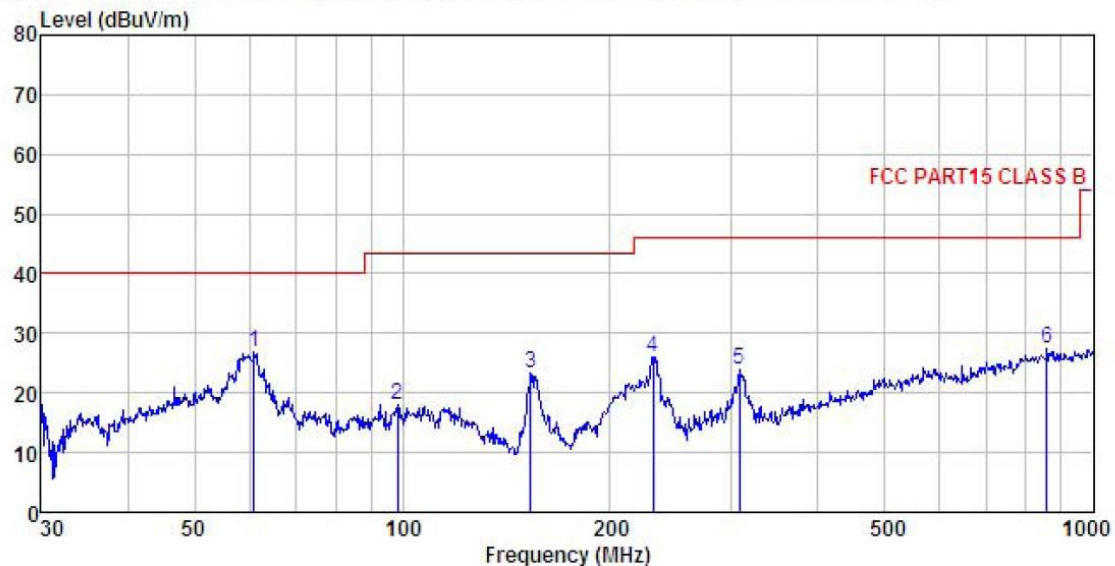


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	60.918	44.20	11.02	1.38	29.77	26.83	40.00	-13.17 QP
2	98.487	33.51	12.13	1.97	29.54	18.07	43.50	-25.43 QP
3	153.200	41.09	9.02	2.54	29.19	23.46	43.50	-20.04 QP
4	230.907	39.95	11.95	2.83	28.64	26.09	46.00	-19.91 QP
5	307.831	35.72	13.76	2.97	28.47	23.98	46.00	-22.02 QP
6	857.025	28.64	22.59	4.12	27.99	27.36	46.00	-18.64 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

Product Name:	JustBoom Amp	Product Model:	v1.2
Test By:	Carey	Test mode:	On mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

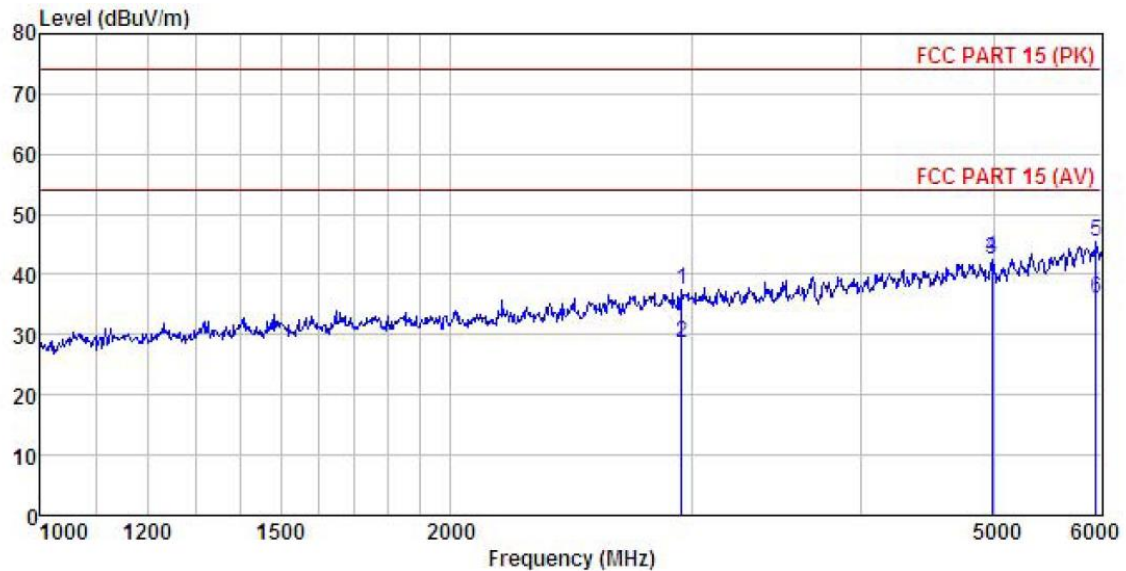


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2951.232	45.49	28.40	5.30	41.55	37.64	74.00	-36.36	Peak
2	2951.232	36.42	28.40	5.30	41.55	28.57	54.00	-25.43	Average
3	4988.864	46.11	31.37	6.93	41.88	42.53	74.00	-31.47	Peak
4	4988.864	46.37	31.37	6.93	41.88	42.79	54.00	-11.21	Average
5	5946.487	46.79	32.69	7.92	42.04	45.36	74.00	-28.64	Peak
6	5946.487	37.54	32.69	7.92	42.04	36.11	54.00	-17.89	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	JustBoom Amp	Product Model:	v1.2
Test By:	Carey	Test mode:	On mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

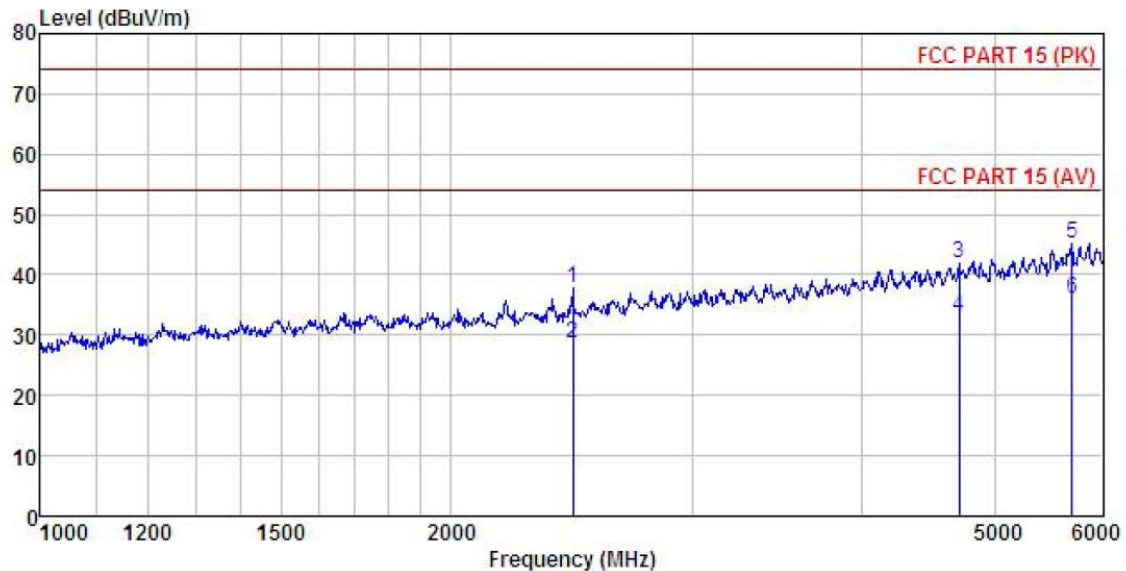


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2453.883	47.53	27.27	4.77	41.92	37.65	74.00	-36.35	Peak
2	2453.883	38.62	27.27	4.77	41.92	28.74	54.00	-25.26	Average
3	4710.867	46.34	30.83	6.85	41.96	42.06	74.00	-31.94	Peak
4	4710.867	37.48	30.83	6.85	41.96	33.20	54.00	-20.80	Average
5	5696.195	46.79	32.64	7.60	41.90	45.13	74.00	-28.87	Peak
6	5696.195	37.53	32.64	7.60	41.90	35.87	54.00	-18.13	Average

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

7 Test Setup Photo

Radiated Emission Below 1GHz

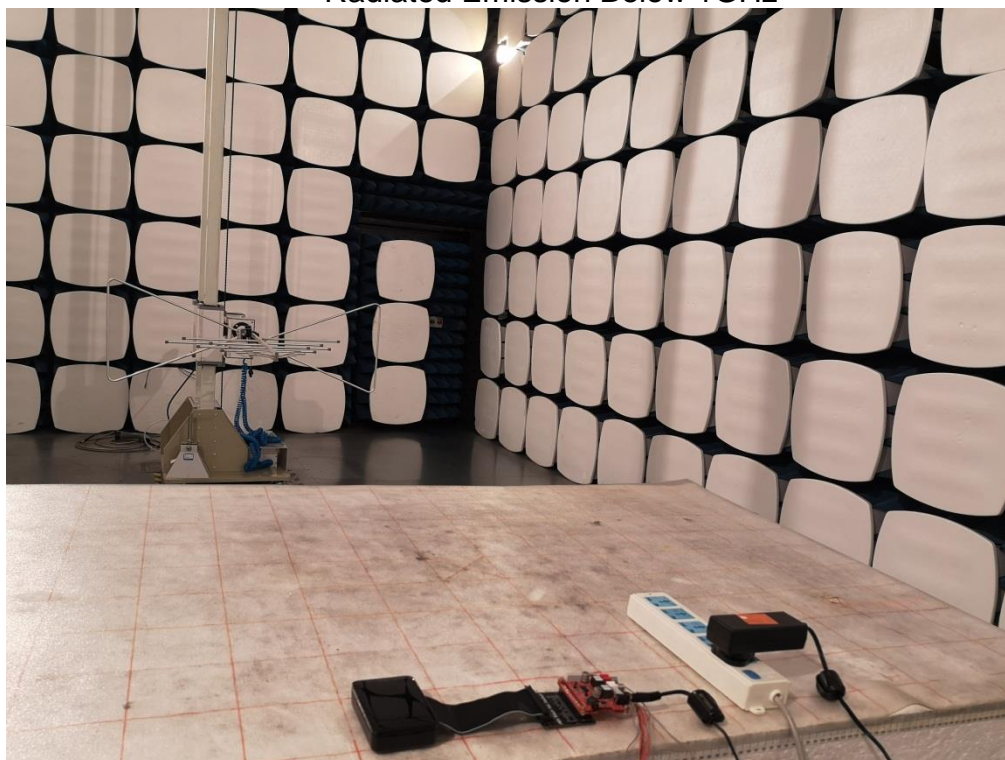

Radiated Emission Above 1GHz

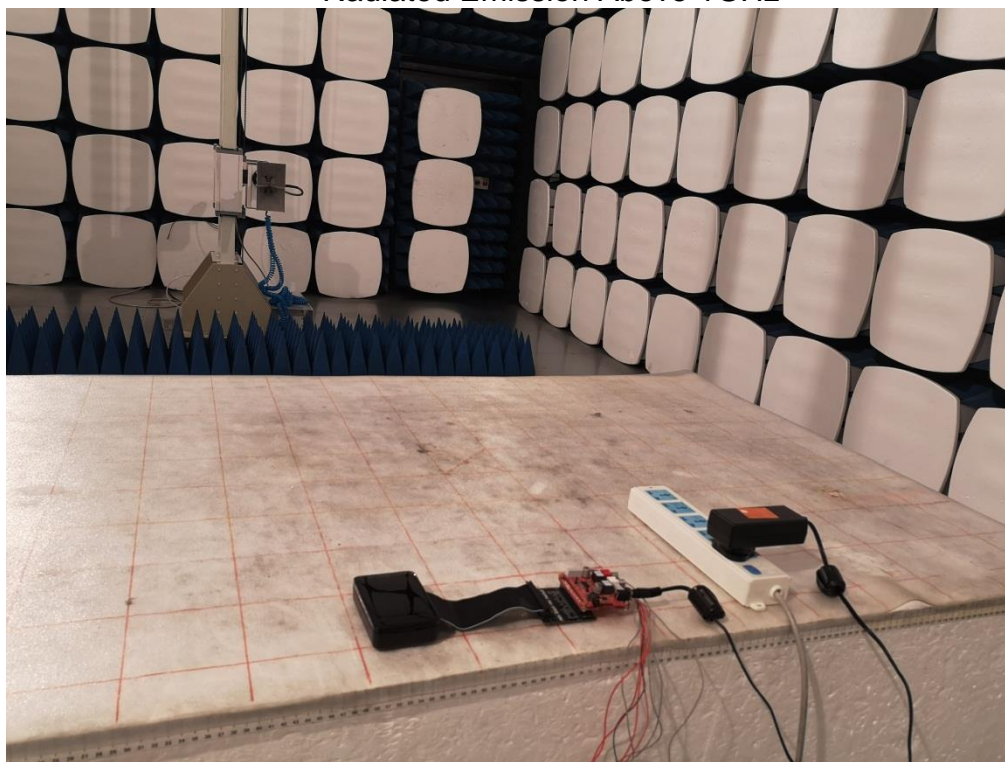

The image displays two views of a red printed circuit board (PCB) for an audio power amplifier, labeled "justboom".


Top View (Front Side): This view shows the internal components of the amplifier. Key components include:

- Two large electrolytic capacitors (220V, 1000µF) on the left and right sides.
- A central integrated circuit (IC) labeled "CS8416C87".
- Two smaller electrolytic capacitors (100µF, 10V) near the top.
- Various resistors and smaller capacitors throughout the board.
- A black cylindrical component, likely a speaker or a large capacitor, on the left side.
- Four yellow circular mounting holes at the corners.

Bottom View (Back Side): This view shows the reverse side of the PCB. Key features include:

- The "justboom" logo and the text "Amp Audio Power Amplifier VER 1.2" and "www.justboom.co".
- A QR code located in the bottom right corner.
- Technical specifications: "94V-0", "UL", "E350325", and "13".
- Four yellow circular mounting holes at the corners.

Both views include a ruler for scale, indicating the board's dimensions are approximately 100mm by 100mm.

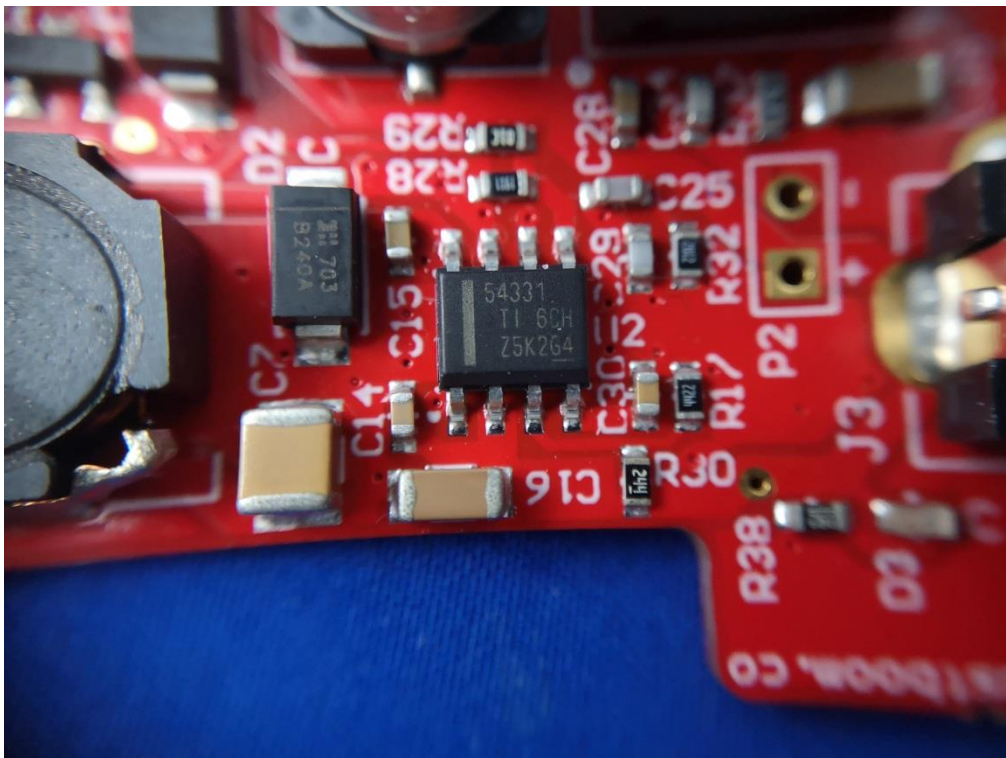

-----End of report-----