

2016.0 RANGE ROVER (LG), 501-10

SEATING - LONG WHEEL BASE

SEAT SMOOTHING (G1774019)

GENERAL PROCEDURES

CHECK

WARNINGS:

- Make sure that the steamer is in the OFF position before connecting or disconnecting from the electrical outlet.
- Do not use another high wattage device on the same electrical circuit.
- If the use of an extension cord is absolutely necessary, the cord must be rated at a minimum of 10 amps.
- To avoid the risk of electrical shock, check the condition of the power cord and the steamer before use.
- Make sure that the steamer is disconnected from the electrical outlet before filling or emptying the water reservoir.
- The steamer must only be used and placed on its stand on a stable surface.
- To prevent injury such as burns, take care whilst using the steamer. Avoid coming into contact with the hot surface of the steamer and do not direct steam toward any persons.
- The steamer must ALWAYS be switched off when not in use or left unattended.
- Do not allow the power cord to come into contact with the hot surface of the steamer.

CAUTIONS:

- Protect the surrounding paintwork to avoid damage.
- Protect the paintwork during this operation.
- Do not use any additives in the steamer. Damage to the steamer or the seat cover can result if used.

NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.

1.

NOTE:


The seat smoothing process should be used to improve all natural leather characteristics before the seat cover is replaced. Use the below examples and the seat cover inspection procedure as a guide for when to use the seat smoothing process.

Refer to: [Seat Cover Inspection](#) (501-10B Seating - Long Wheel Base, Description and Operation).

2.

NOTE:

The example in the illustration shows the natural characteristics of leather that **can** be improved using the seat smoothing process.

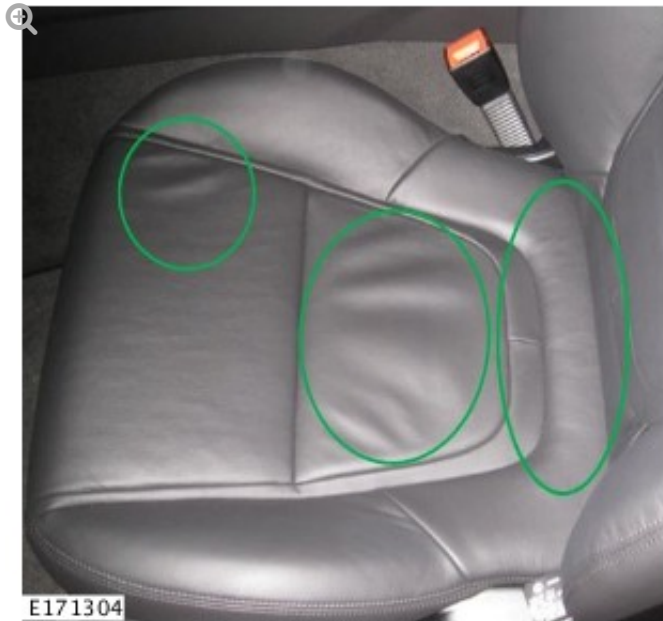

3.

NOTE:

The example in the illustration shows the natural characteristics of leather that **can** be improved using the seat smoothing process.



4.

NOTE:


The example in the illustration shows the natural characteristics of leather that **can** be improved using the seat smoothing process.



5.

NOTE:

The example in the illustration shows the natural characteristics of leather that **can** be improved using the seat smoothing process.

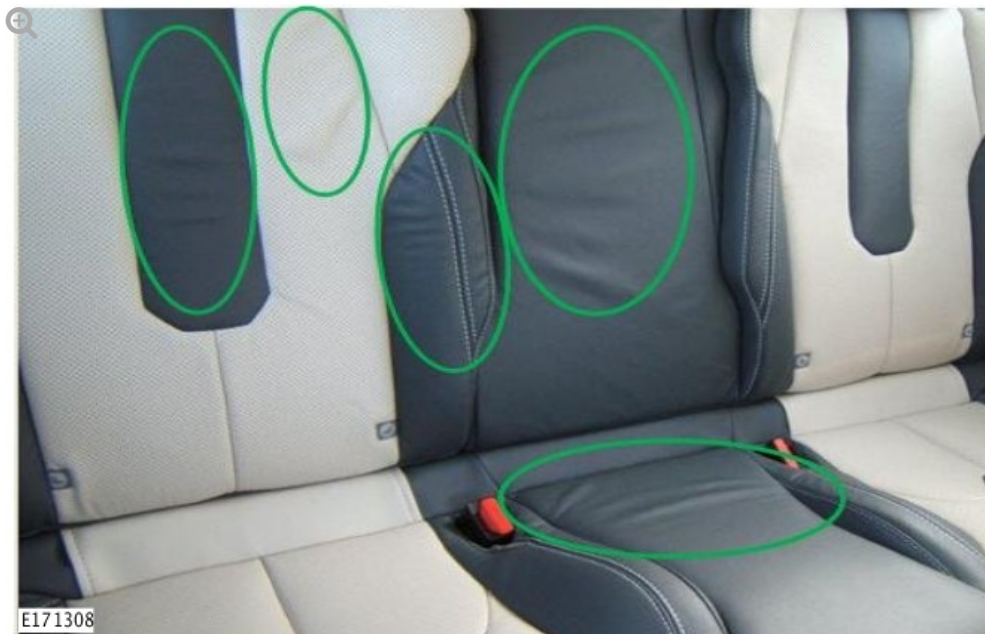

6.

NOTE:

The example in the illustration shows the natural characteristics of leather that **can** be improved using the seat smoothing process.



7.

NOTE:

The example in the illustration shows the natural characteristics of leather that **can not** be improved using the seat smoothing process.



8.

NOTE:

The example in the illustration shows the natural characteristics of leather that **can not** be improved using the seat smoothing process.



9.

CAUTIONS:

- Steam the leather cushions evenly and progressively. Do not use excessive force.
- Take care not to damage the leather whilst steaming into the corners.
- Do not hold the steamer in one place for longer than 10 seconds, as this will burn the leather and damage the covers.



E166054