

2016.0 RANGE ROVER (LG), 205-02

REAR DRIVE AXLE/DIFFERENTIAL

DIFFERENTIAL FRONT BUSHING

(G1508997)

REMOVAL AND INSTALLATION

		3000 CC, TDV6, DIESEL, WITH PARTICULATE FILTER, WITH DIESEL EXHAUST FLUID			
51.15.43	BUSHING - DIFFERENTIAL MOUNTING - FRONT - EACH - RENEW		3.9	USED WITHINS	+

SPECIAL TOOL(S)



204-598

Hydraulic Cylinder
10t



JLR-205-991

Support, Bush



JLR-502-013

Remover, Bush

REMOVAL

1. Refer to: Differential Case - TDV6 3.0L Diesel /TDV8 4.4L Diesel/V6 S/C 3.0L Petrol /V8 5.0L Petrol/V8 S/C 5.0L Petrol (205-02, Removal and Installation).

2.

CAUTION:

Note the orientation of the bushing before removal.



E156654


Using a suitable tool, remove the bush.

INSTALLATION

1.

NOTE:

Make sure the new bushes are installed in the correct orientation.

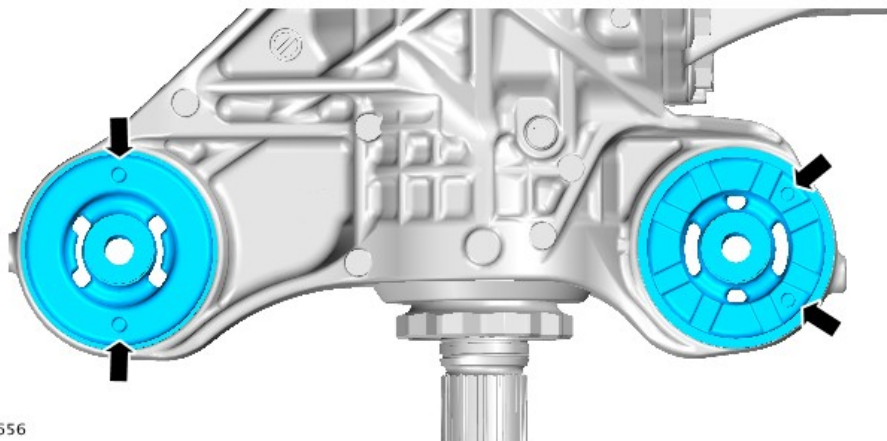

E156656


2.

CAUTION:

Make sure that the special tool is correctly located.

NOTE:

Make sure the bushing is correctly orientated.

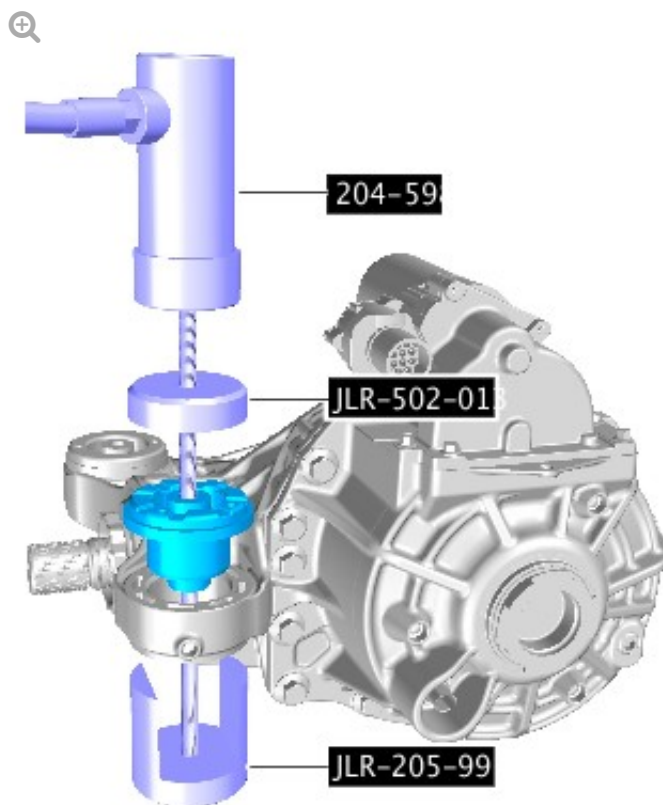

E156655

Special Tool(s): [204-598](#), [JLR-205-991](#), [JLR-502-013](#)

3. Refer to: Differential Case - TDV6 3.0L Diesel /TDV8 4.4L Diesel/V6 S/C 3.0L Petrol /V8 5.0L Petrol/V8 S/C 5.0L Petrol (205-02, Removal and Installation).

