

2016.0 RANGE ROVER (LG), 204-01

FRONT SUSPENSION

FRONT STABILIZER BAR LINK

[G1509288]

REMOVAL AND INSTALLATION

60.10.02	LINK - STABILIZER BAR - ONE - RENEW	ALL DERIVATIVES	0.3	USED WITHINS	+
----------	--	--------------------	-----	-----------------	---

REMOVAL

NOTES:

- Removal steps in this procedure may contain installation details.
- LH illustration shown, RH is similar.

1.

WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2. Refer to: [Wheel and Tire - GTDi 2.0L Petrol/TDV6 3.0L Diesel /TDV8 4.4L Diesel/V6 S/C 3.0L Petrol /V8 N/A 5.0L Petrol/V8 S/C 5.0L](#)


3.

CAUTION:

Use a wrench on the hexagon provided to prevent the ball joint rotating.

NOTE:

Discard the nut.

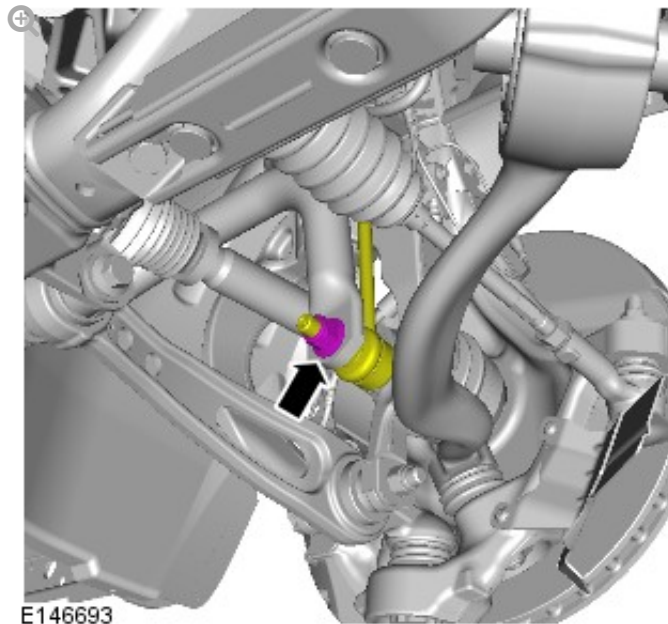

Torque: 185 Nm


4.

CAUTIONS:

- Use a wrench on the hexagon provided to prevent the ball joint rotating.
- Nuts must be tightened with vehicle at normal ride height.

NOTE:

Discard the nut.

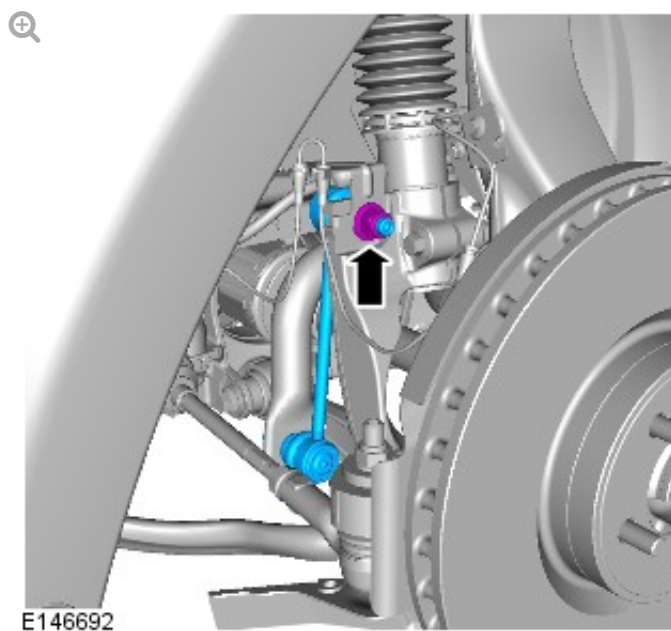

Torque: 185 Nm

INSTALLATION

1. To install, reverse the removal procedure.