

2016.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - TDV6 3.0L DIESEL

POST CATALYTIC CONVERTER TEMPERATURE SENSOR

(G1883377)

REMOVAL AND INSTALLATION

		3000 CC, TDV6, DIESEL, WITH PARTICULATE FILTER, WITH DIESEL EXHAUST FLUID			
18.31.56	CATALYST POST TEMPERATURE SENSOR - RENEW		1.1	USED WITHINS	+

SPECIAL TOOL(S)



310-121
Wrench, H02S

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1.

WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

2. Refer to: [Exhaust System - Vehicles With: Diesel Exhaust Fluid](#) (309-00A Exhaust System - TDV6 3.0L Diesel, Removal and Installation).
Refer to: [Exhaust System - Vehicles With: Diesel Particulate Filter \(DPF\)](#) (309-00A Exhaust System - TDV6 3.0L Diesel, Removal and Installation).

3.

CAUTION:

Make sure that the mating faces are clean and free of foreign material.

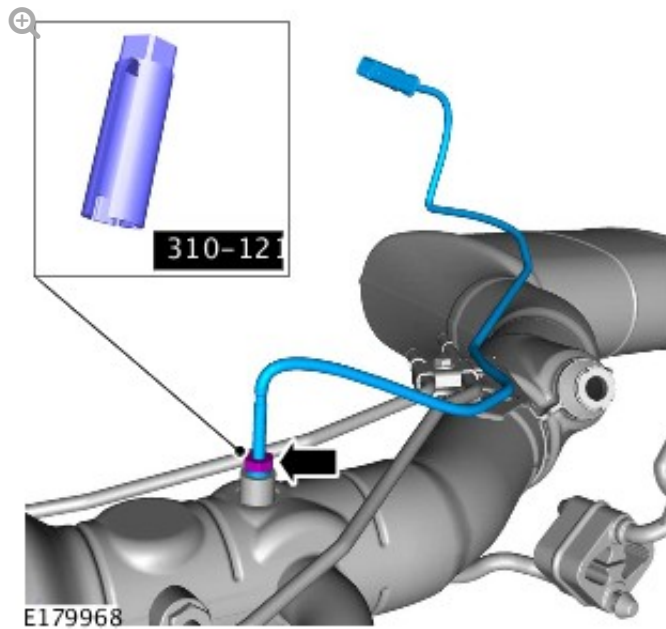

Special Tool(s): [310-121](#)

Torque: 35 Nm

INSTALLATION

1.

CAUTION:

If accidentally dropped or knocked install a new sensor.

NOTE:

If the original sensor is to be installed, apply lubricant meeting specification ESE-M12A4-A to the thread of the sensor.

To install, reverse the removal procedure.