

PUBLISHED: 31-JUL-2012
2014.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

REAR RIGHT KNOCK SENSOR (G1509621)

REMOVAL AND INSTALLATION

18.30.85	SENSOR - KNOCK (KS) - RH REAR - RENEW	5000 CC, AJ V8, SUPERCHARGED	4	USED WITHINS
----------	---	------------------------------------	---	-----------------

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1. Disconnect the battery ground cable.
Refer to: Specifications (414-00, Specifications).

2. WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


3. Refer to: Supercharger (303-12D, Removal and Installation).

4. CAUTION:

Note the fitted position of the component prior to removal.

NOTE:

Make sure that the component is installed to the noted removal position.

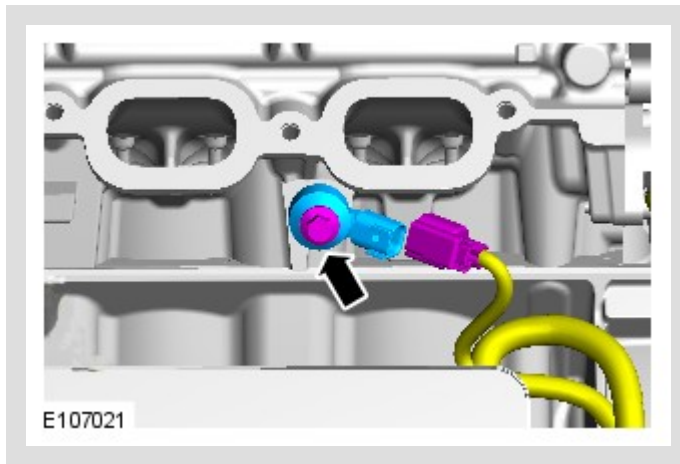

Torque: 20 Nm

INSTALLATION

1. To install, reverse the removal procedure.