


AMENDMENT NO. 1 SEPTEMBER 2005
TO
IS 13336 : 1992 REDUCER COUPLING ASSEMBLIES FOR OIL HYDRAULIC
SYSTEM — SPECIFICATION

(Table 1, pages 2 to 4) — Substitute the following for the existing table:

Table 1 Dimensions for Reducer Assemblies
(Clause 3)

All dimensions in millimetres.

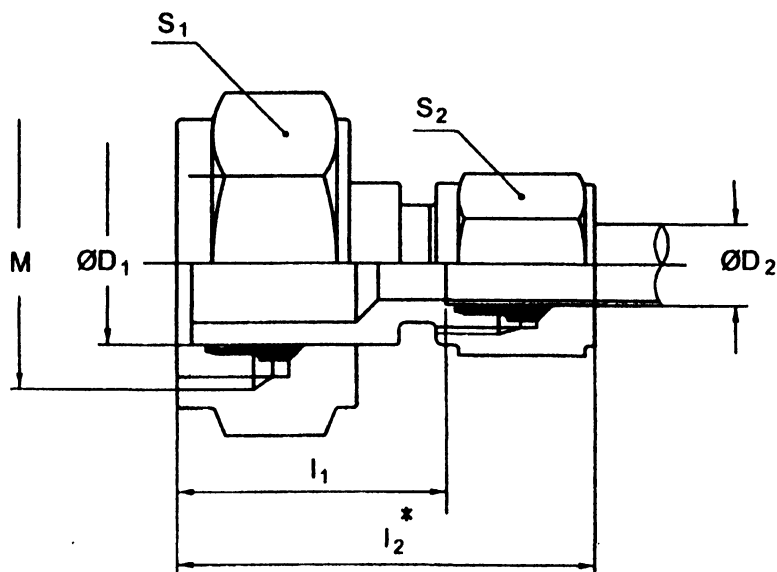

*Dimensions given are approx. with tightened nut.

Light Series, L

ØD_1	ØD_2	S_1	S_2	l_1	l_2	M
8	6	17	14	23.5	38	M 14 × 1.5
10	6	19	14	23.5	38	M 16 × 1.5
10	8	19	17	23.5	38	M16 × 1.5
12	6	22	14	23.5	38	M 18 × 1.5
12	8	22	17	23.5	38	M 18 × 1.5
12	10	22	19	24.5	39	M 18 × 1.5
15	6	27	14	23.5	38	M 22 × 1.5
15	8	27	17	23.5	38	M 22 × 1.5
15	10	27	19	24.5	39	M 22 × 1.5
15	12	27	22	24.5	39	M 22 × 1.5
18	6	32	14	24.5	39	M 26 × 1.5
18	8	32	17	24.5	39	M 26 × 1.5
18	10	32	19	25.5	40	M 26 × 1.5
18	12	32	22	25.5	40	M 26 × 1.5
18	15	32	27	26.5	42	M 26 × 1.5
22	6	36	14	25.5	40	M 30 × 2.0
22	8	36	17	25.5	40	M 30 × 2.0
22	10	36	19	26.5	41	M 30 × 2.0
22	12	36	22	26.5	41	M 30 × 2.0
22	15	36	27	27.5	43	M 30 × 2.0
22	18	36	32	27	43	M 30 × 2.0

Price Group 1

Amend No. 1 to IS 13336 : 1992

Table 1 (Continued)

Light Series, L						
$\varnothing D_1$	$\varnothing D_2$	S_1	S_2	l_1	l_2	M
28	6	41	14	26.5	41	M 36 × 2.0
28	8	41	17	26.5	41	M 36 × 2.0
28	10	41	19	27.5	42	M 36 × 2.0
28	12	41	22	27.5	42	M 36 × 2.0
28	15	41	27	28.5	44	M 36 × 2.0
28	18	41	32	28	44	M 36 × 2.0
28	22	41	36	30	46	M 36 × 2.0
35	6	50	14	31.5	46	M 45 × 2.0
35	8	50	17	31.5	46	M 45 × 2.0
35	10	50	19	32.5	47	M 45 × 2.0
35	12	50	22	32.5	47	M 45 × 2.0
35	15	50	27	33.5	49	M 45 × 2.0
35	18	50	32	33	49	M 45 × 2.0
35	22	50	36	35	51	M 45 × 2.0
35	28	50	41	35	52	M 45 × 2.0
42	10	60	19	33.5	48	M 52 × 2.0
42	12	60	22	33.5	48	M 52 × 2.0
42	15	60	27	34.5	50	M 52 × 2.0
42	18	60	32	34	50	M 52 × 2.0
42	22	60	36	36	52	M 52 × 2.0
42	28	60	41	36	53	M 52 × 2.0
42	35	60	50	35	57	M 52 × 2.0
Heavy Series, H						
$\varnothing D_1$	$\varnothing D_2$	S_1	S_2	l_1	l_2	M
8	6	19	17	25	40	M 16 × 1.5
10	6	22	17	26	41	M 18 × 1.5
10	8	22	19	26	41	M 18 × 1.5
12	6	24	17	27	42	M 20 × 1.5
12	8	24	19	27	42	M 20 × 1.5
12	10	24	22	26.5	43	M 20 × 1.5
14	6	27	17	29	44	M 22 × 1.5
14	8	27	19	29	44	M 22 × 1.5
14	10	27	22	28.5	45	M 22 × 1.5
14	12	27	24	28.5	45	M 22 × 1.5
16	6	30	17	29	44	M 24 × 1.5
16	8	30	19	29	44	M 24 × 1.5
16	10	30	22	28.5	45	M 24 × 1.5
16	12	30	24	28.5	45	M 24 × 1.5
16	14	30	27	30	48	M 24 × 1.5
20	6	36	17	34	49	M 30 × 2.0
20	8	36	19	34	49	M 30 × 2.0
20	10	36	22	33.5	50	M 30 × 2.0
20	12	36	24	33.5	50	M 30 × 2.0
20	14	36	27	35	53	M 30 × 2.0
20	16	36	30	34.5	53	M 30 × 2.0

Amend No. 1 to IS 13336 : 1992

Table 1 (Concluded)

Light Series, H						
ϕD_1	ϕD_2	S_1	S_2	l_1	l_2	M
25	6	46	17	37	52	M 36 x 2.0
25	8	46	19	37	52	M 36 x 2.0
25	10	46	22	36.5	53	M 36 x 2.0
25	12	46	24	36.5	53	M 36 x 2.0
25	14	46	27	37	55	M 36 x 2.0
25	16	46	30	36.5	55	M 36 x 2.0
25	20	46	36	37.5	59	M 36 x 2.0
30	6	50	17	39	54	M 42 x 2.0
30	8	50	19	39	54	M 42 x 2.0
30	10	50	22	38.5	55	M 42 x 2.0
30	12	50	24	38.5	55	M 42 x 2.0
30	14	50	27	40	58	M 42 x 2.0
30	16	50	30	39.5	58	M 42 x 2.0
30	20	50	36	39.5	61	M 42 x 2.0
30	25	50	46	40	64	M 42 x 2.0
38	6	60	17	43	58	M 52 x 2.0
38	8	60	19	43	58	M 52 x 2.0
38	10	60	22	42.5	59	M 52 x 2.0
38	12	60	24	42.5	59	M 52 x 2.0
38	14	60	27	44	62	M 52 x 2.0
38	16	60	30	43.5	62	M 52 x 2.0
38	20	60	36	43.5	65	M 52 x 2.0
38	25	60	46	44	68	M 52 x 2.0
38	30	60	50	44.5	71	M 52 x 2.0