

AMENDMENT NO. 1 JULY 1985
TO
IS : 10627-1983 METHODS FOR SAMPLING OF
PESTICIDAL FORMULATIONS

Alterations

(*Page 5, clause 3.1*) — Substitute existing clause 3.1 by the following:


‘ 3.1 Formulations in Solid Form — Generally a sampler (or bag trier) consisting of two barrels (outer and inner) having slots at equal intervals, as shown in Fig. 1, is recommended. The working end of the outer barrel is pointed for easy insertion into the bag. The sampler shall be made of steel, brass or any other suitable material for taking the material from different layers of the bag. The slots of the sampler can be opened or closed by rotating the inner-barrel-head. The sampler is inserted into the bag in a closed position. After inserting the sampler to the desired depth, the sample material is collected by opening the slots of the sampler and then closing them. The sampler after this shall be taken out from the bag and then emptied on a smooth flat surface table/paper/any other suitable container. Thus the sample of requisite quantity is collected and difference in the material taken out from different layers of the bag can also be studied.

NOTE — The tops of the inner and the outer barrels should be convenient for handling.’

(*Page 6, Fig. 1*) — Substitute the existing Fig. 1 by the figure appearing on page 2.

(*Page 6, clause 4*) — Insert the following new clause under this clause:

‘ 4.0 Following process control provisions are recommended for the guidance of manufacturer.’

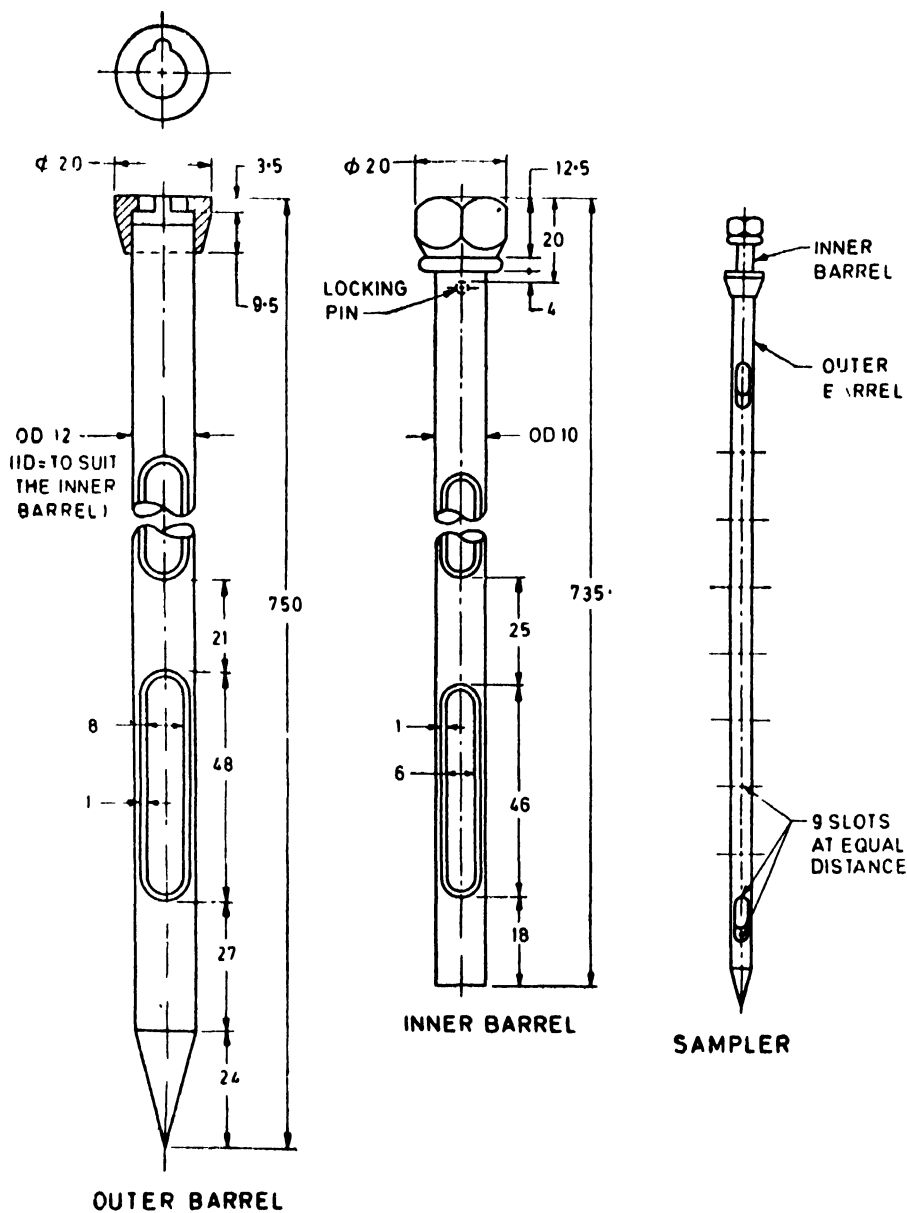

All dimensions in millimetres.

FIG. 1 TYPICAL SAMPLER FOR FORMULATIONS IN SOLID FORM
(AFDC 57)