

AMENDMENT NO. 2 FEBRUARY 2013
TO
IS 13664 : 1993 POLY-PALLETS FOR BAG STORAGE GODOWNS —
SPECIFICATION

(Page 1, clause 1) — Substitute the following for the existing clause:

‘1 SCOPE

This standard specifies the dimensions, requirements of materials, construction and tests for poly-pallets and steel reinforced injection moulded plastic pallets and injection moulded plastic pallets for bag storage godowns.’

(Page 1, clause 2.1) — Insert the following at the end of the clause:

<i>IS No.</i>	<i>Title</i>
7328 : 1992	High density polyethylene material for moulding — Specification
10146 : 2003	Specifications for PE for its safe use in contact with foodstuff
10910 : 2003	Specifications for PP for its safe use in contact with foodstuff

(Page 1, clause 4.1) — Substitute the following for the existing clause:

‘4.1 Based on design, poly-pallets, steel reinforced injection moulded plastic pallets and injection moulded plastic pallets may be classified as Type A, Type B, Type C and Type D, etc. Type A and Type B are for poly-pallets. Type C is for steel reinforced injection moulded plastic pallets. Type D is for injection moulded plastic pallets.’

(Page 1, clause 5.2) – Substitute the following for the existing clause:

‘5.2 Tolerances

A tolerance of ± 1 percent shall be permitted on both length as well as width whereas a tolerance of ± 2 percent shall be permitted on height of assembled poly-pallets, steel reinforced injection moulded plastic pallets and injection moulded plastic pallets.’

[Page 1, clause 5.3(c)] — Insert the following at the end of the clause:

‘The dimensions and cross-sectional details of the steel reinforced injection moulded pallets and injection moulded poly-pallets shall be as shown in Fig. 2 to Fig. 5.’

(Page 2, Fig. 1) — Insert the following Figs. 2 to 5 at the end of Fig. 1:

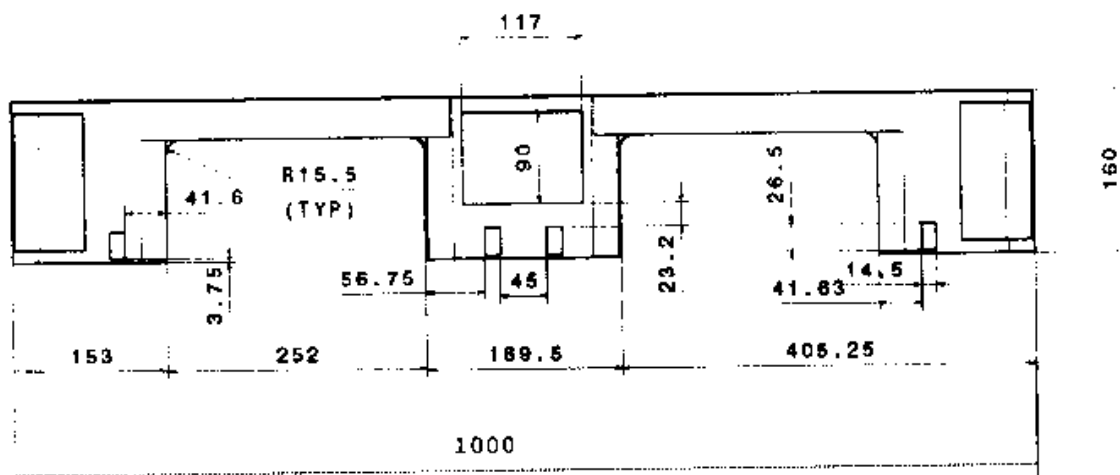


FIG. 2 STEEL REINFORCED INJECTION MOULDED PLASTIC PALLET FRONT VIEW

Price Group 2

Amend No. 2 to IS 13664 : 1993

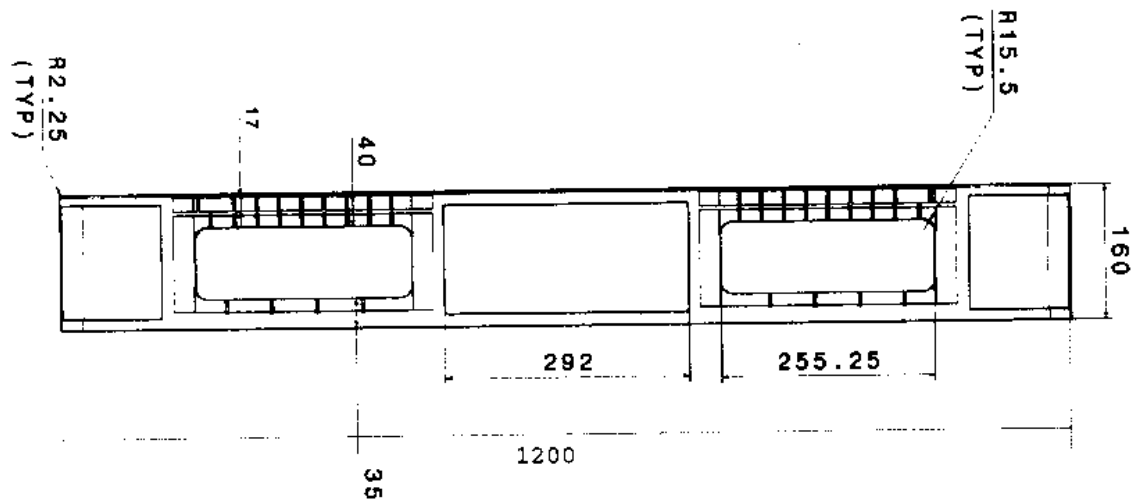


FIG. 3 STEEL REINFORCED INJECTION MOULDED PLASTIC PALLET SIDE VIEW

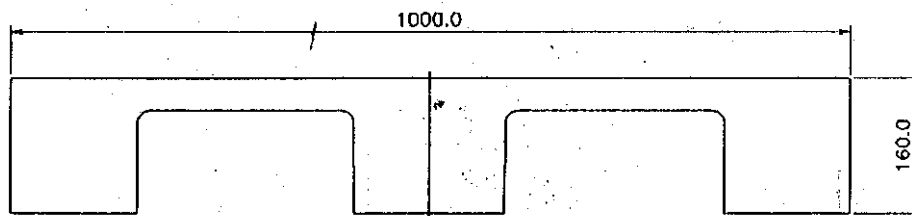


FIG. 4 INJECTION MOULDED PLASTIC PALLET FRONT VIEW

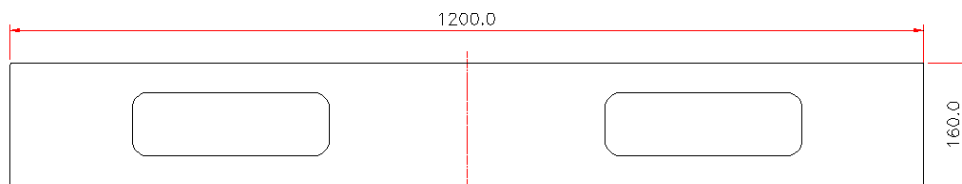


Fig. 7

FIG 5 INJECTION MOULDED PLASTIC PALLET SIDE VIEW

(Page 3, Table 1) — Insert the following at the end of the table:

Type	Nominal Length (L)	Nominal Width (W)	Overall Height (H)	Member Distances			
				(L)	(H)	(W ₁)	(W ₂)
C	1 200	1 000	160	—	—	—	—
D	1 200	1 000	160	—	—	—	—

(Page 4, clause 6.1) — Substitute the following for the existing clause:

Amend No. 2 to IS 13664 : 1993

‘6.1 The nominal load rating of the poly-pallets, steel reinforced injection moulded plastic pallets and injection moulded plastic pallets shall be as follows:

<i>Type</i>	<i>Static Load</i> (kg)	<i>Dynamic Load</i> (kg)	<i>Racking Load</i> (kg)
A	4 500	3 000	—
B	3 500	2 500	—
C1 (Heavy duty)	5 000	1 250	1 000
C2 (Normal)	4 000	1 000	800
D	4 000	1 000	1 000

NOTE — For Type A and Type B pallets used for food grain storage system, the dynamic load is not applicable.

(Page 4, clause 7.3) — Insert the following new clause at the end of clause:

‘7.4 Steel Reinforced Injection Moulded Pallets

- a) *Material* — HDPE as per IS 7328 / Polyethylene as per IS 10146/ Polypropylene as per IS 10910; and
- b) *Steel* — As per IS 226.’

(Page 4, clause 8.1) — Substitute the following for the existing clause:

‘8.1 Type

The poly-pallets, steel reinforced injection moulded plastic pallets and injection moulded plastic pallets shall be flat, non-expandable, single deck, general purpose type.’

(Page 4, clause 8.2) — Substitute the following for the existing clause:

‘8.2 Stability

When placed on a horizontal flat surface, the poly-pallets, steel reinforced injection moulded plastic pallets and injection moulded plastic pallets shall rest evenly and the bearing surface shall be flat and horizontal.’

[Page 4, clause 9.1.3(e)] — Insert the following new clause at the end of clause:

‘9.1.3.1 Tests on steel reinforced injection moulded pallets and plastic injection moulded pallets

Steel reinforced injection moulded pallets and plastic injection moulded pallets shall be subjected to the following test and in accordance with IS 6219 in the sequence given below:

- a) Stacking test;
- b) Bending test; and
- c) Corner drop test.’