

AMENDMENT NO. 4 AUGUST 2026
TO
IS 13983 : 1994 STAINLESS STEEL SINKS FOR DOMESTIC PURPOSES —
SPECIFICATION

(Page 1, clause 1, line 3) — Delete ‘sit-on and inset type’.

(Page 1, clause 3.2, see also amendment No. 2) — Insert the following at the end:

‘3.3 Flat Type Sink

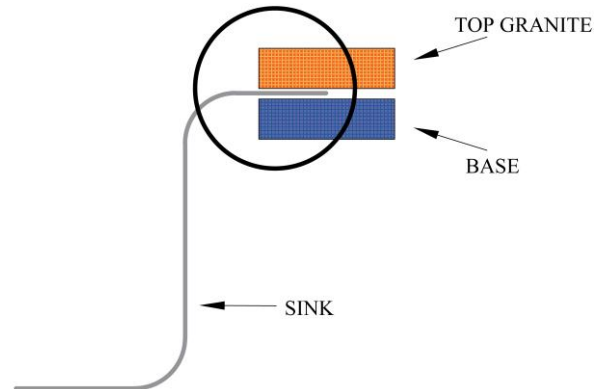


FIG. 2 TYPICAL SKETCH OF FLAT TYPE SINK

3.4 Flat with 45° Bevel Sink

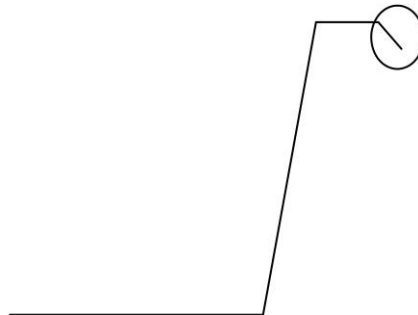


FIG. 3 TYPICAL SKETCH OF FLAT WITH 45° BEVEL SINK

3.5 Flat with 90° Collar Sink

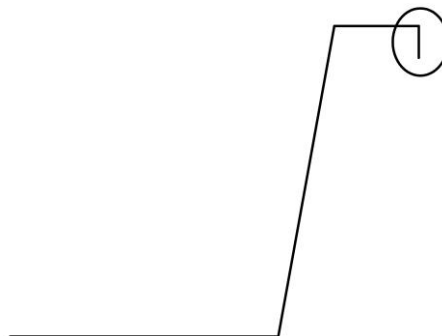


FIG. 4 TYPICAL SKETCH OF FLAT WITH 90° COLLAR SINK

Amendment No. 4 to IS 13983 : 1994

3.6 Flat with 45° then Straight Sink

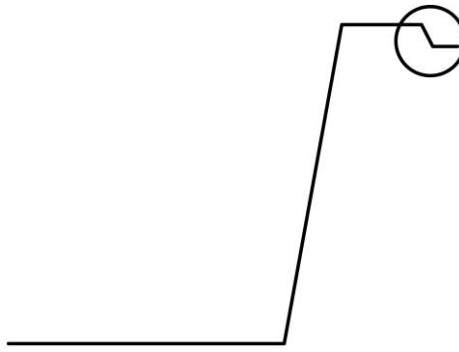


FIG. 5 TYPICAL SKETCH OF FLAT WITH 45° THEN STRAIGHT SINK'

(Page 1, clause 4) — Insert the following new type:

'Type G : Varied shape sinks as per customer requirement'

(Page 1, clause 5) — Substitute the following for the existing:

'Austenitic stainless steel of Grade Designation X04Cr17Ni12Mo2 (numerical symbol 316), X04Cr19Ni9 (numerical symbol 304), or X07Cr18Ni9 (numerical symbol 302) conforming to IS 5522 or IS 6911 shall be used.'

(Page 1, clause 6.1.1) — Insert the following at the end:

'with tolerance limits as per IS 5522 or IS 6911.'

(Page 1, clause 6.1.2) — Substitute the following for the existing:

'6.1.2 Thickness at any point of sink, after forming, shall not be less than 0.75 mm for sinks with a depth of up to 150 mm and 0.6 mm for sinks with a depth of more than 150 mm.'

(Page 1, clause 6.3) — Substitute the following for existing:

'6.3 Internal Dimensions of Bowls

The minimum internal dimensions shall be as per the customer requirements.

NOTES — Internal width of smaller bowl shown in Fig. 6 for Type E₂ and E₃ may be reduced as per the manufacturers design.'

(Page 1, clause 6.4) — Substitute the following for existing:

'6.4 Bowl Locating Limits

The Coordinating sizes of the sinks shall be as per the Table 1.'

(Page 2, Fig. 1, see also amendment No. 2) — Renumber the existing 'Fig. 1' as 'Fig. 6'

Amendment No. 4 to IS 13983 : 1994

(Page 3, Table 1) — Substitute the following for the existing:

‘Table 1 Coordinate Sizes

(Clause 6.5 and Fig. 6)

SI No.	Reference to Fig. 6	Dimension (Minimum Unless Specified)
		mm
(1)	(2)	(3)
i)	a	200 (for rectangle bowl) 200 (for round bowl)
ii)	b	150
iii)	c	20
iv)	d	12
v)	e	12
vi)	f	Max 600

(Page 3, clause 7.5) — Insert the following note after the point (c):

‘NOTE — Provision and size for tap holes may be made by the manufacturer based on customer requirements and the type of tap or faucet intended to be used.’

(Page 3, clause 9.1) — Substitute the following for existing:

‘9.1 Each sink shall be clearly and permanently marked with the following:

- The manufacturer name and identification mark;
- Type and size of the sink;
- Year of manufacture; and
- Grade of steel used.’