


AMENDMENT NO. 1 JUNE 1998
TO
IS 6533 (PART 2) : 1989 CODE OF PRACTICE FOR
DESIGN AND CONSTRUCTION OF STEEL CHIMNEY
PART 2 STRUCTURAL ASPECT

(First Revision)

(Page 5, Table 2) — Substitute the following set of figures for the existing:

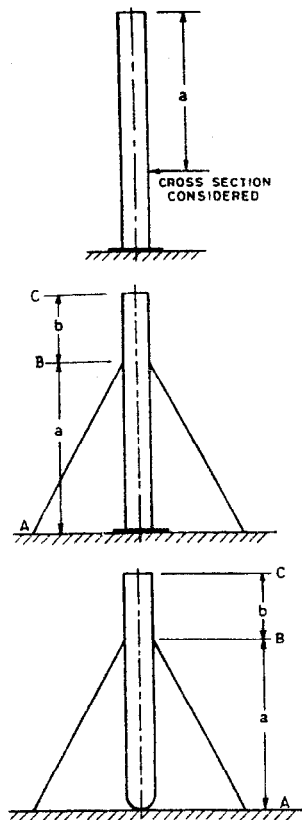

Amend No. 1 to IS 6533 (Part 2) : 1989

(Page 12, clause 10.10.1.2, line 2) — Substitute '300 mm' for '3 000 mm'.

(Page 12, clause 10.10.1.2, line 3) — Substitute '3 000 mm' for '300 mm'.

(Page 17, clause A-3) — Substitute 'm' for 'mm' in the definition given for D_t under formula (1).

(Page 17, clause A-4) — Substitute ' $C_y q_{cr} d_z h_z$ ' for the existing in the definition given in the fifth line for $F_{ei}(z)$ under formula (2).

(Page 17, clause A-4) — Substitute ' $\frac{V_{cr}^2}{16}$ ' for the existing in the definition given for q_{cr} in the third line under formula (2).

(Page 18, clause A-6) — Substitute 'shape' for 'sape' in the definition given for C.

(Page 20, Annex C) — Substitute the following formula for the existing against B:

$$B = 270 \frac{t}{D} \left(1 - 67 \frac{t}{D} \right), \text{ if } \frac{D}{t} > 130$$

(CED 7)