Draft ETSI EN 302 340 V2.1.19 (2026-09)



HARMONISED EUROPEAN STANDARD

Satellite Earth Stations and Systems (SES);
Satellite Earth Stations on board Vessels (ESVs)
operating in the 11/12/14 GHz frequency bands
allocated to the Fixed Satellite Service (FSS);
Harmonised Standard for access to radio spectrum

Reference
REN/SES-00436

Keywords
earth station, ESV, maritime, regulation, satellite

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI Search & Browse Standards application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on ETSI deliver repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the Milestones listing.

If you find errors in the present document, please send your comments to the relevant service listed under Committee Support Staff.

If you find a security vulnerability in the present document, please report it through our Coordinated Vulnerability Disclosure (CVD) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part of this document may be reproduced in any form, by any means and in any media, without the prior written authorization of ETSI and except as expressly permitted below.
By way of exception and when the document is a normative deliverable (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)), ETSI authorizes to reproduce and incorporate into products, services and technical documentation only those extracts (e.g. templates) that are strictly necessary for the technical implementation of the normative deliverable, to ensure compliance with the latter.
Nothing in this notice shall be construed as limiting any mandatory exceptions to copyright provided by applicable law.

© ETSI 2026.
All rights reserved.

Contents

Intellectual Property Rights 7
Foreword 7
Modal verbs terminology 8
Introduction 8
1 Scope 9
2 References 10
2.1 Normative references 10
2.2 Informative references 10
3 Definition of terms, symbols and abbreviations 11
3.1 Terms 11
3.2 Symbols 13
3.3 Abbreviations 13
4 Technical requirements specifications 14
4.1 General 14
4.1.1 Environmental profile 14
4.1.2 Operational configurations 14
4.1.3 ESV states and radio states 15
4.2 Conformance requirements 16
4.2.1 Off-axis spurious radiation 16
4.2.1.1 Justification 16
4.2.1.2 Specification 16
4.2.1.3 Conformance tests 17
4.2.2 On-axis spurious radiation for ESV 18
4.2.2.1 Justification 18
4.2.2.2 Specification 18
4.2.2.2.1 "Carrier-on" radio state 18
4.2.2.2.2 "Carrier-off" and "Emissions disabled" radio states 18
4.2.2.3 Conformance tests 19
4.2.3 Maximum ESV emissions towards the horizon 19
4.2.3.1 Justification 19
4.2.3.2 Specification 19
4.2.3.2.1 Specification 1: Maximum e.i.r.p. spectral density towards the horizon 19
4.2.3.2.2 Specification 2: Maximum e.i.r.p. towards the horizon 19
4.2.3.3 Conformance tests 19
4.2.4 Off-axis e.i.r.p. emission density within the band 19
4.2.4.0 General 19
4.2.4.1 Justification 19
4.2.4.2 Specification 19
4.2.4.3 Conformance tests 21
4.2.5 Carrier suppression 21
4.2.5.1 Justification 21
4.2.5.2 Specification 21
4.2.5.3 Conformance tests 22
4.2.6 Antenna mechanical stability and antenna pointing 22
4.2.6.1 Justification 22
4.2.6.2 Specification 22
4.2.6.3 Conformance tests 22
4.2.7 Cessation of emissions of the ESV 22
4.2.7.1 Justification 22
4.2.7.2 Specification 22
4.2.7.2.1 Specification 1: Mode of cessation of emissions 22
4.2.7.2.2 Specification 2: Conditions under which the ESV shall cease emissions 23
4.2.7.2.3 Specification 3: Cessation of emissions 23
4.2.7.2.4 Specification 4: Fault conditions 24

4.2.7.3 Conformance tests 24
4.2.8 Identification of ESV 24
4.2.8.1 Justification 24
4.2.8.2 Specification 24
4.2.8.3 Conformance tests 24
4.2.9 Control and Monitoring Functions (CMFs) 24
4.2.9.1 CMF state diagram 24
4.2.9.2 Processor monitoring 25
4.2.9.2.1 Justification 25
4.2.9.2.2 Specification 25
4.2.9.2.3 Conformance tests 26
4.2.9.3 Transmit subsystem monitoring 26
4.2.9.3.1 Justification 26
4.2.9.3.2 Specification 26
4.2.9.3.3 Conformance tests 26
4.2.9.4 Power-on/Reset 26
4.2.9.4.1 Justification 26
4.2.9.4.2 Specification 26
4.2.9.4.3 Conformance tests 26
4.2.9.5 Control Channel (CC) and Response Channel (RC) 26
4.2.9.5.1 Justification 26
4.2.9.5.2 Specification 27
4.2.9.5.3 Conformance tests 27
4.2.9.6 Network control commands 27
4.2.9.6.1 Justification 27
4.2.9.6.2 Specification 28
4.2.9.6.3 Conformance test 28
4.2.9.7 Initial burst transmission 28
4.2.9.7.1 Justification 28
4.2.9.7.2 Specification 28
4.2.9.7.3 Conformance tests 29
4.2.10 Receive antenna off-axis gain pattern 29
4.2.10.1 Justification 29
4.2.10.2 Specification 29
4.2.10.3 Conformance tests 29
4.2.11 Blocking performance 29
4.2.11.1 Justification 29
4.2.11.2 Specification 29
4.2.11.3 Conformance tests 30
4.2.12 Adjacent Signal Selectivity 30
4.2.12.1 Justification 30
4.2.12.2 Specification 30
4.2.12.3 Conformance tests 30

5 Testing for compliance with technical requirements 31
5.1 Environmental conditions for testing 31

6 Test methods for the complete ESV 31
6.1 General 31
6.2 Off-axis spurious radiation 31
6.2.0 General 31
6.2.1 Test method 32
6.2.1.a General 32
6.2.1.0 Multi-carrier operation 32
6.2.1.1 Up to 2 000 MHz 33
6.2.1.1.1 Test site 33
6.2.1.1.2 Procedure 33
6.2.1.2 Above 2 000 MHz 33
6.2.1.2.0 General 33
6.2.1.2.1 Identification of the significant frequencies of spurious radiation 34
6.2.1.2.2 Measurement of radiated power levels of identified spurious radiation 34
6.2.1.2.3 Measurement of conducted spurious radiation at the antenna flange 36

6.3 On-axis spurious radiation....36
6.3.1 Test method....36
6.3.1.1 Test site....36
6.3.1.2 Method of measurement....37
6.3.1.2.1 General....37
6.3.1.2.2 Method of measurement at the antenna flange....37
6.3.1.2.3 Method of measurement with a test antenna....38
6.4 Maximum ESV emissions towards the horizon....39
6.4.1 Test method....39
6.4.1.1 Maximum e.i.r.p. towards the horizon....39
6.4.1.2 Maximum e.i.r.p. spectral density towards the horizon....39
6.5 Off-axis e.i.r.p. emission density within the band....39
6.5.0 General....39
6.5.1 Test method....40
6.5.1.1 General....40
6.5.1.2 Transmit output power density....40
6.5.1.2.1 General....40
6.5.1.2.2 Test site....40
6.5.1.2.3 Method of measurement....40
6.5.1.3 Antenna transmit gain....41
6.5.1.3.1 General....41
6.5.1.3.2 Test site....42
6.5.1.3.3 Method of measurement....42
6.5.1.4 Antenna transmit radiation patterns....43
6.5.1.4.1 General....43
6.5.1.4.2 Test site....43
6.5.1.4.3 Test arrangement....43
6.5.1.4.4 Co-polar radiation pattern-azimuth....43
6.5.1.4.5 Co-polar radiation pattern-elevation....44
6.5.1.4.6 Cross-polar radiation pattern-azimuth....44
6.5.1.4.7 Cross-polar radiation pattern-elevation....45
6.5.2 Computation of results....46
6.6 Carrier suppression....46
6.6.1 Test method....46
6.7 Antenna pointing for ESV....46
6.7.1 General....46
6.7.2 Test method....47
6.8 Antenna mechanical stability....48
6.8.1 Test method....48
6.9 Antenna pointing....48
6.9.1 Antenna pointing....48
6.9.1.1 Test method....48
6.10 Cessation of emissions of the ESV....48
6.10.1 Test arrangement....48
6.10.2 Test method....49
6.10.2.1 Required documentation....49
6.10.2.2 Cessation of emissions from the "Transmission enabled" state....49
6.10.2.3 Cessation of emission from the "Transmission disabled" state....50
6.10.2.4 Cessation of emission from the "Initial Phase" state....50
6.10.2.4.1 EUTs transmitting initial bursts....50
6.10.2.4.2 EUTs not transmitting initial bursts....50
6.10.2.5 "Single action" means of cessation of emissions....51
6.10.2.6 Fault conditions....51
6.11 Identification of ESV....52
6.11.1 Test set up....52
6.11.2 Test method....52
6.12 Control and monitoring functions....52
6.12.0 General....52
6.12.1 Test set up....52
6.12.2 Processor monitoring- Test method....52
6.12.3 Transmit subsystem monitoring-Test method....53
6.12.4 Power-on/Reset-Test method....53

6.12.5 Control Channel and Response Channel -Test method....53
6.12.6 Network Control commands-Test method....54
6.12.7 Initial burst transmission-Test method....56
6.13 Receive antenna off-axis gain pattern....56
6.13.1 Test method....56
6.13.1.1 Test site....56
6.13.1.2 Method of measurement....56
6.14 Blocking performance....57
6.14.1 Test method....57
6.15 Adjacent Signal Selectivity....58
6.15.1 Test method....58

Annex A (informative): Relationship between the present document and the essential requirements of Directive 2014/53/EU....59

Annex B (normative): Mechanical stability methodology....63

Annex C (informative): Maximum measurement uncertainty....65

Annex D (informative): Bibliography....66

Annex E (informative): Change history....67

History....68

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)) may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI IPR online database.

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This draft Harmonised European Standard (EN) has been produced by ETSI Technical Committee Satellite Earth Stations and Systems (SES), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI Standardisation Request deliverable Approval Procedure (SRdAP).

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.5] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.8].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive and associated EFTA regulations.

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

Void.

Figure 1: Void

1 Scope

The present document specifies technical characteristics and methods of measurements for Earth Stations located on board Vessels (ESVs) which have the following characteristics:

- The ESV is comprised of all the equipment, electrical and mechanical, from the antenna itself to the interface with other communications equipment on board (usually referred to as the terrestrial interface).
- The ESV transmits in the frequency range from 14,00 GHz to 14,50 GHz in the Fixed Satellite Services (FSS) (earth-to-space).
- The ESV receives in one or more frequencies within the range from 10,70 GHz to 12,75 GHz in the bands allocated to the Fixed Satellite Services (FSS) (space-to-earth), depending on the ITU Region where the ESV is located.
- The ESV uses linear polarization.
- The ESV operates through a geostationary satellite at least 2° to 3° away from any other geostationary satellite operating in the same frequency band and covering the same area.

NOTE 1: The satellite spacing is mainly equal to 3° in ITU Regions 1 and 3 and 2° in ITU Region 2.

- The ESV transmits at elevations greater or equal to the minimum elevation angle defined for its intended use.
- The ESV antenna diameter is not smaller than 0,6 m.

NOTE 2: Operation within 125 km of non-CEPT countries is subject to specific agreement with concerned administrations as stated in ITU-R Resolution 902 (Rev. WRC-23). Decision ECC(05)10 [i.9] applies for CEPT countries.

- The ESV is designed for transmission and reception of radio-communications signals in accordance with any of the frequency bands specified above.
- The ESV is usually designed for unattended operation.
- The ESV is operating as part of a satellite network (e.g. star, mesh or point-to-point) used for the distribution and/or exchange of information between users.
- The ESV is controlled and monitored by a Network Control Facility (NCF). The NCF is outside the scope of the present document.

The present document applies to the ESV with its ancillary equipment and its various telecommunication ports, and when operated within the boundary limits of the operational environmental profile defined for its intended use including all equipment as brought to the market.

The present document incorporates the technical limitations listed in annex 2 of ITU Radio Regulations Resolution 902 (Rev. WRC-23) [9].

NOTE 3: The relationship between the present document and essential requirements of article 3.2 of Directive 2014/53/EU [i.8] (RE Directive) is given in annex A.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found in the ETSI docbox.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents are necessary for the application of the present document.

[1] Void.

[2] Void.

[3] Void.

[4] Void.

[5] CISPR 16-1 (2019): "Specification for radio disturbance and immunity measuring apparatus and methods".

[6] CISPR 16-1-5:2014+AMD1:2016: "Specification for radio disturbance and immunity measuring apparatus and methods - Part 1-5: Radio disturbance and immunity measuring apparatus - Antenna calibration sites and reference test sites for 5 MHz to 18 GHz".

[7] EN 60945:2002: "Maritime navigation and radiocommunication equipment and systems - General requirements - Methods of testing and required test results", (produced by CEN).

[8] ITU Radio Regulations (2024).

[9] ITU Radio Regulations Resolution 902 (Rev. WRC-23): "Provisions relating to earth stations located on board vessels which operate in fixed-satellite service networks in the uplink frequency bands 5 925-6 425 MHz and 14-14.5 GHz".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents may be useful in implementing an ETSI deliverable or add to the reader's understanding, but are not required for conformance to the present document.

[i.1] Void.

[i.2] Void.

[i.3] ETSI TR 102 215: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Recommended approach, and possible limits for measurement uncertainty for the measurement of radiated electromagnetic fields above 1 GHz".

[i.4] ETSI TR 102 375: "Satellite Earth Stations and Systems (SES); Guidelines for determining the parts of satellite earth station antenna radiation patterns concerned by the geostationary satellite orbit protection".

[i.5] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.

[i.6] ETSI EG 203 336: "Guide for the selection of technical parameters for the production of Harmonised Standards covering article 3.1(b) and article 3.2 of Directive 2014/53/EU".

[i.7] ETSI TR 100 028-2: "Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the Measurement of Mobile Radio Equipment Characteristics Part 2".

[i.8] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC (RE Directive).

[i.9] ECC/DEC/(05)10: "The free circulation and use of Earth Stations on board Vessels operating in fixed satellite service networks in the frequency bands 14-14.5 GHz".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in Directive 2014/53/EU [i.8] and the following apply:

above-deck unit: part of the ESV intended to be installed above deck, as defined for its intended use, and as indicated in the user documentation

NOTE 1: The above-deck unit usually comprises the following main parts:

a) The antenna sub-system which converts the incident radiation field into a guided wave and vice versa.

b) The Low Noise Block (LNB) down converter, which is a device that amplifies, with very low internal noise, the received signals in the Radio Frequency (RF) band and converts them to intermediate frequencies.

c) The up-converter and the power amplifier which convert from the intermediate frequency to RF and amplify the low level RF signals for transmission through the antenna subsystem.

d) The stabilization and tracking subsystems that ensure pointing of the antenna main beam towards the satellite within the required accuracy.

NOTE 2: The installation equipment (means of attachment) is outside the scope of the present document.

NOTE 3: The antenna structures and other components directly mounted on the antenna and forming an integral part of it, are subject to the specifications of the present document.

ancillary equipment: equipment used in connection with an ESV is considered as ancillary if the three following conditions are met:

a) the equipment is intended for use in conjunction with the ESV to provide additional operational and/or control features (e.g. to extend control to another position or location);

b) the equipment cannot be used on a stand alone basis, to provide user functions independently of the ESV; and

c) the absence of the equipment does not inhibit the operation of the ESV

below-deck unit: part of the ESV equipment which is installed inside the vessel (i.e. below deck) and its connection cables with the above deck units

carrier-off radio state: radio state in which the ESV may transmit and does not transmit any carrier

NOTE 1: The phrase "the ESV may transmit" means that all the conditions for transmission are satisfied (e.g. in a state where transmissions are permitted, no failure detected, and the ESV is correctly pointed towards the satellite).

NOTE 2: The existence of a "Carrier-off" radio state depends on the system of transmission used. For ESVs designed for continuous transmission mode there may be no "Carrier-off" state.

carrier-on radio state: radio state in which the ESV may transmit and transmits a carrier

Control Channel (CC): channel or channels by which ESVs receive control information from the NCF

$EIRP_{max}$: maximum e.i.r.p. capability of the ESV as defined for the intended use of the ESV

$EIRP_{nom}$:

i) either $EIRP_{max}$;

ii) or, when uplink power control is implemented, the maximum required e.i.r.p. of the ESV under clear sky condition as defined for the intended use of the ESV

e.i.r.p density: e.i.r.p. within a given frequency range

emissions disabled radio state: radio state in which the ESV does not emit

NOTE: Examples of cases where the ESV is in this radio state: before system monitoring pass, before the control channel is received, when a failure is detected, when an ESV is commanded to disable, and when the ESV in a location requiring cessation of emissions.

environmental profile: range of environmental conditions under which equipment within the scope of ETSI EN 302 340 (the present document) is required to comply

external control channel: control channel which is either (i) carried by the ESV network via the same or another satellite, but not within the internal protocol of the ESV system, or (ii) carried by any other radio communication system

external response channel: response channel which is either (i) carried by the ESV network via the same or another satellite, but not within the internal protocol of the ESV system, or (ii) carried by any other radio communication system

integral antenna: antenna which may not be removed during the tests according to the documentation provided with the EUT

internal control channel: control channel which is carried by the ESV network via the same satellite as used for transmission of user data and within the internal protocol structure of the ESV system

internal response channel: response channel which is carried by the ESV network via the same satellite as used for transmission of user data and within the internal protocol structure of the ESV system

network: any network configuration including star, mesh and point-to-point configurations

Network Control Facility (NCF): set of functional entities that, at system level, monitor and control the correct operation of all ESVs in a network

nominal antenna diameter: antenna diameter as defined for the intended use of the ESV

NOTE 1: An antenna with a nominal antenna diameter D has the same technical characteristic as a circular aperture antenna of diameter D. For non circular aperture antenna, the nominal antenna diameter is defined for the intended use of the ESV.

NOTE 2: Network operators might request antennas of a certain diameter. Then an antenna that is compliant with the requirement for nominal antenna diameter equal to the requested antenna diameter can be used.

nominated bandwidth: bandwidth of the ESV radio frequency transmission nominated for the intended use of the ESV

NOTE 1: The nominated bandwidth is centred on the transmit frequency and does not exceed 5 times the occupied bandwidth.

NOTE 2: The nominated bandwidth is wide enough to encompass all spectral elements of the transmission which have a level greater than the specified spurious radiation limits. The nominated bandwidth is wide enough to take account of the transmit carrier frequency stability. This definition is chosen to allow flexibility regarding adjacent channel interference levels which will be taken into account by operational procedures depending on the exact transponder carrier assignment situation.

off-axis angle: angle between the direction of the axis of the antenna main beam and the considered direction

removable antenna: antenna which may be removed during the tests according to the intended use of the ESV and upon the EUT equipment capabilities

Response Channel (RC): channel by which ESV transmit monitoring information to the NCF

spurious radiation: any radiation outside the nominated bandwidth

transmission disabled state: state of the ESV when it is not authorized by the NCF to transmit

transmission enabled state: state of the ESV when it is authorized by the NCF to transmit

wanted signal occupied Bandwidth (BW): for a digital modulation scheme: width of the signal spectrum 10 dB below the maximum in-band density

3.2 Symbols

For the purposes of the present document, the following symbols apply:

dBc	Ratio expressed in decibels relative to the e.i.r.p. of the unmodulated carrier
dBi	Ratio of an antenna gain to the gain of an isotropic antenna, expressed in decibels
dBsd	Ratio expressed in decibels relative to the spectral density
dBW	Ratio of a power to 1 watt, expressed in decibels
dBpW	Ratio of a power to 1 pico watt, expressed in decibels
dBµV/m	Ratio of an electric field to 1 µV/m, expressed in decibels (20 log(electric field /1 µV/m))

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BDU	Below Deck Unit
BW	Wanted signal occupied Bandwidth
CC	Control Channel
CCF	Control Channel reception Failure
CCR	Control Channel correctly Received
CENR	Cessation of Emissions Not Requested
CEPT	Conférence Européenne des Postes et Télécommunications (European Conference of Postal and Telecommunications Administrations)
CER	Cessation of Emissions Requested
CISPR	Comité International Spécial des Perturbations Radioélectriques (International Special Committee on Radio Interference)
CMF	Control and Monitoring Functions
e.i.r.p.	equivalent isotropically radiated power
ECC	Electronic Communications Committee (of CEPT)
EMC	Electro-Magnetic Compatibility
EN	European Standard
ESV	Earth Station on board a Vessel
EUT	Equipment Under Test
FEC	Forward Error Correction
FS	Fixed Service
FSS	Fixed Satellite Service
GEUT	Gain of EUT
GSO	Geostationary Satellites Orbit
HPA	High Power Amplifier
IPR	Intellectual Property Rights

ITU	International Telecommunication Union
ITU-R	International Telecommunication Union - Radiocommunication Sector
LNB	Low Noise Block
LO	Local Oscillator
LV	Low Voltage
NCF	Network Control Facility
OATS	Open Area Test Site
RC	Response Channel
RE	Radio Equipment
RED	RE Directive
RF	Radio Frequency
SMF	System Monitoring Fail
SMP	System Monitoring Pass
STE	Special Test Equipment
TxD	Transmission Disable command
TxE	Transmission Enable command
WGSE	Working Group Spectrum Engineering
WRC	ITU World Radio Conference

4 Technical requirements specifications

4.1 General

4.1.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be in accordance with its intended use. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the operational environmental profile defined by its intended use.

Before carrying out any other tests specified in the present document, survivability testing of the ESV shall be conducted under the following clauses of EN 60945 [7]:

- Clause 8.1 General
- Clause 8.3 Damp heat
- Clause 8.7 Vibration

The components of the ESV may be subject to different operational environmental conditions and shall maintain their performance in accordance with the present document under all environmental circumstances for the environmental classes applicable to them as defined in EN 60945 [7]. Specifically, the operational environmental conditions for:

- "protected" class shall apply to the below deck equipment; and
- "exposed" class shall apply to the above deck equipment.

4.1.2 Operational configurations

Under operational conditions an ESV may dynamically change the occupied bandwidth and other transmission parameters (e.g. FEC, modulation, symbol rate) of the transmitted signal. For each occupied bandwidth an $EIRP_{max}$, an $EIRP_{nom}$ and a nominated bandwidth shall be defined for the intended use of the ESV. The following specifications apply to the ESV for each occupied bandwidth and other transmission parameters.

4.1.3 ESV states and radio states

For the purpose of the present document the following four ESV states are defined, without presuming the effective implementation of the ESV state machine:

- "Non valid";
- "Initial phase";
- "Transmission disabled"; and
- "Transmission enabled".

The four ESV states are represented on figure 2 and are used in clause 4.2.9 for the specification of the Control and Monitoring Functions (CMFs).

In the "Non-valid" state and in the "Transmission disabled" state the ESV is not allowed to transmit. In the "Transmission-enabled" state the ESV is allowed to transmit. In the "Initial phase" state the ESV is only allowed to transmit initial bursts or is waiting for a transmit enable/disable command.

The "Initial phase" is divided into three radio states:

- "Initial phase-0" until the first initial burst is transmitted or when no initial bursts are transmitted;
- "Initial phase-1" during the transmission of the initial bursts;
- "Initial phase-2" between initial bursts.

NOTE: ESVs which do not transmit initial bursts have no "Initial phase-1" state and no "Initial phase-2" state.

The ESV "may transmit" when all the conditions for transmission are satisfied (e.g. in a state where transmissions are permitted, no failure detected, correctly pointed towards the satellite and there is no requirement for cessation of emissions).

The following radio states of the ESV are defined:

- "Emissions disabled" when the ESV does not transmit any carrier;
- "Carrier-off" when the ESV may transmit and does not transmit any carrier;
- "Carrier-on" when the ESV may transmit and transmits a carrier.

Table 1 gives the only possible combinations of the ESV states and radio states which shall apply, with some examples of associated events.

When the ESV transmits several carriers having different frequencies, an ESV state machine as described above may be associated with each carrier or each set of carriers.

Table 1: ESV states and radio states of the ESV

ESV states	Radio states	Examples of events
"Non valid"	"Emissions disabled"	After-power on; or After any failure; or During the checking phase
"Initial phase"		When waiting for a transmission enable or disable command from the NCF
"Initial phase-0"	"Emissions disabled"	Before the first initial burst transmissions; or n locations where no transmission is allowed
"Initial phase-1"	"Carrier-on"	During the transmission of each initial burst, and the pointing is correct
"Initial phase-2"	"Carrier-off"	Between initial bursts; or When the pointing threshold is exceeded
"Transmission enabled"	"Carrier-off"	When no carrier is transmitted; or When the pointing threshold is exceeded
	"Carrier-on"	During transmission of carrier(s), and the pointing is correct
"Transmission disabled"	"Emissions disabled"	When a disable command from the NCF has been received and waiting for a transmission enable command from the NCF; or In locations where no transmission is allowed

4.2 Conformance requirements

4.2.1 Off-axis spurious radiation

4.2.1.1 Justification

To limit the level of interference to terrestrial and satellite radio services, to meet the essential requirements as referred to in the scope of the present document.

4.2.1.2 Specification

The following specifications apply to the ESV transmitting at e.i.r.p. values up to and including $EIRP_{max}$:

1) The electric field strength level of any radiation from the ESV in the frequency range from 30 MHz to 2 GHz shall not exceed the limits specified in table 2.

Table 2: Limits of radiated electric field strength at a measuring distance of 3 m

Frequency range	Limit (Quasi Peak)	Limit (Peak)	Measurement bandwidth
30 MHz to 1 GHz	54 dBµV/m	No limit applies	100 kHz to 120 kHz
1 GHz to 2 GHz	No limit applies	54 dBµV/m	100 kHz to 120 kHz
156 MHz to 165 MHz	24 dBµV/m	30 dBµV/m	9 kHz to 10 kHz

The above limits below 2 GHz are those specified in EN 60945 [7] for marine navigational equipment, i.e. for the maritime environment as indicated in table 2.

NOTE: The EN 60945 [7] limits below 30 MHz are not relevant for ESVs radiating in the band 14,0 GHz to 14,5 GHz.

The Peak and Quasi Peak detectors shall be in accordance with CISPR 16-1 [5].

2) When the ESV is in the "Emissions disabled" radio state, the off-axis spurious equivalent isotropically radiated power (e.i.r.p.) from the ESV, in any 100 kHz band, shall not exceed the limits in table 3, for all off-axis angles greater than 7° or greater than the minimum elevation angle defined for the intended use of the ESV, whichever is lower.

Table 3: Limits of spurious e.i.r.p. - "Emissions disabled" radio state

Frequency band	e.i.r.p. limit	Measurement bandwidth
2,0 GHz to 10,7 GHz	48 dBpW	100 kHz
10,7 GHz to 21,2 GHz	54 dBpW	100 kHz
21,2 GHz to 40,0 GHz	60 dBpW	100 kHz

The lower limits of table 3 shall apply at the transition frequency.

3) This specification applies outside the nominated bandwidth. In the "Carrier-on" and "Carrier-off" radio states, the off-axis spurious e.i.r.p. density from the ESV, shall not exceed the limits in table 4, for all off-axis angles greater than 7° or greater than the minimum elevation angle defined for the intended use of the ESV, whichever is lower.

Table 4: Limits of spurious e.i.r.p. - "Carrier-on" and "Carrier-off" radio states

Frequency band	e.i.r.p. limit	Measurement bandwidth	Remarks
2,0 GHz to 3,4 GHz	49 dBpW	100 kHz	
3,4 GHz to 10,7 GHz	55 dBpW	100 kHz	
10,7 GHz to 13,75 GHz	61 dBpW	100 kHz	
13,75 GHz to 14,0 GHz	95 dBpW	10 MHz	See note 1
14,00 GHz to 14,25 GHz			See note 2
14,250 GHz to 14,75 GHz	95 dBpW	10 MHz	See note 1
14,75 GHz to 21,2 GHz	61 dBpW	100 kHz	
21,2 GHz to 40,0 GHz	67 dBpW	100 kHz	
NOTE 1: This limit may be exceeded in a frequency band which shall not exceed 50 MHz, centred on the carrier frequency, provided that the on-axis e.i.r.p. density at the considered frequency is 50 dB below the maximum on-axis e.i.r.p. density of the signal (within the nominated bandwidth) expressed in dBW/100 kHz.			
NOTE 2: A limit may be required in regions outside CEPT where FS systems have an allocation and are operating in the band 14,00 GHz to 14,25 GHz. Therefore, such requirement is outside the scope of the present document.			

The lower limits shall apply at the transition frequency.

In the frequency band 28,0 GHz to 29,0 GHz, for any 20 MHz band within which one or more spurious signals exceeding the above limit of 67 dBpW/100 kHz are present, then the power of each of those spurious signals exceeding the limit shall be added in watts, and the sum shall not exceed 78 dBpW.

For ESVs designed to transmit simultaneously several carriers (multicarrier operation), the above limits apply to any combination of carriers defined for the intended use of the ESV and outside the shortest bandwidth encompassing the nominated bandwidths of the carriers.

Each combination of carriers shall be characterized by the carriers' centre frequencies and characteristics, the maximum value of the total on-axis e.i.r.p. of the carriers and the relative levels of the carriers (in dBs) at the input or output of the HPA or antenna.

4) These limits are applicable to the complete ESV equipment, comprising the equipment units below and above deck including cabling between the units.

4.2.1.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.2.

4.2.2 On-axis spurious radiation for ESV

4.2.2.1 Justification

To limit the level of interference to satellite radio services, to meet the essential requirements as referred to in the scope of the present document.

4.2.2.2 Specification

4.2.2.2.1 "Carrier-on" radio state

The following specification applies to the ESV transmitting at e.i.r.p. values up to $EIRP_{nom}$. For e.i.r.p. above $EIRP_{nom}$ (when uplink power control is implemented) the limits below may be exceeded by the difference in dB between the current e.i.r.p. and $EIRP_{nom}$.

The e.i.r.p. spectral density of the spurious radiation outside the nominated bandwidth and outside the 14,0 GHz to 14,5 GHz band shall not exceed 4 - K dBW in any 100 kHz band.

The e.i.r.p. spectral density of the spurious radiation outside the nominated bandwidth and within the range 14,0 GHz to 14,5 GHz, shall not exceed 18 - K dBW in any 100 kHz band.

Where K is the factor that accounts for a reduction on the on-axis spurious radiation level in case of multiple ESVs transmitting towards the same satellite on the same frequency and polarization; the value of K is given by one the following cases:

1) For the case where only one ESV transmits at any one time on a given carrier frequency, the value of K is 0.

2) For the case where several ESVs are expected to transmit simultaneously on a given carrier frequency at the same e.i.r.p. then K = 10 log (N) where N is the maximum number of these ESVs. The value of N shall not be exceeded for more than 0,01 % of the time. The value of N and the operational conditions of the system shall be defined for the intended use of the ESV.

3) For the case where several ESVs are expected to transmit simultaneously on a given carrier frequency at different e.i.r.p. levels then K = -10 log ($EIRP/EIRP_{Aggregate}$), where:

   - EIRP is the on-axis e.i.r.p. (Watts) of the ESV within the nominated bandwidth; and
   - $EIRP_{Aggregate}$ is the maximum on-axis aggregate e.i.r.p. (Watts) within the nominated bandwidth of the ESV system towards the satellite;
   - $EIRP_{Aggregate}$ shall not be exceeded for more than 0,01 % of the time.

The value of $EIRP_{Aggregate}$ and the operational conditions of the ESV network shall be defined for the intended use of the ESV.

NOTE 1: The on-axis spurious radiations, outside the 14,0 GHz to 14,5 GHz band, are indirectly limited by clause 4.2.1.2 Consequently no specification is needed.

NOTE 2: Intermodulation limits inside the band 14,0 GHz to 14,5 GHz are to be determined by system design and are subject to satellite operator specifications.

For ESVs designed to transmit several carriers on different frequencies simultaneously (multicarrier operation), the above limits only apply to each individual carrier when transmitted alone.

4.2.2.2.2 "Carrier-off" and "Emissions disabled" radio states

In the 14,0 GHz to 14,5 GHz band the e.i.r.p. spectral density of the spurious radiation outside the nominated bandwidth shall not exceed -21 dBW in any 100 kHz band.

4.2.2.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.3.

4.2.3 Maximum ESV emissions towards the horizon

4.2.3.1 Justification

Protection of terrestrial services, to meet the essential requirements as referred to in the scope of the present document.

4.2.3.2 Specification

4.2.3.2.1 Specification 1: Maximum e.i.r.p. spectral density towards the horizon

The ESV e.i.r.p. spectral density towards the horizon, within the frequency band 14,0 GHz to 14,5 GHz, shall not exceed 12,5 dBW/MHz as specified in ITU Radio Regulations Resolution 902 (Revised WRC-23) [9], for all operational elevations angles of the antenna main beam axis.

The range of operational elevations angles of the antenna main beam axis of the ESV shall be defined for the intended use of the ESV and provided with the EUT.

4.2.3.2.2 Specification 2: Maximum e.i.r.p. towards the horizon

The ESV e.i.r.p. towards the horizon, within the frequency band 14,0 GHz to 14,5 GHz, shall not exceed 16,3 dBW as specified in ITU Radio Regulations Resolution 902 (Revised WRC-23) [9], for all operational elevations angles of the antenna main beam axis.

The range of operational elevation angles of the antenna main beam axis of the ESV shall be defined for the intended use of the ESV and provided with the EUT.

4.2.3.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.4.

4.2.4 Off-axis e.i.r.p. emission density within the band

4.2.4.0 General

This clause deals with the off-axis e.i.r.p. emission density (co-polar and cross-polar) within the band 14,0 GHz to 14,5 GHz.

4.2.4.1 Justification

Protection of other satellite (uplink) systems, to meet the essential requirements as referred to in the scope of the present document.

4.2.4.2 Specification

The following specifications apply to the ESV transmitting at e.i.r.p. values up to $EIRP_{max}$.

The maximum e.i.r.p. in any 40 kHz band within the nominated bandwidth of the co-polarized component in any direction ϕ degrees from the antenna main beam axis shall not exceed the following limits:

$$33 - 25 \log (\phi + \delta\phi) - H \text{ dBW} \quad \text{for} \quad \phi_{min} \leq \phi + \delta\phi \leq 7{,}0°;$$

$$+12 - H \text{ dBW} \quad \text{for} \quad 7{,}0° < \phi + \delta\phi \leq 9{,}2°;$$

$$36 - 25 \log (\phi + \delta\phi) - H \text{ dBW} \quad \text{for} \quad 9{,}2° < \phi + \delta\phi \leq 48°;$$

$$- 6 - H \text{ dBW} \quad \text{for} \quad \phi + \delta\phi > 48°;$$

where:

- ϕ is the angle, in degrees, between the main beam axis and the direction considered; and
- $\delta\phi$ is the pointing error threshold, in degrees, relative to the line between the ESV and the satellite with which it is operating, as defined for the intended use of the ESV (see clause 4.2.6.2).

For ESVs designed to transmit always at $EIRP_{max}$, H (in dB) is the maximum number of ESVs transmitting towards the same satellite on the same frequency and polarization which may transmit at $EIRP_{max}$ in the same 40 kHz band as defined for the intended use of the ESV.

For ESVs designed to operate in an FSS network where the e.i.r.p. of each ESV is determined by the NCF and where the NCF is in charge of the compliance of the aggregate e.i.r.p. density with the above mask, H is the margin as defined for the intended use of the ESV for compliance with the mask, when the ESV is transmitting at $EIRP_{max}$. In the case where the NCF uses the antenna pattern or the off-axis $EIRP_{sd}$ the applicable pattern shall be defined for the intended use of the ESV, the value of H shall be set to 0 dB and the ESV e.i.r.p. density shall not exceed the e.i.r.p. density corresponding to the defined pattern. This margin H or this pattern may be a function of the position of the ESV relative to the GSO arc (e.g. in the case of active antennas).

The minimum satellite separation, ΔL, for which the equipment is designed shall be provided with the EUT. ΔL is assumed to be a value from 2,0° to 3,0°. With this, ϕ_{min} as used in the above equation is equal to 2,0° or ΔL-0,2°, whichever is greater.

NOTE 1: The minimum satellite spacing, ΔL, is mainly equal to 3° in ITU Regions 1 & 3 and 2° in ITU Region 2.

For $\phi > 70°$ the values given above may be increased to 4 - H dBW over the range of angles for which the particular feed system may give rise to relatively high levels of spillover.

In addition the maximum e.i.r.p. in any 40 kHz band within the nominated bandwidth of the cross-polarized component in any direction ϕ degrees from the antenna main beam axis shall not exceed the following limits:

$$23 - 25 \log (\phi + \delta\phi) - H \text{ dBW} \quad \text{for} \quad \phi_{min} \leq \phi + \delta\phi \leq 7{,}0°;$$

$$+2 - H \text{ dBW} \quad \text{for} \quad 7{,}0° < \phi + \delta\phi \leq 9{,}2°;$$

where ϕ, ϕ_{min} and H are as defined above.

For non-continuous transmission, the above limits may not apply for a specific portion of each burst as defined for the intended use of the ESV. This excluded portion shall not exceed 50 µsec or 10 % of the burst, whichever is the smaller.

The excluded portion shall have characteristics similar to the remaining part of the burst:

- same symbol rate and modulation; and
- same or lower maximum amplitude.

In the case of ESVs employing uplink power control, the above limits, for co-polar and cross-polar components, shall apply under clear-sky conditions and these limits include all additional margins above the minimum clear-sky level necessary for the implementations of uplink power control. For ESVs implementing uplink power control, the above limits may be exceeded by up to A dB during fade conditions, where A is the attenuation of the transmit signal relative to clear sky conditions.

The uplink power control shall be subject to following additional requirement:

- The value of A shall not exceed 10 dB.

NOTE 2: The satellite operator may require lower off-axis e.i.r.p. limits in compliance with FSS Intersystem Coordination Agreements. In other cases, operation of the ESV within national waters, off-axis e.i.r.p. emissions are subject to compliance with national regulations and the relevant FSS intersystem coordination agreements.

Any antenna off-axis direction may be defined by a pair of values (α, φ) where φ is the off-axis angle of that direction with the antenna main beam axis and α is the angle of the plane defined by that direction and the antenna main beam axis with any arbitrary plane containing the antenna main beam axis.
The range of values of φ and α is from φ_{min} - $\delta\varphi$ to 180° for φ, and from -180° to +180° for α.

The above limits only apply to any off-axis direction (α, φ) within ±3° of the GSO. The concerned directions shall be any direction within the (α, φ) domain unless it can be demonstrated by documentary evidence that only a limited subset of the (α, φ) domain is concerned.

The determination of the (α, φ) subset shall take into account the operational conditions for which the ESV is designed, as defined for the intended use of the ESV or indicated within the user documentation. These conditions shall include:

- the range of latitudes of the ESV;
- the minimum elevation pointing angle;
- the type of antenna mount (e.g. with azimuth and elevation axes or equatorial);
- the maximum static and dynamic alignment errors of the antenna mount axes;
- the maximum static and dynamic alignment errors of the antenna major axis with respect to the GSO arc;
- the range of adjustment for the major axis of the antenna for antennas with asymmetric main beam;
- the direction of the electric field radiated by the satellite with respect to the Earth's axis, when the electric field is used for the antenna alignment.

The alignment errors shall not exceed the maximum values when applying the alignment method defined for the intended use of the ESV or indicated within the user documentation.

NOTE 3: ETSI TR 102 375 [i.4] gives guidance for the determination of the concerned subset within the (α, φ) domain.

4.2.4.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.5.1 with the results being computed in accordance with clause 6.5.2.

4.2.5 Carrier suppression

4.2.5.1 Justification

To allow for the satisfactory suppression of transmissions of the ESV by the NCF, under any fault condition and under any cessation of emissions condition, to meet the essential requirements as referred to in the scope of the present document.

4.2.5.2 Specification

In the "Carrier-off" and in the "Emissions disabled" radio states the on-axis e.i.r.p. density shall not exceed 4 dBW in any 100 kHz band within the nominated bandwidth.

4.2.5.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.6.

4.2.6 Antenna mechanical stability and antenna pointing

4.2.6.1 Justification

Protection of transmissions to adjacent satellites and cross-polarized transponders on the same satellite, to meet the essential requirements as referred to in the scope of the present document.

4.2.6.2 Specification

a) Mechanical stability:

   Under the condition of 100 km/h maximum wind speed, with gusts of 130 km/h lasting 3 seconds, the installation shall not show any sign of permanent distortion that could affect the radiation subsystem of the ESV after the application of the wind load.

b) Pointing error detection:

   The values on maximum pointing error shall be provided with the ESV in accordance with the intended use.

   These values shall be checked so that they do not exceed ± 0,2º which is the limit specified in ITU Radio Regulations Resolution 902 [9] for the tracking accuracy of the ESV

   The ranges of values for $\delta\phi$ shall be established as a function of on-axis e.i.r.p. spectral density such that the e.i.r.p. density limits in clause 4.2.3.2 can not be exceeded as defined for the intended use of the ESV.

4.2.6.3 Conformance tests

Conformance tests shall be carried out in accordance with clauses 6.8 to 6.9.

4.2.7 Cessation of emissions of the ESV

4.2.7.1 Justification

For cessation of emissions of the ESV to fulfil the requirements of ITU Radio Regulations Resolution 902 (WRC-03) [9], annex 1, item 6 in locations where the ESV is not allowed to transmit.

4.2.7.2 Specification

4.2.7.2.1 Specification 1: Mode of cessation of emissions

At least one of the following two modes of cessation of emissions shall be implemented:

a) the NCF determines that the ESV shall cease emissions; and/or

b) the ESV autonomously determines that it shall cease emissions.

In addition, there shall be a "single-action" means (e.g. operating a switch) on the front panel of the ESV below deck unit by which a local operator may cease emissions.

Cessation of emissions shall be implemented in such a way that the corresponding mechanisms cannot be bypassed on board the vessel, except under the provisions of article 4.9 of the Radio Regulations of the ITU Radio Regulations [8].

NOTE: The capability to bypass these functions for emergency purposes is outside the scope of the present document.

The ESV interfaces involved in the cessation of emissions shall be defined for the intended use of the ESV:

- the list of relevant parameters which are collected by the ESV or the NCF for determination as to whether the ESV should cease emissions;
- the list of these relevant parameters which are used by the ESV;
- the list of these relevant parameters which are transmitted by the ESV to the NCF;
- the list of the relevant parameters which are received by the ESV from the NCF;
- for the collected relevant parameters, the ESV interface (s), including the protocols, the timing, the ranges of the values, the speed of the variations and the required accuracies;
- for the relevant parameters transmitted to the NCF, the ESV interface with the NCF, including the protocols and the timing;
- for the transmission parameter received from the NCF, the ESV interface with the NCF, including the protocols and the timing.

4.2.7.2.2 Specification 2: Conditions under which the ESV shall cease emissions

For ESV networks where the NCF determines completely or partially where and under which conditions the emissions of the ESV shall be ceased, the collection of the relevant parameters by the ESV and the exchange of information between the ESV and the NCF shall be sufficient for the NCF to determine when to cease emissions with the accuracy defined for the intended use of the ESV and to inform in time the ESV to cease emissions.

For ESVs which determine completely where and under which conditions the emissions shall be ceased, the collection of the relevant parameters by the ESV shall be sufficient for the ESV to determine when to cease emissions with the accuracy defined for the intended use of the ESV.

The determination of these conditions shall take into account the inaccuracy of the ESV location and of the boundaries of the authorized operating areas in the data base used either by the ESV or the NCF, as defined for the intended use of the ESV.

The conditions for cessation of emissions shall take into account at least the following parameters:

- the location of the ESV and the boundaries of the authorized operating area;
- the operating parameters specified in annex 2 of ITU Radio Regulations Resolution 902 (WRC-03) [9];
- the carrier frequency and the authorized frequency bands.

4.2.7.2.3 Specification 3: Cessation of emissions

When in the "Transmission enabled" state a condition requiring cessation of emissions occurs, the ESV shall cease transmissions and enter the "Transmission disabled" state.

When in the "Transmission disabled" state, the ESV shall not leave that state for the "Transmission enable" state as long as a condition requiring cessation of emissions exists or the last CC command received from the NCF is a transmission disable command.

When in the "Initial phase-1" and "Initial phase-2" radio state a condition requiring cessation of emissions occurs, the ESV shall cease transmissions and enter the "Initial phase-0" radio state.

When in the "Initial phase-0" radio state, the ESV shall not leave that state for the "Initial phase-1" or the "Transmission enabled" states as long as a condition requiring cessation of emissions exists.

The time for transition in any state from the occurrence of a condition requiring cessation of emissions to the "Emissions disabled" radio state shall not exceed 5 seconds.

4.2.7.2.4 Specification 4: Fault conditions

Any collection of the relevant parameters by the ESV or transmission of these parameters to the NCF, which have not been completed correctly within the required delay(s) as defined for the intended use of the ESV, shall be considered as a fault condition.

Any transmission parameter not received or not correctly received from the NCF within the required delay defined for the intended use of the ESV shall be considered as a fault condition.

These fault conditions shall be processed as conditions requiring cessation of emissions.

4.2.7.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.10.

4.2.8 Identification of ESV

4.2.8.1 Justification

To fulfil the requirements of ITU Radio Regulations Resolution 902 (Rev. WRC-23) [9], annex 1, item 6 for use by duly authorized entities, to meet the essential requirements as referred to in the scope of the present document.

4.2.8.2 Specification

The ESV shall be designed such that it is possible for the network operator to identify which ESVs are transmitting with at least 1 km accuracy in a given geographic area. The intended use of the ESV shall define the means by which identification of ESVs is accomplished. In the case where an external system is required, any additional means necessary for identification of the ESV in accordance with its intended use of the ESV shall be defined.

4.2.8.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.11.

4.2.9 Control and Monitoring Functions (CMFs)


4.2.9.1 CMF state diagram

The following minimum set of CMFs shall be implemented in ESVs in order to minimize the probability that they originate unwanted transmissions that may give rise to harmful interference to other systems.

In the "Non-valid" state and in the "Transmission disabled" state the ESV shall not transmit. In the "Transmission-enabled" state the ESV is allowed to transmit. In the "Initial phase" state the ESV is only allowed to transmit initial bursts.

NOTE 1: The restrictions in the "Initial phase" state are for the protection of other systems when the ESV is entering the system after a power-on or a reset. These initial burst restrictions do not apply to the ESV transmissions in the "Transmission-enabled" state and once a transmission enable command has been received by the ESV the ESV may transmit or not transmit as required.

Under any fault condition the ESV shall enter the "Non-valid" state where the e.i.r.p. limits for the "Emissions disabled" radio state apply.

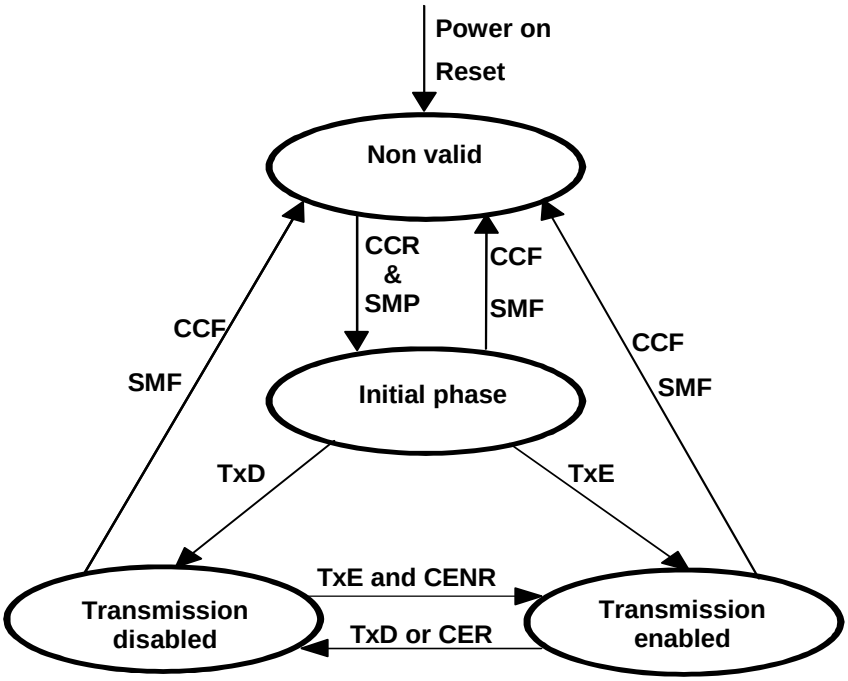

CER: Cessation of Emissions Required;
CENR: Cessation of Emissions Not Required;
SMP: System Monitoring Pass;
SMF: System Monitoring Fail;
TxE: Transmission Enable command;
TxD: Transmission Disable command;
CCR: Control Channel correctly Received;
CCF: Control Channel reception Failure.

Figure 2: State transition diagram of the control and monitoring function of an ESV

NOTE 2: From "Transmission disabled" state a TxE command may also result in a transition towards the "Initial phase" state.

When the ESV transmits several carriers having different frequencies, an ESV state machine as described above may be associated with each carrier or each set of carriers. The events then apply to the subsystem associated with the specific carrier or the specific set of carriers, rather than the whole ESV.

4.2.9.2 Processor monitoring

4.2.9.2.1 Justification

To ensure that the ESV can suppress its transmissions in the event of a processor sub-system failure, to meet the essential requirements as referred to in the scope of the present document.

4.2.9.2.2 Specification

The ESV shall incorporate a processor monitoring function for each of its processors involved in maintaining the performance requirements of the present document and in Control and Monitoring Functions (CMF).

The processor monitoring function shall detect failures of these processors' hardware and software.

In the "Transmission enabled" state, the ESV shall enter the "Non valid" state or the "Carrier-off" radio state no later than 5 seconds after any fault condition occurs, and in any case it shall enter the "Non valid" state within 30 seconds until the processor monitoring function has determined that all fault conditions have been cleared. In any other state after any fault condition occurs, the ESV shall enter the "Non valid" state within 30 seconds until the processor monitoring function has determined that all fault conditions have been cleared.

4.2.9.2.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.12.2.

4.2.9.3 Transmit subsystem monitoring

4.2.9.3.1 Justification

To ensure the inhibition of transmissions that are potentially harmful to other systems in the event of incorrect operation of the transmit frequency generation sub-system.

4.2.9.3.2 Specification

The ESV shall monitor the operation of its transmit frequency generation sub-system and shall be able to detect:

a) loss of frequency lock (if applicable);

b) failure of the Local Oscillator (LO).

No later than 5 seconds after any of these fault conditions of the transmit frequency generation sub-system occurs, the ESV shall enter the "Non-valid" state until the transmit sub-system monitoring function has determined that all fault conditions have been cleared.

4.2.9.3.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.12.3.

4.2.9.4 Power-on/Reset

4.2.9.4.1 Justification

To demonstrate that the ESV achieves a controlled non-transmitting state following the powering of the unit, or the occurrence of a reset made by a local operator when this function is implemented, to meet the essential requirements as referred to in the scope of the present document.

4.2.9.4.2 Specification

Following a manual reset, when this function is implemented, the ESV shall enter the "Non-valid" state.

During and following "power-on" the ESV shall remain in the "Non-valid" state.

4.2.9.4.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.12.4.

4.2.9.5 Control Channel (CC) and Response Channel (RC)

4.2.9.5.1 Justification

Control Channels (CC) are used by ESVs to receive control information from the NCF and Response Channels (RCs) to respond to the NCF. For ESV designed to operate within networks where the NCF determines that the ESV shall cease emissions, then the CCs and RCs are also used for the dialogue with the NCF, to meet the essential requirements as referred to in the scope of the present document.

To ensure that the ESV cannot transmit unless it receives the CC messages from the NCF.

4.2.9.5.2 Specification

4.2.9.5.2.1 Specification 1: types of CCs and RCs

a) The ESV shall have at least one CC and one RC with the NCF. Each CC and each RC may be internal or external.

The types (internal or external) of each CC and each RC shall be defined for the intended use of the ESV.

NOTE 1: The availability of the network carrying the external CC(s) and RC(s) and the numbers of external CC(s) and RC(s) are not within the scope of the present document.

NOTE 2: Some satellite operators may require that internal CC(s) and or RC(s) are available.

b) The connection between the NCF and the ESV via the CCs and RCs shall be either permanent or shall be set up on a call by call basis through a switched network. In case of connection through a switched network the ESV shall be able to receive calls from the NCF and to initiate calls towards the NCF in order to set up the CCs and RCs.

c) The ESV with an external CC shall not transmit without receiving an appropriate signal from the NCF through the satellite to which the ESV transmits, indicating to the ESV that the NCF is alive and insuring that the ESV is pointing to the target satellite.

4.2.9.5.2.2 Specification 2: CC Reception

a) The ESV shall immediately enter the "Non-valid" state when it is not able to correctly receive messages through the CC, from the NCF, for a period not exceeding 30 seconds. This event is called a "CC disruption".

In the case of external CCs and RCs without permanent connection of the NCF with the ESV, the ability to receive CC messages from the NCF is the ability to receive calls and messages from the network through a permanent connection to the switched network to which is connected the NCF.

The inability to receive CC messages from the NCF may be due to the following various causes but not limited to them: no received signal from the NCF or from the network, a too low level received signal, no network accessible, the inability to lock onto the received carrier frequency, to demodulate, to decode, to receive calls and/or messages, a hardware failure or power off.

b) The ESV shall remain in the "Non-valid" state as long as the ESV is unable to receive CC messages from the NCF.

c) From the "Non-valid" state the ESV may enter the "Initial phase" state if the following conditions are met:

- the ESV is able to receive CC messages from the NCF; and
- no fault conditions are present.

4.2.9.5.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.12.5.

4.2.9.6 Network control commands

4.2.9.6.1 Justification

These requirements ensure that the ESV is capable of:

a) retaining a unique identification in the network;

b) receiving commands from the NCF through its CC(s) and executing those commands;

with aim of meeting the essential requirements as referred to in the scope of the present document.

4.2.9.6.2 Specification

The ESV shall hold, in non-volatile memory, its unique identification code in the network.

The ESV shall be capable of receiving through its CCs dedicated messages (addressed to the ESV) from the NCF, and which contain:

- transmission enable commands (TxE);
- transmission disable commands (TxD).

When in the "Initial phase" or "Transmission enabled" states, once a transmission disable command is received, within 1 second the ESV shall enter into, and shall remain in the "Transmission disabled" state until the transmission disable command is superseded by a subsequent transmission enable command.

When in the "Initial phase" or "Transmission disabled" states, once a transmission enable command is received, the ESV may enter into the "Transmission enabled" state.

When entering the "Initial phase" from the "Non-valid" state, the last TxE or TxD command received from the NCF may be used by the ESV to enter the "Transmission enabled" state or the "Transmission disabled" state, respectively, if since the time of reception of that command no "CC disruption" occurred.

NOTE: The physical unit in charge of the reception of the CCs, of the transmissions of the RCs and of the CC commands reception may be a separate and independent unit from the other units of the ESV and it may be common to several ESVs.

4.2.9.6.3 Conformance test

Conformance tests shall be carried out in accordance with clause 6.12.6.

4.2.9.7 Initial burst transmission

4.2.9.7.1 Justification

Restrictions on the initial burst transmissions are necessary to limit disturbance to other services, to meet the essential requirements as referred to in the scope of the present document.

4.2.9.7.2 Specification

For systems where no transmission enable command is foreseen without request from the ESV, in the "Initial phase" state the ESV may transmit initial bursts:

a) The ESV shall not start the transmission of initial bursts before having obtained a confirmation that no cessation of emission applies where the ESV is located. This confirmation shall be obtained either by local means of determination of the cessation of emissions (see clause 4.2.7) or from the NCF via an external control channel.

b) The duty cycle of the burst retransmission shall not exceed 0,2 %, where the duty cycle is defined as the ratio of burst duration to the duration between two successive bursts.

c) Each burst shall not carry more than 256 data bytes excluding the burst preambles and the FEC coding bits.

d) The initial burst shall be transmitted at an e.i.r.p. no greater than $EIRP_{nom}$.

e) The duration between two successive bursts shall not be less than the required NCF response time as defined for the intended use of the ESV. This response time is defined as the duration, measured at the ESV, between an initial burst transmission and the reception and processing of a transmission enable or disable command from the NCF which is never exceeded during 99 % of the cases under normal conditions in the system for which the ESV is designed, as defined for the intended use of the ESV.

NOTE: The present document does not address the possibility for ESVs of transmitting initial bursts in locations where transmissions are not permitted. This possibility is under study within CEPT/ECC WGSE.

4.2.9.7.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.12.7.

4.2.10 Receive antenna off-axis gain pattern

4.2.10.1 Justification

To protect the wanted signals from interference from terrestrial services and from other satellite services, to meet the essential requirements as referred to in the scope of the present document.

4.2.10.2 Specification

The maximum antenna gain of each of the co-polarized components in any direction φ degrees from the antenna main beam axis shall not exceed the following limits:

$G = 32 - 25 \log \varphi$ dBi for $\varphi_{min} \leq \varphi < 48°$

$G = -10$ dBi for $48° \leq \varphi \leq 85°$

$G = 0$ dBi for $85° \leq \varphi \leq 180°$

where:

φ_{min} = 1° or 100 λ/*D* degrees, whichever is the greater, for $D/\lambda \geq 50$.

φ_{min} = 2° or 114 $(D/\lambda)^{-1,09}$ degrees, whichever is the greater, for $D/\lambda < 50$.

D is the nominal diameter of the antenna.

In addition the maximum antenna gain of each of the cross-polarized components in any direction ϕ degrees from the antenna main beam axis shall not exceed the following limits:

$G_x(\varphi) = 23 - 20 \log \varphi$ dBi for $\varphi_r \leq \varphi \leq 7°$

where φ_r is equal to 1° or 100 λ/*D*, whichever is greater.

4.2.10.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.13.

4.2.11 Blocking performance

4.2.11.1 Justification

To prevent high power signals outside the receive frequency band from blocking the reception of signals inside the receive frequency band, to meet the essential requirements as referred to in the scope of the present document.

4.2.11.2 Specification

Receiver blocking is characterized here through gain compression for a signal inside the receive frequency band that is caused by another signal outside the receive frequency band at high power. The level of the other signal is compared to the level of a signal inside the receive frequency band that would cause the same gain compression.

Receiver blocking rejection at a particular frequency is defined as the level of a second signal at this frequency that causes a certain gain compression to a first signal inside the receive frequency band, minus the level of a second signal at a frequency inside the receive frequency band that causes the same gain compression.

The first signal shall be the wanted modulated signal as defined for the intended use, tuned at the centre frequency of the receive frequency band. The second signal shall be a CW signal with a level of 30 dB above the reference sensitivity level and shall not cause a gain compression for the first signal higher than 1 dB.

The rejection shall comply with table 5.

Table 5: Receiver blocking rejection

Frequency	Minimum rejection
Below 9 GHz	20 dB
9 GHz to 10 GHz	10 dB
14 GHz to 16 GHz	10 dB
Above 16 GHz	20 dB
NOTE: In the frequency ranges 10 GHz to 10,7 GHz and 12,75 GHz to 14 GHz, a specific minimum rejection value is required in accordance with the intended use of the ESV.	

4.2.11.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.14.

4.2.12 Adjacent Signal Selectivity

4.2.12.1 Justification

To enable reception of a wanted signal in presence of other signals on adjacent frequencies which are transmitted with high EIRP density from target satellite orbital position, to meet the essential requirements as referred to in the scope of the present document.

NOTE: The power level of signals transmitted from the same orbital position are under control of the satellite operator. Signals transmitted from an adjacent orbital position that is not near-by are suppressed by the antenna gain pattern.

4.2.12.2 Specification

Adjacent Signal Selectivity is a measure of a receiver's ability to receive a signal at its assigned channel frequency in the presence of an adjacent signal at a given frequency offset from the centre frequency of the assigned channel.
The adjacent signal shall occupy the same bandwidth as the wanted signal. Frequency offset and relative power level of the adjacent signal compared to the wanted signal shall take the value given in table 6. BW is the wanted signal occupied bandwidth.

Table 6: Adjacent signal frequency and Power level

Signal	Centre frequency offset from wanted signal	Power level relative to wanted signal
Adjacent Carrier	BW	7 dBsd

The decrease in the required signal to noise ratio in the presence of an adjacent signal shall be no more than 0,5 dB.

4.2.12.3 Conformance tests

Conformance tests shall be carried out in accordance with clause 6.15.

5 Testing for compliance with technical requirements

5.1 Environmental conditions for testing

Tests defined in the present document shall be carried out at representative points within the boundary limits of the operational environmental profile.

Where technical performance varies subject to environmental conditions, tests shall be carried out under a sufficient variety of environmental conditions (within the boundary limits of the operational environmental profile defined by its intended use) to give confidence of compliance for the affected technical requirements.

6 Test methods for the complete ESV

6.1 General

To enable the performance tests to be carried out the use of an NCF or a Special Test Equipment (STE), made available with the EUT, may be necessary. Since this STE will be specific for the intended use, specifications are not specified in the present document. However, the following baseline is provided:

- if the ESV requires to receive a modulated carrier from the satellite in order to transmit, then special test arrangements are required to simulate the satellite signal, thus enabling the ESV to transmit allowing measurement of transmission parameters;
- any characteristic of these special test arrangements which may have direct or indirect effects on the parameters to be measured shall be clearly defined for the intended use of the ESV.

All tests with carrier-on shall be undertaken with the transmitter operating at $EIRP_{nom}$ or $EIRP_{max}$, as per the specific requirement, and with the maximum transmit burst rate, which shall be defined for the intended use of the ESV.

If the Equipment Under Test (EUT) is an ESV that has had hardware and/or software modification(s)included in the EUT for these tests then full documentation of such modification(s) shall be provided to simulate the required test condition. Such modification(s) shall be tested to allow the ESV to operate without its main characteristics being changed.

All technical characteristics and operational conditions as defined for the intended use of the ESV shall be entered in the test report.

For testing under this clause 6 the cable lengths used should be the maximum lengths as defined for the intended use of the ESV. For maximum cable lengths longer than 10 m, the tests may be performed with cables no shorter than 10 m.

6.2 Off-axis spurious radiation

6.2.0 General

The tests for the ESV specification 3) shall be limited to the "Carrier-on" radio state. The tests shall be undertaken with the transmitter operating at $EIRP_{max}$.

6.2.1 Test method

6.2.1.a General

An EUT with antenna is an ESV with its antenna. It comprises both the below-deck and above-deck units interconnected by the appropriate cable(s). An EUT without antenna is an ESV with the removable antenna removed. It comprises both the below-deck and above-deck units, up to the antenna flange, interconnected by the appropriate cable(s). The connecting cable(s) between the below-deck and the above-deck units shall be the same types as recommended in the installation manual defined for the intended use of the ESV. The type of each cable used shall be entered in the test report.

The below-deck unit shall be terminated with matched impedances at the telecommunication ports if there is no associated equipment connected to such ports if recommended in the user documentation defined for the intended use of the ESV. For frequencies up to 80 MHz the measuring antenna shall be a balanced dipole with a length equal to the 80 MHz resonant length and shall be matched to the feeder by a suitable transforming device. Measurements with broad band antennas are also possible provided that the test site has been calibrated according to the requirements of CISPR 16-1-5 [6].

For frequencies between 80 MHz and 1 000 MHz the measuring antenna shall be a balanced dipole which shall be resonant in length. Measurements with broad band antennas are also possible provided that the test site has been calibrated according to the requirements of CISPR 16-1-5 [6].

For frequencies above 1 000 MHz the antenna shall be a horn radiator of known gain/frequency characteristics. When used for reception the antenna and any associated amplification system, the combined amplitude/frequency response calibration curves shall be verified across the measurement frequency range considered for the antenna, to account for the interaction between the components. The antenna is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and at the specified height.

Unused input and output ports of the EUT shall be connected to cables of the appropriate length (see clause 6.1) and terminated to simulate the impedance of the relevant ports of the radio equipment. These cables shall be bundled at the approximate centre of the cable with the bundles of 30 cm to 40 cm in length running in the horizontal plane from the port to which it is connected. If it is impractical to do so because of cable bulk or stiffness, the disposition of the excess cable shall be precisely noted in the test report.

The radiations shall be measured in the frequency range of 30 MHz to 2 GHz in accordance with CISPR 16-1 [5] using the measuring receiver or a comparable spectrum analyser. During the measurements up to 1 GHz the quasi-peak detector shall be used, for measurements in the frequency range 1 GHz to 2 GHz a peak detector shall be used.

In addition, for the frequency band 156 MHz to 165 MHz, the measurement shall be repeated with a receiver bandwidth of 9 kHz to 10 kHz. The equipment shall meet both, the quasi peak and the peak emission limits set out in table 2.

6.2.1.0 Multi-carrier operation

For ESVs designed to transmit simultaneously several carriers the verification below 2 000 MHz shall be performed with the minimum number of carriers and the verification above 2 000 MHz shall be repeated for each combination of carriers defined for the intended use of the ESV.

For each combination of carriers the intended use of the ESV shall identify the carriers' centre frequencies and characteristics, the maximum value of the total on-axis e.i.r.p. of the carriers and the relative levels of the carriers (in dBs) at the input or output of the HPA or antenna.

In the case of combinations of carriers with identical characteristics and when the Global Input Back-Off at the input of the HPA does not exceed the maximum Global Input Back-Off at the input of the HPA of two carriers, the verification may be limited to the case with two carriers and with the maximum frequency separation between them.

In any other case, the number of configurations to be verified above may be limited to the cases which can be provided with the EUT for its intended use, by documentary evidence or demonstration, to generate the maximum e.i.r.p. density level of the out-of-band emissions due to inter-modulation products.

6.2.1.1 Up to 2 000 MHz

6.2.1.1.1 Test site

The test method shall be in accordance with EN 60945 [7] and the test site shall also be in accordance with EN 60945 [7] as well as CISPR 16-1-5 [6], with the following modifications.

This test shall be performed using the following test procedure and test set-up as specified in the following clauses.

The tests can be carried out in an Open Area Test Site (OATS) environment or in an anechoic chamber or in a semi-anechoic chamber as they lead to comparable test results for establishing compliance. Ambient noise levels shall be at least 6 dB below the applicable unwanted emissions limit. The preferred test site is the semi-anechoic chamber.

The open area test site shall be flat, free of overhead wires and nearby reflecting structures, to permit aerial placement at the specified measuring distance and provide adequate separation between aerial, test unit and reflecting structures, according to the specification of CISPR 16-1-5 [6].

For both the open area test site and the semi-anechoic chamber a metal ground plane shall be inserted on the ground plane and it shall extend at least 1 m beyond the perimeter of the EUT at one end and at least 1 m beyond the measurement antenna at the other end. The EUT shall be placed on a non-conductive support.

The distance between the EUT and measuring antenna should be 3 m for measurements below 2 000 GHz. For measurements at a different distance an inverse proportionality factor of 20 dB per decade shall be used to normalize the measured data to the specified distance for determining compliance. Measurement of large test units at 3 m at frequencies near 30 MHz shall take into account the near field effects.

The measuring bandwidth shall be in accordance with table 2.

The setting of controls which may affect the level of radiated interference shall be varied in order to ascertain the maximum emission level. Measuring receivers.

Measuring receivers shall conform to the following characteristics:

- the response to a constant amplitude sine wave signal shall remain within ±1 dB across the frequency range of interest;
- quasi-peak detection shall be used in a -6 dB bandwidth of 120 kHz;
- the receiver shall be operated below the 1 dB compression point.

6.2.1.1.2 Procedure

a) The EUT shall be an EUT without antenna but with the antenna flange terminated by a dummy load.

b) The EUT shall be in the "Carrier-on" radio state.

c) The EUT shall be rotated through 360° and, except in an anechoic chamber, the measuring antenna height simultaneously varied from 1 m to 4 m above the ground plane.

d) All identified spurious radiations shall be measured and noted in frequency and level.

6.2.1.2 Above 2 000 MHz

6.2.1.2.0 General

The spectrum analyser resolution bandwidth shall be set to the specified measuring bandwidth. If the resolution bandwidth is different from the specified measuring bandwidth, linear bandwidth correction shall be performed for the noise-like wideband spurious.

For an EUT with antenna the tests shall be performed in two stages for both the "Carrier-on" and "Carrier-off" radio states:

- Procedure a) Identification of the significant frequencies of spurious radiation;

- Procedure b) Measurement of radiated power levels of identified spurious radiation.

NOTE: Testing for an EUT with antenna attached is not recommended due to difficulties in achieving the required measurement accuracy.

For an EUT without antenna the tests shall be performed in three stages for both the "Carrier-on" and "Carrier-off" radio states:

- Procedure a) Identification of the significant frequencies of spurious radiation;
- Procedure b) Measurement of radiated power levels of identified spurious radiation;
- Procedure c) Measurement of conducted spurious radiation at the antenna flange.

6.2.1.2.1 Identification of the significant frequencies of spurious radiation

6.2.1.2.1.1 Test site

The identification of frequencies emitting from the EUT shall be performed using the following test procedure and test set-up as specified in the following clauses.

The tests can be carried out in an Open Area Test Site (OATS) environment or in an anechoic chamber or in a semi-anechoic chamber as they lead to comparable test results for establishing compliance. Ambient noise levels shall be at least 6 dB below the applicable unwanted emissions limit. The preferred test site is the semi-anechoic chamber.

6.2.1.2.1.2 Procedure

a) The EUT shall be in the "Carrier-off" radio state.

b) For an EUT with antenna the main beam of the antenna shall have an angle of elevation equal to 7° or to the minimum angle of elevation defined for the intended use of the ESV, whichever is greater, and, for an EUT without antenna the antenna flange shall be terminated by a dummy load.

c) The receivers shall scan the frequency band whilst the EUT revolves.

d) The EUT shall be rotated though 360° and the frequency of any spurious signals noted for further investigation.

e) For an EUT with antenna the test shall be repeated with the test antenna being in the opposite polarization.

f) The test shall be repeated in the "Carrier-on" radio state whilst transmitting one modulated carrier at maximum power.

6.2.1.2.2 Measurement of radiated power levels of identified spurious radiation

6.2.1.2.2.1 Test site

The measurement of each spurious radiation noted during procedure a) of the test shall be performed using the following test procedure and test set-up as specified in the following clauses.

The tests can be carried out in an Open Area Test Site (OATS) environment or in an anechoic chamber or in a semi-anechoic chamber as they lead to comparable test results for establishing compliance. Ambient noise levels shall be at least 6 dB below the applicable unwanted emissions limit.

6.2.1.2.2.2 Procedure

The preferred test site is the semi-anechoic chamber.

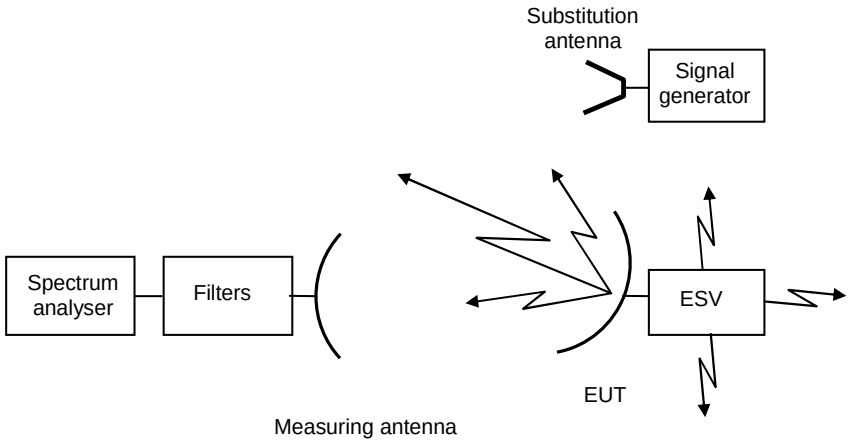


Figure 3: Test set up - spurious radiation measurement above 2 000 MHz for an EUT with antenna

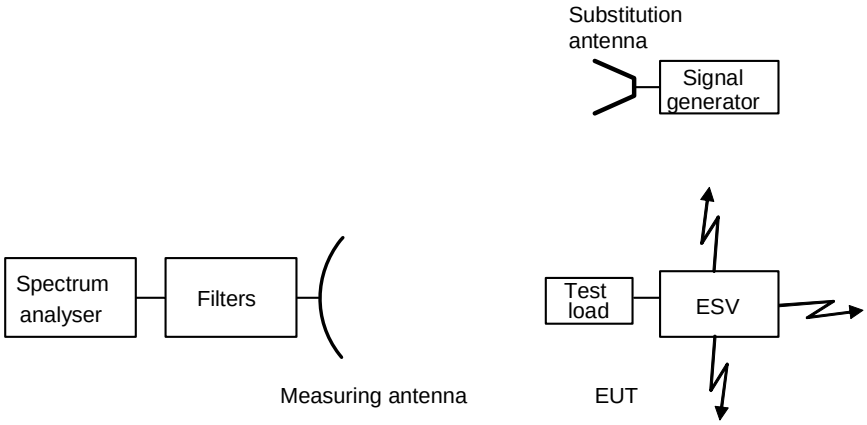


Figure 4: Recommended test set up - spurious radiation measurements above 2 000 MHz for an EUT without antenna

a) The test set ups shall be as shown in figure 3 for spurious radiation measurement above 2 000 MHz for an EUT with antenna or preferably figure 4 for spurious radiation measurements above 2 000 MHz for an EUT without antenna. A tuneable notch filter should be used to remove the wanted (non-spurious) signal. However, precautions should be taken to prevent spectrum analyser damage due to accidental filter mistuning during test or other potentially harmful scenarios.

b) The EUT shall be installed such that the units are separated by about 1 m to 2 m with the below-deck unit at a height between 0,5 m and 1,0 m on a turntable. The interconnection cable shall be maintained by non-metallic means at a height between 0,5 m and 1,0 m. For the test arrangement shown in figure 3 the main beam of the antenna shall have an angle of elevation equal to 7° or to the minimum angle of elevation defined for the intended use of the ESV, whichever is greater, and be oriented away from the geostationary orbit, or be inhibited by placing RF absorbing panels in that direction. For antennas designed for minimum off-axis gain in the direction of the geostationary orbit plane, the plane containing the larger cut of the main lobe shall be set vertical.

c) The measuring antenna shall be positioned at a distance from the EUT (e.g. 3 m, 5 m, 10 m) relevant to the applied test site. The measuring antenna shall be adjusted in height and the EUT rotated, whilst the EUT is in the appropriate carrier condition, for a maximum response on the associated spectrum analyser at each spurious frequency previously identified, this response level shall be noted. The adjustment in height of the measuring antenna does not apply when an anechoic chamber is being used. The measuring antenna shall never enter the 7° off-axis cone around the main beam direction.

d) The investigation shall be repeated with the measuring antenna in the opposite polarization and the response level similarly noted.

e) The EUT shall be replaced by the substitution antenna to which is connected a signal generator. The main beam axes of the measuring and substitution antennas shall be aligned. The distance between these antennas shall be the distance determined under test c).

f) The substitution and measuring antennas shall be aligned in the polarization which produced the larger response between the EUT and the test antenna in steps c) and d).

g) The output of the generator shall be adjusted so that the received level is identical to that of the previously noted largest spurious radiation.

h) The output level of the signal generator shall be noted. The e.i.r.p. of the spurious radiation is the sum, in dB, of the signal generator output plus the substitution antenna isotropic gain minus the interconnection cable loss.

6.2.1.2.3 Measurement of conducted spurious radiation at the antenna flange

6.2.1.2.3.1 Test site

There are no requirements for the test site to be used for this test.

6.2.1.2.3.2 Procedure

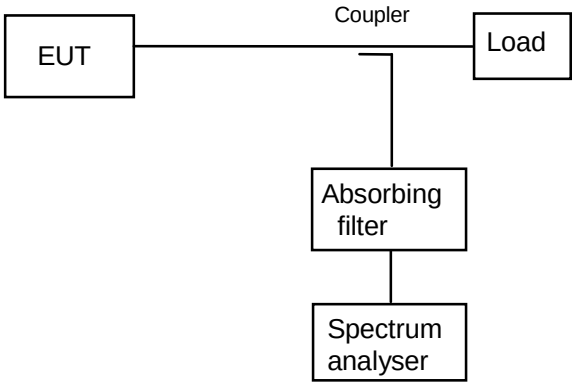


Figure 5: Test set up - conducted spurious radiation above the cut-off frequency

a) The test set up shall be as shown in figure 5. In order to protect the spectrum analyser an absorbing filter can be used and it shall be tuned to the transmit carrier frequency.

b) The frequency range from the cut-off frequency of the waveguide of the EUT to 40 GHz shall be investigated for spurious radiation whilst in the "Carrier-on" radio state with the carrier being at maximum power and normally modulated.

c) To obtain the off-axis spurious e.i.r.p. the maximum measured antenna transmit gain, measured at the frequency of the identified unwanted emission, for off-axis angles greater than 7°, shall be added to the measured power density and any correction or calibration factors summated with the result. If so identified for the intended use of the ESV, it shall be acceptable that the worst case value assumed (i.e. 8 dBi for off-axis angles greater than 7°) is used in place of the maximum off-axis antenna gain at the frequency of the identified unwanted emission.

d) The test shall be repeated, for transmit capable equipment, in the "Carrier-off" radio state.

6.3 On-axis spurious radiation

6.3.1 Test method

6.3.1.1 Test site

There are no requirements for the test site to be used for this test.

6.3.1.2 Method of measurement

6.3.1.2.1 General

The tests shall be undertaken with the transmitter operating at $EIRP_{max}$.

For ESV equipment for which measurements at the antenna flange are not possible, the measurements shall be performed with a test antenna.

For ESV equipment for which measurements at the antenna flange are possible, the measurements shall be performed at the antenna flange. The EUT is the ESV with its antenna comprising both the below- and above-deck units interconnected by appropriate cables.

6.3.1.2.2 Method of measurement at the antenna flange

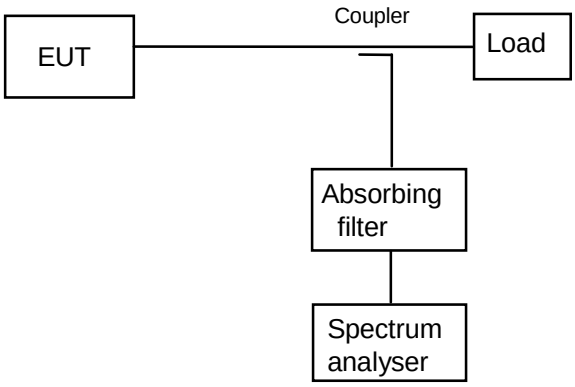


Figure 6: Test set up - on-axis spurious radiation measurements at the antenna flange

a) The test set up shall be as shown in figure 6. In order to protect the spectrum analyser an absorbing filter can be used and it shall be tuned to the transmit carrier frequency.

b) The EUT shall transmit one modulated carrier continuously at its maximum burst rate, centred on a frequency within the lower limit of the operating frequency band of the EUT. The EUT shall be operated at the highest normal operating e.i.r.p. The frequency range 14,00 GHz to 14,50 GHz shall be measured.

c) Due to the proximity of the carrier the spectrum analyser resolution bandwidth shall be set to a measurement bandwidth of 3 kHz, or as close as possible. If the measurement bandwidth is different from the specified measurement bandwidth, bandwidth correction shall be performed for noise-like wideband spurious radiation.

d) To obtain the on-axis spurious e.i.r.p., the antenna transmit gain shall be added to any figure obtained in the above measurement and any correction or calibration factor summated with the result. The antenna gain shall be as measured in clause 6.5.1.3 at the closest frequency to the spurious frequency.

e) The tests in b) to e) shall be repeated with a transmit frequency in the centre of the operating frequency band.

f) The tests in b) to e) shall be repeated with a transmit frequency as close to the upper limit of the operating frequency band of the EUT as possible.

g) The test shall be repeated in the "Carrier-off" radio state.

h) The test shall be repeated in the "Emissions disabled" radio state.

6.3.1.2.3 Method of measurement with a test antenna

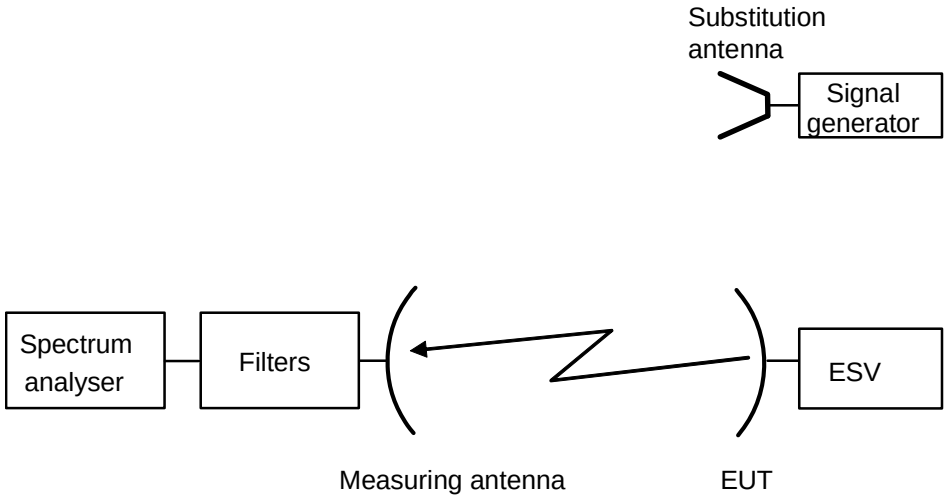


Figure 7: Test set up - on-axis spurious radiation measurements for an EUT with antenna

a) The test set up shall be as shown in figure 7.

b) The EUT shall be installed such that the units are separated by about 1 m to 2 m with the below-deck unit at a height between 0,5 m and 1,0 m on a turntable. The interconnection cable shall be maintained by non-metallic means at a height between 0,5 m and 1,0 m.

c) The spectrum analyser resolution bandwidth shall be set to the specified measuring bandwidth or as close as possible. If the resolution bandwidth is different from the specified measuring bandwidth, bandwidth correction shall be performed for noise-like wideband spurious radiation.

d) The EUT shall transmit the modulated carrier(s) continuously, or at its maximum burst rate where applicable, centred on a frequency as close to the lower limit of the operating frequency band of the EUT as possible. The EUT shall be operated at $EIRP_{max}$. The frequency range 14,00 GHz to 14,50 GHz shall be measured and each spurious frequency shall be noted.

e) Due to the proximity of the carrier the spectrum analyser resolution bandwidth shall be set to a measurement bandwidth of 3 kHz, or as close as possible. If the measurement bandwidth is different from the specified measurement bandwidth, linear bandwidth correction shall be performed for noise-like wideband spurious radiation.

f) The measuring antenna shall be positioned at a distance from the EUT (e.g. 3 m, 5 m, 10 m) relevant to the applied test site and shall be aligned with the EUT antenna for the transmit frequency. The measuring antenna shall be adjusted in height, whilst the EUT is in the appropriate carrier condition, for a maximum response on the associated spectrum analyser at each spurious frequency previously identified, this response level shall be noted. The adjustment in height of the measuring antenna does not apply when an anechoic chamber is being used.

g) The EUT shall be replaced by a representative substitution antenna to which is connected a signal generator. The main beam axes of the measuring and substitution antennas shall be aligned. The distance between these antennas shall be the distance determined under test f).

h) The substitution and measuring antennas shall be aligned in the polarization which produced the largest response between the EUT and the test antenna.

i) The output of the generator shall be adjusted so that the received level is identical to that of the previously noted largest spurious radiation.

j) The output level of the signal generator shall be noted. The e.i.r.p. of the on-axis spurious radiation is the sum, in dB, of the signal generator output plus the substitution antenna isotropic gain minus the interconnection cable loss.

k) The tests in d) to j) shall be repeated with a transmit frequency in the centre of the operating frequency band.

l) The tests in d) to j) shall be repeated with a transmit frequency as close to the upper limit of the operating frequency band of the EUT as possible.

m) The test shall be repeated in the "Carrier-off" radio state.

n) The test shall be repeated in the "Emissions disabled" radio state.

6.4 Maximum ESV emissions towards the horizon

6.4.1 Test method

6.4.1.1 Maximum e.i.r.p. towards the horizon

a) The co-polarization radiation pattern in the elevation plane shall be taken from measurements made in clause 6.5.1.4.5.

b) The maximum e.i.r.p. towards the horizon, $EIRP_{horizon}$ (dBW), shall be calculated from:

$$EIRP_{horizon} = EIRP_{max} - G_{max_on_axis} + G_{max_horizon}$$

where:

- $EIRP_{max}$ is the maximum on-axis e.i.r.p. (dBW) as defined for the intended use of the ESV ;
- $G_{max_on_axis}$ is the maximum on-axis antenna gain (dBi), as measured in clause 6.5.1.3;
- $G_{max_horizon}$ is the maximum antenna gain (dBi) towards the horizon within the range of the declared operational elevation angles. The determination of $G_{max_horizon}$ shall take into account the maximum pointing threshold, $\delta\phi$ as defined for the intended use of the ESV, for operating elevation angles on the main beam.

c) It shall be verified that the $EIRP_{horizon}$ does not exceed 16,3 dBW (clause 4.2.3.2.2).

6.4.1.2 Maximum e.i.r.p. spectral density towards the horizon

a) The co-polarization radiation pattern in the elevation plane shall be taken from measurements made in clause 6.5.1.4.5.

b) The maximum e.i.r.p. spectral density towards the horizon, $EIRP_{sd_horizon}$ (dBW/1 MHz), shall be calculated from:

$$EIRP_{sd_horizon} = PSD_{max} + G_{max_horizon}$$

where:

- PSD_{max} is the maximum power spectral density (dBW/1 MHz) at the antenna flange measured using the procedure in clause 6.5.2 using a resolution bandwidth of 1 MHz instead of 40 kHz and performed at $EIRP_{max}$;
- $G_{max_horizon}$ is as defined above in clause 6.4.1.1.

c) It shall be verified that the $EIRP_{sd_horizon}$ does not exceed 12,5 dBW/1 MHz (clause 4.2.3.2.1).

6.5 Off-axis e.i.r.p. emission density within the band

6.5.0 General

Off-axis e.i.r.p. emission density (co-polar and cross-polar) within the band 14,0 GHz to 14,5 GHz.

6.5.1 Test method

6.5.1.1 General

The measurement shall be made in the operational configuration(s) (occupied bandwidth, $EIRP_{nom}$) producing the highest emission density in the frequency band. The selected configuration(s) shall be recorded in the test report. All of the e.i.r.p. emission density measurement shall be performed at $EIRP_{nom}$.

Test with an STE can be done; then the STE shall provide all the signals needed by the ESVs under normal operation (e.g. a radio beacon if it is expected to be received by the satellite).

The e.i.r.p. densities are determined from the measurements of the antenna copolar and crosspolar gain patterns, and of the power density at the antenna flange. These e.i.r.p. densities shall be compared to the specified masks, taking into account the maximum allowed exceedance (specified to take into account the rain fading) by a value A (10 dB).

To ascertain the off-axis e.i.r.p. it is necessary to know the transmit power density and antenna transmit radiation pattern. To ascertain the radiation pattern it is necessary to know the antenna transmit gain.

The following three measurement procedures shall, therefore, be performed:

a) transmit output power density (dBW/40 kHz);

b) antenna transmit gain (dBi);

c) antenna transmit radiation patterns (dBi).

6.5.1.2 Transmit output power density

6.5.1.2.1 General

For the purpose of this test the EUT is defined as the below deck unit and that part of the above deck unit up to the antenna flange.

The EUT output power shall be set to the power corresponding to $EIRP_{nom}$.

6.5.1.2.2 Test site

There are no requirements for the test site to be used for this test.

6.5.1.2.3 Method of measurement

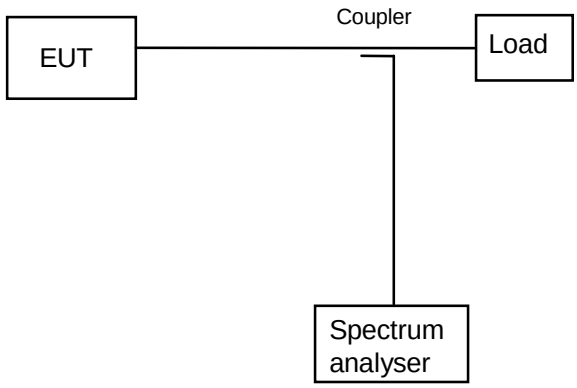


Figure 8: Test set up - transmit output power density measurement

a) The test set up shall be as shown in figure 8.

b) The EUT shall transmit the carrier(s) with a pseudo random signal. For burst mode transmission the EUT shall transmit at its maximum burst-rate. The power density supplied to the antenna flange shall be measured in dBW/40 kHz. The coupling factor of the test coupler at the test frequency and the attenuation of any necessary waveguide adapter shall be taken into account.

   The spectrum analyser shall be operated under the following conditions:

   - Frequency span:
     As required for the complete nominated bandwidth.

   - Resolution bandwidth:
     The resolution bandwidth of the spectrum analyser shall be set as close as possible to the specified measuring bandwidth of 40 kHz. If the resolution bandwidth is different from the specified bandwidth then bandwidth correction shall be performed except for spectrum components the width of which are narrower than the measurement bandwidth.

   - Display/video bandwidth:
     Equal to the resolution bandwidth.

   - Averaging:
     Yes.

   - Max hold:
     No.

   If so provided with the EUT, the test may be performed in max hold mode.

   For an ESV operating in a continuous carrier mode, the measurement time shall be sufficient to ensure that at any frequency the difference between any two measurement results is less than 1 dB.

   For an ESV operating in a non-continuous carrier mode, the average measurement shall be performed over the transmitted burst and the measurements from a series of bursts shall be combined as follows:

   - Each measurement can exclude a specific portion of each burst. The excluded portion shall not exceed 50 µs or 10 % of the burst, whichever is the smaller. The excluded portion shall be defined for the intended use of the ESV.

   - The measurements from several bursts shall be averaged to give a final measurement result. The number of bursts that are averaged shall be sufficient to ensure that the difference between any two final measurement results is less than 1 dB.

c) The measurement shall be made in the operational configuration(s) (occupied bandwidth, $EIRP_{nom}$) producing the highest emission density in the frequency band. The selected configuration(s) shall be recorded in the test report.

6.5.1.3 Antenna transmit gain

6.5.1.3.1 General

For the purpose of the present document, the antenna transmit gain is defined as the ratio, expressed in decibels (dBi), of the power that would have to be supplied to the reference antenna, i.e. an isotropic radiator isolated in space, to the power supplied to the antenna being considered, so that they produce the same field strength at the same distance in the same direction. Unless otherwise specified the gain is for the direction of maximum radiation.

For the purpose of this test the EUT is defined as that part of the above-deck unit which comprises the antenna and its flange. The antenna includes the reflector(s), feed, support struts and an enclosure of equal weight/distribution to any electrical equipment normally housed with the feed at the antenna focal point, as the ESV is planned to be brought to the market.

6.5.1.3.2 Test site

This test shall be performed using the following method of measurement and test set-up as specified in the following clauses.

The tests can be carried out in an Open Area Test Site (OATS) environment or in an anechoic chamber or in a semi-anechoic chamber as they lead to comparable test results for establishing compliance. Ambient noise levels shall be at least 6 dB below the applicable unwanted emissions limit. The preferred test site is the semi-anechoic chamber.

6.5.1.3.3 Method of measurement

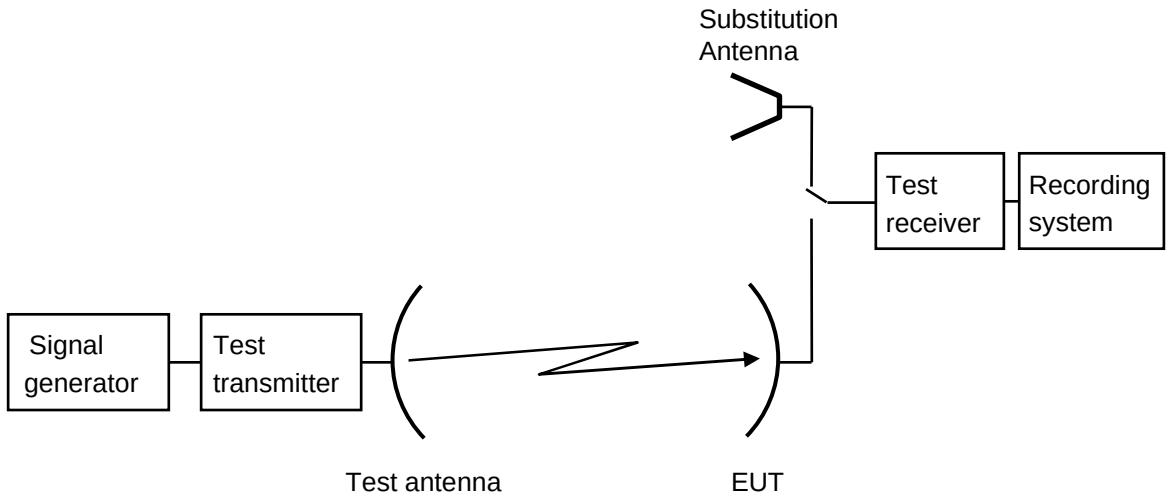


Figure 9: Test set up - antenna transmit gain measurement

a) The test set up shall be as shown in figure 9 with the EUT connected to the test receiver. The test arrangement shall enable the test results to be displayed and recorded with the angular position and the signal level.

b) A test signal shall be transmitted by the test transmitter through the test antenna. The centre frequency of the test signal shall be set to the middle of the operating frequency band as defined for the intended use of the ESV. The E-plane shall be vertical. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. The polarizer of the EUT antenna shall be rotated and adjusted such that the E-plane coincides with the E-plane of the test transmitter.

c) The EUT shall be aligned to maximize the received signal and the recording system adjusted to give the maximum reading on the plot.

d) The EUT shall be driven in azimuth in one direction through 10°.

e) The pattern measurement is then obtained by driving the EUT in azimuth back through boresight to 10° the other side and recording the results.

f) The EUT shall be replaced by the substitution antenna and the received signal level maximized.

g) This level shall be recorded.

h) The substitution antenna shall be driven in azimuth as in d) and e).

i) The gain of the EUT shall be calculated from:

$$G_{EUT} = L_1 - L_2 + C$$

where:

- G_{EUT} is the gain of the EUT (dBi);
- L_1 is the level obtained with the EUT (dB);

- L_2 is the level obtained with the substitution antenna (dB);
- C is the calibrated gain of the substituted antenna at the test frequency (dBi).

j) The tests in c) to i) shall be repeated with the frequency changed to lowest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

k) The tests in c) to i) shall be repeated with the frequency changed to highest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

6.5.1.4 Antenna transmit radiation patterns

6.5.1.4.1 General

For the purpose of the present document, the antenna transmit radiation patterns are diagrams relating field strength to the angle of the direction pointed by the antenna at a constant large distance from the antenna.

For the purpose of this test, the EUT is defined as that part of the above deck unit which comprises the antenna and its flange. The antenna includes the reflector(s), feed, support struts and an enclosure of equal weight/distribution to any electrical equipment normally housed with the feed at the antenna focal point.

6.5.1.4.2 Test site

This test shall be performed using the following method of measurement and test set-up as specified in the following clauses.

The tests can be carried out in an Open Area Test Site (OATS) environment or in an anechoic chamber or in a semi-anechoic chamber as they lead to comparable test results for establishing compliance. Ambient noise levels shall be at least 6 dB below the applicable unwanted emissions limit. The preferred test site is the semi-anechoic chamber.

6.5.1.4.3 Test arrangement

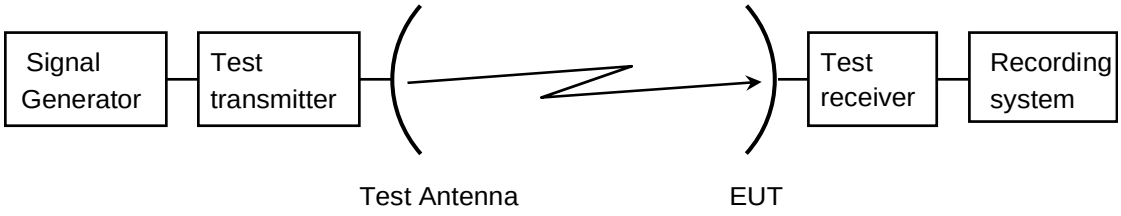


Figure 10: Test set up - antenna transmit radiation pattern measurement

6.5.1.4.4 Co-polar radiation pattern-azimuth

a) The test set up shall be as shown in figure 10 with the EUT connected to the test receiver. The test set up shall enable the test results to be displayed and recorded with the angular position along and the signal level.

b) The frequency of the test signal shall be set to the middle frequency of the operating frequency band as defined for the intended use of the ESV.

c) The initial E-plane of the test signal radiated by the test transmitter through its antenna shall be vertical. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane coincides with the E-plane of the test transmitter. Precise co-polar peaking of the polarization shall be done by observing the cross-polar minimum (fine adjustment).

d) The EUT shall be aligned to maximize the received signal and the recording system adjusted to give the maximum reading on the plot.

e) The EUT shall be driven in azimuth to -180°.

f) The transmit pattern measurement is then obtained by driving the EUT in azimuth from -180° to +180° with the results recorded.

g) The tests in d) to f) shall be repeated with the frequency changed to the lowest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

h) The tests in d) to f) shall be repeated with the frequency changed to the highest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV use.

i) The tests in b) to h) may be performed simultaneously.

j) The tests in d) to i) shall be repeated with the E-plane of the test signal being horizontal. The frequency of the test signal shall be set to middle of the operating frequency band as defined for the intended use of the ESV. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane coincides with the E-plane of the test transmitter (giving the minimum cross-polar receive signal). Precise co-polar peaking of the polarization shall be done by observing the cross-polar minimum.

6.5.1.4.5 Co-polar radiation pattern-elevation

a) The test set up shall be as shown in figure 10 with the EUT connected to the test receiver. The test arrangement shall enable the test results to be displayed and recorded with the angular position and the signal level.

b) The frequency of the test signal shall be set to the middle frequency of the operating frequency band as defined for the intended use of the ESV.

c) The initial E-plane of the test signal radiated by the test transmitter through its antenna shall be vertical. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane coincides with the E-plane of the test transmitter. Precise co-polar peaking of the polarization shall be done by observing the cross-polar minimum (fine adjustment).

d) The EUT shall be aligned to maximize the received signal and the recording system adjusted to give the maximum reading on the plot.

e) The EUT shall be driven in elevation to -1°.

f) The transmit pattern measurement is then obtained by driving the EUT in elevation from -1° to 70° and the results recorded.

g) The tests in d) to f) shall be repeated with the frequency changed to the lowest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

h) The tests in d) to f) shall be repeated with the frequency changed to the highest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

i) The tests in b) to h) may be performed simultaneously.

j) The tests in d) to i) shall be repeated with the E-plane of the test signal being horizontal. The frequency of the test signal shall be set to the middle frequency of the operating frequency band as defined for the intended use of the ESV. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane coincides with the E-plane of the test transmitter. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. Precise co-polar peaking of the polarization plane shall be done by observing the cross-polar minimum (fine adjustment).

6.5.1.4.6 Cross-polar radiation pattern-azimuth

a) The test set up shall be as shown in figure 10 with the EUT connected to the test receiver. The test set up shall enable the test results to be displayed and recorded with the angular position and the signal level.

b) The frequency of the test signal shall be set to the middle frequency of the operating frequency band as defined for the intended use of the ESV.

c) The initial E-plane of the test signal radiated by the test transmitter through its antenna shall be vertical. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane is orthogonal to the E-plane of the test transmitter. Precise fine adjustment of the polarization plane shall be done by observing the cross-polar minimum.

d) The boresight co-polar receive signal shall be used to adjust the recording system such that it gives the maximum reading on the plot.

e) The EUT shall be driven in azimuth to -10°.

f) The transmit pattern measurement is then obtained by driving the EUT in azimuth from -10° to +10° with the results recorded.

g) The tests in d) to f) shall be repeated with the frequency changed to the lowest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

h) The tests in d) to f) shall be repeated with the frequency changed to the highest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

i) The tests in b) to h) may be performed simultaneously.

j) The tests in d) to i) shall be repeated with the E-plane of the test signal being horizontal. The frequency of the test signal shall be set to the middle frequency of the operating frequency band as defined for the intended use of the ESV. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane is orthogonal with the E-plane of the test transmitter precise fine adjustment of the polarization plane shall be done by observing the cross-polar minimum.

6.5.1.4.7 Cross-polar radiation pattern-elevation

a) The test set up shall be as shown in figure 10 with the EUT connected to the test receiver. The test set up shall enable the test results to be displayed and recorded with the angular position and the signal level.

b) The frequency of the test signal shall be set to the middle frequency of the operating frequency band as defined for the intended use of the ESV.

c) The initial E-plane of the test signal radiated by the test transmitter through its antenna shall be vertical. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane is orthogonal to the E-plane of the test transmitter. Precise fine adjustment of the polarization plane shall be done by observing the cross-polar minimum.

d) The boresight co-polar receive signal shall be used to adjust the recording system such that it gives the maximum reading on the plot.

e) The EUT shall be driven in elevation to -1°.

f) The transmit pattern measurement is then obtained by driving the EUT in elevation from -1° to +10° with the results recorded.

g) The tests in d) to f) shall be repeated with the frequency changed to the lowest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

h) The tests in d) to f) shall be repeated with the frequency changed to the highest carrier centre frequency of the operating frequency band as defined for the intended use of the ESV.

i) The tests in b) to h) may be performed simultaneously.

j) The tests in d) to i) shall be repeated with the E-plane of the test signal being horizontal. The frequency of the test signal shall be set to the middle frequency of the operating frequency band as defined for the intended use of the ESV. The EUT antenna main beam axis shall be aligned with the main beam axis of the test transmitter. The polarizer of the EUT antenna shall be rotated and adjusted such that its E-plane is orthogonal with the E-plane of the test transmitter precise fine adjustment of the polarization plane shall be done by observing the cross-polar minimum.

6.5.2 Computation of results

The results shall be computed by producing a "mask" to the specified limits with the reference level being equal to the sum of the transmitter output power density and the gain of the antenna. This reference shall then be placed on the maximum point of the plots obtained from the transmit radiation pattern measurements, so as to ascertain that the off-axis e.i.r.p. density is within the mask, and thus conforming to the specification in clause 4.2.4.

6.6 Carrier suppression

6.6.1 Test method

a) For EUTs with antenna, the test set up for conducted measurements shall be as shown in figure 6. Otherwise, for EUTs without antenna, the test set up for radiated measurements shall be as shown in figure 7.

b) The EUT shall transmit one modulated carrier continuously, or at its maximum burst rate where applicable, centred on the middle frequency of the operating frequency band as defined for the intended use of the ESV.

c) The resolution bandwidth of the spectrum analyser shall be set to 3 kHz.

d) The "transmission disabled state" shall be obtained by use of the NCF.

e) For conducted measurements the maximum residual carrier power density within the nominated bandwidth shall be measured and added to the antenna on-axis gain.

f) For radiated measurements the maximum residual e.i.r.p. density within the nominated bandwidth shall be measured and recorded.

An STE provided with the EUT can be used to enable the ESV transmission to be suppressed.

6.7 Antenna pointing for ESV

6.7.1 General

The antenna pointing test method is designed to verify the ability of the EUT to detect and correctly respond to pointing errors that exceed the threshold, $\delta\phi$, defined for the intended use of the ESV as required in clauses 4.2.4 and 4.2.6. For the purposes of testing antenna pointing, the documentation provided with the EUT shall include:

- the operational dynamic limits for ship motion under which the ESV is expected to maintain tracking within the declared $\delta\phi$;
- the survivability dynamic limits for operation without permanent damage; and
- the dynamic limits for testing of the EUT, which shall not be less than the operational dynamic limits and not greater than the survivability dynamic limits.

For the purpose of these tests the EUT is the ESV with its antenna connected.

6.7.2 Test method

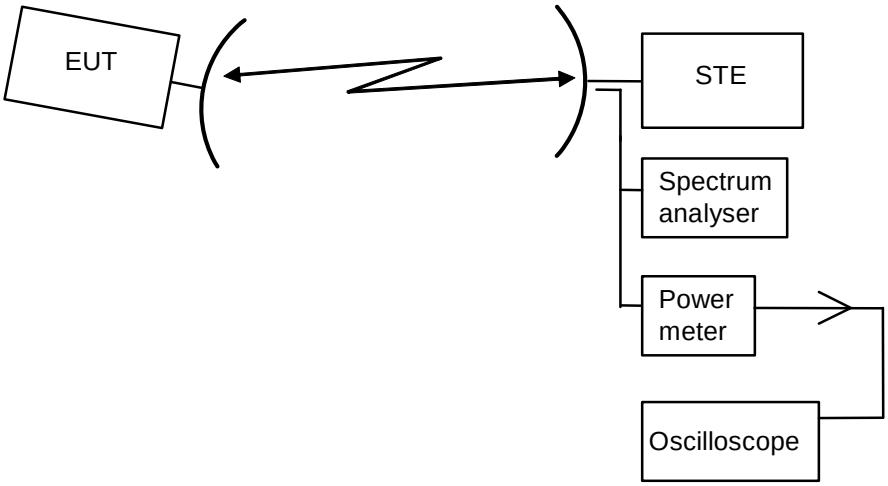


Figure 11: Test set up for pointing error detection

a) The equipment shall be tested as shown in figure 11. An actual satellite link may be used in place of the STE. In which case, care should be taken so that interference to adjacent satellites does not occur due to the pointing errors that will be induced in the test procedure (e.g. suppress the carrier or use a low e.i.r.p.).

b) The signal received by the EUT shall be adjusted so that the signal to noise ratio corresponds to the minimum threshold signal to noise ratio defined for the intended use of the ESV for reliable tracking.

c) If the test is done with the carrier on then the spectrum analyser or the power meter shall be used to verify that the EUT has suppressed the carrier. Otherwise, the documentation provided with the EUT shall describe how the tests are performed and it is determined that the carrier is suppressed.

d) There shall be a means for measuring and analysing true pointing error values defined for the intended use of the ESV. The means of measuring and analysing pointing errors shall be included in the test report.

e) There shall be a means of dynamically inducing pointing errors that exceed the threshold defined for the intended use of the ESV. The means for inducing pointing errors shall be representative of operating vessel dynamics, within the dynamic limits for testing the EUT, as defined for the intended use of the ESV in clause 6.7.1. If dynamic means alone are not sufficient to induce pointing errors that exceed the threshold for pointing errors, then an alternative means shall be used. Pointing errors shall be induced in at least two orthogonal directions; but not necessarily during the same test sequence. The means of inducing pointing errors shall be included in the test report.

f) Conduct of test:

   1) EUT shall be switched on and pointing towards the STE in a stable tracking state.

   2) Pointing errors of an increasing magnitude shall be induced in the EUT using the means given in e) above until the declared pointing error threshold is exceeded.

   3) It shall be verified that the EUT correctly detects that the induced pointing error has exceeded the pointing error threshold and enters the "Carrier-off" radio state no later than T seconds after the pointing error threshold is exceeded, where T is the response time defined for the intended use of the ESV.

   4) Using the dynamic means given in e), the induced pointing error shall be decreased until it is less than the pointing error threshold.

   5) It shall be verified that the EUT does not re-enter the "Carrier-on" radio state for at least 2 × T seconds.

g) Step f) shall be repeated ten times.

h) If the results in f) 3) are satisfied on all ten tests, then the EUT shall be declared compliant with the requirements.

6.8 Antenna mechanical stability

6.8.1 Test method

The methodology described in annex B shall be used to show compliance with the specification for mechanical stability.

6.9 Antenna pointing

6.9.1 Antenna pointing

6.9.1.1 Test method

It shall be verified that the value provided with the ESV is within the limit set in the specification b) of clause 4.2.6.2.

6.10 Cessation of emissions of the ESV

6.10.1 Test arrangement

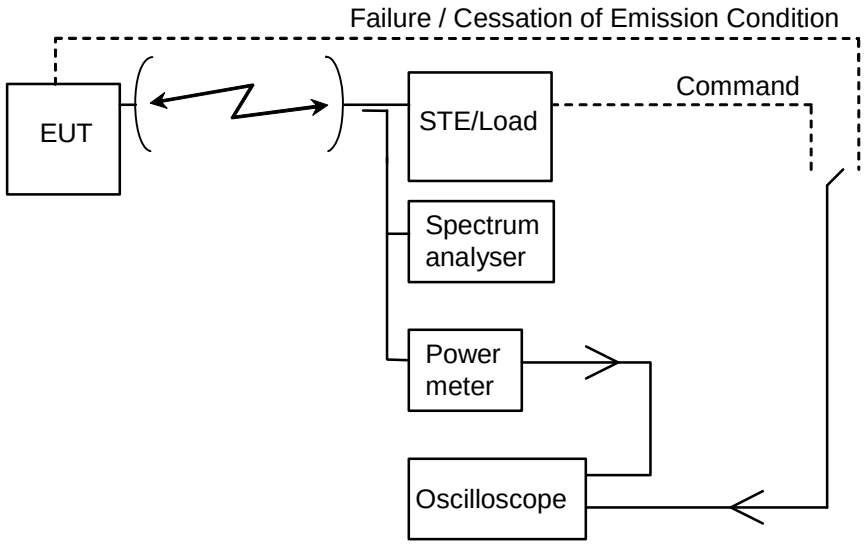


Figure 12: General test set up for control and monitoring tests for radiated measurements

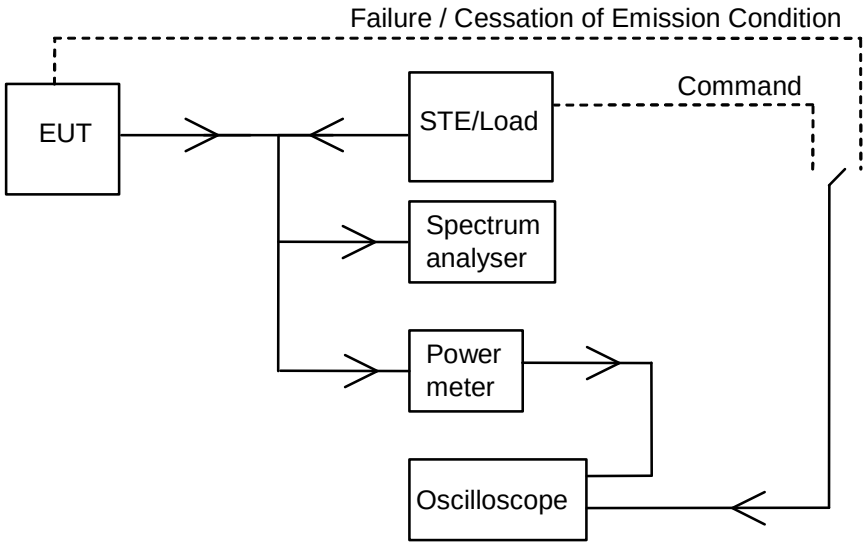


Figure 13: General test set up for control and monitoring tests for conducted measurements

The test set up shall be as shown in figure 12 for control and monitoring tests for radiated measurements and figure 13 for control and monitoring tests for conducted measurements. There shall be a means of simulating a condition where cessation of emissions is required. The spectrum analyser or the oscilloscope shall be used to measure the time difference between the occurrence of the condition and the cessation of emissions. In all test methods, it shall be verified that the time difference does not exceed 5 seconds as specified in clause 4.2.7.2.3.

Where the EUT adds an operational margin around areas where cessation of emissions is required to account for the position determination accuracy and latency, the test procedure may simulate the actual behaviour of an EUT as its sails into an area where cessation of emissions is required. For example, if the EUT adds a margin of X meters around areas where cessation of emissions is required, then the test may begin with the EUT being simulated at a position more than X meters outside of an area where cessation of emissions is required. The test may then simulate the motion of the EUT towards the area where cessation of emissions is required. In any event, the EUT shall enter the "emission disabled" radio state within 5 seconds of entering the actual area where cessation of emissions is required.

For the purpose of these tests the EUT is the ESV either with, or without its antenna connected.

6.10.2 Test method

6.10.2.1 Required documentation

The documentation provided with the EUT shall indicate the mode(s) of cessation of emissions implemented in the EUT and the ESV interfaces involved in the cessation of emissions as specified in clause 4.2.7.2.1.

By documentary evidence provided with the EUT, it shall be demonstrated compliance with specification 2 in clause 4.2.7.2.2 for the determination of the conditions under which the ESV should cease emissions.

6.10.2.2 Cessation of emissions from the "Transmission enabled" state

a) The EUT shall be set in the "Transmission enabled" ESV state.

b) The EUT shall be set in the "Carrier on" radio state.

c) A condition requiring the cessation of emission shall be initiated either by the STE or the EUT.

d) It shall be verified that the EUT enters the "Emissions disabled" radio state.

e) In order to verify that the EUT is in the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

6.10.2.3 Cessation of emission from the "Transmission disabled" state

a) The EUT shall be set in the "Transmission disabled" state.

b) A condition requiring the cessation of emission shall be initiated either by the STE or the EUT.

c) In order to verify that the EUT remains in the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

d) The STE shall send a TxE command to the EUT.

e) In order to verify that the EUT remains in the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

f) The STE shall send a TxD command to the EUT.

g) The condition requiring the cessation of emissions shall be removed.

h) In order to verify that the EUT remains in the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

6.10.2.4 Cessation of emission from the "Initial Phase" state

6.10.2.4.1 EUTs transmitting initial bursts

This applies only to EUTs transmitting initial bursts (i.e. where "Initial phase-1" and "Initial phase-2" are implemented):

a) The EUT shall be set in "Initial phase-1" state.

b) The STE shall not send the TxE command and the EUT shall be allowed to cycle between "Initial phase-1" and "Initial phase-2" as it would under normal operations.

c) A condition requiring the cessation of emission shall be initiated either by the STE or the EUT.

d) It shall be verified that the EUT enters the "Emissions disabled" radio state.

e) In order to verify that the EUT is in the "Initial phase-0" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

f) The STE shall send a TxE command to the EUT.

g) In order to verify that the EUT remains in the "Initial phase-0" ESV state or enters the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

h) Repeat the test steps a) through g) using a TxD command in step f) instead of the TxE command.

6.10.2.4.2 EUTs not transmitting initial bursts

This applies only to EUTs that do not transmit initial bursts (i.e. where only "Initial phase-0" is implemented):

a) The EUT shall be set in "Initial phase-0" ESV state.

b) The STE shall not send the TxE command to maintain the EUT in "Initial phase-0" ESV state.

c) A condition requiring the cessation of emission shall be initiated either by the STE or the EUT.

d) In order to verify that the EUT remains in the "Initial phase-0" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

e) The STE shall send a TxE command to the EUT.

f) In order to verify that the EUT remains in the "Initial phase-0" ESV state or enters the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

g) Repeat the test steps a) through f) using a TxD command in step e) instead of the TxE command.

6.10.2.5 "Single action" means of cessation of emissions

a) It shall be verified that there is a "single action" means of ceasing emissions on the below deck unit of the EUT.

b) The EUT shall be set in the "Transmission enabled" ESV state.

c) The EUT shall be set in the "Carrier on" radio state.

d) The "single action" means of cessation of emissions shall be activated (e.g. the switch thrown).

e) It shall be verified that the EUT enters the "Emissions disabled" radio state.

f) In order to verify that the EUT is in the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

g) The STE shall send a TxE command to the EUT.

h) In order to verify that the EUT remains in the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

i) The EUT shall be switched off and then switched on and the EUT shall enter the "Initial phase" ESV state without receiving a TxE from the STE.

j) The "single action" means of cessation of emissions shall be activated.

k) The STE shall send a TxE command to the EUT.

l) In order to verify that the EUT remains in the "Initial phase" ESV state or enters the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

m) The EUT shall be switched off and then switched on and the EUT shall enter the "Initial phase" ESV state without receiving a TxE from the STE.

n) The STE shall send a TxD command to the EUT so that it enters the "Transmission disabled" ESV state.

o) The "single action" means of cessation of emissions shall be activated.

p) The STE shall send a TxE command to the EUT.

q) In order to verify that the EUT remains in the "Transmission disabled" ESV state, it shall be verified that the EUT remains in the "Emissions disabled" radio state when the EUT is requested to transmit data.

6.10.2.6 Fault conditions

The documentation provided with the EUT shall indicate the means of generating fault conditions:

a) The EUT shall be set in the "Transmission enabled" ESV state.

b) The EUT shall be set in the "Carrier on" radio state.

c) A fault condition requiring the cessation of emission shall be generated either by the STE or directly on the EUT.

d) It shall be verified that the EUT enters the "Emissions disabled" radio state as long as the fault condition persists.

e) Steps a) through d) shall be repeated for each fault condition defined for the intended use of the ESV.

6.11 Identification of ESV

6.11.1 Test set up

The test set up shall be as shown in figure 12 for control and monitoring tests for radiated measurements and figure 13 for control and monitoring tests for conducted measurements. The test shall be arranged such that EUT can determine its own location, or if external means are employed, the test shall be arranged so that the EUT can be located by the means defined for the intended use of the ESV. The STE shall be arranged to simulate the NCF. The actual location of the EUT shall be known within 100 m.

6.11.2 Test method

a) The EUT shall be in the "Transmission enabled" state.

b) The EUT shall report its location to the STE.

c) The reported EUT location shall be within 1 km of the actual location of the EUT.

6.12 Control and monitoring functions

6.12.0 General

The ESV can be modified for the purpose of these tests provided that full documentation is given with the EUT to prove that the modifications accurately simulate the required test conditions.

The EUT shall transmit at $EIRP_{nom}$.

For the purpose of these tests the EUT is the ESV either with, or without its antenna connected.

The measurement of the e.i.r.p. spectral density shall be limited within either the nominated bandwidth or to a 10 MHz bandwidth centred on the carrier frequency, whichever is the greater.

6.12.1 Test set up

The test set up shall be as shown in figure 12 for control and monitoring tests for radiated measurements and figure 13 for control and monitoring tests for conducted measurements. The EUT shall be authorized to transmit and shall be in the "Transmission enabled" state at the commencement of each test, unless otherwise stated. The dual trace storage oscilloscope shall monitor by measuring the time difference between the command, or failure, and the occurrence of the expected event (e.g. the transmission suppression). The spectrum analyser and the power meter shall monitor the EUT output level.

6.12.2 Processor monitoring- Test method

a) Each of the processors in the EUT shall, in turn, be caused to fail.

b) Within 5 seconds of such failure the EUT shall cease to transmit as measured by the oscilloscope.

c) The power meter and spectrum analyser shall be observed to ascertain that the transmissions have been suppressed within the limits of the "Carrier-off" radio state emission levels.

d) Within 30 seconds of such failure the power meter and spectrum analyser shall be observed to ascertain that the transmissions have been suppressed within the limits of the "Emissions disabled" radio state emission levels.

e) The failed processor shall be restored to normal working condition and the EUT shall restore automatically to normal working before the next processor shall be induced to fail.

6.12.3 Transmit subsystem monitoring-Test method

To demonstrate compliance with clause 4.2.9.3.2, the following test procedure shall apply. However, for EUTs where it is not possible to directly induce failures in the components of the frequency generation subsystem, the documentation provided with the EUT shall demonstrate compliance:

a) The frequency generation subsystem within the EUT shall be caused to fail in respect of:

   1) loss of frequency lock (if applicable);

   2) failure of the Local Oscillator (LO).

b) Recognition of each failure in turn by the subsystem monitor shall constitute a SMF event.

c) Within 5 seconds of such failure the EUT shall cease to transmit as measured by the oscilloscope.

d) The power meter and spectrum analyser shall be observed to ascertain that the transmissions have been suppressed within the limits of the "Emissions disabled" radio state emission levels.

e) The failed elements shall be restored to normal working state and the EUT shall be restored to normal working condition before the next induced failure.

6.12.4 Power-on/Reset-Test method

a) The EUT shall be switched off and the STE shall not transmit the CC.

b) The EUT shall be switched on.

c) The EUT shall not transmit during and after switching-on, and shall enter the "Non valid" state.

The events from a) to c) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal. If a manual reset function is implemented the following test shall be performed:

d) The EUT shall be restored to the "Initial phase" state and the STE shall transmit the CC.

e) The EUT shall remain in the "Initial phase" state.

f) The reset function shall be initiated.

g) The EUT shall enter the "Non valid" state.

h) The EUT shall be restored to the "Initial phase" state and the STE shall transmit the CC as well as a TxE.

i) The EUT shall enter the "Transmission enabled" state.

j) The reset function shall be initiated.

k) The EUT shall enter the "Non valid" state.

The event from e) to h) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

6.12.5 Control Channel and Response Channel -Test method

Tests shall simulate the following events:

- The CC has never been received by the EUT after power-on.
- The CC is lost by the EUT after reception of a Transmission Enable command.
- The CC is lost by the EUT without reception of a Transmission Enable command.
- The CC is being lost by the EUT and a call is initiated within the Time-Out period T1.

The Time-Out period T1 used in the tests shall be 30 seconds.

a) Case where the CC has never been received by the EUT after power-on:

a1) the EUT shall be switched off and the STE shall not transmit the CC;

a2) the EUT shall be switched on;

a3) the EUT shall remain in the "Non valid" state.

The events from a2) to a3) shall be displayed and verified with the oscilloscope and by measurement of the transmit signal.

b) Case where the CC is lost by the EUT after reception of a Transmission Enable command:

b1) the EUT shall be switched-on and the STE shall transmit the CC and a TxE;

b2) the EUT shall enter the "Initial phase" state and go, if applicable, to the "Transmission enabled" state;

b3) a transmission request shall be initiated from the EUT;

b4) the STE shall stop transmitting the CC;

b5) within the period T1 from event b4), the EUT shall enter the "Non valid" state.

The events from b1) to b5) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

c) Case where the CC is lost by the EUT without reception of a "Transmission enabled" state:

c1) the EUT shall be switched on and the STE shall transmit the CC;

c2) the EUT shall enter the "Initial phase" state;

c3) the STE shall stop transmitting the CC;

c4) the EUT shall enter in the "Non valid" state not later than T1;

c5) a transmission request shall be initiated and the EUT shall remain in the "Non valid" state.

The events from c2) to c5) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

d) Case where the CC is being lost by the EUT and a call is initiated within the T1 period:

d1) the EUT shall be switched on and the STE shall transmit the CC;

d2) the STE shall stop transmitting the CC;

d3) within the period T1 from d2), a transmission request shall be initiated from the EUT;

d4) the EUT may transmit but within the T1 period the EUT shall enter the "Non valid" state.

The events from d2) to d4) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

6.12.6 Network Control commands-Test method

The following tests shall be performed in sequence:

- transmission enable command;
- transmission disable command received in the "Transmission enabled" state;
- transmission disable command received in the "Initial phase" state.

a) Transmission enable command:

a1) the EUT shall be switched-on and the STE shall transmit the CC;

a2) the EUT shall enter the "Initial phase" state;

a3) a transmission request shall be initiated from the EUT, the EUT shall remain in the "Initial phase" state;

a4) the STE shall transmit a transmit enable command to the EUT;

a5) a transmission request shall be initiated from the EUT;

a6) the EUT shall enter the "Transmission enabled" state and shall transmit.

The events from a2) to a6) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

b) Transmission disable command received in the "Transmission enabled" state:

b1) continue from a6);

b2) the STE shall transmit a disable command to the EUT;

b3) the EUT shall enter the "Transmission disabled" state within 1 second;

b4) a transmission request shall be initiated from the EUT;

b5) the EUT shall remain in the "Transmission disabled" state;

b6) the STE shall transmit an enable command;

b7) the EUT shall enter either the "Transmission enabled" state or the "Initial phase" state;

b8) if the EUT is in the "Transmission enable" state then the test continues with b11);

b9) the STE shall transmit a TxE command;

b10) the EUT shall enter the "Transmission enable" state;

b11) if a transmission request is not active any more than a new transmission request shall be initiated;

b12) the EUT shall transmit;

b13) the EUT transmission shall be terminated.

The events from b2) to b13) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

c) Transmission disable command received in the "Initial phase" state:

c1) the EUT shall be switched-on and the STE shall transmit the CC;

c2) the EUT shall enter the "Initial phase" state;

c3) the STE shall transmit a disable command to the EUT;

c4) the EUT shall enter the "Transmission disabled" state within 1 second;

c5) a transmission request shall be initiated from the EUT;

c6) the EUT shall remain in the "Transmission disabled" state;

c7) the STE shall transmit an enable command;

c8) the EUT shall enter either the "Transmission enabled" state or the "Initial phase" state;

c9) if the EUT is in the "Transmission enable" state then the test continues with c12);

c10) the STE shall transmit a TxE command;

c11) the EUT shall enter the "Transmission enable" state;

c12) if a transmission request is not active any more than a new transmission request shall be initiated;

c13) the EUT shall transmit;

c14) the EUT transmission shall be terminated.

The events from c2) to c14) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

6.12.7 Initial burst transmission-Test method

The documentation provided with the EUT shall indicate the initial burst duration.

The following test shall be performed in sequence:

a) the EUT shall be switched-off and the STE shall transmit the CC;

b) the EUT shall be switched-on;

c) the EUT shall not transmit, except the initial bursts;

d) it shall be verified that the specifications given in clause 4.2.9.7.2 are fulfilled.

The events from b) to d) shall be displayed and verified with the oscilloscope and by measurement of the transmitted signal.

6.13 Receive antenna off-axis gain pattern

6.13.1 Test method

6.13.1.1 Test site

This test shall be performed using the following method of measurement and test set-up as specified in the following clauses.

The tests can be carried out in an Open Area Test Site (OATS) environment or in an anechoic chamber or in a semi-anechoic chamber as they lead to comparable test results for establishing compliance. Ambient noise levels shall be at least 6 dB below the applicable unwanted emissions limit. The preferred test site is the semi-anechoic chamber.

6.13.1.2 Method of measurement

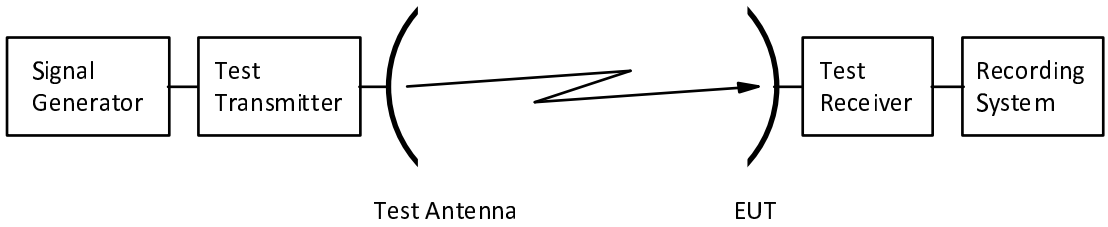


Figure 14: Test set up - antenna receive pattern measurement

a) The test set up shall be as shown in figure 14 with the EUT connected to the test receiver.

b) A signal proportional to the angular position from the servo mechanism shall be applied to the X-axis and the signal level from the test receiver shall be applied to the Y-axis of the plotter.

c) The test frequencies shall be the centre frequency of each applicable frequency range. The E plane shall be vertical.

d) The EUT shall be aligned to maximize the received signal level and the X-Y plotter shall be adjusted to give the maximum reading on the chart.

e) The EUT shall be driven in azimuth through 180°.

f) The pattern measurement is then obtained by driving the EUT in azimuth through 360° with the plotter recording the results.

g) The tests in b) to e) shall be repeated with the frequency changed to the lower limit of the applicable band as defined for the intended use of the ESV.

h) The tests in b) to e) shall be repeated with the frequency changed to the upper limit of the applicable band as defined for the intended use of the ESV.

i) The tests in b) to h) shall be repeated with the frequencies changed to the others specified if the design of the equipment is such that operation is possible, but not necessarily simultaneously, in all bands.

j) The tests in b) to h) shall be repeated with the test signal being transmitted in the H-plane instead of the E-plane.

k) The tests in b) to h) shall be repeated with the test signal being transmitted in a plane at 45° to the H-plane.

l) The tests in b) to h) shall be repeated with the test signal being transmitted in a plane at 90° to that in k).

m) The tests in b) to l) shall be repeated between the angles of φ_r and 7° with the EUT rotated through 90°, or the test antenna or the polarization subsystem of the EUT rotated by 90°, to give the cross-polar measurement.

6.14 Blocking performance

6.14.1 Test method

a) The output signals of two signal generators shall be combined with equal weight. The first signal shall be the wanted modulated signal as defined for the intended use, tuned at the centre frequency of the receive frequency band and have a level in the operational range. The second signal shall be a CW signal with same level. The combined signal shall be coupled to the LNB input.

b) A spectrum analyser shall be connected to the LNB output in a way that allows to supply the LNB with power.

c) f_c is the center frequency of the receive frequency band.

d) The first signal generator frequency shall be set to f_c.

e) The first signal generator level shall be set to a level in the LNB operational input level range.

f) The spectrum analyser shall be set for measuring the level of the converted first signal at the LNB output.

g) The second signal generator frequency shall be set to $f_c - 20$ MHz.

h) The second signal generator level shall be adjusted so that the measured level is 1 dB less than in absence of the second signal.

i) The second signal generator level shall be noted down as reference level.

j) The second signal generator frequency shall be set to the frequency of interest.

k) The second signal generator level shall be adjusted so that the measured level is 1 dB less than in absence of the second signal.

l) The rejection at the frequency of interest is equal to the second signal generator level minus the reference level determined in step i).

m) Steps j) to l) shall be repeated for frequencies in the ranges of table 5.

NOTE: The worst case rejection in a particular frequency range can be determined after step i) by sweeping the second signal generator frequency over the frequency range and observe the gain compression, then perform steps j) to l) with the frequency where gain compression is highest.

6.15 Adjacent Signal Selectivity

6.15.1 Test method

a) Two test signal generators shall be used, each generating the same modulated signal as the wanted signal in the BDU input frequency range and thermal noise.

b) The signal generators shall be connected to the BDU input through a splitter (combiner).

c) The test signal generators shall be set to the frequencies and levels according to table 6.

d) The BDU shall be set to receive the signal of the first test signal generator.

e) The second test signal generator shall be set to signal off.

f) The noise level (or signal to noise ratio) of the first test signal generator shall be varied such that the SNR (at the receiver input) is set to the reference level plus 1 dB. The reference level is the minimum SNR required to achieve the target performance level for the modulated wanted signal This is the sensitivity reference level.

g) The second signal generator shall be set to signal on.

h) The noise level (or signal to noise ratio) of the first test signal generator shall be varied in order to determine the threshold reference sensitivity level.

i) The degradation is equal to the noise level (or signal to noise ratio) determined in step h minus that determined in step f).

j) The result is the highest degradation found.

Annex A (informative): Relationship between the present document and the essential requirements of Directive 2014/53/EU

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.5] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.8].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

Table A.1: Relationship between the present document and the essential requirements of Directive 2014/53

Harmonised Standard ETSI EN 302 340					
Requirement				Requirement Conditionality	
No	Description	Essential requirements of Directive	Clause(s) of the present document	U/C	Condition
1	Off-axis spurious radiation	3.2	4.2.1	U	
2	On-axis spurious radiation for ESV	3.2	4.2.2	U	
3	Maximum ESV emissions towards the horizon	3.2	4.2.3	U	
4	Off-axis e.i.r.p. emission density within the band	3.2	4.2.4	U	
5	Carrier suppression	3.2	4.2.5	U	
6	Antenna pointing and polarization alignment for ESVs	3.2	4.2.6	U	
7	Cessation of emissions of the ESV	3.2	4.2.7	U	
8	Identification of ESV	3.2	4.2.8	U	
9	CMF state diagram	3.2	4.2.9.1	U	
10	Processor monitoring	3.2	4.2.9.2	U	
11	Transmit subsystem monitoring	3.2	4.2.9.3	U	
12	Power on/Reset	3.2	4.2.9.4	U	
13	Control Channel (CC) and Response Channel (RC)	3.2	4.2.9.5	U	
14	Network control commands	3.2	4.2.9.6	U	
15	Initial burst transmissions	3.2	4.2.9.7	U	

Harmonised Standard ETSI EN 302 340					
Requirement				Requirement Conditionality	
No	Description	Essential requirements of Directive	Clause(s) of the present document	U/C	Condition
16	Receiver co-channel rejection	3.2	4.2.10 (appearing as Receive antenna off-axis gain patterns))	C	Satellite communications networks may contain a central control unit that keeps received interference low by taking into account the actual antenna gain pattern of earth stations. The requirement is not relevant for earth stations that are always operated as part of such a network. The requirement is relevant in all other cases. If the receive antenna performance does not meet the requirement of clause 4.2.10 then the earth station accepts the risk of additional co-frequency interference caused by its off-axis gain that is not compliant with the mask.
17	Receiver blocking	3.2	4.2.11 (appearing as Blocking Performance)	U	
18	Single signal selectivity - receiver adjacent signal selectivity	3.2	4.2.12 (appearing as Adjacent Signal Selectivity)	U	
19	Receiver radio-frequency intermodulation				In an FSS network, receiver radio-frequency intermodulation is not relevant, because possibly inter-modulating signals originating from other networks are rejected thanks to requirements on receive antenna off-axis gain pattern and adjacent signal selectivity. Interfering signals up to 28 dB above the wanted carrier can be tolerated with minimal impact on performance.
20	Receiver sensitivity				There is no causal relationship between receiver sensitivity and interference in the case of satellite communications. Therefore, a quantitative calculation is not possible.
21	Single signal selectivity - receiver adjacent signal selectivity (or Adjacent Signal Selectivity)	3.2	4.2.12	U	
22	Receiver spurious response rejection				Frequencies other than the image frequency are not relevant because this is covered by receiver blocking and adjacent channel requirements which are already included in the receiver parameters.
23	Receiver multiple signal selectivity - receiver adjacent signal selectivity	3.2	4.2.12	U	

Harmonised Standard ETSI EN 302 340					
Requirement				Requirement Conditionality	
No	Description	Essential requirements of Directive	Clause(s) of the present document	U/C	Condition
24	Receiver dynamic range	3.2			In an FSS network, receiver dynamic range has no influence on harmful interference. The satellite earth stations are deployed in a manner that results in a situation where it is impossible to receive a wanted signal that is high enough to produce any overloading effect (satellite systems are power limited). So that it is not necessary to specify receiver dynamic range. See clause 5.3.6.1 of ETSI EG 203 336 [i.6].
25	Reciprocal mixing	3.2			For FSS equipment, the parameter is excluded for the following reason. It is considered that the reciprocal mixing effects are implicitly covered in HSs where comprehensive interference characteristics are specified in terms of selectivity and/or blocking requirements, thus removing the need for this parameter to be included in HSs as the effects of receiver selectivity and reciprocal mixing cannot be separated. See clause 5.3.6.2 of ETSI EG 203 336 [i.6].
26	Desensitization	3.2			As desensitization is a receiver effect addressed by other parameters (including receiver blocking), its inclusion as a separate parameter in an HS is not required. See clause 5.3.2.3 of ETSI EG 203 336 [i.6].
27	Receiver unwanted emissions in the spurious domain	3.2			Frequencies other than the image frequency are not relevant because this is covered by receiver blocking and adjacent channel requirements which are already included in the receiver parameters.

Key to columns:

Requirement:

No A unique identifier for one row of the table which may be used to identify a requirement.

Description A textual reference to the requirement.

Essential requirements of Directive

Identification of article(s) defining the requirement in the Directive.

Clause(s) of the present document

Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

U/C Indicates whether the requirement is unconditionally applicable (U) or is conditional upon the manufacturer's claimed functionality of the equipment (C).

Condition Explains the conditions when the requirement is or is not applicable for a requirement which is classified "conditional".

Presumption of conformity stays valid only as long as a reference to the present document is maintained in the list published in the Official Journal of the European Union. Users of the present document should consult frequently the latest list published in the Official Journal of the European Union.

Other Union legislation may be applicable to the product(s) falling within the scope of the present document.

Annex B (normative): Mechanical stability methodology

This test based on an analytical or numerical analysis shall be performed in two stages.

In the first stage the loads generated by the maximum wind speed shall be computed on the above deck unit, taking into account the intrinsic properties of the materials.

In the second stage the computed loads shall be applied to the structure.

The purpose of the analysis is twofold:

a) To show that the torque and the fields of force applied to the above deck unit structure under nominated conditions do not reach any of the following:

- the point where deformation fouls the antenna pointing mechanism;
- the yield point of any element of the structure;
- the buckling point of any element of the structure.

NOTE: The yield point is elastic limit of the material and the buckling point is the failure point for the material.

b) To compute equivalent static loads (force and torque) applied to the critical attachment points of the structures, e.g.:

- for antennas without a radome:
  - reflector-mounting legs fixing point;
  - reflector-struts;
  - LNB- struts;
- for antennas with a radome:
  - radome surface;
  - radome mounting points.

Analysis and load applications procedure:

a) The air related parameters, namely the kinetic viscosity used to calculate drags at the rims of the structure shall be calculated with the standard atmospheric environmental conditions (temperature = 293 K, air pressure = $1{,}013 \times 10^5$ Pascal).

b) The computations needed to derive the field of force and torque and the equivalent static stresses shall be carried out for each of the following variables:

- elevation angle: maximum and minimum for antennas without a radome;
- wind direction: in steps of 45° around the above-deck unit;
- wind speed: 100 km/h;
- gust speed: 130 km/h for 3 seconds.

c) It shall be verified with the simulated results that yield point limits are not exceeded for any self-contained element.

d) The calculated equivalent static loads shall be applied at any identified critical fixing point of the assembly.

e) Whilst the loads are applied the above deck unit shall be observed and any distortion noted.

f) The test report shall contain the following information:

- the computation method used;
- the description of the test equipment;
- the description of the tests performed;
- the results of the safety margin test;
- any signs of distortion observed;
- the results of the measurements of the deviation of the antenna or radome position;
- the component deviation with respect to each other.

Annex C (informative): Maximum measurement uncertainty

The measurements described in the present document are based on the following assumptions:

- the measured value related to the corresponding limit is used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter is included in the test report.

Table C.1 shows the recommended values for the maximum measurement uncertainty figures (computed on the basis of ETSI TR 100 028-2 [i.7]).

Table C.1: Maximum measurement uncertainty

Parameter	Uncertainty
Radio frequency	$\pm 1 \times 10^{-7}$
Radiated RF power (up to 40 GHz)	±6 dB
Radiated RF power (above 40 GHz)	±8 dB
Conducted Measurements (up to 18 GHz)	±1,5 dB
Conducted Measurements (from 18 GHz up to 40 GHz)	±2,5 dB
Conducted Measurements (above 40 GHz)	±4 dB
Temperature	±1 °C
Humidity	±5 %
DC and low frequency voltages	±3 %
Polarization discrimination	±2 dB
Angles	0,1°

Table C.2: Measurement uncertainties for antenna gain pattern

Gain relative to the antenna on-axis gain	Uncertainty
> -3 dB	±0,3 dB
-3 dB to -20 dB	±1,0 dB
-20 dB to -30 dB	±2,0 dB
-30 dB to -40 dB	±3,0 dB

The values of measurement uncertainty associated with each measurement parameter apply to all of the test cases described in the present document.

NOTE: ETSI TR 102 215 [i.3] gives guidance on interpretation of measurement uncertainty and interpretation of results.

Annex D (informative): Bibliography

- ETSI ETR 169 (1995): "Satellite Earth Stations and Systems (SES); Common Technical Regulations (CTRs) in the satellite earth station equipment field".
- ETSI EN 301 843-6 (2005): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for marine radio equipment and services; Part 6: Specific conditions for Earth Stations on board Vessels, transmitting above 3 GHz".
- Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to Electrical Equipment designed for use within certain voltage limits (LV Directive) as amended 93/68/EEC.
- Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).

Annex E (informative): Change history

Version	Information about changes
V2.1.2	Input document for review by WG HARM on RED requirements
V2.1.3	Reviewed by WG HARM meeting #82
V2.1.4	Revision of the WG HARM#83
V2.1.5	Further editorials to address "…defined for the intended use of the ESV..:", as agreed by WG HARM#83
V2.1.6	Further editorials inserted by WG HARM#84
V2.1.7	Revision of the WG HARM#85
V2.1.8	Edited version after WG HARM#85
V2.1.9	Revisions introduced by WG HARM#88
V2.1.10	Further revision addressing ETSI secretariat comments
V2.1.11	Further revision addressing ETSI secretariat comments by WG HARM#95 producing track changes and clean versions
V2.1.12 to V2.1.15	Further reviews by WG HARM#130, 131 and 132 meetings
V2.1.16	Rapporteur final formatting and cleaning the document for TC SES 109 approval
V2.1.17	Minor editorial updates introduced by WG HARM 136 aligning with other ENs at the light of HAS comments to other ENs
V2.1.18	Review by WG HARM 148 updating references to OATS and preferred test site

History

Version	Date	Status
V1.1.1	April 2006	Publication
V2.1.1	May 2016	Publication
V2.1.19	September 2026	SRdAP process EV 20261214: 2026-09-21 to 2026-12-14