ETSI EN 300 494-2 V1.4.1 (2002-04)

European Standard (Telecommunications series)

Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile Test Specification (PTS); Part 2: Profile Specific Test Specification (PSTS) - Portable radio Termination (PT)

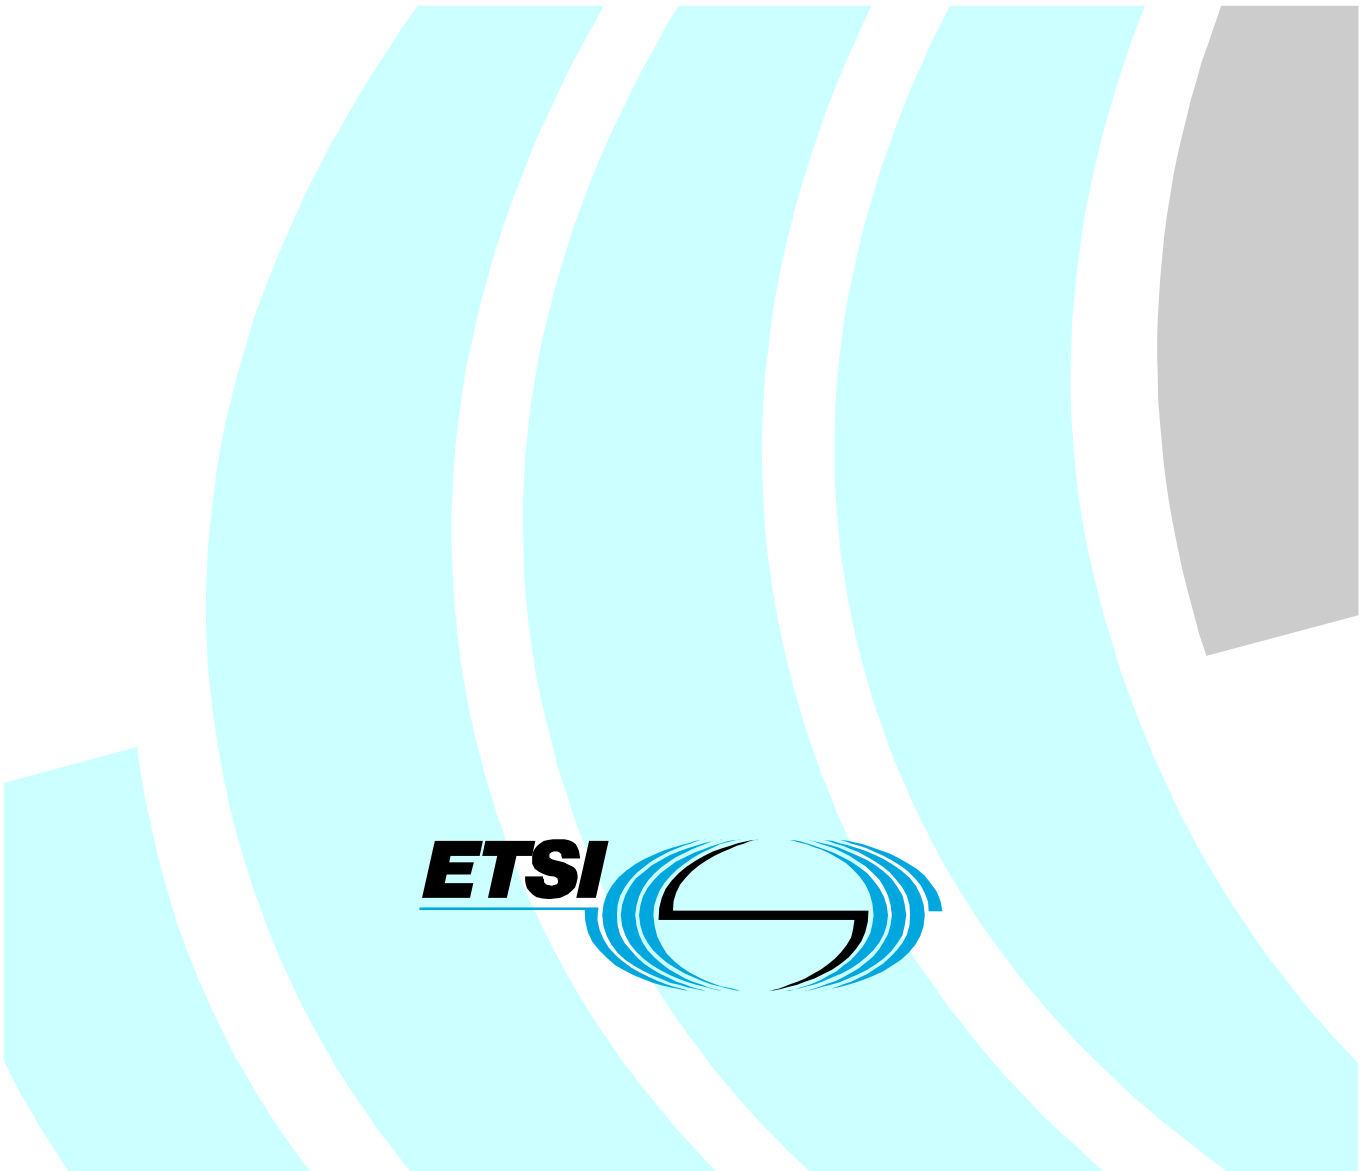

Reference
REN/DECT-040209-2

Keywords
DECT, GAP, PTS, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at
http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.
All rights reserved.

DECT™, **PLUGTESTS**™ and **UMTS**™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights 6
Foreword 6
1 Scope 7
2 References 7
3 Definitions and abbreviations 8
3.1 Definitions 8
3.2 Abbreviations 9
4 Relevant test cases list 9
4.1 Network (NWK) layer 9
4.1.1 Test Suite Structure (TSS) 10
4.1.2 Test case index 12
4.2 Data Link Control (DLC) layer 15
4.2.1 Test suite structure 15
4.2.2 Test case index 16
4.3 Medium Access Control (MAC) layer 17
4.3.1 Test suite structure 17
4.3.2 Test case index 18
4.4 Physical (PHY) layer 19
4.4.1 Manufacturer declarations 19
4.4.2 Normal Transmitted Power (NTP) 19
4.4.2.1 Verdict criteria for IUTs with an integral antenna 19
4.4.2.2 Verdict criteria for IUTs with external antenna connection(s) 19
4.4.3 PP radio receiver sensitivity 19
4.4.4 Void 19
4.4.5 Void 19
4.4.6 User controlled volume control 19
5 Additional test cases list 20
5.1 Test purposes 20
5.1.1 NWK layer 20
5.1.2 DLC layer 20
5.1.3 MAC layer 20
5.1.4 PHY layer 20
5.2 Test cases 20
5.2.1 NWK layer 20
5.2.2 DLC layer 20
5.2.3 MAC layer 20
5.2.4 PHY layer 21
5.2.4.1 Receiver sensitivity tolerance of transmitter deviation variations 21
5.2.4.1.1 Definition 21
5.2.4.1.2 Test environment 21
5.2.4.1.3 Method of measurement 21
5.2.4.1.4 Verdict criteria 21
5.2.4.2 Receiver timing tolerance of a PT 21
5.2.4.2.1 Definition 22
5.2.4.2.2 Test environment 22
5.2.4.2.3 Method of measurement, Part 1 22
5.2.4.2.4 Method of measurement, Part 2 22
5.2.4.2.5 Verdict criteria for part 1 23
5.2.4.2.6 Verdict criteria for part 2 23
5.2.4.3 Transmission of Z-field 23
5.2.4.3.1 Definition 23
5.2.4.3.2 Test environment 23
5.2.4.3.3 Method of measurement 23

5.2.4.3.4 Verdict criteria 23

Annex A (normative): Profile Implementation eXtra Information for Testing (PIXIT) proforma 24

A.1 General 24

A.2 Profile IXIT Requirements List (XRL) 24
A.2.1 NWK layer protocol 24
A.2.2 DLC layer protocol 24
A.2.3 MAC layer protocol 24
A.2.4 PHY layer protocol 24

A.3 Profile specific IXIT 24
A.3.1 NWK layer 24
A.3.2 DLC layer 24
A.3.3 MAC layer 25
A.3.4 PHY layer 25
A.3.5 Configuration constraints 25

A.4 Declaration of features supported 25
A.4.1 Network layer 25

Annex B (normative): Profile Conformance Test Report (PCTR) proforma 27

B.1 Identification summary 27
B.1.1 Profile CTR 27
B.1.2 Implementation Under Test (IUT) 28
B.1.3 Testing environment 28
B.1.4 Limits and reservations 28
B.1.5 Comments 29

B.2 IUT conformance status 29

B.3 Static conformance summary 29

B.4 Dynamic conformance summary 29

B.5 Static conformance review report 30

B.6 Test campaign report 30
B.6.1 NWK layer 31
B.6.2 DLC layer 33
B.6.3 MAC layer 34
B.6.4 PHY layer 34

B.7 Observations 34

Annex C (normative): System Conformance Test Report (SCTR) proforma 35

C.1 Identification summary 35
C.1.1 System Conformance Test Report (SCTR) 35
C.1.2 Test laboratory 35
C.1.3 Client 36
C.1.4 System Under Test (SUT) 36
C.1.5 Profile 37
C.1.6 Nature of conformance testing 37
C.1.7 Limits and reservations 37
C.1.8 Record of agreement 38
C.1.9 Comments 38

C.2 System report summary 39
C.2.1 Profile testing summary for GAP NWK layer PT 39
C.2.2 Profile testing summary for GAP DLC layer PT 40
C.2.3 Profile testing summary for GAP MAC layer PT 41
C.2.4 Profile testing summary for GAP PHY layer PT 42

Annex D (normative): System Conformance Statement (SCS) proforma 43

D.1 Identification summary....43
D.1.1 SCS identification....43
D.1.2 IUT identification....43
D.1.3 Client identification....44
D.1.4 Supplier identification....44
D.1.5 Manufacturer identification....45
D.1.6 Protocols identification....45
D.1.7 Profile identification....45

D.2 Miscellaneous system information....46
D.2.1 Configuration....46
D.2.2 Other information....46

Annex E (informative): Bibliography....47

History....48

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Digital Enhanced Cordless Telecommunications (DECT).

The present document is part 2 of a multi-part deliverable covering the Generic Access Profile (GAP); Profile Test Specification (PTS), as identified below:

Part 1: "Summary";

Part 2: "Profile Specific Test Specification (PSTS) - Portable radio Termination (PT)";

Part 3: "Profile Specific Test Specification (PSTS) - Fixed radio Termination (FT)".

National transposition dates	
Date of adoption of this EN:	5 April 2002
Date of latest announcement of this EN (doa):	31 July 2002
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 January 2003
Date of withdrawal of any conflicting National Standard (dow):	31 January 2003

1 Scope

The present document contains the test specification for Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP) Portable Part (PP) applications.

The main objective of the GAP test specification is to provide approval tests giving a high probability of air interface inter-operability between different manufacturer's equipment in different environments (i.e. public, business and residential).

The ISO standard for the methodology of conformance testing ISO/IEC 9646 parts 1 to 7 [8] to [10] is used as the basis for the test methodology, and as the basis for the test case specification. This is considered to be unsuitable for Physical layer testing, and therefore a text description is used.

The test cases listed in the present document have been derived from the DECT Common Interface (CI) Test Case Library (TCL) [13] to [21]. In addition as far as the Physical layer is concerned EN 300 176 parts 1 [11] and 2 [25] apply. Additional GAP specific test cases are included where required. The Profile IXIT is based on the DECT CI PIXITs specified in EN 300 497 parts 1 to 9 [13] to [21].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

[1] ETSI EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".

[2] ETSI EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical Layer (PHL)".

[3] ETSI EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".

[4] ETSI EN 300 175-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".

[5] ETSI EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".

[6] ETSI EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".

[7] ETSI EN 300 444: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP)".

[8] ISO/IEC 9646-1: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".

[9] ISO/IEC 9646-5: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 5: Requirements on test laboratories and clients for the conformance assessment process".

[10] ISO/IEC 9646-7: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation Conformance Statements".

[11] ETSI EN 300 176-1: "Digital Enhanced Cordless Telecommunications (DECT); Approval test specification; Part 1: Radio".

[12] ETSI EN 300 476 (all parts): "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma".

[13] ETSI EN 300 497-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 1: Test Suite Structure (TSS) and Test Purposes (TP) for Medium Access Control (MAC) layer".

[14] ETSI EN 300 497-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 2: Abstract Test Suite (ATS) for Medium Access Control (MAC) layer - Portable radio Termination (PT)".

[15] ETSI EN 300 497-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 3: Abstract Test Suite (ATS) for Medium Access Control (MAC) layer - Fixed radio Termination (FT)".

[16] ETSI EN 300 497-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 4: Test Suite Structure (TSS) and Test Purposes (TP) - Data Link Control (DLC) layer".

[17] ETSI EN 300 497-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 5: Abstract Test Suite (ATS) - Data Link Control (DLC) layer".

[18] ETSI EN 300 497-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 6: Test Suite Structure (TSS) and Test Purposes (TP) - Network (NWK) layer - Portable radio Termination (PT)".

[19] ETSI EN 300 497-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 7: Abstract Test Suite (ATS) for Network (NWK) layer - Portable radio Termination (PT)".

[20] ETSI EN 300 497-8: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 8: Test Suite Structure (TSS) and Test Purposes (TP) - Network (NWK) layer - Fixed radio Termination (FT)".

[21] ETSI EN 300 497-9: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Test Case Library (TCL); Part 9: Abstract Test Suite (ATS) for Network (NWK) layer - Fixed radio Termination (FT)".

[22] ETSI ETS 300 474-1: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile requirement list and profile specific Implementation Conformance Statement (ICS) proforma; Part 1: Portable radio Termination (PT)".

[23] ETSI ETS 300 474-2: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile requirement list and profile specific Implementation Conformance Statement (ICS) proforma; Part 2: Fixed radio Termination (FT)".

[24] ETSI EN 300 494-1: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile Test Specification (PTS); Part 1: Summary".

[25] ETSI EN 300 176-2: "Digital Enhanced Cordless Telecommunications (DECT); Approval test specification; Part 2: Speech".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions given in ISO/IEC 9646 parts 1 to 7 [8] to [10], in EN 300 175 parts 1 to 7 [1] to [6] and in EN 300 444 [7] apply.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AC	Authentication Code
ATS	Abstract Test Suite
BER	Bit Error Rate
CC	Call Control
CI	Common Interface
DCK	Derived Cipher Key
DLC	Data Link Control
EUT	Equipment Under Test
FT	Fixed radio Termination
GAP	Generic Access Profile
ICS	Implementation Conformance Statement
IPUI	International Portable User Identity
IUT	Implementation Under Test
IXIT	Implementation eXtra Information for Testing
LCE	Link Control Entity
LLME	Lower Layer Management Entity
LT	Lower Tester
MAC	Medium Access Control
MM	Mobility Management
NLF	New Link Flag
NPT	Normal Transmitted Power
NWK	NetWorK
OSI	Open Systems Interconnection
PARK	Portable Access Rights Key
PCTR	Profile Conformance Test Report
PHY	PHYsical
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PSTS	Profile Specific Test Specification
PT	Portable radio Termination
PTS	Profile Test Specification
RF	Radio Frequency
RFP	Radio Fixed Part
RLR_H	Receiving Loudness Rating of the Handset
SARI	Secondary Access Rights Identity
SCS	System Conformance Statement
SCTR	System Conformance Test Report
SUT	System Under Test
TPUI	Temporary Portable User Identity
TS	Test System
TSS	Test Suite Structure
XRL	piXit Requirements List

4 Relevant test cases list

4.1 Network (NWK) layer

This clause includes lists of the test groups, and abstract test cases relevant for GAP Profile Test Specification (PTS) - Network (NWK) layer Portable radio Termination (PT) derived from EN 300 497-7 [19].

NOTE: References when necessary are given based on the particular test case name unique through all test specification EN 300 497 [13] to [21].

4.1.1 Test Suite Structure (TSS)

Table 1

TSS	
Suite Name: nwk_pt **Standards Ref:** EN 300 444 [7]; EN 300 497-7 [19] **Profile ICS Ref:** ETS 300 474-1 [22] **Profile IXIT Ref:** EN 300 494-2 (the present document) **Test Method:** remote **Comments:**	
Test Group Reference	**Test Group Objective**
PT/	To check the behaviour of the NWK layer of the PT (IUT)
PT/CC/	To check the IUT CC-state machine behaviour
PT/CC/IT/	To check that the IUT CC-state machine provides sufficient conformance for possible interconnection without trying to perform thorough testing
PT/CC/CA/	Limited testing that the observable capabilities of the CC entity of the IUT are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/CC/BV/	To test the CC entity of the IUT in response to syntactically and contextual correct behaviour of the test system
PT/CC/BV/OC/	To check the IUT's behaviours to setup an outgoing call
PT/CC/BV/IC/	To check the IUT's behaviours to setup an incoming call
PT/CC/BV/CI/	To check the IUT's behaviour in information transfer procedures
PT/CC/BV/CR/	To check the IUT's behaviours to release an outgoing/incoming call
PT/CC/BV/RS/	To check the IUT's behaviour during call related supplementary service procedures
PT/CC/BO/	To check the behaviour of the CC entity of the IUT in response to the messages that are syntactically correct but not allowed to occur in some states of the CC procedures
PT/CC/BI/	To check the behaviour of the CC entity of the IUT in response to invalid messages
PT/CC/TI/	To verify that the IUT CC timers are with correct values and the IUT is reacting properly to the expiry of a timer
PT/MM/	To check the behaviour of the Mobility Management (MM) entity of the IUT
PT/MM/IT/	To check that the MM entity of the IUT provides sufficient conformance for possible interconnection without trying to perform thorough testing
PT/MM/CA/	Limited testing that the observable capabilities of the MM entity of the IUT are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/MM/BV/	To test the MM entity of the IUT in response to syntactically and contextual correct behaviour of the test system
PT/MM/BV/ID/	To check the IUT's behaviour concerning identity procedures
PT/MM/BV/AU/	To check the IUT's behaviour concerning the authentication procedures
PT/MM/BV/LO/	To check the IUT's behaviour concerning the location procedures
PT/MM/BV/AR/	To check the IUT's behaviour concerning the access rights procedures
PT/MM/BV/KA/	To check the IUT's behaviour concerning the key allocation procedure
PT/MM/BV/CH/	To check the IUT's behaviour concerning the ciphering related procedures
PT/MM/BO/	To check the IUT behaviour in response to the messages that are syntactically correct but not allowed to occur in some phase of the MM procedures
PT/MM/BI/	To check the IUT in response to invalid MM messages
PT/MM/TI/	To verify that the IUT MM timers are with correct values and the IUT is reacting properly to the expiry of a timer
PT/ME/	To check the behaviour of the LLME of the IUT
PT/ME/IT/	To check that LLME of the IUT provides sufficient conformance for possible interconnection without trying to perform thorough testing
PT/ME/CA/	Limited testing that the observable capabilities of the LLME of the IUT are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/ME/BV/	To test the LLME of the IUT in response to syntactically and contextual correct behaviour of the test system
PT/ME/BO/	To check the IUT behaviour in response to the messages that are syntactically correct but not allowed to occur in some phase of the LLME managed procedures
PT/LC/	To check the behaviour of the LCE of the IUT

TSS	
Suite Name: nwk_pt **Standards Ref:** EN 300 444 [7]; EN 300 497-7 [19] **Profile ICS Ref:** ETS 300 474-1 [22] **Profile IXIT Ref:** EN 300 494-2 (the present document) **Test Method:** remote **Comments:**	
Test Group Reference	**Test Group Objective**
PT/LC/IT/	To check that LCE of the IUT provides sufficient conformance for possible interconnection without trying to perform thorough testing
PT/LC/CA/	Limited testing that the observable capabilities of the LCE of the IUT are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/LC/BV/	To test the LCE of the IUT in response to syntactically and contextual correct behaviour of the test system
PT/LC/BV/LE/	To check the IUT's behaviour concerning the connection oriented link establishment procedures
PT/LC/BV/LR/	To check the IUT's behaviour concerning the connection oriented link release procedures
PT/LC/BI/	To check the IUT in response to invalid LCE messages
PT/LC/TI/	To verify that the IUT LCE timers are with correct values and the IUT is reacting properly to the expiry of a timer
Detailed Comments: The sub-sub-groups with identifiers PT/xx/IT/ and PT/xx/CA/ do not include their own test cases but only list an appropriate selection of tests from the relevant sub-group with identifier PT/xx/.	

4.1.2 Test case index

Table 2

Test Case Index		
Test Group Reference	**Test Case Id**	**Description**
PT/CC/BV/OC/	TC_PT_CC_BV_OC_01	Outgoing call; T-00, T-01, T-02, T-03, T-04, T-10; piece wise dialling in T-02
	TC_PT_CC_BV_OC_02	Outgoing call; states T-00, T-01, T-10; piece wise dialling in T-10
	TC_PT_CC_BV_OC_03	Outgoing call; states T-00, T-01, T-02, T-10; piece wise dialling in T-02 and T-10
	TC_PT_CC_BV_OC_04	Outgoing call; U-plane connection upon << Progress ind. >> in {CC-SETUP-ACK}
PT/CC/BV/IC/	TC_PT_CC_BV_IC_01	Incoming call; T-01, T-06, T-07, T-08, T-10; << SIGNAL >> in T-07
	TC_PT_CC_BV_IC_02	Incoming call; T-01, T-06, T-07, T-08, T-10; << SIGNAL >> in {CC-SETUP}
PT/CC/BV/CI/	TC_PT_CC_BV_CI_01	Alerting the user; Incoming call; << SIGNAL >> in {CC-SETUP}
	TC_PT_CC_BV_CI_02	Go to pulse invocation in T-02; Outgoing call
	TC_PT_CC_BV_CI_03	Go to pulse invocation in T-10; Outgoing call
	TC_PT_CC_BV_CI_04	Dialling pause indication in T-02; Outgoing call
	TC_PT_CC_BV_CI_05	Dialling pause indication in T-10; Outgoing call
	TC_PT_CC_BV_CI_06	Go to DTMF invocation in T-02; defined tone length; Outgoing call
	TC_PT_CC_BV_CI_07	Go to DTMF invocation in T-10; defined tone length; Outgoing call
	TC_PT_CC_BV_CI_08	Go to DTMF invocation in T-02; infinite tone length; Outgoing call
	TC_PT_CC_BV_CI_09	Go to DTMF invocation in T-10; infinite tone length; Outgoing call
	TC_PT_CC_BV_CI_10	Outgoing normal call; T-02; {CC-INFO], sending << Multi keypad >>, "0-9, star, hash mark"
	TC_PT_CC_BV_CI_11	Internal call
	TC_PT_CC_BV_CI_12	T-10; {CC-INFO}, << Multi display >> standard characters handling
	TC_PT_CC_BV_CI_13	T-10; {CC-INFO}, << Multi display >> control characters handling
	TC_PT_CC_BV_CI_14	T-10; invocation of "Register recall"; {CC-INFO}, << Multi keypad >>
PT/CC/BV/CR/	TC_PT_CC_BV_CR_01	Outgoing normal call; T-02; FT initiated normal release
	TC_PT_CC_BV_CR_02	Outgoing normal call; T-03; FT initiated normal release
	TC_PT_CC_BV_CR_03	Outgoing normal call; T-04; FT initiated normal release
	TC_PT_CC_BV_CR_04	Incoming call; T-08; FT initiated normal release
	TC_PT_CC_BV_CR_05	T-10; FT initiated normal release
	TC_PT_CC_BV_CR_06	T-10; IUT initiated normal release
	TC_PT_CC_BV_CR_07	T-01; FT initiated abnormal release
	TC_PT_CC_BV_CR_08	T-02; FT initiated abnormal release
	TC_PT_CC_BV_CR_09	T-10; FT initiated abnormal release
	TC_PT_CC_BV_CR_10	T-10; FT initiated partial release
	TC_PT_CC_BV_CR_11	T-10; IUT initiated partial release
PT/CC/BV/RS/	TC_PT_CC_BV_RS_01	T-00; Incoming call; {CC-SETUP} with << Calling party number >>; CLIP handling
PT/CC/BO/	TC_PT_CC_BO_01	T-03; unexpected message {CC-CALL-PROC}; ignore
	TC_PT_CC_BO_02	T-19; receipt of {CC-RELEASE}; release collision; clear the call
PT/CC/BI/	TC_PT_CC_BI_01	T-00; {CC-SETUP} mandatory I.E. missing; answer upon with {CC-RELEASE-COM]
	TC_PT_CC_BI_02	T-00; {CC-SETUP} wrong mandatory I.E.; answer upon with {CC-RELEASE-COM]
	TC_PT_CC_BI_03	T-00; {CC-SETUP}-like message, non {CC-SETUP} unrecognized message type; ignore

Test Case Index		
Test Group Reference	**Test Case Id**	**Description**
PT/CC/TI/	TC_PT_CC_TI_01	T-19; timer P - < CC.02 > expiry (-10 % margin); IUT sends {CC-RELEASE-COM}
	TC_PT_CC_TI_02	Outgoing call; T-01; timer P - < CC.03 > expiry (-10 % margin); IUT sends {CC-RELEASE-COM}
	TC_PT_CC_TI_03	T-01; restarts P - < CC.03 > upon {CC-NOTIFY}
	TC_PT_CC_TI_04	Outgoing call; T-08; timer P - < CC.05 > expiry (-10 % margin); IUT sends {CC-RELEASE}
PT/MM/BV/ID/	TC_PT_MM_BV_ID_01	Identity request; IPUI type requested; active IPUI returned
	TC_PT_MM_BV_ID_02	Identity request; unavailable id. type requested; no identity in the reply
	TC_PT_MM_BV_ID_08	Identity request; PARK requested; active PARK returned
PT/MM/BV/AU/	TC_PT_MM_BV_AU_01	Authentication of PT; IUT(PT) has no stored ZAP value and service class info
	TC_PT_MM_BV_AU_02	Authentication of PT; unacceptable algorithm requested; reject
	TC_PT_MM_BV_AU_03	Authentication of PT; IUT(PT) has stored ZAP value; IUT includes ZAP value in the replay
	TC_PT_MM_BV_AU_04	Authentication of PT; ZAP increment handling
	TC_PT_MM_BV_AU_05	Authentication of PT; ZAP increment handling; unsuccessful authentication of FT; ZAP is not incremented
	TC_PT_MM_BV_AU_06	Authentication of PT; storage of DCK handling
	TC_PT_MM_BV_AU_07	Authentication of user
	TC_PT_MM_BV_AU_08	Authentication of FT; IUT initiated
	TC_PT_MM_BV_AU_09	Authentication of PT; IUT(PT) has stored service class info; IUT includes service class info in the reply
PT/MM/BV/LO/	TC_PT_MM_BV_LO_01	Location registration after obtain access rights; a44 and a38 = 1 at locking; no TPUI assignment
	TC_PT_MM_BV_LO_02	Location registration after obtain access rights; a44 and a38 = 1 at locking; TPUI assignment
	TC_PT_MM_BV_LO_03	Location registration after obtain access rights; a44 = 1 and a38 = 0 at locking; IUT does not perform location registration
	TC_PT_MM_BV_LO_04	Location registration; no CC activities; location area changes; a38 = 1 at locking and at the beginning of the procedure; no TPUI assignment
	TC_PT_MM_BV_LO_05	No CC activities; power off; power on; Location registration request
	TC_PT_MM_BV_LO_06	Location registration; unacceptable TPUI assignment; reject
	TC_PT_MM_BV_LO_07	Location registration; entering new location area; IUT deletes old TPUI-no TPUI in identity reply sent from IUT
	TC_PT_MM_BV_LO_08	Location update suggested by FT; Location registration initiated by IUT; a38 = 1 at locking and at the beginning of the procedure
	TC_PT_MM_BV_LO_09	Location update suggested by FT; Location registration initiated by IUT; a38 = 1 at locking, a38 = 0 at the beginning of the procedure
	TC_PT_MM_BV_LO_10	Verify that the IUT can correctly perform location registration and a following outgoing call when it uses SARI as the means to lock to the LT
PT/MM/BV/AR/	TC_PT_MM_BV_AR_01	Obtain access rights; a44 = 1; both sides use AC
	TC_PT_MM_BV_AR_03	Obtain access rights; a44 = 0; IUT does not initiate obtain access rights procedure
	TC_PT_MM_BV_AR_05	Terminate access rights; FT initiated; IUT(PT) may authenticate FT
	TC_PT_MM_BV_AR_06	Terminate access rights; FT initiated; IUT(PT) authenticates FT; authentication fails; termination rejected
	TC_PT_MM_BV_AR_09	Obtain access rights; FT assigns ZAP field; IUT stores it
	TC_PT_MM_BV_AR_10	Obtain access rights; FT assigns service class; IUT stores it
PT/MM/BV/KA/	TC_PT_MM_BV_KA_01	Key allocation
	TC_PT_MM_BV_KA_02	Key allocation; << Auth type >> unacceptable; reject
	TC_PT_MM_BV_KA_03	Key allocation; implicit authentication of FT fails; key is not allocated

Test Case Index		
Test Group Reference	**Test Case Id**	**Description**
PT/MM/BV/CH/	TC_PT_MM_BV_CH_01	Cipher switching; IUT(PT) initiated; "cipher-off" to "cipher-on"
	TC_PT_MM_BV_CH_02	Cipher switching; IUT(PT) initiated; "cipher-on" to "cipher-off"
	TC_PT_MM_BV_CH_03	Cipher switching; FT initiated; "cipher-off" to "cipher-on"
	TC_PT_MM_BV_CH_04	Cipher switching; FT initiated; "cipher-on" to "cipher-off"
	TC_PT_MM_BV_CH_05	Cipher switching; FT initiated; "cipher-off" to "cipher-on"; unacceptable algorithm or key; reject
	TC_PT_MM_BV_CH_08	Cipher switching; IUT (PT) initiated; "cipher-off" to "cipher-on" fails; release of link
	TC_PT_MM_BV_CH_09	Cipher switching; IUT (PT) initiated; "cipher-off" to "cipher-on"; successful inter-cell bearer handover
	TC_PT_MM_BV_CH_10	Cipher switching; IUT (PT) initiated; "cipher-off" to "cipher-on"; successful intra-cell bearer handover
	TC_PT_MM_BV_CH_11	Cipher switching; IUT (PT) initiated; "cipher-off" to "cipher-on"; "cipher-on" to "cipher-off" fails; release of link
	TC_PT_MM_BV_CH_12	Cipher switching; FT initiated; "cipher-off" to "cipher-on" fails; release of link
	TC_PT_MM_BV_CH_13	Cipher switching; FT initiated; "cipher-off" to "cipher-on"; successful inter-cell bearer handover
	TC_PT_MM_BV_CH_14	Cipher switching; FT initiated; "cipher-off" to "cipher-on"; successful intra-cell bearer handover
	TC_PT_MM_BV_CH_15	Cipher switching; FT initiated; "cipher-off" to "cipher-on"; "cipher-on" to "cipher-off" fails; release of link
PT/MM/BO/	TC_PT_MM_BO_01	Location registration request; receipt of {ACCES-RIGHT-ACCEPT}; unexpected, ignore
PT/MM/BI/	TC_PT_MM_BI_01	Unrecognized message type; ignore
	TC_PT_MM_BI_02	"Cipher off"; {CIPHER-REQUEST}, with invalid << Cipher info >>; reject
	TC_PT_MM_BI_03	Authentication of PT; {AUTH-REQUEST} missing << RAND >>; reject
	TC_PT_MM_BI_04	Obtain access rights; {ACCESS-RIGHTS-ACCEPT}, wrong << Portable id >>; ignore
PT/MM/TI/	TC_PT_MM_TI_01	Key allocation; timer P - < MM_auth.1 > expiry (+5 % margin)
	TC_PT_MM_TI_03	Location registration; just before timer P - < MM_locate.1 > expiry (-10 % margin)
	TC_PT_MM_TI_04	Obtain access rights; just before timer P - < MM_access.1 > expiry (-10 % margin)
	TC_PT_MM_TI_05	Cipher switching; IUT(PT) initiated; timer P - < MM_cipher.2 > expiry (-10 % margin)
PT/ME/BV/	TC_PT_ME_BV_01	Outgoing call; T-01; Authentication of IUT(PT) performed before answering the setup request
	TC_PT_ME_BV_03	Obtain access rights; Interrupted by Authentication of user
	TC_PT_ME_BV_04	Obtain access rights; Interrupted by Authentication of IUT(PT)
	TC_PT_ME_BV_05	Outgoing call and authentication of IUT(PT) in parallel
	TC_PT_ME_BV_06	Outgoing call and cipher switching FT initiated in parallel
	TC_PT_ME_BV_07	Outgoing call; T-01; Cipher switching FT initiated performed before answering the setup request
	TC_PT_ME_BV_09	Cipher on; Store DCK; new DCK not used in the current ciphering
	TC_PT_ME_BV_10	T-10; a38 = 1; location area changes; location registration request during the call or in T-00
	TC_PT_ME_BV_11	Outgoing call; T-01; Terminate access rights FT initiated performed before answering the setup request
	TC_PT_ME_BV_12	T-10; link fails; IUT clears the call
	TC_PT_ME_BV_13	Obtain access rights interrupted by key allocation
PT/ME/BO/	TC_PT_ME_BO_01	Authentication of FT interrupted by {AUTH-REQUEST} from FT; ignore
PT/LC/BV/LE/	TC_PT_LC_BV_LE_01	Direct link establishment; IUT initiated
	TC_PT_LC_BV_LE_02	Indirect FT initiated link establishment

Test Case Index		
Test Group Reference	**Test Case Id**	**Description**
PT/LC/BV/LR/	TC_PT_LC_BV_LR_01	Link exists; MM entity ceases to use the link; no other entity uses the link; IUT maintains the link < LCE.02 > time
	TC_PT_LC_BV_LR_02	Link exists; CC entity ceases to use the link; no other entity uses the link; normal release
	TC_PT_LC_BV_LR_03	Link exists; CC entity ceases to use the link; partial release agreed; no other entity uses the link; IUT maintains the link < LCE.02 > time
PT/LC/BI/	TC_PT_LC_BI_01	Protocol discriminator value error - unsupported service; IUT ignores
	TC_PT_LC_BI_03	{IDENTITY-REQUEST} with illegal transaction id.; ignore
PT/LC/TI/	TC_PT_LC_TI_02	MM ceases to use the link; no other entity uses the link; timer < LCE.02 > expiry (allowed period: (TSPX_lce_02-1000) ms to 10 500 ms)
Detailed Comments: The PT is the IUT.		

4.2 Data Link Control (DLC) layer

This clause includes lists of the test groups and the abstract test cases relevant for GAP PTS - DLC layer PT derived from EN 300 497-5 [17].

4.2.1 Test suite structure

Table 3

Test Suite Structure	
Suite Name: DLC **Standards Ref:** EN 300 444 [7]; EN 300 497-5 [17] **Profile ICS Ref:** ETS 300 474-1 [22] **Profile IXIT Ref:** EN 300 494-2 (the present document) **Test Method:** remote **Comments:**	
Test Group Reference	**Test Group Objective**
DLC/	Verify the correct implementation of the FT (IUT) DLC layer
DLC/C_Plane/	Verify the correct implementation of the C-plane data link services
DLC/C_Plane/ClassA/	Verify the correct implementation of the LAPC's Class A acknowledged transfer operation
DLC/C_Plane/ClassA/CA/	Limited testing that the observable capabilities of the IUT concerning the LAPC's Class A acknowledged transfer operation are in accordance with the static conformance requirements and the additional capabilities claimed in the PICS/PIXIT
DLC/C_Plane/ClassA/BV/	To test the behaviour of the IUT in response to syntactically and contextual correct behaviour of the test system
DLC/C_Plane/ClassA/BI/	To check the behaviour of the of the IUT in response to invalid frames
DLC/C_Plane/ClassA/BO/	To check the behaviour of the IUT in response to the messages that are syntactically correct but not allowed to occur in some states of the LAPC's Class A acknowledged transfer operation
DLC/C_Plane/Lb/	Verify the correct implementation of the Lb (C-plane broadcast control) entity
DLC/C_Plane/Lb/CA/	Limited testing that the observable capabilities of the IUT concerning the Lb (C-plane broadcast control) entity are in accordance with the static conformance requirements and the additional capabilities claimed in the PICS/PIXIT
DLC/U_Plane/	Verify the correct implementation of the U-plane services
DLC/U_Plane/Class0/	Verify the correct implementation of the Class 0 transmission class
DLC/U_Plane/Class0/CA/	Limited testing that the observable capabilities of the IUT concerning the Class 0 transmission class service are in accordance with the static conformance requirements and the additional capabilities claimed in the PICS/PIXIT
Detailed Comments:	

4.2.2 Test case index

Table 4

Test Case Index		
Test Group Reference	**Test Case Id**	**Description**
DLC/C_Plane/Class A/CA/	TC_A_CA_000	Re-transmission of the link establishment I-Frame request N250 times
	TC_A_CA_001	Link establishment request; receipt of a valid RR frame; enters established state
	TC_A_CA_005	I-Frame acknowledgement within timer < DL - 04 >
	TC_A_CA_006	Re-transmission of an I-Frame N250 times
DLC/C_Plane/Class A/BV/	TC_A_BV_002	I-Frame acknowledgement; accepting RR response frame with correct N(R)
	TC_A_BV_003	I-Frame acknowledgement; accepting an I-Frame command with correct N(S) and N(R) values as an acknowledgement
	TC_A_BV_005	Timer re transmission phase; acceptance of a RR response frame with correct N(R) value as an acknowledgement
	TC_A_BV_006	Timer re transmission phase; acceptance of an I-Frame command with correct N(S) and N(R) values as an acknowledgement
	TC_A_BV_007	Connection handover; PT initiated intracell
	TC_A_BV_008	Connection handover; PT initiated intercell
DLC/C_Plane/Class A/BI/	TC_A_BI_000	Class A establishment pending state; discarding RR Class B response frame with NLF bit set to "1"; re-transmitting the establishment request
	TC_A_BI_001	establishment pending state; discarding RR response frame with NLF bit set to "1" and invalid N(R); re-transmitting the establishment request
	TC_A_BI_002	Class A re-establishment pending state; discarding RR Class B response frame with NLF bit set to "1"; re-transmits the re-establishment request
	TC_A_BI_003	Re-establishment pending state; discarding RR response frame, NLF bit set to "1", invalid N(R); re-transmitting the re-establishment request
	TC_A_BI_004	Class A established; information transfer phase; discarding of RR Class B response frame, NLF = "0"; re-transmission the unacknowledged I-Frame
	TC_A_BI_005	Information transfer phase; discarding RR response frame, NLF = "0", invalid N(R); re-transmission the unacknowledged I-Frame
	TC_A_BI_006	Received I-Frame with invalid N(R); < DL - 04 > expiry; re-transmission the unacknowledged I-Frame with updated N(R)
	TC_A_BI_007	Receipt of an I-Frame with invalid N(S); sending RR response frame or I-Frame with the expected N(S); stops, if necessary, DL_04 according to the received N(R)
	TC_A_BI_008	Receipt of an I-Frame with invalid N(S) and invalid N(R); RR response frame transmission with expected N(S); unacknowledged I-Frame re-transmission
	TC_A_BI_009	Timer re transmission phase; discarding RR Class B response frame, NLF = "0"; re-transmits the unacknowledged I-Frame
	TC_A_BI_011	Timer re transmission phase; accepting I-Frame with invalid N(R);< DL - 04 > expiry; re-transmits the unacknowledged I-Frame with updated N(R)
	TC_A_BI_012	Timer re transmission phase; receipt of an I-Frame with invalid N(S); RR response frame or I-Frame, expected N(S); leaves timer re transmission phase
	TC_A_BI_013	Re transmission phase; receipt of an I-Frame with invalid N(S) and invalid N(R);sending a RR response frame, expected N(S); re-transmits the unacknowledged I-Frame

Test Case Index		
Test Group Reference	**Test Case Id**	**Description**
DLC/C_Plane/Class A/BO/	TC_A_BO_000	Establishment pending state; discarding a received I-Frame, NLF = "0"; re-transmits the establishment request
	TC_A_BO_001	Establishment pending state; discarding a RR response frame with NLF = "0"; re-transmits the establishment request
	TC_A_BO_002	Re-establishment pending state; discarding a received I-Frame, NLF = "0"; re-transmits the establishment request
	TC_A_BO_003	Re-establishment pending state; discarding a RR response frame with NLF = "0"; re-transmits the establishment request
DLC/C_Plane/Lb/CA/	TC_L_CA_000	Receive a short broadcast frame (3 octets)
DLC/U_Plane/Class 0/CA/	TC_0_CA_000	IUT transmission of a correct U-plane Class 0 frame
	TC_0_CA_001	IUT reception of a correct U-plane Class 0 frame
Detailed Comments: The PT is the IUT.		

4.3 Medium Access Control (MAC) layer

This clause includes lists of the test groups and the abstract test cases relevant for GAP PTS-MAC layer PT derived from EN 300 497-2 [14].

4.3.1 Test suite structure

Table 5

Test Suite Structure	
Suite Name: mac_pt **Standards Ref:** EN 300 444 [7]; EN 300 497-2 [14] **Profile ICS Ref:** ETS 300 474-1 [22] **Profile IXIT Ref:** EN 300 494-2 (the present document) **Test Method:** remote (modified) **Comments:**	
Test Group Reference	**Test Group Objective**
PT/	Verify the correct implementation of the PT (IUT) MAC layer
PT/DB/	Verify the correct implementation of the Downlink broadcast services handling
PT/DB/BV/	To test the behaviour of the IUT in response to syntactically and contextual correct behaviour of the test system
PT/PG/	Verify the correct implementation of the paging services handling
PT/PG/CA/	Limited testing that the observable capabilities of the IUT concerning the paging services are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/PG/BV/	To test the behaviour of the IUT in relation to syntactically and contextual correct behaviour of the test system
PT/BS/	Verify the correct implementation of connection oriented bearer setup procedures
PT/BS/CA/	Limited testing that the observable capabilities of the IUT concerning the connection oriented bearer setup procedures are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/BS/BV/	To test the behaviour of the IUT in relation to syntactically and contextual correct behaviour of the test system
PT/BH/	Verify the correct implementation of connection oriented bearer handover procedures
PT/BH/CA/	Limited testing that the observable capabilities of the IUT concerning the connection oriented bearer handover procedures are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/BR/	Verify the correct implementation of connection oriented bearer release procedures
PT/BR/CA/	Limited testing that the observable capabilities of the IUT concerning the connection oriented bearer release procedures are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/DT/	Verify the correct implementation of connection oriented data transfer procedures

Test Suite Structure	
Suite Name: mac_pt **Standards Ref:** EN 300 444 [7]; EN 300 497-2 [14] **Profile ICS Ref:** ETS 300 474-1 [22] **Profile IXIT Ref:** EN 300 494-2 (the present document) **Test Method:** remote (modified) **Comments:**	
Test Group Reference	**Test Group Objective**
PT/DT/CA/	Limited testing that the observable capabilities of the IUT concerning the connection oriented data transfer procedures are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
PT/DT/BI/	To check the behaviour of the of the IUT in response to invalid messages
PT/LM/	Verify the correct implementation of the LLME MAC layer management procedures
PT/LM/CA/	Limited testing that the observable capabilities of the IUT concerning the LLME MAC layer management procedures are in accordance with the static conformance requirements and the additional capabilities claimed in the PROFILE ICS/PROFILE IXIT
Detailed Comments:	

4.3.2 Test case index

Table 6

Test Case Index		
Test Group Reference	**Test Case Id**	**Description**
PT/DB/BV/	TC_PT_DB_BV_01	Idle_locked; receipt of QT extended RF carrier information; bearer establishment
	TC_PT_DB_BV_02	Check that the IUT enters the idle locked state after receiving the QT SARI list contents message containing ARI matching the IUT PARK (the LT PARI does not match the IUT PARK)
PT/PG/CA/	TC_PT_PG_CA_00	Idle_locked; paging; short page message reception
	TC_PT_PG_CA_01	Idle_locked; zero page message reception
PT/PG/BV/	TC_PT_PG_BV_02	Idle_locked; receipt of PT blind full slot information; do not setup bearer on blind slot
	TC_PT_PG_BV_03	Idle_locked; receipt of PT zero length messages indicating "other bearer", "dummy or C/L bearer position"; keep being locked
PT/BS/CA/	TC_PT_BS_CA_00	Idle_locked; PT initiated single bearer setup; no WAIT messages
	TC_PT_BS_CA_01	Idle_locked; PT initiated single bearer setup; with WAIT messages
PT/BS/BV/	TC_PT_BS_BV_00	Active_locked; duplex bearer; T201 expiry; bearer release
PT/BH/CA/	TC_PT_BH_CA_00	Active_locked; PT initiated intracell bearer handover using basic setup
	TC_PT_BH_CA_01	Active_locked; PT initiated intercell bearer handover using basic setup
PT/BR/CA/	TC_PT_BR_CA_00	Active_locked; unacknowledged release; FT sends release message
PT/DT/CA/	TC_PT_DT_CA_00	Active_locked; CS segment re-transmission till acknowledgement in the same ARQ window
	TC_PT_DT_CA_01	Active_locked; no transmission of new CS segment before acknowledgement
	TC_PT_DT_CA_02	Active_locked; numbering of the CS segments
PT/DT/BI/	TC_PT_DT_BI_00	Active_locked; IN_minimum_delay data, A-field R-CRC error handling; respond Q2 = 0
PT/LM/CA/	TC_PT_LM_CA_00	Idle_locked; N200 management
	TC_PT_LM_CA_01	Idle_locked; T200 management
	TC_PT_LM_CA_02	Idle_locked; T207 management
	TC_PT_LM_CA_03	Idle_locked; T208 management
	TC_PT_LM_CA_04	Active_locked; T202 and N201 management; bearer handover on one particular bearer
Detailed Comments: 1. The PT is the IUT.		

4.4 Physical (PHY) layer

For PHY layer capabilities testing, EN 300 176 parts 1 [11] and 2 [25] shall apply with the modifications in the following clauses.

4.4.1 Manufacturer declarations

The support of the following GAP PHY layer requirements shall be explicitly given as manufacturer declaration in ETS 300 474-1 [22].

Table 7

No	EN 300 444 [7]	DESCRIPTION	Status PT
1	11.1	Full slot for speech information	M
2	11.5	Sliding collision detection	M
3	11.6	Physical channel availability	M

4.4.2 Normal Transmitted Power (NTP)

In addition to the test described in EN 300 176-1 [11], clause 10, the following requirements shall apply.

4.4.2.1 Verdict criteria for IUTs with an integral antenna

The NTP, as measured, shall be greater than 80 mW per simultaneously active transceiver at both nominal and extreme temperatures. The test method is described in EN 300 176-1 [11], clause 10.2.

4.4.2.2 Verdict criteria for IUTs with external antenna connection(s)

The NTP, as measured, shall be greater than 80 mW per simultaneously active transceiver at both nominal and extreme temperatures. The test method is described in EN 300 176-1 [11], clause 10.3.

4.4.3 PP radio receiver sensitivity

The following additional requirement applies to EN 300 176-1 [11], clause 13.1.3, item b):

"The LT shall be programmed to set its RF transmission to a power level such that -86 dBm shall be present at the input of the IUT receiver".

4.4.4 Void

Table 8: void

4.4.5 Void

4.4.6 User controlled volume control

The following modification applies to EN 300 176-2 [25], clause 7.10.

Condition for executing:

- If IUT does not incorporates an adaptive volume control in the PP.

When adjusting the volume control from nominal to maximum setting, the decrease in RLR_H shall not be less than 6 dB.

5 Additional test cases list

5.1 Test purposes

This clause includes all the test purposes developed for covering the GAP behaviour not included in the EN 300 497, parts 1 [13], 4 [16], 6 [18], 7 [19] and EN 300 176 parts 1 [11] and 2 [25].

5.1.1 NWK layer

No additional test purposes.

5.1.2 DLC layer

No additional test purposes.

5.1.3 MAC layer

No additional test purposes.

5.1.4 PHY layer

This clause includes all the test purposes developed for covering the GAP behaviour not included in EN 300 176-1 [11] and EN 300 176-2 [25].

Table 9

Nr.	Test purpose	Comment
GAP/PH-1	Receive operation on maximum and minimum transmitter deviation.	
GAP/PH-2	Related to its reference timer, the PP synchronization window shall be at least ±4 bits for bearers to the RFP to which the reference timer is synchronized, and at least ±10 bits for other bearers	
GAP/PH-3	IUT transmits the Z-field.	

5.2 Test cases

This clause includes all test cases developed for covering the GAP behaviour not included in the EN 300 497 parts 2, [14], 3 [15], 5 [17], 8 [20], 9 [21] and EN 300 176 parts 1 [11] and 2 [25].

5.2.1 NWK layer

No additional test cases.

5.2.2 DLC layer

No additional test cases.

5.2.3 MAC layer

No additional test cases.

5.2.4 PHY layer

5.2.4.1 Receiver sensitivity tolerance of transmitter deviation variations

The purpose of the present document is to ensure that the required radio receiver sensitivity is achieved over the range of transmitter deviation levels permitted by the DECT specification.

The measurement method is the same as that used for radio receiver sensitivity testing in EN 300 176-1 [11], clause 13.1, item A).

5.2.4.1.1 Definition

The "nominal sensitivity" is defined as the power level specified in the GAP at which the bit error ratio shall be 0,001 or less.

Maximum transmitter deviation is defined as a signal whose peak deviation is 403 kHz (+0 % -10 %). Minimum transmitter deviation is defined as a signal whose peak deviation is 259 kHz (+10 % -0 %). These deviations are measured while transmitting the D-M2 modulation signal (see EN 300 176-1 [11], clause 5.8.4.4, item A)).

The radio receiver sensitivity tolerance of transmitter deviation variations is defined as the reduction in sensitivity (expressed as a power level) when the transmitter deviation is adjusted to each extreme value. The tolerance shall be 2 dBm or less.

5.2.4.1.2 Test environment

The test should preferably take place at a test site, otherwise a test fixture or temporary connector shall be used.

If the EUT has an antenna connector then it shall be used to connect the EUT to the LT.

The test shall take place under nominal supply voltage conditions and at a nominal temperature.

5.2.4.1.3 Method of measurement

a) The EUT shall be oriented in the reference position as determined in EN 300 176-1 [11], clause 5.11.3, item A) if no antenna connector is available.

b) The LT shall be programmed to set its RF transmission to a power level such that a power level equal to the (nominal sensitivity +2 dBm) shall be present at the input of the EUT receiver.

c) The LT shall be programmed to set its RF transmitter deviation to maximum.

d) The LT shall place the EUT in a mode whereby the EUT is positioned in a LT specified slot and RF channel c = 5. If so equipped, the handover function in the EUT shall be disabled.

e) The EUT shall be placed in a test mode whereby it performs the loop back function.

f) A test modulation signal D-M2 (see EN 300 176-1 [11], clause 5.8.4.4, item A) is generated by the LT.

g) The LT shall calculate the BER of the EUT, testing at least 1,6 million bits.

h) The LT shall set its RF transmitter deviation to minimum and repeat parts d) to g).

i) Parts b) to h) shall be repeated for RF channels c = 0 and 9.

5.2.4.1.4 Verdict criteria

The BER of the EUT as measured shall be less than or equal to 0,001 for the duration of the present document.

5.2.4.2 Receiver timing tolerance of a PT

This test is in two parts. The purpose of part 1 is to ensure that the PT is able to receive transmissions from the FT accurately under extreme conditions of reference timing changes at the FT. The purpose of part 2 is to ensure that the PT is able to perform bearer and connection handovers between RFPs whose timings differ by an extreme value.

5.2.4.2.1 Definition

The "test timing pattern" used in part 1 simulates an RFP whose timing is both jittering and being adjusted to follow an external synchronization source.

Jitter is simulated as follows: on even numbered frames the LT's timing will be advanced by 1 μs ± 0,1 μs and on odd numbered frames the LT's timing will be in the nominal position.

Timing adjustment is simulated as follows: every 35th frame will be either 2 bits longer (positive adjustment) or 2 bits shorter (negative adjustment) than the nominal length.

5.2.4.2.2 Test environment

The test should preferably take place at a test site, otherwise a test fixture or temporary connector shall be used.

If the EUT has an antenna connector then it shall be used to connect the EUT to the LT.

The test shall take place under nominal supply voltage conditions and at a nominal temperature.

The reference timing accuracy of the LT shall be better than 1 ppm. The inherent slot-to-slot jitter of the LT shall be less than ± 0,1 μs.

5.2.4.2.3 Method of measurement, Part 1

a) The EUT shall be oriented in the reference position as determined in EN 300 176-1 [11], clause 5.11.3, item A) if no antenna connector is available.

b) The LT shall be programmed to set its RF transmission to a power level such that a power level equal to the (nominal sensitivity +2 dBm) shall be present at the input of the EUT receiver.

c) The LT shall place the EUT in a mode whereby the EUT is positioned in a LT specified slot and RF channel c = 5. If so equipped, the handover function in the EUT shall be disabled.

d) The EUT shall be placed in a test mode whereby it performs the loop back function.

e) A test modulation signal D-M2 (see EN 300 176-1 [11], clause 5.8.4.4 item A) is generated by the LT.

f) The LT shall shift its reference timing, so that the position of p0 of the packets transmitted by the LT varies according to the test-timing pattern defined the in PH_2.1, using a positive timing adjustment.

g) The LT shall calculate the BER of the EUT, testing at least 1,6 million bits.

h) Parts c) to g) shall be repeated for RF channels c = 0 and 9.

i) Parts c) to h) shall be repeated using a negative timing adjustment in part f).

5.2.4.2.4 Method of measurement, Part 2

a) The EUT shall be oriented in the reference position.

b) The LT shall be programmed to simulate two GAP compliant RFPs RFP1 and RFP2 within the same FP, supporting bearer handover but not connection handover.

c) The LT shall be programmed to shift the reference timing of RFP1 to RFP2 to +9 bits.

d) The LT shall be programmed to set the RF level of RFP1 at the EUT higher than the radio receiver reference sensitivity as defined in CTR6, clause 13.2 while the RF level of RFP2 shall be programmed lower than the radio receiver sensitivity of the EUT.

e) The EUT shall establish a connection to RFP1 using its normal operational protocol (not a test mode).

f) The LT shall program the RF level of RFP2 to the same value as RFP1.

g) The EUT shall be forced to perform a handover. This may be done lowering the RF level of RFP1 or by other means declared by the manufacturer.

h) The LT shall verify that the EUT performs the handover successfully.

i) Parts d) to h) shall be repeated for shift of the reference timing as defined in c) of RFP1 to RFP2 to -9 bits.

j) Parts c) to i) shall be repeated with the LT programmed to simulate two GAP compliant RFPs within the same FP, supporting connection handover but not bearer handover.

5.2.4.2.5 Verdict criteria for part 1

The BER of the EUT as measured shall be less than or equal to 0,001 for the duration of the present document.

5.2.4.2.6 Verdict criteria for part 2

The EUT shall be able to make a handover to the second RFP successfully in all cases.

5.2.4.3 Transmission of Z-field

The purpose of the present document is to ensure that the EUT is correctly transmitting a Z-field.

5.2.4.3.1 Definition

No additional definition applies for the present document.

5.2.4.3.2 Test environment

The test shall take place at a test site or in a test fixture.

If the EUT has an antenna connector then it shall be used to connect the EUT to the LT.

The test shall take place under nominal supply voltage conditions and at a nominal temperature.

5.2.4.3.3 Method of measurement

a) The LT shall place the EUT in a mode whereby the EUT is positioned in a LT specified slot and RF channel c = 5.

b) The EUT shall be placed in a test mode whereby it performs the loop back function.

c) A test modulation signal D-M2 (see EN 300 176-1 [11], clause 5.8.4.4, item A) is generated by the LT.

d) The LT demodulates 10 received physical packets from the EUT and compares the received X and Z fields.

5.2.4.3.4 Verdict criteria

The X and Z fields shall be identical for all 10 received physical packets.

Annex A (normative): Profile Implementation eXtra Information for Testing (PIXIT) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

A.1 General

This annex specifies restrictions on answers, and additional questions to (and is intended to be used with) the PIXIT proformas specified in EN 300 497, parts 2, 3, 5, 8 and 9.

A.2 Profile IXIT Requirements List (XRL)

This clause specifies restrictions on answers relevant to GAP PTS. If a question exists in the relevant DECT CI PIXIT but is not listed in the tables of this clause this means that such a question does not need modifications and is fully applicable for GAP.

A.2.1 NWK layer protocol

No restrictions or modifications required.

A.2.2 DLC layer protocol

No restrictions or modifications required.

A.2.3 MAC layer protocol

No restrictions or modifications required.

A.2.4 PHY layer protocol

For parameter values, see clause 4.4. No other restrictions or modifications required.

A.3 Profile specific IXIT

This clause contains additional information to the DECT CI PIXITs questions related to the requirements of the GAP Profile Specific Test Specification (PSTS).

A.3.1 NWK layer

No additions required.

A.3.2 DLC layer

No additions required.

A.3.3 MAC layer

No additions required.

A.3.4 PHY layer

Table A.1

No.	Parameter name	Parameter value	Profile ICS clause	Parameter range	Parameter value	Comment
Detailed comments: For further study.						

A.3.5 Configuration constraints

This clause includes constraints on the configuration of the IUT to restrict its operation to the GAP Profile only.

No constraints on the configuration of the IUT required.

A.4 Declaration of features supported

The following tables contain extracts from the PICS documents EN 300 476 parts 1 and 4. The information contained within them is required for parameterization of the test cases referred to in this PTS. The entries in the status column in each table are either those in the PICS documents referred to above, or are taken from ETS 300 474-1 or ETS 300 474-2. If the status of an item is dependent on another item not included in the tables in the present document, it is listed as being optional.

The abbreviations used in the following tables have the same meaning as those used in annex A of part 1 of this PTS. The references are to EN 300 444, unless otherwise specified.

A.4.1 Network layer

Table A.2: EN 300 476-1 Table A.15 SS features (services) supported

Item	CC(CRSS) and CISS features	Reference to EN 300 175-5	Status	Support
17	Cost information	10.6.2.4	o	
32	Queue management	10.6.2.1	o	

Table A.3: EN 300 476-1 Table A.20 SS protocols supported

Item	SS protocol name	Reference to EN 300 175-5	Status	Support
4	ciss_keypad_protocol	10.2	o	

Table A.4: EN 300 476-1 Table A.22 CLMS procedures supported

Prerequisite: A/4				
Item	**CLMS procedures**	**Reference to EN 300 175-5**	**Status**	**Support**
1	clms_fixed	12.3.1	o.101	
2	clms_variable	12.3.2	o.101	

o.101: It is mandatory to support at least one of these options.

Table A.5: EN 300 476-1 Table A.24 LLME procedures supported

Item	Procedure name	Reference	Status	Support
5	mgt_mm_procedures_prioriry_mgt	13.1	m	
6	mgt_mm_cc_coexistance	6.9.6	m	

Table A.6: EN 300 476-1 Table A.27 {CC-SETUP} sending (P to F) supported

Item	{CC-SETUP} sending (P to F) Information element name	Reference to EN 300 175-5	Status	Support
30	Called party number	7.7.7	o	

Table A.7: EN 300 476-1 Table A.28 {CC-SETUP} receiving (F to P) supported

Item	{CC-SETUP} receiving (F to P) Information element name	Reference to EN 300 175-5	Status	Support
17	Progress Indicator	7.7.31	c101	
20	Signal	7.6.8	c102	

c101: IF A/5 OR A/12 THEN m ELSE n/a
c102: IF A/40 THEN o ELSE n/a

Table A.8: EN 300 476-1 Table A.30 {CC-INFO} receiving (F to P) supported

Item	{CC-INFO} receiving (F to P) Information element name	Reference to EN 300 175-5	Status	Support
5	Progress Indicator	7.7.31	c101	
8	Signal	7.6.8	c102	

c101: IF A/5 OR A/12 THEN m ELSE n/a
c102: IF A/40 THEN o ELSE n/a

Table A.9: EN 300 476-1 Table A.73 IDENTITY-REPLY sending (P to F) supported

Item	IDENTITY-REPLY sending (P to F) Information element name	Reference to EN 300 175-5	Status	Support
2	Repeat Indicator "non-prioritized"	7.6.3	o	
6	Repeat Indicator "non-prioritized"	7.6.3	o	
10	Repeat Indicator "non-prioritized"	7.6.3	o	

Table A.10: EN 300 476-1 Table A.264 Multi-display supported

It.	Multi-display Name of field	Reference to EN 300 175-5	Stat.	Sp.	Value allowed	Value sp.
3	Display information (group of octets)	Clause 7.7.26, annex D	o		len_o: 1 .. 255 val: 00,02,03,05-0F, 11-14,16,19-1B, 20-7F (Hex)	

Annex B (normative): Profile Conformance Test Report (PCTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the Profile CTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed Profile CTR.

B.1 Identification summary

B.1.1 Profile CTR

Table B.1

PCTR Number	
PCTR Date	
Test Laboratory	
Accreditation Status	
Accreditation Reference	
Technical Authority	
Job Title	
Signature	
Test Laboratory Manager	
Signature	

B.1.2 Implementation Under Test (IUT)

Table B.2

Name	
Version	
Protocol Specification	EN 300 444
Profile ICS	ETS 300 474-1

B.1.3 Testing environment

Table B.3

Profile IXIT	EN 300 494-2 (the present document)
Profile Specific Test Specification	EN 300 494-2 (the present document)
ATM	Remote
MOT	
Period of testing	
Conformance Log reference	
Retention Date of Log reference	

B.1.4 Limits and reservations

The order of test cases listed in clause B.6 (if any) of this annex corresponds to the ordering of test cases defined in the PSTS referenced in clause B.1.3. This does not indicate that the test cases were executed in this order.

The test results presented in the present document apply only to the particular IUT declared in clause B.1.2, as presented for test in the period declared in clauses B.1.3, and configured as declared in the relevant IXIT attached to this PCTR. This PCRT shall not be reproduced except in full together with its attached ICS and IXIT.

NOTE: Additional information relevant to the technical contents or further use of the test report, or to the rights and obligations of the test laboratory and the client, may be given here. Such information may include restrictions on the publication of the report.

B.1.5 Comments

Additional comments may be given by either the client or test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

Table B.4

Additional comments reference in annex:	

B.2 IUT conformance status

Table B.5

IUT conformance status	Yes/No
The IUT conformance to the referenced base specification	

NOTE: For further details see ISO/IEC 9646-5, annex B, clause 2.

B.3 Static conformance summary

Table B.6

Static conformance summary	Yes/No
The ICS for this IUT consistency with the static conformance requirements in the referenced base specification	

NOTE: For further details see ISO/IEC 9646-5, annex B, clause 3.

B.4 Dynamic conformance summary

Table B.7

Dynamic conformance summary	Yes/No
Errors in the IUT revealed by the test campaign.	

NOTE: For further details see ISO/IEC 9646-5, annex B, clause 4.

B.5 Static conformance review report

If clause B.3 indicates non-conformance, this clause itemizes the mismatches between the ICS and the static conformance requirements of the referenced base specifications: EN 300 476 and ETS 300 474-1.

Table B.8

Non-conformance indication		Comment
Item in EN 300 476	Item in ETS 300 474-1	

B.6 Test campaign report

Table B.9 lists all the Test Cases (TCs) relevant to GAP and required by the present document. The abbreviations used in the verdict column stand for Pass (P), Fail (F) and Inconclusive (I).

NOTE: For further details see ISO/IEC 9646-5, annex B, clause 6.

B.6.1 NWK layer

Table B.9

TC Name	Selected [Yes/No]	Run [Yes/No]	Verdict [P/F/I]	Observation
TC_PT_CC_BV_OC_01				
TC_PT_CC_BV_OC_02				
TC_PT_CC_BV_OC_03				
TC_PT_CC_BV_OC_04				
TC_PT_CC_BV_IC_01				
TC_PT_CC_BV_IC_02				
TC_PT_CC_BV_CI_01				
TC_PT_CC_BV_CI_02				
TC_PT_CC_BV_CI_03				
TC_PT_CC_BV_CI_04				
TC_PT_CC_BV_CI_05				
TC_PT_CC_BV_CI_06				
TC_PT_CC_BV_CI_07				
TC_PT_CC_BV_CI_08				
TC_PT_CC_BV_CI_09				
TC_PT_CC_BV_CI_10				
TC_PT_CC_BV_CI_11				
TC_PT_CC_BV_CI_12				
TC_PT_CC_BV_CI_13				
TC_PT_CC_BV_CI_14				
TC_PT_CC_BV_CR_01				
TC_PT_CC_BV_CR_02				
TC_PT_CC_BV_CR_03				
TC_PT_CC_BV_CR_04				
TC_PT_CC_BV_CR_05				
TC_PT_CC_BV_CR_06				
TC_PT_CC_BV_CR_07				
TC_PT_CC_BV_CR_08				
TC_PT_CC_BV_CR_09				
TC_PT_CC_BV_CR_10				
TC_PT_CC_BV_CR_11				
TC_PT_CC_BV_RS_01				
TC_PT_CC_BO_01				
TC_PT_CC_BO_02				
TC_PT_CC_BI_01				
TC_PT_CC_BI_02				
TC_PT_CC_BI_03				
TC_PT_CC_TI_01				
TC_PT_CC_TI_02				
TC_PT_CC_TI_03				
TC_PT_CC_TI_04				
TC_PT_MM_BV_ID_01				
TC_PT_MM_BV_ID_02				
TC_PT_MM_BV_ID_08				
TC_PT_MM_BV_AU_01				
TC_PT_MM_BV_AU_02				
TC_PT_MM_BV_AU_03				
TC_PT_MM_BV_AU_04				
TC_PT_MM_BV_AU_05				
TC_PT_MM_BV_AU_06				
TC_PT_MM_BV_AU_07				
TC_PT_MM_BV_AU_08				
TC_PT_MM_BV_AU_09				
TC_PT_MM_BV_LO_01				
TC_PT_MM_BV_LO_02				
TC_PT_MM_BV_LO_03				
TC_PT_MM_BV_LO_04				

TC Name	Selected [Yes/No]	Run [Yes/No]	Verdict [P/F/I]	Observation
TC_PT_MM_BV_LO_05				
TC_PT_MM_BV_LO_06				
TC_PT_MM_BV_LO_07				
TC_PT_MM_BV_LO_08				
TC_PT_MM_BV_LO_09				
TC_PT_MM_BV_LO_10				
TC_PT_MM_BV_AR_01				
TC_PT_MM_BV_AR_03				
TC_PT_MM_BV_AR_05				
TC_PT_MM_BV_AR_06				
TC_PT_MM_BV_AR_09				
TC_PT_MM_BV_AR_10				
TC_PT_MM_BV_KA_01				
TC_PT_MM_BV_KA_02				
TC_PT_MM_BV_KA_03				
TC_PT_MM_BV_CH_01				
TC_PT_MM_BV_CH_02				
TC_PT_MM_BV_CH_03				
TC_PT_MM_BV_CH_04				
TC_PT_MM_BV_CH_05				
TC_PT_MM_BV_CH_08				
TC_PT_MM_BV_CH_09				
TC_PT_MM_BV_CH_10				
TC_PT_MM_BV_CH_11				
TC_PT_MM_BV_CH_12				
TC_PT_MM_BV_CH_13				
TC_PT_MM_BV_CH_14				
TC_PT_MM_BV_CH_15				
TC_PT_MM_BO_01				
TC_PT_MM_BI_01				
TC_PT_MM_BI_02				
TC_PT_MM_BI_03				
TC_PT_MM_BI_04				
TC_PT_MM_TI_01				
TC_PT_MM_TI_03				
TC_PT_MM_TI_04				
TC_PT_MM_TI_05				
TC_PT_ME_BV_01				
TC_PT_ME_BV_03				
TC_PT_ME_BV_04				
TC_PT_ME_BV_05				
TC_PT_ME_BV_06				
TC_PT_ME_BV_07				
TC_PT_ME_BV_09				
TC_PT_ME_BV_10				
TC_PT_ME_BV_11				
TC_PT_ME_BV_12				
TC_PT_ME_BV_13				
TC_PT_ME_BO_01				
TC_PT_LC_BV_LE_01				
TC_PT_LC_BV_LE_02				
TC_PT_LC_BV_LR_01				
TC_PT_LC_BV_LR_02				
TC_PT_LC_BV_LR_03				
TC_PT_LC_BI_01				
TC_PT_LC_BI_03				
TC_PT_LC_TI_02				

B.6.2 DLC layer

Table B.10

TC Name	Selected [Yes/No]	Run [Yes/No]	Verdict [P/F/I]	Observation
TC_A_CA_000				
TC_A_CA_001				
TC_A_CA_005				
TC_A_CA_006				
TC_A_BV_002				
TC_A_BV_003				
TC_A_BV_005				
TC_A_BV_006				
TC_A_BV_007				
TC_A_BV_008				
TC_A_BI_000				
TC_A_BI_001				
TC_A_BI_002				
TC_A_BI_003				
TC_A_BI_004				
TC_A_BI_005				
TC_A_BI_006				
TC_A_BI_007				
TC_A_BI_008				
TC_A_BI_009				
TC_A_BI_011				
TC_A_BI_012				
TC_A_BI_013				
TC_A_BO_000				
TC_A_BO_001				
TC_A_BO_002				
TC_A_BO_003				
TC_L_CA_000				
TC_0_CA_000				
TC_0_CA_001				

B.6.3 MAC layer

Table B.11

TC Name	Selected [Yes/No]	Run [Yes/No]	Verdict [P/F/I]	Observation
TC_PT_DB_BV_01				
TC_PT_DB_BV_02				
TC_PT_PG_CA_00				
TC_PT_PG_CA_01				
TC_PT_PG_BV_02				
TC_PT_PG_BV_03				
TC_PT_BS_CA_00				
TC_PT_BS_CA_01				
TC_PT_BS_BV_00				
TC_PT_BH_CA_00				
TC_PT_BH_CA_01				
TC_PT_BR_CA_00				
TC_PT_DT_CA_00				
TC_PT_DT_CA_01				
TC_PT_DT_CA_02				
TC_PT_DT_BI_00				
TC_PT_LM_CA_00				
TC_PT_LM_CA_01				
TC_PT_LM_CA_02				
TC_PT_LM_CA_03				
TC_PT_LM_CA_04				

B.6.4 PHY layer

Table B.12

TC Name	Selected [Yes/No]	Run [Yes/No]	Verdict [P/F/I]	Observation
GAP_PH_1				
GAP_PH_2				
GAP_PH_3				

B.7 Observations

.....

.....

.....

.....

.....

.....

.....

.....

NOTE: Additional information relevant to the technical content of the PCTR may be given here.

Annex C (normative): System Conformance Test Report (SCTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the SCTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed SCTR.

C.1 Identification summary

C.1.1 System Conformance Test Report (SCTR)

Table C.1

SCTR Number	
SCTR Date	
Test Laboratory Manager	
Signature	

C.1.2 Test laboratory

Table C.2

Identification	
Address	
Postal code/city	
Country	
Telephone	
Telefax	
Telex	
Teletex	
E-Mail	

C.1.3 Client

Table C.3

Identification	
Address	
Postal code/city	
Country	
Telephone	
Telefax	
Telex	
Teletex	
E-Mail	

C.1.4 System Under Test (SUT)

Table C.4

Name	
Version	
Supplier	
Dates of testing	
Date of receipt of SUT	
Location of SUT for Testing	
SCS Identifier	

C.1.5 Profile

Table C.5

Profile Identification	EN 300 444
Profile Version	
Profile ICS	ETS 300 474-1
Profile Specific IXIT	EN 300 494-2 (the present document)
PTS-Summary	EN 300 494-1
PSTS	EN 300 494-2 (the present document)

C.1.6 Nature of conformance testing

The purpose of conformance testing is to increase the probability that different implementations can interwork in different environments. However, the complexity of OSI protocols makes exhaustive testing impractical on both technical and economic grounds. Furthermore, there is no guarantee that a SUT which has passed all the relevant test cases conforms to a specification. Neither is there any guarantee that such a SUT will interwork with other real open systems. Rather, passing of the test cases gives confidence that the SUT has the stated capabilities and that its behaviour conforms consistently in representative instances of communication.

C.1.7 Limits and reservations

The test results presented in the present document apply only to the particular SUT and component IUTs declared in clauses C.1.4 and C.1.8, for the functionality described in the referenced SCS and in the ICS referenced in each PCTR, as presented for test in the period declared in clause C.1.4 and configured as declared in the relevant IXIT referenced in each PCTR. This SCTR may not be reproduced except in full, together with its SCS.

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

NOTE: Additional information relevant to the technical contents or further use of the test report, or to the rights and obligations of the test laboratory and the client, may be given here. Such information may include restrictions on the publication of the report.

C.1.8 Record of agreement

A definition of what parts of the SUT were considered to be the IUT during testing, and of the abstract test method and abstract test suite that were used.

Table C.6

IUT Definition Reference	Protocol	ATM	ATS
	DECT NWK layer PT	Remote	EN 300 494-2 (the present document)
	DECT DLC layer PT	Remote	EN 300 494-2 (the present document)
	DECT MAC layer PT	Remote (modified)	EN 300 494-2 (the present document)
	DECT PHY layer PT	Not applicable	EN 300 494-2 (the present document)

C.1.9 Comments

Table C.7

Additional comments reference in annex:	

NOTE: Additional comments may be given by either the client or test laboratory on any of the contents of the SCTR, for example, to note disagreement between the two parties.

C.2 System report summary

C.2.1 Profile testing summary for GAP NWK layer PT

Table C.8

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-5 EN 300 444
Profile ICS	ETS 300 474-1
Profile IXIT	EN 300 494-2 (the present document)
PCTR Number	
PCTR Date	
PSTS	EN 300 494-2 (the present document)
ATM	Remote
Means of Testing identifier	
Conformance Status	
Conformance Status Static conformance errors Dynamic conformance errors	 Yes/No Yes/No
Test cases all	
Selected	
Run	
Passed	
Inconclusive	
Failed	
Observations	

NOTE: If the SUT is not statically and dynamically conforming to this protocol, an additional summary may be given on aspect of non conformance. Any difficulties encountered may be reported here.

C.2.2 Profile testing summary for GAP DLC layer PT

Table C.9

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-4 EN 300 444
Profile ICS	ETS 300 474-1]
Profile IXIT	EN 300 494-2 (the present document)
PCTR Number	
PCTR Date	
PSTS	EN 300 494-2 (the present document)
ATM	Remote
Means of Testing identifier	
Conformance Status	
Conformance Status Static conformance errors Dynamic conformance errors	 Yes/No Yes/No
Test cases all	
Selected	
Run	
Passed	
Inconclusive	
Failed	
Observations	

NOTE: If the SUT is not statically and dynamically conforming to this protocol, an additional summary may be given on aspect of non conformance. Any difficulties encountered may be reported here.

C.2.3 Profile testing summary for GAP MAC layer PT

Table C.10

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-3 EN 300 444
ICS	ETS 300 474-1
IXIT	EN 300 494-2 (the present document)
PCTR Number	
PCTR Date	
PSTS	EN 300 494-2 (the present document)
ATM	Remote (modified)
Means of Testing identifier	
Conformance Status	
Conformance Status Static conformance errors Dynamic conformance errors	 Yes/No Yes/No
Test cases all	
Selected	
Run	
Passed	
Inconclusive	
Failed	
Observations	

NOTE: If the SUT is not statically and dynamically conforming to this protocol, an additional summary may be given on aspect of non conformance. Any difficulties encountered may be reported here.

C.2.4 Profile testing summary for GAP PHY layer PT

Table C.11

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-2 EN 300 444
ICS	ETS 300 474-1
IXIT	EN 300 494-2 (the present document)
PCTR Number	
PCTR Date	
PSTS	EN 300 494-2 (the present document)
ATM	
Means of Testing identifier	
Conformance Status	
Conformance Status Static conformance errors Dynamic conformance errors	 Yes/No Yes/No
Test cases all	
Selected	
Run	
Passed	
Inconclusive	
Failed	
Observations	

NOTE: If the SUT is not statically and dynamically conforming to this protocol, an additional summary may be given on aspect of non conformance. Any difficulties encountered may be reported here.

Annex D (normative): System Conformance Statement (SCS) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the SCS proforma in this annex so that it can be used for its intended purposes and may further publish the completed SCS.

D.1 Identification summary

D.1.1 SCS identification

Table D.1

SCS Serial Number	
SCS Date	

D.1.2 IUT identification

Table D.2

Trade Name	
Type	
Version	
Serial Number	

D.1.3 Client identification

Table D.3

Company	
Street Number	
Postal Code/City	
Country	
Contact Person Name	
Telephone	
Telefax	
Telex	
Teletex	
E-Mail	

D.1.4 Supplier identification

Table D.4

Company	
Street Number	
Postal Code/City	
Country	
Contact Person Name	
Telephone	
Telefax	
Telex	
Teletex	
E-Mail	

D.1.5 Manufacturer identification

(if different from client).

Table D.5

Company	
Street Number	
Postal Code/City	
Country	
Contact Person Name	
Telephone	
Telefax	
Telex	
Teletex	
E-Mail	

D.1.6 Protocols identification

Table D.6

Protocol Name	Specification Reference	PICS Reference	PCTR Reference	PCTR Reference from previous campaign
DECT NWK layer	EN 300 175-5	EN 300 476	-	
DECT DLC layer	EN 300 175-4	EN 300 476	-	
DECT MAC layer	EN 300 175-3	EN 300 476	-	
DECT PHY layer	EN 300 175-2	EN 300 476	-	

D.1.7 Profile identification

Table D.7

Profile Identifier	Specification Reference	Profile ICS Specific Reference	SCTR Reference	SCTR reference from previous campaign
Generic Access Profile (GAP)	EN 300 444	ETS 300 474-1	EN 300 494-1	

D.2 Miscellaneous system information

D.2.1 Configuration

Table D.8

Environment	Which one
CPU Type	
Bus-System	
Operating System Name	
Additional	

D.2.2 Other information

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

Annex E (informative): Bibliography

- ETSI EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".
- ISO/IEC 9646-2: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 2: Abstract test suite specification".
- ISO/IEC 9646-3: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 3: The Tree and Tabular Combined Notation (TTCN)".
- ISO/IEC 9646-4: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 4: Test realization".
- ISO/IEC 9646-6: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 6: Protocol Profile Test Specification".

History

Document history		
Edition 1	August 1996	Publication as ETS 300 494-2
Amendment 1	February 1998	Amendment 1 to the 1st Edition of ETS 300 494-2
V1.2.1	August 1999	Publication
V1.3.1	April 2001	Publication
V1.4.0	December 2001	One-step Approval Procedure OAP 20020405: 2001-12-05 to 2002-04-05
V1.4.1	April 2002	Publication