C.L.	E.C.O.	ZONE	REVISION	CHKD.	DATE
⚠	CA-24-00042817		NEW DESIGN RELEASE	AKS	11.12.24

Drawing Status				
Stage	Stage 0	Stage 1	Stage 2	Stage 3
Description	Drawing Release Only For Reference	Drawing Release For Feasibility Study	Drawing Release For Proto Development	Drawing Release For Production
Drawing Release Stages				

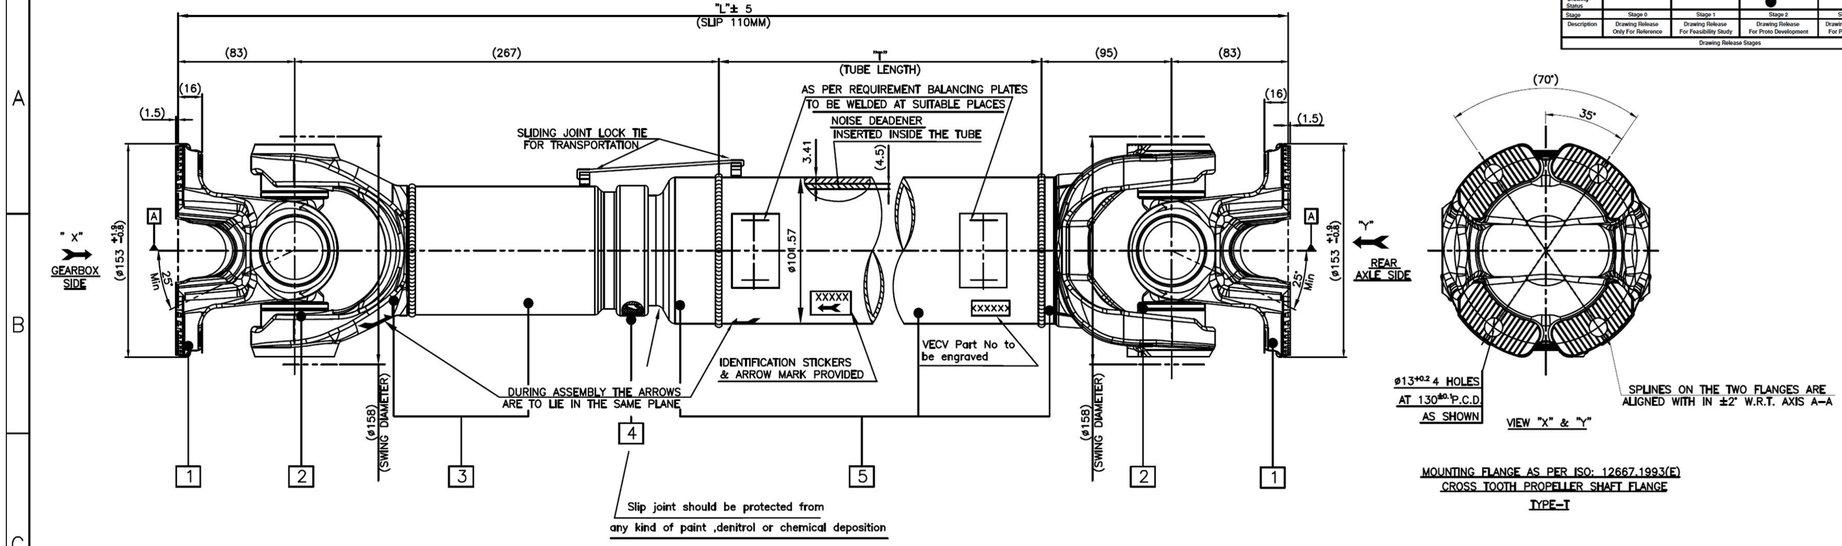

TECHNICAL DETAILS

1. FUNCTIONAL STATIC TORQUE – 14,000 Nm
   FATIGUE TORQUE – 7,000 Nm UPTO 1,00,000 CYCLES
2. U. JOINT & SLIP JOINT CAN BE SUPPLIED IN TWO OPTION (BASED ON CUSTOMER RECOMMENDATION)
   ☑ OPTION 1: SEALED TYPE UNIVERSAL JOINT & SLIP JOINT
   ☒ OPTION 2: REGULAR GREASING UNIVERSAL JOINT & SLIP JOINT
3. ANTI RUST USED FOR FLANGE FACE
4. FLANGE FACE TO BE FREE FROM PAINT
5. SHAFT TO BE PAINTED WITH BLACK COLOUR TO MEET 300 HRS OF SALT SPRAY LIFE AS PER ASTM B117 ON PANEL
6. AS PER REQUIREMENT BALANCING PLATES TO BE WELDED AT SUITABLE PLACE
7. UNIVERSAL JOINT LOOSENESS 0.020 TO 0.051mm.
8. SLIDING JOINT LOCK HOOK TO DETACH BEFORE USE
9. IDENTIFICATION STICKER MENTIONING BARCODE AS PER VECV STANDARD D–MED–002 SHOULD BE PASTED IN MID OF THE TUBE

BILL OF MATERIAL FOR SPARE PARTS

SL.NO.	PART DESCRIPTION	RSB PART NUMBER	CUSTOMER PART NO.	QTY.	MATERIAL	ENVELOPE SIZE
5.5 ⓓ	SHORT FORK, TUBE, NOISE DEADENER & REAR HSG SUB ASSY.	S655 490 525 630 653 1160		01	Medium Carbon Steel	180X180X1518
5.4 ⓒ		S655 490 525 630 653 0805				180X180X1163
5.3 ⓓ ⓑ		S655 490 525 630 653 0827				180X180X1185
5.2		S655 490 525 630 653 0834				180X180X1192
5.1		S655 490 525 630 653 1247				180X180X1605
4	DUST SEAL	F623 490 865 022	ID321731	01	Nitrile Rubber	100X100X50
3	LONG FORK SUB ASSY.(110 SLIP)	S207 490 570 205	ID369638	01	Medium Carbon Steel	180X180X350
2	SEALED UNIVERSAL JOINT ASSY.	S295 490 599 202	ID320936	02	Alloy Steel	160X160X75
1	FLANGE YOKE (ø150 T–SERRATED)	F507 490 150 083	ID344386	02	Medium Carbon Steel	230X230X150

SR.	VEHICLE MODEL	"L" DIMENSION	"T" (TUBE LENGTH)	CAD WEIGHT	@UNBALANCE @2200 RPM (75% VALUE)	REMARKS	PART STATUS	ENVELOPE SIZE	RSB PART NUMBER	CUSTOMER PART NO.
05	VOLVO B8F VARIANT 1 LHD MT 6300(WB) 6S ⓓ	1688	1160	37.1 Kg	126 Cmg.	2nd SHAFT REAR	PROTO	250X250X1718	A120 490 309 396 630 1160	ID632703
04	PRO 6019 13.5M WITH EMR HD BUS 6900WB RHD_ET90S6_MDEP5 BSVI 458DH ⓒ	1333	805	34.14 Kg	115 Cmg.	3RD SHAFT REAR	PROTO	250X250X1363	A120 490 309 396 630 0805	ID627194
03	VOLVO B8F VARIANT 1 LHD MT 6300(WB) 6S ⓓ FEB Mech–13.5 with_EMR 6900(WB) Eaton 6S ⓑ	1355	827	34.30 Kg	117 Cmg.	3RD SHAFT REAR	PROTO	250X250X1385	A120 490 309 396 630 0827	ID624756
02	PRO 6019 13.5M WITH EMR HD BUS 6900WB RHD_ET90S6_MDEP5 BSVI	1362	834	34.37 Kg	@ 116 Cmg.	3RD SHAFT REAR	PROTO	250X250X1392	A120 490 309 396 630 0834	ID601574
01	PRO 6019 13.5M WITHOUT EMR HD BUS 6900WB RHD_ET90S6_MDEP5 BSVI	1775	1247	37.79 Kg	@ 128 Cmg.	3RD SHAFT REAR	PROTO	250X250X1805	A120 490 309 396 630 1247	ID601564

Material Description
Size, Spec. Std. No.

RSB TRANSMISSIONS (I) LTD
JAMSHEDPUR

Date	Mod. No.	Sl. No.	Zone	Modification	D.O.	STDZ
11/12/24	d	1,2	D,E,F	Vehicle model VOLVO B8F Variant 1 LHD MT 6300WB added in the table drawing.	PR	AM
15/02/24	c	1,2	D,E,F	Vehicle model PRO 6019 13.5 with EMR HD BUS 6900WB RHD ET90S6 458DH added in the table drawing	PR	AM
19/08/23	b	1,2	D,F	Vehicle model FEB Mech –13.5 with_EMR 6900(WB) Eaton 6S added in the table drawing	RD	AM
02/09/22	a	3	F	Unbalance value revised	PR	AM
05/10/20	NR	——	——	——	——	——

2020	SIGN	DATE	1st Angle Projection
CAD	PRADIP	05/10/20	SERIES: 490 JOINT
CHD	ARNAB	05/10/20	
STDZ			
APPD	H.PAIRA	05/10/20	
SCALE : N.T.S			ALL DIM IN mm

Drg./Part Designation: DRIVE SHAFT (PROPOSAL DRAWING)

Replace Drg. ——
Reference Drg. No. ——
Opp Hand Drg./Pt. No.
Drg./Part No. A120 490 309 396 630
Sheet No. 1 of 1

CAD Reference– PEC SHARE FOLDER\Project\Customer\VECV\20.15 Bus\Proposal Drawing

C Release

APPROVED
DATE : 11.12.24

WT-Kg. 37.100

SPEC NO.

SPEC CONTROL DRAWING NO.

DRN AS
CHD AKS
APPD KK

EICHER
VE COMMERCIAL VEHICLES LTD.

DESCRIPTION: DRIVE SHAFT ASSY

PART No./DRG. No. ID632703

SHT. No. 1 of 1 CL. ⚠ SIZE A1