

Product Description	13W LED linear Profile Light with top cover of PC diffuser, Constant Current , 1 Mtr Long with 120 LEDs per RM Linear Profile Light of Dimension 1000mm by 16.0mm by 16.0mm – IP65, LM-79 & LM-80, Operating Voltage -12V
Fixture Dimension	1000mm X 16mm X 16mm
Fixture Body	Aluminium Extrusion fabricated Housing
Viewing Angle	120
Colour Temp	10000K
CRI	>70K
Working Temperature	-35 to 80deg C
Fixture Efficacy	>75lm/watt
Life Span	50,000 hrs, On Site Warranty Five Year
LED Driver	BIS Approved Fully Potted IP67 LED Driver (Non-Integral. Single Driver to be used for 2 Linear Fixtures) with below specification: (a) Over Voltage Cut Off & Restart (220V & 100V) (b) Under Voltage Cut off & Restart(220V & 100V) (c) 440V Protection – 8 Hours (d) THD <10% (e) Power Factor >0.9 (f) Surge Protection: 4KV
LED Chip Make	CREE/ NICHIA/ OSRAM/ SAMSUNG/ CITIZEN/ PHILIPS (Lumileds)/SEOUL/ Bridgelux
External Surge Protection for one side fascia	10KA/10KV, IP67 SPD to be used (Non Integral)




- ✓ Certification from CPRI/Intertek / UL /TUV lab for LED fittings and Driver required.
- ✓ Light fittings to be provided with all necessary internal wiring (Copper 3/20).
- ✓ Drivers should comply with BIS specifications.
- ✓ All products should be to embossed or screen printed (No sticker or skin allowed) with Name of supplier, Batch No & Year.
- ✓ Warranty for lights will be given for lot by suppliers. RVI vendor to provide warranty to BPCL linking this batch no with sites. Overall responsibilities of warranty lies with RVI Vendor.

ajay
kumar

Digitally signed
by ajay kumar
Date: 2022.01.10
21:12:05 +05'30'

Technical Specs:Annex1

BPCL RVI-Additional Element- Front Lit Fascia

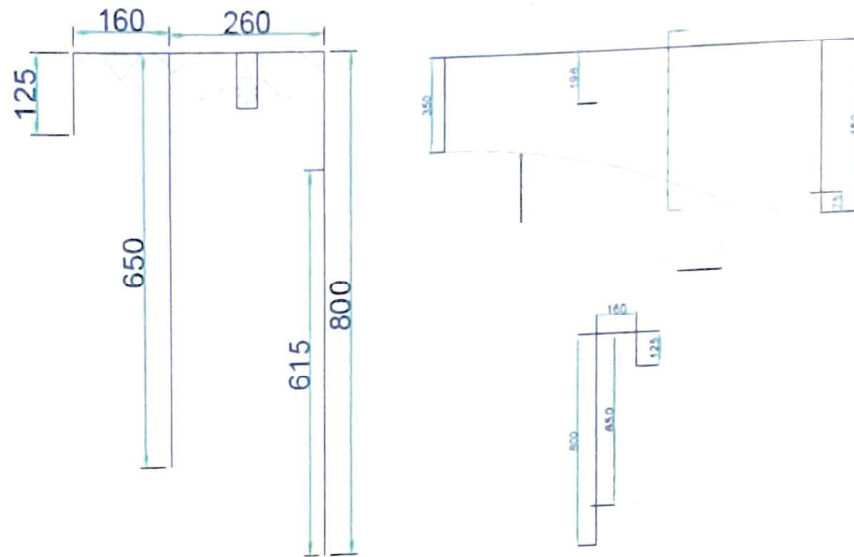

Supply and installation of an additional **Blue ACM (BPCL Approved Make)** at an offset of 160mm over the existing Blue fascia wave. The additional blue ACM fascia is rectangular in shape of 125 mm depth measured from the top of the existing fascia in the groove formed between 125mm depth and 160mm offset of the Blue Fascia, the LED tube-lights of 'White' Color of 13 Watts with a viewing angle of 120 degrees.

Blue Fascia lighting Tech Specs :

Front Lit light for Blue wave of 1-meter-long LED linera light with aluminum profile and Driver fitted on the outer edge of the Pelmet touching the front and upper sides. The LED Strips are placed in the profile at 45-degree angle from horizontal (or vertical) to lighten towards the canopy fascia.

ajay
kumar

Digitally signed
by ajay kumar
Date:
2022.01.10
21:11:38 +05'30'