

FANSHAWE

ENGR-3027 Process Engineering

Martin Volkening

2026-08-07

Table of contents

Introduction	1
Labs	3
Assignments	3
Quizzes	3
Tests	4
Other Grade Considerations	4
How to succeed	4
Cheating and Plagiarism	4
FOL	4
Accessibility	4
Fanshawe's Recording Policy	5
1 Types of Manufacturing Processes	7
1.1 Learning Objectives	7
1.2 Introduction to Manufacturing Processes	7
1.3 Process Selection Framework	8
1.4 1. Casting Processes	9
1.4.1 Sand Casting	10
1.4.2 Die Casting	11
1.4.3 Investment Casting (Lost-Wax)	11
1.4.4 Centrifugal Casting	12
1.4.5 Permanent Mold Casting	12
1.4.6 Shell Molding	12
1.5 2. Molding Processes	12
1.5.1 Injection Molding	13
1.5.2 Blow Molding	15
1.5.3 Rotational Molding	15
1.5.4 Thermoforming	15
1.5.5 Powder Metallurgy	15
1.6 3. Forming Processes	15
1.6.1 Forging	16
1.6.2 Stamping	16
1.6.3 Bending	17

1.6.4	Shearing	17
1.6.5	Rolling	17
1.6.6	Extrusion (Metal)	17
1.7	4. Machining Processes	17
1.7.1	Turning	18
1.7.2	Milling	18
1.7.3	Drilling	18
1.7.4	Grinding	18
1.7.5	Electrical Discharge Machining (EDM)	19
1.8	5. Joining Processes	19
1.8.1	Welding	19
1.8.2	Brazing and Soldering	20
1.8.3	Adhesive Bonding	20
1.8.4	Mechanical Fastening	20
1.9	6. Surface Treatment and Coating	20
1.9.1	Electroplating	21
1.9.2	Anodizing	21
1.9.3	Powder Coating	21
1.9.4	Galvanizing	21
1.10	7. Additive Manufacturing (3D Printing)	21
1.10.1	FDM (Fused Deposition Modeling)	22
1.10.2	SLA (Stereolithography)	22
1.10.3	SLS (Selective Laser Sintering)	22
1.10.4	Metal 3D Printing (DMLS/SLM)	22
1.11	Industry Applications	22
1.12	Sustainability in Manufacturing	23
1.13	Review Questions	24
1.14	Summary	25
1.14.1	Key Takeaways	26
1.15	References	26
2	Process and Design	27
2.1	Learning Objectives	27
2.2	Introduction to Process Engineering	27
2.3	Types of Manufacturing Automation	28
2.3.1	Fixed Automation	28
2.3.2	Programmable Automation	30
2.3.3	Flexible Automation	30
2.3.4	Automation Advantages and Disadvantages	31
2.4	Project Development Phases	31
2.4.1	Phase 1: Concept Development	32
2.4.2	Phase 2: Front-End Engineering Design (FEED)	32
2.4.3	Phase 3: Detailed Engineering	33
2.4.4	Phase 4-7: Construction, Commissioning, and Start-up	34
2.5	Process Documentation	34
2.5.1	Process Flow Diagrams (PFDs)	34

2.5.2	Piping & Instrumentation Diagrams (P&IDs)	35
2.6	Design for Manufacturing (DFM) and Assembly (DFA)	36
2.6.1	DFM Principles	36
2.6.2	DFA Analysis	37
2.7	HAZOP Studies	38
2.7.1	HAZOP Methodology	38
2.7.2	HAZOP Example	39
2.8	Cost Estimation	39
2.9	Case Study: Automotive Paint Line Project	41
2.10	Review Questions	41
2.11	Summary	43
2.11.1	Key Takeaways	44
2.12	References	44
3	Integrated Manufacturing Systems	45
3.1	Learning Objectives	45
3.2	Material Handling Methods & Systems	45
3.3	Fundamentals of Production Lines	46
3.3.1	Methods of Work Transport	47
3.3.2	Work Cycle Types	49
3.4	Key Time Metrics	49
3.4.1	Takt Time vs. Cycle Time	50
3.4.2	Manufacturing Cycle Time and Efficiency	51
3.5	Manual Assembly Lines	53
3.5.1	Line Balancing	53
3.5.2	Line Balancing Example: Electronics Assembly	54
3.6	Automated Production Lines	57
3.6.1	Impact of Station Failures	57
3.6.2	Buffer Sizing	60
3.7	Cellular Manufacturing	61
3.7.1	Part Families and Machine Cells	61
3.8	Flexible Manufacturing Systems (FMS)	62
3.8.1	FMS Components	62
3.9	Modern Manufacturing Concepts	63
3.9.1	SMED (Single-Minute Exchange of Die)	63
3.9.2	AGV and AMR Systems	64
3.9.3	Digital Twin	65
3.10	Industry Applications	65
3.11	Review Questions	66
3.12	Summary	67
3.12.1	Key Takeaways	68
3.13	References	68
4	Plant Layout and Facility Design	69
4.1	Learning Objectives	69
4.2	Types of Facility Layouts	70

4.2.1	Visualizing the Layout Spectrum	70
4.3	Process Layout (Functional Layout)	70
4.3.1	Characteristics of Process Layouts	71
4.3.2	Real-World Examples	72
4.4	Product Layout (Assembly Line)	72
4.4.1	Characteristics of Product Layouts	72
4.5	Hybrid Layout (Cellular Manufacturing)	73
4.5.1	Group Technology Concept	73
4.6	Fixed-Position Layout	74
4.6.1	Examples of Fixed-Position Layouts	74
4.7	Designing Process Layouts	74
4.7.1	Step 1: Gather Information	74
4.7.2	Step 2: Develop Block Plans	75
4.7.3	Interactive Example: Comparing Two Layouts	75
4.7.4	Step 3: Develop Detailed Layout	76
4.8	Designing Product Layouts (Line Balancing)	76
4.8.1	Line Balancing Steps	76
4.8.2	Key Formulas	77
4.8.3	Interactive Example: Pizza Assembly Line	77
4.8.4	Line Balancing Calculation	78
4.9	Warehouse Layout Design	79
4.9.1	Key Principles	79
4.10	Office Layout Design	80
4.10.1	Two Main Approaches	80
4.10.2	Office Ergonomics Checklist	81
4.10.3	The Future of Office Design	81
4.11	Summary: Choosing the Right Layout	81
4.11.1	Key Takeaways	81
4.12	Industry Case Studies	82
4.12.1	Case Study 1: Food Processing Plant Layout	82
4.12.2	Case Study 2: Aerospace Manufacturing Facility	83
4.12.3	Case Study 3: Automotive Supplier - Hybrid Cell Layout	84
4.13	Ergonomics in Manufacturing	85
4.13.1	The NIOSH Lifting Equation	85
4.13.2	Lifting Index Calculation	85
4.13.3	NIOSH Lifting Example	86
4.13.4	Ergonomic Workstation Design	88
4.14	Modern Layout Trends and Industry 4.0	89
4.14.1	Flexible Manufacturing Layouts	89
4.14.2	Industry 4.0 Layout Considerations	89
4.14.3	AGV and AMR Traffic Planning	89
4.15	Layout Simulation Software	90
4.15.1	Common Layout Planning Software	90
4.15.2	Simulation Benefits	91
4.16	Practice Problems	91
4.17	Review Questions	92

4.18 Chapter Summary	94
4.19 References	95
5 Lean Manufacturing	97
5.1 Learning Objectives	97
5.2 Introduction to Lean Manufacturing	97
5.2.1 Definition of Lean	98
5.3 Evolution of Manufacturing Systems	98
5.3.1 Comparison of Manufacturing Systems	98
5.4 The Toyota Production System (TPS)	99
5.4.1 Historical Context	100
5.4.2 Two Pillars of TPS	101
5.5 The 3 M's of Lean	101
5.6 The Seven Types of Waste (MUDA)	102
5.6.1 Detailed Breakdown of the Seven Wastes	103
5.7 The 5S Methodology	104
5.7.1 Visual Factory	105
5.8 Just-in-Time (JIT) Production	106
5.8.1 The JIT Philosophy	106
5.8.2 Push vs. Pull Systems	107
5.8.3 Kanban System	107
5.9 Key Time Metrics	108
5.9.1 Definitions	108
5.9.2 Formulas and Calculations	109
5.9.3 Interactive Example: Calculating Takt Time	109
5.10 Setup Reduction (SMED)	110
5.10.1 The SMED Concept	110
5.10.2 SMED Methodology	110
5.11 Kaizen: Continuous Improvement	111
5.11.1 Kaizen Principles	112
5.11.2 Key Kaizen Concepts	112
5.12 Value Stream Mapping (VSM)	113
5.12.1 VSM Symbols	113
5.13 Summary	113
5.14 Review Questions	113
5.15 References	114
6 Machine Guarding and Functional Safety	115
6.1 Learning Objectives	115
6.2 Introduction: The Safety Hierarchy	115
6.3 Physical Guarding and Interlocks	117
6.3.1 Fixed Guards	117
6.3.2 Interlocked Guards	118
6.3.3 Stop Categories	118
6.3.4 Trapped Key Systems (Lock-Out/Tag-Out)	118
6.4 Presence-Sensing Devices	119

6.4.1	Light Curtains	120
6.4.2	Laser Area Scanners	121
6.4.3	Pressure-Sensitive Safety Mats	122
6.5	Control-Actuated Safety Devices	123
6.5.1	Two-Hand Controls	123
6.5.2	Enable/Deadman Switches	124
6.6	Collaborative Robotics (Cobots)	124
6.6.1	Collaborative Operation Methods	125
6.6.2	Power and Force Limiting (PFL)	125
6.7	Safety Distance Calculation	126
6.7.1	The Safety Distance Formula	126
6.7.2	Standard Values for K	127
6.7.3	Penetration Depth (C)	127
6.7.4	Example Calculation	128
6.8	Emergency Stop (E-Stop) Systems	129
6.8.1	E-Stop Pull Cords	130
6.9	Functional Safety Standards	131
6.9.1	Safety Integrity Levels (SIL) - IEC 62061	131
6.9.2	Performance Levels (PL) - ISO 13849-1	131
6.10	Risk Assessment Process	132
6.10.1	Risk Estimation	133
6.11	Summary	134
6.12	Review Questions	135
6.13	References	136
7	Ergonomics in Automated Manufacturing	137
7.1	Learning Objectives	137
7.2	What is Ergonomics?	137
7.2.1	Why Ergonomics Matters in Manufacturing	139
7.3	The Seven Ergonomic Risk Factors	139
7.3.1	Risk Factor 1: Awkward Postures	140
7.3.2	Risk Factor 2: Repetition	141
7.3.3	Risk Factor 3: Force	142
7.4	Musculoskeletal Disorders (MSDs)	143
7.4.1	The MSD Development Cycle	144
7.5	Preventing MSDs: Best Practices	144
7.5.1	Proper Lifting Technique	145
7.6	Ergonomic Design Principles	146
7.6.1	Anthropometry: Designing for Human Dimensions	148
7.6.2	Work Surface Height Guidelines	149
7.7	Ergonomic Assessment Tools	149
7.7.1	REBA: Rapid Entire Body Assessment	150
7.7.2	REBA Scoring Tables	150
7.7.3	REBA Employee Assessment Worksheet	151
7.7.4	REBA Example Calculation: Step-by-Step Walkthrough	156
7.7.5	REBA Example Calculation	162

7.7.6	NIOSH Lifting Equation	164
7.8	AI-Powered Ergonomic Assessment	166
7.8.1	Benefits of AI Ergonomic Assessment	168
7.9	Ergonomics in Automated Manufacturing	168
7.9.1	Human-Automation Interaction Points	169
7.9.2	Collaborative Robot Ergonomics	169
7.10	Employer Responsibilities	170
7.11	Case Study: Ergonomics in Automated Assembly	171
7.12	Summary	173
7.13	Review Questions	173
7.14	Additional Resources	175
7.14.1	Videos	175
7.14.2	Online Tools	175
7.15	References	175
8	Industrial Robotics	177
8.1	Learning Objectives	177
8.2	Introduction to Industrial Robotics	177
8.2.1	Why Use Robots?	178
8.2.2	Robot Market Growth	178
8.2.3	Industries Using Robots	178
8.3	Robot Configurations	179
8.3.1	Common Robot Types	179
8.3.2	Detailed Configuration Comparison	179
8.3.3	Degrees of Freedom	180
8.4	Robot Specifications	180
8.4.1	Key Specifications	180
8.4.2	Work Envelope	181
8.4.3	Payload Considerations	181
8.4.4	Repeatability vs Accuracy	182
8.5	Robot System Components	183
8.5.1	System Architecture	184
8.5.2	End Effectors (EOAT)	184
8.5.3	Gripper Selection Example	184
8.6	Coordinate Systems and Motion	186
8.6.1	Coordinate Frames	186
8.6.2	Motion Types	186
8.7	Robot Applications	187
8.7.1	Automotive Applications	187
8.7.2	Food & Beverage Applications	187
8.7.3	Aerospace/Defense Applications	188
8.8	Robot Safety	188
8.8.1	Hazard Categories	188
8.8.2	Safety Standards	188
8.8.3	Safeguarding Methods	189
8.9	Collaborative Robots (Cobots)	189

8.9.1	Cobot Characteristics	189
8.9.2	Collaborative Operation Modes (ISO/TS 15066)	190
8.9.3	Force and Pressure Limits	190
8.10	Robot Programming Basics	190
8.10.1	Programming Methods	190
8.10.2	Basic Program Structure	191
8.10.3	Key Programming Concepts	191
8.11	Video Resources	192
8.11.1	Introduction to Industrial Robots	192
8.11.2	Collaborative Robots Explained	192
8.12	Summary	192
8.13	Review Questions	193
8.14	References	203
9	Industrial Automation Fundamentals	205
9.1	Learning Objectives	205
9.2	Introduction to Industrial Automation	205
9.2.1	Why Automate?	206
9.2.2	Automation in Key Industries	206
9.3	Types of Automation	206
9.3.1	Automation Classification	207
9.3.2	The Automation Pyramid	208
9.4	Programmable Logic Controllers (PLCs)	209
9.4.1	What is a PLC?	209
9.4.2	PLC Hardware Components	209
9.4.3	The PLC Scan Cycle	209
9.4.4	PLC Programming Languages (IEC 61131-3)	211
9.4.5	Ladder Logic Example	212
9.5	Industrial Sensors	212
9.5.1	Sensor Classification	213
9.5.2	Sensor Wiring: PNP vs NPN	214
9.6	Actuators and Motor Control	214
9.6.1	Types of Industrial Actuators	214
9.6.2	Variable Frequency Drives (VFDs)	214
9.6.3	VFD Benefits	216
9.6.4	Servo Systems	217
9.7	Industrial Communication Networks	217
9.7.1	Network Architecture	218
9.7.2	Common Industrial Protocols	218
9.8	Human-Machine Interface (HMI) and SCADA	219
9.8.1	HMI Overview	219
9.8.2	HMI Design Best Practices	219
9.8.3	SCADA Systems	220
9.9	Safety in Automation	220
9.9.1	Safety System Architecture	220
9.9.2	Safety Integrity Levels (SIL)	221

9.10 Industry 4.0 and IIoT	221
9.10.1 Industry 4.0 Technologies	221
9.10.2 IIoT Architecture	221
9.10.3 Predictive Maintenance Example	222
9.11 Video Resources	223
9.11.1 Introduction to PLCs	223
9.11.2 Industrial Networks Explained	223
9.12 Summary	224
9.13 Review Questions	224
9.14 References	231
10 Statistical Process Control (SPC)	233
10.1 Learning Objectives	233
10.2 Introduction to SPC	233
10.2.1 What is Statistical Process Control?	233
10.2.2 Brief History of SPC	234
10.2.3 Why SPC Matters	235
10.3 Understanding Variation	235
10.3.1 Common Cause vs. Special Cause Variation	236
10.3.2 The Two Mistakes in Process Control	236
10.3.3 When is a Process “In Control”?	237
10.4 Control Charts: The Foundation of SPC	238
10.4.1 What is a Control Chart?	238
10.4.2 Control Chart Components	239
10.4.3 Why ± 3 Sigma?	239
10.4.4 Choosing the Right Control Chart	240
10.5 Variable Control Charts	241
10.5.1 X-bar and R Chart	241
10.5.2 Control Chart Constants	244
10.5.3 Individual and Moving Range (I-MR) Chart	245
10.6 Attribute Control Charts	246
10.6.1 p Chart (Proportion Defective)	246
10.6.2 c Chart (Count of Defects)	247
10.7 Interpreting Control Charts	248
10.7.1 Out-of-Control Signals (Western Electric Rules)	248
10.7.2 Additional Patterns to Watch For	249
10.8 Process Capability	250
10.8.1 What is Process Capability?	250
10.8.2 Capability Indices	250
10.8.3 Cp vs. Cpk: Why Both Matter	251
10.8.4 Capability Example Calculation	251
10.8.5 Capability Index Interpretation	252
10.9 Responding to Out-of-Control Signals	254
10.9.1 The Response Process	254
10.9.2 Investigation Checklist (5 Ms + E)	254
10.10 SPC Implementation	254

10.10.1 Steps to Implement SPC	254
10.10.2 Common SPC Mistakes	255
10.11 Summary	255
10.12 Review Questions	256
10.12.1 Conceptual Questions	256
10.12.2 Calculation Questions	257
10.12.3 Application Questions	258
10.13 References	259
11 Measurement Systems Analysis	261
11.1 Learning Objectives	261
11.2 Introduction to Measurement Systems Analysis	261
11.2.1 Why MSA Matters	262
11.2.2 The Cost of Poor Measurement	262
11.2.3 MSA in Industry Standards	262
11.3 Components of Measurement Variation	263
11.3.1 The Measurement System Model	263
11.3.2 Accuracy vs. Precision	263
11.4 Accuracy Studies	264
11.4.1 Bias	264
11.4.2 Linearity	266
11.4.3 Stability	267
11.4.4 Stability Control Chart	267
11.5 Precision Studies: Gauge R&R	268
11.5.1 Repeatability vs. Reproducibility	269
11.5.2 Gauge R&R Study Design	269
11.5.3 Range Method (Short Form)	269
11.5.4 ANOVA Method (Full Study)	271
11.5.5 Calculating %GRR and Acceptance Criteria	276
11.5.6 Gauge R&R Acceptance Criteria Summary	277
11.5.7 Visual Analysis of Gauge R&R	278
11.6 Attribute Measurement Systems	278
11.6.1 Kappa Statistic	278
11.6.2 Attribute Agreement Study Example	280
11.6.3 Calculating Kappa	282
11.6.4 Attribute MSA Best Practices	283
11.7 Measurement System Resolution	283
11.7.1 Rule of Ten	283
11.7.2 Resolution Impact on Gauge R&R	285
11.8 Common Sources of Measurement Error	285
11.9 MSA and SPC Relationship	286
11.9.1 Effect on Control Charts	286
11.9.2 Effect on Capability Studies	286
11.10 Conducting an MSA Study: Step-by-Step	288
11.10.1 Data Collection Sheet Template	289
11.11 Video Resources	289

11.11.1 Understanding Gauge R&R	289
11.11.2 MSA in Practice	289
11.12 Summary	289
11.13 Review Questions	290
11.14 References	297
12 Total Productive Maintenance (TPM)	299
12.1 Learning Objectives	299
12.2 Introduction to TPM	299
12.2.1 What is Total Productive Maintenance?	299
12.2.2 History of TPM	300
12.2.3 The Goals of TPM	300
12.2.4 Traditional vs. TPM Approach	301
12.3 The Eight Pillars of TPM	302
12.4 Overall Equipment Effectiveness (OEE)	303
12.4.1 What is OEE?	303
12.4.2 OEE Component Formulas	303
12.4.3 OEE Calculation Example	304
12.4.4 OEE Benchmarks	307
12.5 The Six Big Losses	308
12.5.1 Typical Loss Distribution	309
12.6 Autonomous Maintenance	309
12.6.1 The Seven Steps of Autonomous Maintenance	310
12.6.2 The AM Tag System	310
12.6.3 Example: AM Cleaning and Inspection Checklist	311
12.7 Planned Maintenance	311
12.7.1 Types of Maintenance	312
12.7.2 Predictive Maintenance Technologies	312
12.7.3 The P-F Curve	313
12.8 Focused Improvement (Kobetsu Kaizen)	314
12.8.1 The Kaizen Process	314
12.8.2 Loss Elimination Tools	316
12.9 TPM Implementation	320
12.9.1 The 12 Steps of TPM Implementation	320
12.9.2 Success Factors	321
12.10 Case Study: TPM Implementation	321
12.10.1 Background	321
12.10.2 Problem Analysis	321
12.10.3 Improvements Implemented	322
12.10.4 Results After 18 Months	323
12.11 Summary	324
12.12 Review Questions	324
12.12.1 Conceptual Questions	324
12.12.2 Calculation Questions	325
12.12.3 Application Questions	327
12.13 References	328

13 Quality Management Systems	329
13.1 Learning Objectives	329
13.2 Introduction to Quality Management Systems	329
13.2.1 Why Implement a QMS?	330
13.2.2 The Evolution of Quality Management	330
13.2.3 Quality Management Principles	330
13.3 ISO 9001:2015 Structure	331
13.3.1 The Ten Clauses	332
13.3.2 The Process Approach and PDCA	332
13.3.3 Risk-Based Thinking	333
13.4 Industry-Specific Quality Standards	334
13.4.1 Comparison of Major Standards	334
13.4.2 IATF 16949:2016 (Automotive)	334
13.4.3 Automotive Core Tools	335
13.4.4 AS9100D (Aerospace/Defense)	342
13.4.5 ISO 22000:2018 (Food Safety)	342
13.5 Documentation Requirements	343
13.5.1 Documentation Hierarchy	343
13.5.2 Document Control Requirements	343
13.5.3 Documented Information Required by ISO 9001:2015	344
13.6 Internal Auditing	345
13.6.1 The Audit Process	345
13.6.2 Audit Checklist Example	345
13.6.3 Types of Audit Findings	345
13.6.4 Auditor Competence	346
13.7 Corrective and Preventive Action (CAPA)	346
13.7.1 The CAPA Process	346
13.7.2 CAPA Effectiveness Criteria	352
13.8 Management Review	353
13.8.1 Management Review Inputs	353
13.8.2 Management Review Outputs	353
13.8.3 Sample Management Review Dashboard	354
13.9 Continuous Improvement	354
13.9.1 Improvement Methodologies	354
13.9.2 Key Performance Indicators (KPIs)	355
13.9.3 Cost of Quality (COQ)	355
13.10 Integration with Quality Tools	357
13.10.1 Quality Tools Integration Map	358
13.10.2 Linking Tools to QMS Requirements	358
13.11 Certification Process	358
13.11.1 The Certification Journey	358
13.11.2 Certification Audit Types	359
13.12 Video Resources	359
13.12.1 ISO 9001:2015 Overview	359
13.12.2 Internal Auditing Best Practices	359
13.13 Summary	359

13.14	Review Questions	360
13.15	References	368
14	Process Failure Mode and Effects Analysis (PFMEA)	369
14.1	Learning Objectives	369
14.2	Introduction to PFMEA	369
14.2.1	What is PFMEA?	369
14.2.2	Brief History of FMEA	370
14.2.3	DFMEA vs. PFMEA	370
14.2.4	Why PFMEA Matters	372
14.3	PFMEA Fundamentals	372
14.3.1	Core Objectives	372
14.3.2	The PFMEA Team	373
14.3.3	Key Terminology	374
14.3.4	The PFMEA Form	374
14.4	The PFMEA Methodology: 10 Steps	374
14.4.1	Step 1: Define Scope and Process Boundaries	375
14.4.2	Step 2: Process Mapping and Identifying Functions	375
14.4.3	Step 3: Identifying Potential Failure Modes	376
14.4.4	Step 4: Analyzing Failure Effects	377
14.4.5	Step 5: Determining Severity Ratings	377
14.4.6	Step 6: Identifying Potential Causes	378
14.4.7	Step 7: Rating Occurrence	378
14.4.8	Step 8: Current Controls and Detection Ratings	379
14.4.9	Step 9: Calculating RPN and Prioritization	380
14.4.10	Limitations of RPN	381
14.4.11	Action Priority (AP) Method — AIAG-VDA Alternative	382
14.4.12	Step 10: Recommended Actions and Follow-Up	382
14.5	Complete PFMEA Example: Injection Molding	383
14.6	Industry-Specific PFMEA Examples	385
14.6.1	Example: Welding Process	385
14.6.2	Example: Heat Treatment Process	385
14.6.3	Example: Food Processing (Pasteurization)	386
14.7	Integration with Other Quality Tools	387
14.7.1	From PFMEA to Control Plan	387
14.8	Common Pitfalls and Best Practices	388
14.8.1	Common Pitfalls to Avoid	388
14.8.2	Best Practices	388
14.9	Case Study: Preventing a Major Quality Issue	388
14.9.1	Background	388
14.9.2	PFMEA Analysis	389
14.9.3	Actions Taken	389
14.9.4	Results	390
14.10	Summary	390
14.11	Review Questions	390
14.11.1	Conceptual Questions	390

14.11.2 Calculation Questions	392
14.11.3 Application Questions	392
14.11.4 Critical Thinking Questions	393
14.12 References	395
15 Troubleshooting and Root Cause Analysis	397
15.1 Learning Objectives	397
15.2 Introduction to Troubleshooting	397
15.2.1 The Cost of Downtime	397
15.2.2 Reactive vs. Proactive Problem Solving	398
15.3 Systematic Troubleshooting Methodology	399
15.3.1 The DMAIC Troubleshooting Framework	399
15.3.2 Step 1: Define the Problem	399
15.3.3 Problem Statement Template	400
15.3.4 Step 2: Gather Data and Observations	400
15.3.5 The “Change Analysis” Approach	400
15.4 Understanding Root Cause vs. Symptoms	401
15.4.1 The Causation Hierarchy	401
15.4.2 Why Finding Root Cause Matters	402
15.5 The 5 Whys Technique	402
15.5.1 How It Works	402
15.5.2 5 Whys Example: Production Line Stoppage	403
15.5.3 5 Whys Template	403
15.5.4 Multiple Branches in 5 Whys	403
15.6 Ishikawa (Fishbone) Diagram	404
15.6.1 The 6M Categories	405
15.6.2 Constructing a Fishbone Diagram	405
15.6.3 Fishbone Diagram Best Practices	406
15.6.4 Video: How to Create a Fishbone Diagram	406
15.7 Fault Tree Analysis (FTA)	406
15.7.1 FTA Symbols	407
15.7.2 FTA Example: Pump Fails to Deliver Flow	407
15.7.3 Calculating Probability with FTA	407
15.8 Pareto Analysis	408
15.8.1 Creating a Pareto Chart	409
15.8.2 Interpreting Pareto Analysis	409
15.8.3 Stratified Pareto Analysis	410
15.9 Is/Is Not Analysis	410
15.9.1 Is/Is Not Matrix	410
15.9.2 Key Insights from Is/Is Not Analysis	411
15.10 The 8D Problem-Solving Methodology	411
15.10.1 Detailed 8D Steps	412
15.10.2 D3: Containment Actions	412
15.11 Corrective Action Implementation	413
15.11.1 Types of Corrective Actions	413
15.11.2 SMART Corrective Actions	413

15.12	Verification and Validation	414
15.12.1	Verification vs. Validation	414
15.12.2	Effectiveness Monitoring	414
15.13	Case Study: Automotive Welding Defects	415
15.13.1	The Problem	415
15.13.2	Initial Problem Definition (5W2H)	415
15.13.3	5 Whys Analysis	415
15.13.4	Fishbone Diagram Findings	416
15.13.5	8D Report Summary	416
15.14	Documentation and Knowledge Management	416
15.14.1	Key Documentation Elements	417
15.14.2	Creating a Troubleshooting Knowledge Base	417
15.15	Troubleshooting Tools Quick Reference	417
15.16	Video Resources	418
15.16.1	Understanding 5 Whys	418
15.16.2	8D Problem Solving	418
15.17	Summary	418
15.18	Review Questions	418
15.19	References	424
16	Simulation Modeling with AnyLogic	425
16.1	Learning Objectives	425
16.2	Introduction to Simulation Modeling	425
16.2.1	What is Simulation?	426
16.2.2	Why AnyLogic?	427
16.3	The Three Simulation Paradigms	427
16.3.1	Discrete-Event Simulation (DES)	427
16.3.2	Agent-Based Modeling (ABM)	427
16.3.3	System Dynamics (SD)	428
16.3.4	Choosing the Right Paradigm	428
16.4	The AnyLogic Interface and Libraries	428
16.4.1	The AnyLogic Workspace	428
16.4.2	Essential Libraries for Manufacturing	429
16.4.3	The Process Modeling Library	430
16.5	Production Line Simulation	430
16.5.1	Case Study: Automotive Door Panel Assembly Line	430
16.5.2	Step 1: Calculate Required Takt Time	431
16.5.3	Step 2: Define Process Parameters	431
16.5.4	Step 3: Build the Simulation Model	431
16.5.5	Step 4: Simulate and Analyze Results	432
16.5.6	Interpreting the Results	434
16.5.7	Step 5: Test Improvement Scenarios	435
16.6	Warehouse Simulation: Picking and Order Fulfillment	436
16.6.1	The Warehouse Challenge	436
16.6.2	Case Study: E-Commerce Distribution Center	437
16.6.3	Picking Strategies Compared	437

16.6.4	Simulating Picker Movement	437
16.6.5	Autonomous Mobile Robots (AMRs) in Warehouses . . .	439
16.7	Built-in AnyLogic Examples	440
16.7.1	Manufacturing Examples	440
16.7.2	Warehouse and Logistics Examples	441
16.8	Building Your First Model: Step-by-Step Tutorial	441
16.8.1	Tutorial: Three-Station Production Line	441
16.9	Advanced Topics	444
16.9.1	3D Visualization	444
16.9.2	Integration with Real Data	444
16.9.3	Optimization Experiments	445
16.10	Key Takeaways	446
16.11	Practice Problems	447
16.11.1	Problem 1: Takt Time Calculation	447
16.11.2	Problem 2: Simulation Model Design	447
16.11.3	Problem 3: Warehouse Picking Analysis	447
16.11.4	Problem 4: AMR Fleet Sizing	447
16.12	Further Resources	448
16.12.1	AnyLogic Official Resources	448
16.12.2	Academic Resources	448
16.12.3	Industry Case Studies	448
17	Working Effectively with AI	449
17.1	Learning Objectives	449
17.2	Introduction: AI in the Modern Workplace	449
17.2.1	The Education Paradox	450
17.2.2	AI Impact by Industry	450
17.3	Prompt Engineering Fundamentals	451
17.3.1	The Seven Rules of Effective Prompts	452
17.4	Prompt Quality Comparison: Bad, Medium, and Good	452
17.4.1	Example 1: Motor Selection	452
17.4.2	Example 2: Troubleshooting a PLC System	452
17.4.3	Example 3: Safety Analysis	453
17.5	Anatomy of an Excellent Engineering Prompt	453
17.6	Interactive Exercise: Rate These Prompts	454
17.6.1	Exercise 1: Pump Selection	454
17.6.2	Exercise 2: Identify the Quality Level	455
17.7	The Four Steps of Effective AI Use	455
17.7.1	Step 1: Define the Task	455
17.7.2	Step 2: Prompt with Context	456
17.7.3	Step 3: Iterate and Refine	456
17.7.4	Step 4: Validate and Apply	456
17.8	AI Tools and Their Use Cases	457
17.8.1	Chat Interfaces (Claude.ai, ChatGPT, Gemini)	458
17.8.2	NotebookLM (Google)	459
17.8.3	Claude Code (Command Line Tool)	459

17.8.4 Browser Extensions (Claude Extension, etc.)	460
17.8.5 Choosing the Right Tool	460
17.9 The Iterative Approach: Multi-Turn AI Collaboration	461
17.9.1 The Iteration Cycle	461
17.9.2 Worked Example: Designing a Conveyor Control System	461
17.10 Practice Topics for Iterative AI Sessions	463
17.10.1 Beginner Level	463
17.10.2 Intermediate Level	463
17.10.3 Advanced Level	463
17.11 Critical Evaluation of AI Outputs	464
17.11.1 Red Flags in AI Responses	464
17.11.2 Verification Checklist	464
17.12 When NOT to Use AI	465
17.12.1 AI Excels At:	465
17.12.2 AI Struggles With:	465
17.13 Ethical Considerations	466
17.13.1 Key Principles	466
17.13.2 Industry-Specific Considerations	466
17.14 Hands-On Lab Exercise	467
17.14.1 Objective	467
17.14.2 Scenario	467
17.14.3 Instructions	467
17.14.4 Deliverables	468
17.15 Summary	468
17.15.1 Key Takeaways	468
17.16 Review Questions	469
17.17 References and Further Reading	469
17.18 Glossary	470

Introduction

Why are we studying this?

- Defining and identifying manufacturing processes is critical to understanding the role that automation plays and how to program an industrial process line.
- What are some examples of a manufacturing process?
- What do we have or use that is manufactured?
- What is the biggest manufacturing change that you have experienced so far?
- Processes have changed throughout the centuries and have been driven by the four Industrial Revolutions.
- First Industrial Revolution – Coal in 1765
 - This transformed society from an agricultural base to an industrial base. Processes became mechanized and rather than hand made, products were manufactured. The discovery of coal and the development of the steam engine and metal forging transformed the way goods were created.
- Second Industrial Revolution – Gas in 1870 *The discovery of oil and electricity fueled the second industrial revolution. The discovery of oil led to the invention of the combustion engine and new steel and chemical based products entered the manufacturing streams. Technological advances in communication were driven by the invention of the telegraph and later the telephone. Modes of transportation developed with the invention of the airplane and automobile. These discoveries helped to drive the advent of mass production which forever changed how items were produced.
- Third Industrial Revolution – Electronics and Nuclear Energy in 1969 *The third industrial revolution is dominated by the development of electronics and the beginning of the age of computers.* Technological developments were centered around four pillars of science: telecommunications, biotechnology, information technology and energy engineering.

- Fourth Industrial Revolution – Internet and AI
 - The fourth industrial revolution describes the current era of digitalization, automation, and advanced manufacturing technology. It's characterized by the convergence of emerging technologies, such as robotics, the Internet of Things (IoT), and 3D printing.

Check out these videos:

The Four Industrial Revolutions: <https://www.youtube.com/watch?v=kpW9JcWxKq0>

and

Industry 4.0 Explained: <https://www.youtube.com/watch?v=okXk4Bnz2Lc>

What is a Fifth Industrial Revolution going to look like?

The Fifth Industrial Revolution: https://www.youtube.com/watch?v=sGI2FFm_8tw

Further Reading Whitepaper 'What is Manufacturing' by Intel

Category	Grade Item	Type	Max. Points	Weight (%)
Lab-Tutorial Labs	Lab-Tutorial	Association	48	40
	Lab-1	NumericSubmissions	48.33	8.33
	Lab-2	NumericSubmissions	48.33	8.33
	Lab-3	NumericSubmissions	48.33	8.33
	Lab-4	NumericSubmissions	48.33	8.33
	Lab-5	NumericSubmissions	48.33	8.33
	Lab-6	NumericSubmissions	48.33	8.33
	Lab-7	NumericSubmissions	48.33	8.33
	Lab-8	NumericSubmissions	48.33	8.33
	Lab-9	NumericSubmissions	48.33	8.33
	Lab-10	NumericSubmissions	48.33	8.33
	Lab-11	NumericSubmissions	48.33	8.33
	Lab-12	NumericSubmissions	48.33	8.33
Assignments	Assignments		12	12
	Assignment-1	NumericQuizzes	2	16.67
	Assignment-2	NumericQuizzes	2	16.67
	Assignment-3	NumericQuizzes	2	16.67
	Assignment-4	NumericQuizzes	2	16.67
	Assignment-5	NumericQuizzes	2	16.66
	Assignment-6	NumericQuizzes	2	16.66
Lab Pop-up Quizzes	Lab Quizes		3	3
	Lab Quiz-1	NumericQuizzes	0.5	16.66
	Lab Quiz-2	NumericQuizzes	0.5	16.66

Category	Grade Item	Type	Max. Points	Weight (%)
Lecture Pop-up Quizzes	Lab Quiz-3	NumericQuizzes	0.5	16.67
	Lab Quiz-4	NumericQuizzes	0.5	16.67
	Lab Quiz-5	NumericQuizzes	0.5	16.67
	Lab Quiz-6	NumericQuizzes	0.5	16.67
	Lecture Quizzes		3	3
	Lecture Quiz-1	NumericQuizzes	0.5	16.66
	Lecture Quiz-2	NumericQuizzes	0.5	16.66
	Lecture Quiz-3	NumericQuizzes	0.5	16.67
	Lecture Quiz-4	NumericQuizzes	0.5	16.67
	Lecture Quiz-5	NumericQuizzes	0.5	16.67
	Lecture Quiz-6	NumericQuizzes	0.5	16.67
Midterm Test	Mid Term Test	NumericQuizzes	10.5	17
Final Test	Final Test	NumericQuizzes	50	25
Calculated Grades	Midterm Grade	Calculated	—	—
	Final Calculated Grade	—	156.5	100

Labs

- Late penalty is 25% per lab session.
- Labs 1-5 must be completed before Week 7.
- Bring your lab kit and PPE to every lab session.

Assignments

- 6 Assignments worth 2% each, for a total of 12%.
- All are FOL quizzes, with at least one week open.

Quizzes

- 6 Lecture Quizzes and 6 Lab Quizzes.
- Quizzes are worth 0.5% each, for a total of 6%.
- Quizzes are given randomly throughout the term as a “pop quiz”.
- Quizzes are given at the start of the lab session (10 minute log in window) or at the end of the lecture.
- **You must be in attendance to write the quizzes.**

Tests

- During in-person lecture time (90 minutes). One midterm test worth 17%, one final test worth 25%.
- Both tests are cumulative and online, in-person.
- Closed-book with handwritten cheat sheet; details will be posted on FOL closer to the date.
- Kit calculators allowed.

Other Grade Considerations

In order to pass, two conditions must be met: * Overall passing grade (50%). * Attendance and submission of the mandatory labs (labs 1 through 10)

How to succeed

- Come to class and lab sessions Participate
- Complete examples given in class
- Do the homework and assigned reading
- Attend office hours

Cheating and Plagiarism

Students must write their reports and assignments in their **own words**. Whenever students take an idea or a passage from another author, they must acknowledge their debt both by using quotation marks where appropriate and by proper referencing such as footnotes or citations. This includes non-published sources, such as work completed in previous years or a classmate's work. **This includes the use of "AI" Technologies.**

FOL

- Lectures will be posted after class, as well as supplementary material.
- Assignments and lab manuals will be posted ahead of time. You will always have at least one week's notice.
- All announcements will be made through the FOL course.

Accessibility

Please contact me if you require material in an alternate format or if any other arrangements can make this course more accessible to you.

Consider contacting Accessibility Services for specifics on accommodations that you may be eligible for. M-Fr 8:30-4:30 F2010, 519-452-4282, accessibility@fanshawec.ca

Fanshawe's Recording Policy

It is forbidden for students to record without written permission from the instructor (and) as an approved accommodation. Recording without permission or sharing a recording will result in disciplinary action.

If a class is being recorded with permission: it will be announced, and alternate means to participation will be made available to protect students' privacy.

Chapter 1

Types of Manufacturing Processes

1.1 Learning Objectives

By the end of this chapter, you will be able to:

1. Identify and classify the seven main types of manufacturing processes
 2. Select appropriate manufacturing processes based on material, volume, and precision requirements
 3. Compare cost, speed, and quality trade-offs between process types
 4. Recognize manufacturing processes used in automotive, food, and defense industries
 5. Apply process selection criteria to real-world manufacturing scenarios
-

1.2 Introduction to Manufacturing Processes

Manufacturing is defined as the conversion of raw materials into finished goods on a large scale using man and machine. **Manufacturing processes** are the specific methods used for this conversion. Based on product requirements, different types of manufacturing processes are selected to achieve the required output with optimal cost, quality, and efficiency.



Figure 1.1: Overview of Manufacturing Process Categories

Why do we need different manufacturing processes?

Different products require different manufacturing approaches based on:

- **Material type:** Metals, plastics, ceramics, composites
- **Production volume:** One-off prototypes vs. millions of units
- **Geometric complexity:** Simple shapes vs. intricate details
- **Precision requirements:** Loose tolerances vs. micron-level accuracy
- **Cost constraints:** Budget limitations affect process selection
- **Lead time:** How quickly parts are needed

No single process is optimal for all situations!

A good video summarizing 6 of the 7 manufacturing processes is linked below (Coating/Plating is not covered):

Manufacturing Processes Overview: https://www.youtube.com/watch?v=Um_g8sQ_p3Y

1.3 Process Selection Framework

Before examining each process type, it's important to understand how engineers select the right manufacturing process. The following visualization shows the key factors:



Figure 1.2: Process Selection Based on Volume and Complexity

Table 1.1: Manufacturing Process Comparison Summary

Process Type	Typical Materials	Production Volume	Typical Tolerance	Tooling Cost	Unit Cost
Casting	Metals, alloys	Low to High	±0.5-2mm	Medium-High	Low
Molding	Plastics, rubber	Medium to Very High	±0.1-0.5mm	High	Very Low
Forming	Metals, sheet	Medium to Very High	±0.1-1mm	Medium-High	Low
Machining	All materials	Low to Medium	±0.01-0.1mm	Low	High
Joining	All materials	All volumes	Varies	Low	Medium
Coating	All materials	All volumes	N/A	Low	Low
Additive	Plastics, metals, ceramics	Prototype to Low	±0.1-0.3mm	None	High

1.4 1. Casting Processes

Casting is a process of pouring liquid metal into a mold containing the hollow shape of the desired outcome. It uses sprue, gates, and runners to direct the molten metal flow.

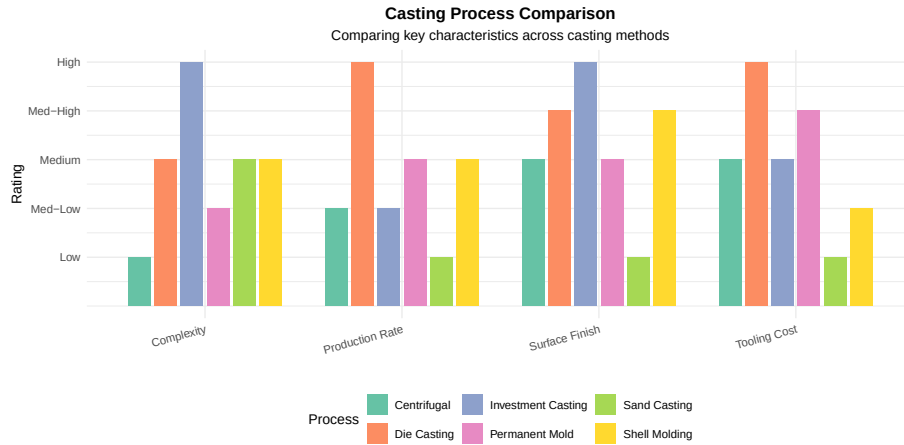


Figure 1.3: Comparison of Casting Processes

1.4.1 Sand Casting

Sand casting is a metal casting process that uses sand as the mold material. This process has a low production rate as the sand mold must be destroyed to remove the part. However, it is economical for low-volume production.

Process Steps:

1. Create a pattern (usually wood or metal)
2. Pack sand around the pattern to form the mold
3. Remove the pattern, leaving a cavity
4. Pour molten metal into the cavity
5. Allow solidification
6. Break the sand mold to remove the casting

Advantages: Low tooling cost, can produce very large parts, suitable for all metals

Disadvantages: Poor surface finish, loose tolerances, slow cycle time

Examples: Engine blocks, machine tool bases, cylinder heads, pump housings, large gears

Discussion: Why is sand casting still widely used despite its limitations?

Sand casting remains popular because:

1. **Low startup cost** - A wood pattern costs hundreds vs. steel dies costing tens of thousands
2. **Flexibility** - Easy to modify patterns for design changes
3. **Size capability** - Can cast parts weighing several tons
4. **Material versatility** - Works with nearly any metal

5. **Short lead time** - Parts can be produced in days vs. weeks for die casting. For prototypes and low-volume production (< 500 parts), sand casting is often the most economical choice even with its lower quality.

1.4.2 Die Casting

Die casting is used for producing metal parts where high precision is required. Molten metal is forced under high pressure into reusable metal dies, enabling high-volume production.

Die Casting Process: <https://www.youtube.com/watch?v=0oibUY8KUQM>
Process:

1. Steel molds (dies) are machined to the part shape
2. Dies are mounted in a die casting machine
3. Molten metal is injected under high pressure (10-175 MPa)
4. Metal solidifies rapidly due to die cooling
5. Part is ejected and the cycle repeats

Advantages: Excellent dimensional accuracy, smooth surface finish, high production rates (up to 400 shots/hour)

Disadvantages: High die cost (\$50,000-\$500,000), limited to non-ferrous metals, porosity issues

Examples: Engine components, transmission housings, electronic enclosures, power tool housings

1.4.3 Investment Casting (Lost-Wax)

Investment casting produces complex, precision parts by creating a wax pattern that is “invested” (surrounded) with ceramic slurry, then melted out to leave a mold cavity.

Investment Casting Process: <https://www.youtube.com/watch?v=QtxVdC7pBQM>

Advantages: Excellent surface finish, tight tolerances ($\pm 0.1\%$), complex geometries, any castable metal

Disadvantages: Expensive, slow cycle time, limited part size

Examples: Turbine blades, aerospace components, medical implants, jewelry, firearm components

Why do aerospace companies pay premium prices for investment casting?

Investment casting is essential for aerospace because:

1. **Complex internal passages** - Turbine blades have intricate cooling channels

2. **Superior metallurgy** - Controlled solidification produces better grain structure
3. **Near-net shape** - Minimizes machining of expensive superalloys
4. **Weight savings** - Can create hollow structures impossible with other methods
5. **Material options** - Works with titanium, Inconel, and other aerospace alloys

A single turbine blade might cost \$1,000-\$5,000, but there's no other process that can produce the required geometry and performance.

1.4.4 Centrifugal Casting

Centrifugal casting spins molten metal in a rotating die, using centrifugal force to distribute the metal and float impurities to the inner surface.

Applications: Pipes, tubes, cylinder liners, bushings, rings

1.4.5 Permanent Mold Casting

Uses reusable metal molds with gravity or low-pressure filling. Good for medium-volume production of aluminum and copper alloy parts.

Applications: Pistons, gear housings, wheels, pipe fittings

1.4.6 Shell Molding

Uses resin-coated sand that forms a thin, strong shell around a heated pattern. Better dimensional accuracy than sand casting.

Applications: Gear housings, cylinder heads, connecting rods

1.5 2. Molding Processes

Molding uses a rigid frame to shape hot liquid or ductile raw material. It is predominantly used for plastics and rubber products.

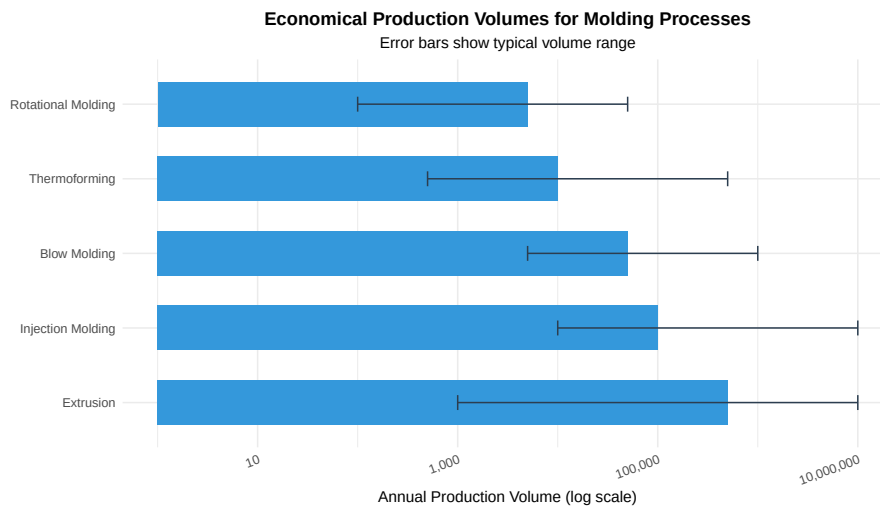


Figure 1.4: Molding Process Selection by Production Volume

1.5.1 Injection Molding

Injection molding is the most common process for manufacturing plastic parts. Plastic pellets are melted and injected under high pressure into a mold cavity.

Injection Molding Process: <https://www.youtube.com/watch?v=RMjtmsr3CqA>

Process Cycle:

1. **Clamping** - Mold halves are clamped together
2. **Injection** - Molten plastic is injected into the cavity
3. **Cooling** - Part solidifies in the mold
4. **Ejection** - Part is pushed out by ejector pins

Cycle times: 10-60 seconds typical, as fast as 2 seconds for small parts

Examples: Automotive dashboards, phone cases, medical devices, food containers, toys

```
# Injection Molding Cost Analysis Example
# Comparing costs at different production volumes

mold_cost <- 50000 # Typical mold cost in dollars
material_cost_per_kg <- 2.50 # ABS plastic
part_weight_kg <- 0.1
cycle_time_sec <- 30
machine_rate_per_hour <- 75 # Machine + operator cost
```

```
# Calculate cost per part at different volumes
volumes <- c(1000, 10000, 50000, 100000, 500000)

cost_analysis <- data.frame(
  Volume = volumes,
  Mold_Per_Part = mold_cost / volumes,
  Material = part_weight_kg * material_cost_per_kg,
  Processing = (cycle_time_sec / 3600) * machine_rate_per_hour
)

cost_analysis$Total_Per_Part <- cost_analysis$Mold_Per_Part +
  cost_analysis$Material +
  cost_analysis$Processing

cat("Injection Molding Cost Breakdown:\n")
```

Injection Molding Cost Breakdown:

```
cat("=====\n")
```

```
=====
```

```
for(i in 1:nrow(cost_analysis)) {
  cat(sprintf("At %s parts: $%.2f per part (Tooling: $%.2f, Material: $%.2f, Processing: $%.2f)\n",
    format(cost_analysis$Volume[i], big.mark=","),
    cost_analysis$Total_Per_Part[i],
    cost_analysis$Mold_Per_Part[i],
    cost_analysis$Material[i],
    cost_analysis$Processing[i]))
}
```

```
At 1,000 parts: $50.88 per part (Tooling: $50.00, Material: $0.25, Processing: $0.62)
At 10,000 parts: $5.88 per part (Tooling: $5.00, Material: $0.25, Processing: $0.62)
At 50,000 parts: $1.88 per part (Tooling: $1.00, Material: $0.25, Processing: $0.62)
At 1e+05 parts: $1.38 per part (Tooling: $0.50, Material: $0.25, Processing: $0.62)
At 5e+05 parts: $0.97 per part (Tooling: $0.10, Material: $0.25, Processing: $0.62)
```

Discussion: When does injection molding become cost-effective vs. 3D printing?

Break-even analysis:

- 3D printing: ~\$5-20 per part (no tooling, slow production)
- Injection molding: \$50,000 tooling + \$0.50-2 per part

Break-even point: Approximately 5,000-10,000 parts

Rule of thumb: - < 500 parts: 3D printing or machining - 500-5,000 parts: Consider soft tooling (aluminum molds) - > 5,000 parts: Steel injection molds become economical

1.5.2 Blow Molding

Blow molding creates hollow plastic parts by inflating a heated plastic tube (parison) inside a mold cavity.

Types: - **Extrusion blow molding** - Parison extruded, then blown - **Injection blow molding** - Preform injection molded, then blown - **Stretch blow molding** - Preform stretched and blown (PET bottles)

Examples: Bottles, containers, fuel tanks, automotive ducts, toys

1.5.3 Rotational Molding

Creates hollow parts by rotating a mold on two axes while heating, causing plastic powder to melt and coat the interior surface.

Advantages: Low tooling cost, no internal stresses, large hollow parts

Examples: Kayaks, playground equipment, tanks, coolers

1.5.4 Thermoforming

Heats a plastic sheet until pliable, then forms it over a mold using vacuum, pressure, or mechanical force.

Examples: Packaging (blister packs), disposable cups, refrigerator liners

1.5.5 Powder Metallurgy

Though involving metal, powder metallurgy uses molding principles. Metal powders are compacted in dies and sintered (heated below melting point) to fuse particles.

Advantages: Near-net shape, complex geometries, controlled porosity

Examples: Self-lubricating bearings, gears, filters, magnets

1.6 3. Forming Processes

Forming uses mechanical forces (compression, tension, shear) to shape material without removing any material. This preserves material grain structure and can improve mechanical properties.

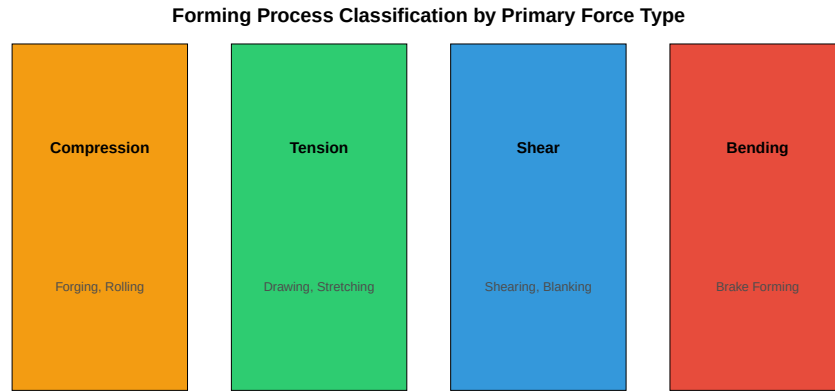


Figure 1.5: Types of Forming Forces

1.6.1 Forging

Forging uses compressive forces from hammers or presses to shape heated metal. Forged parts have superior strength due to aligned grain structure.

Forging Process: <https://www.youtube.com/watch?v=o4vQJnPwgiA>

Types of Forging: - **Open-die forging** - Simple shapes, large parts - **Closed-die (impression) forging** - Complex shapes, high volume - **Cold forging** - Room temperature, excellent finish - **Hot forging** - Heated material, easier deformation

Examples: Crankshafts, connecting rods, gears, aircraft structural components, hand tools

Why are aircraft landing gear forgings so expensive?

Aircraft landing gear forgings can cost \$100,000+ because:

1. **Material** - High-strength steel or titanium alloys
2. **Size** - Large parts require massive presses (50,000+ tons)
3. **Certification** - Extensive testing and documentation
4. **Grain flow** - Must be optimized for fatigue resistance
5. **NDT requirements** - 100% ultrasonic and magnetic particle inspection
6. **Low volume** - Only a few hundred per aircraft type per year

The forged grain structure provides 20-40% better fatigue life than equivalent castings or machined parts.

1.6.2 Stamping

Stamping uses dies and presses to form, cut, or shape sheet metal. Modern stamping lines can produce 1,000+ parts per hour.

Operations include: - **Blanking** - Cutting flat shapes from sheet - **Piercing** - Punching holes - **Drawing** - Forming cup shapes - **Bending** - Creating angles - **Coining** - Fine detail forming

Examples: Automotive body panels, appliance housings, electronic enclosures

1.6.3 Bending

Bending uses press brakes to create angular shapes in sheet metal.

Key formula:

$$\text{Bend Allowance} = \frac{\pi \times A \times (R + K \times T)}{180}$$

Where: A = bend angle, R = inside radius, T = material thickness, K = K-factor (typically 0.3-0.5)

1.6.4 Shearing

Shearing cuts sheet metal without chip formation using opposed cutting edges.

Types: Blanking, piercing, trimming, notching, slitting

1.6.5 Rolling

Reduces material thickness by passing through rotating rolls. Used for sheet, plate, and structural shapes.

1.6.6 Extrusion (Metal)

Forces material through a die to create constant cross-section profiles.

Examples: Aluminum window frames, heat sinks, structural shapes

1.7 4. Machining Processes

Machining removes material using cutting tools to achieve precise dimensions and surface finishes. It is the most versatile manufacturing process but typically has higher per-part costs.

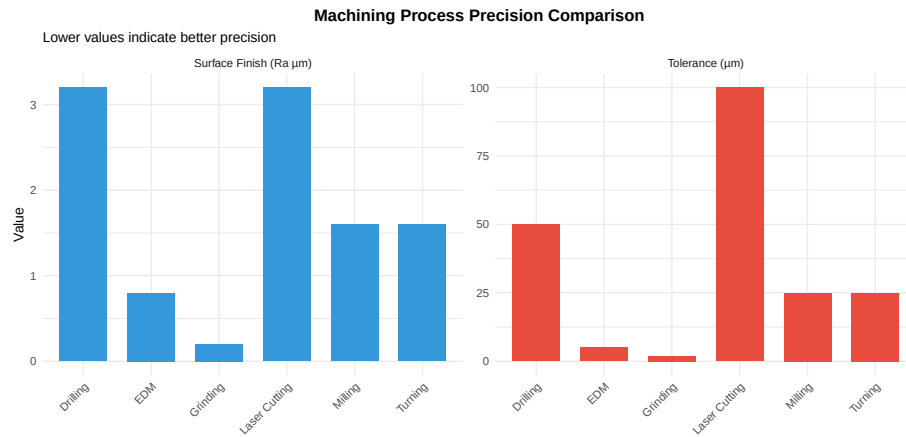


Figure 1.6: Machining Process Capabilities

1.7.1 Turning

Rotates the workpiece while a cutting tool moves to create cylindrical shapes.

Performed on lathes or turning centers

Operations: Facing, turning, boring, threading, grooving, parting

1.7.2 Milling

Rotates a cutting tool while moving the workpiece to remove material. The most versatile machining process.

Types: - **Peripheral milling** - Cutter axis parallel to surface - **Face milling** - Cutter axis perpendicular to surface - **End milling** - Creates slots, pockets, contours

1.7.3 Drilling

Creates cylindrical holes using rotating drill bits.

Related operations: Reaming (sizing), boring (enlarging), tapping (threading)

1.7.4 Grinding

Uses abrasive wheels for precision finishing. Achieves the finest tolerances and surface finishes.

Types: Surface grinding, cylindrical grinding, centerless grinding

1.7.5 Electrical Discharge Machining (EDM)

Uses electrical sparks to erode conductive materials. Essential for hardened materials and complex geometries.

Applications: Injection mold cavities, dies, aerospace components

When should you use EDM instead of conventional machining?

Choose EDM when:

- 1. **Hardened materials** - Can machine 60+ HRC steels that would destroy cutting tools
- 2. **Complex internal features** - Wire EDM cuts intricate shapes
- 3. **Tight corners** - Can achieve sharp internal corners impossible with rotary tools
- 4. **Fragile parts** - No cutting forces (non-contact process)
- 5. **Thin walls** - No deflection from tool pressure

Limitations: - Slow material removal (grams/hour vs. kg/hour for milling) - Only works on conductive materials - Recast layer may need removal - Higher cost per part

1.8 5. Joining Processes

Joining combines two or more components into a single assembly. Methods range from permanent (welding) to removable (fasteners).

Table 1.2: Joining Process Comparison

Process	Joint Strength	Dissimilar Metals	Automation	Typical Applications
Arc Welding	Excellent	Limited	Medium	Structural steel, pressure vessels
Resistance Welding	Excellent	Limited	High	Auto body panels, wire mesh
Laser Welding	Excellent	Limited	High	Electronics, medical devices
Brazing	Good	Yes	Medium	Carbide tooling, HVAC
Soldering	Fair	Yes	High	Electronics, plumbing
Adhesive Bonding	Good	Yes	High	Composites, glass, plastics
Mechanical Fastening	Excellent	Yes	High	All industries

1.8.1 Welding

Melts and fuses base materials together, often with added filler metal.

Common Types: - **MIG (GMAW)** - Gas Metal Arc Welding - fast, easy automation - **TIG (GTAW)** - Gas Tungsten Arc Welding - precise, clean welds

- **Stick (SMAW)** - Shielded Metal Arc Welding - versatile, field use - **Resistance** - Uses electrical resistance heating - **Laser/Electron Beam** - High precision, deep penetration

1.8.2 Brazing and Soldering

Joins metals using a filler metal with a lower melting point than the base materials. The base materials do not melt.

- **Brazing** - Filler melts above 450°C (840°F)
- **Soldering** - Filler melts below 450°C

1.8.3 Adhesive Bonding

Uses chemical adhesives to join materials. Essential for composites, glass, and dissimilar materials.

Advantages: Distributes stress, joins dissimilar materials, seals against fluids

Disadvantages: Surface preparation critical, limited temperature resistance, aging concerns

1.8.4 Mechanical Fastening

Uses bolts, screws, rivets, or clips. Allows disassembly for maintenance.

1.9 6. Surface Treatment and Coating

Coating and surface treatment processes protect parts from corrosion, wear, or environmental damage, and can improve appearance or electrical properties.

Table 1.3: Surface Treatment and Coating Processes

Process	Typical Thickness	Base Material	Primary Benefit	Indus
Electroplating	1-50 m	Conductive metals	Corrosion, appearance	Autom
Anodizing	5-100 m	Aluminum	Corrosion, hardness	Aerosp
Powder Coating	50-150 m	Any metal	Corrosion, appearance	Applia
Painting	25-75 m	Any	Appearance	All
Hot Dip Galvanizing	45-85 m	Steel	Corrosion	Const
PVD/CVD	1-10 m	Any	Wear, hardness	Toolin
Thermal Spray	100-500 m	Any	Wear, thermal barrier	Aerosp

1.9.1 Electroplating

Deposits metal coating using electrical current. Common coatings include chrome, nickel, zinc, gold, and silver.

1.9.2 Anodizing

Electrochemically grows an oxide layer on aluminum. Provides corrosion resistance and can be dyed various colors.

1.9.3 Powder Coating

Applies dry powder electrostatically, then cures with heat. Produces thick, durable, attractive finishes.

1.9.4 Galvanizing

Coats steel with zinc for corrosion protection. Hot-dip galvanizing provides excellent outdoor durability.

1.10 7. Additive Manufacturing (3D Printing)

Additive manufacturing builds parts layer-by-layer from digital models. It's the opposite of machining (subtractive manufacturing).

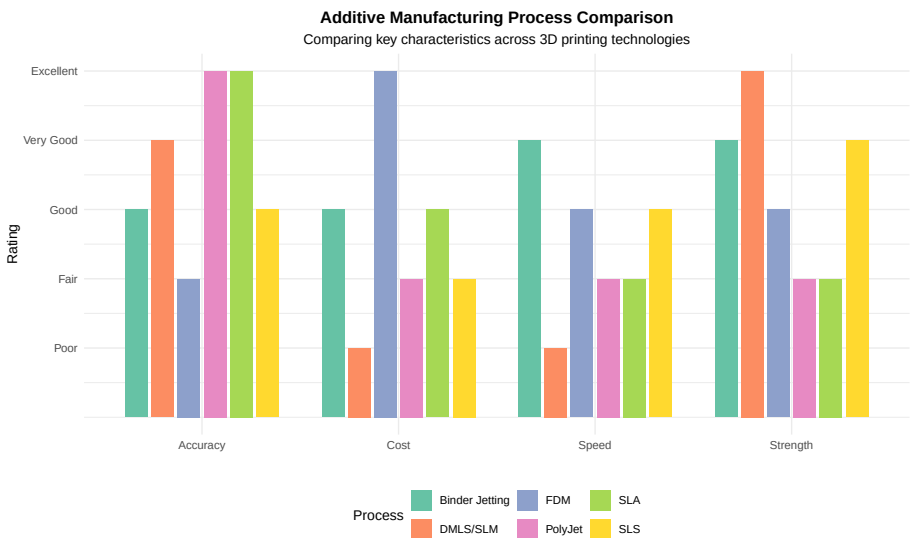


Figure 1.7: Additive Manufacturing Process Comparison

How 3D Printing Works: <https://www.youtube.com/watch?v=Vx0Z6LplaMU>

1.10.1 FDM (Fused Deposition Modeling)

Extrudes thermoplastic filament through a heated nozzle. Most common desktop 3D printing technology.

Materials: PLA, ABS, PETG, Nylon, TPU

1.10.2 SLA (Stereolithography)

Uses UV laser to cure liquid photopolymer resin. Excellent surface finish and detail.

1.10.3 SLS (Selective Laser Sintering)

Fuses powder material with a laser. Produces strong functional parts without support structures.

1.10.4 Metal 3D Printing (DMLS/SLM)

Fuses metal powder with high-power lasers. Used for aerospace, medical, and tooling applications.

When does metal 3D printing make sense vs. traditional manufacturing?

Metal 3D printing is advantageous when:

1. **Complex internal features** - Conformal cooling channels in molds
2. **Topology optimization** - Organic shapes that minimize weight
3. **Consolidation** - Combining multiple parts into one
4. **Low volume** - Too few parts to justify tooling
5. **Custom/one-off** - Medical implants, prototypes

Traditional manufacturing is better when: - High volumes (> 100-1000 parts depending on complexity) - Simple geometries - Large parts (3D print beds are limited) - Maximum strength required (forging still superior)

Cost comparison: - Simple bracket: \$5 machined vs. \$50+ 3D printed - Complex aerospace part: \$10,000 machined vs. \$3,000 3D printed

1.11 Industry Applications

Table 1.4: Manufacturing Process Applications by Industry

Process	Automotive	Food Industry	Defense
---------	------------	---------------	---------

Die Casting	Engine blocks, transmission cases	Equipment housings	Aircraft structural
Injection Molding	Dashboard, interior trim, connectors	Packaging, containers, caps	Connectors, housing
Forging	Crankshafts, connecting rods, gears	Mixer blades, pump impellers	Landing gear, turbi
Stamping	Body panels, structural components	Cans, trays, lids	Aircraft skins, missi
Machining	Engine components, precision parts	Valves, fittings	Precision weapons c
Welding	Body structure, exhaust systems	Tanks, piping, conveyors	Aircraft structures,
Powder Coating	Wheels, chassis components	Equipment frames	Military vehicles, ec
3D Printing	Prototypes, custom fixtures	Custom tooling, fixtures	Turbine blades, bra

1.12 Sustainability in Manufacturing

Modern manufacturing must consider environmental impact. Here’s how different processes compare:

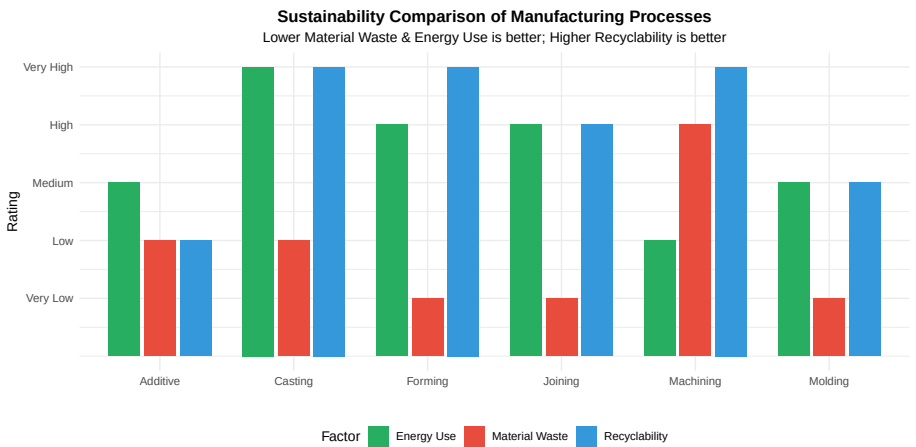


Figure 1.8: Environmental Considerations by Process Type

Discussion: How can manufacturers reduce environmental impact?

Strategies for sustainable manufacturing:

- 1. **Near-net-shape processes** - Casting, forging, and molding reduce machining waste
- 2. **Closed-loop recycling** - Reprocess scrap material on-site
- 3. **Energy-efficient equipment** - Modern machines use 30-50% less energy
- 4. **Additive manufacturing** - Only uses material where needed
- 5. **Water-based coatings** - Replace solvent-based paints
- 6. **Lean manufacturing** - Reduces overproduction and waste
- 7. **Life cycle assessment** - Consider total environmental impact

Example: Aluminum die casting recycles 95%+ of sprues and runners, while machining from billet may waste 80% of material.

1.13 Review Questions

Question 1: Process Identification

A company needs to produce 50,000 aluminum housings per year. Each housing is a complex shape with internal fins for heat dissipation. The surface must be smooth and dimensions must be within $\pm 0.3\text{mm}$. Which process would you recommend?

Answer: Die Casting is the best choice because: - High volume (50,000/year) justifies tooling cost - Aluminum is ideal for die casting - Complex internal features are possible - $\pm 0.3\text{mm}$ tolerance is achievable - Good surface finish without secondary operations

Alternative: If volumes were lower ($< 5,000$), investment casting might be considered.

Question 2: Cost Comparison

Calculate the break-even point between 3D printing and injection molding for a small plastic part: - 3D printing: \$8 per part (no tooling) - Injection molding: \$25,000 mold + \$0.50 per part

Answer: Let n = number of parts

Break-even: $\$8n = \$25,000 + \$0.50n$

$\$7.50n = \$25,000$

$n = 3,333$ parts

Below 3,333 parts: 3D printing is cheaper **Above 3,333 parts:** Injection molding is cheaper

At 10,000 parts: - 3D printing: \$80,000 - Injection molding: \$30,000

Question 3: Material Selection

Match each material/product to the most appropriate manufacturing process:

- a) Stainless steel surgical instrument
- b) Large plastic kayak
- c) Titanium jet engine bracket
- d) Aluminum beverage can

Answers:

- a) **Investment casting** or **machining** - Complex shapes, high precision, excellent surface finish
- b) **Rotational molding** - Large hollow plastic part, low tooling cost
- c) **Additive manufacturing (DMLS)** or **forging** - Complex geometry, lightweight, strength critical
- d) **Deep drawing (stamping)** - Very high volume, thin-wall cylinder

Question 4: Process Selection Scenario

You need to manufacture a new product with these requirements: -

Quantity: 200 units for initial market test - Material: ABS plastic - Size: 150mm × 100mm × 50mm - Tolerance: ±0.5mm - Surface: Smooth, will be painted

What process would you recommend and why?

Answer: 3D Printing (FDM or SLA) would be most appropriate because:

1. **Low quantity (200)** - Injection molding tooling (\$30,000+) not justified
2. **Market test phase** - Design may change based on feedback
3. **Quick turnaround** - Parts in days vs. weeks for tooling
4. **Tolerances achievable** - ±0.5mm is within FDM capabilities
5. **Post-processing acceptable** - Parts will be painted anyway

Cost comparison: - FDM: $200 \times \$15 = \$3,000$ - Injection molding: $\$30,000 + (200 \times \$1) = \$30,200$

If the product succeeds and volume increases to 10,000+, transition to injection molding.

Question 5: Hybrid Manufacturing

What is hybrid manufacturing and when is it used?

Answer: Hybrid manufacturing combines additive and subtractive processes in a single machine or workflow.

Common combinations: - 3D print near-net shape → CNC machine critical surfaces - Cast blank → Machine precision features - Forge rough shape → Machine final dimensions

Benefits: - Reduced material waste vs. pure machining - Better precision than pure additive - Faster than pure machining for complex parts

Example: Aerospace companies 3D print titanium brackets, then machine mounting surfaces to achieve tight tolerances. This can reduce material waste by 90% compared to machining from billet.

1.14 Summary

Table 1.5: Manufacturing Processes Summary

Process Category	Key Principle	Best For
Casting	Pour liquid into mold	Complex metal shapes, medium-high volume
Molding	Shape heated/softened material	Plastic parts, very high volume
Forming	Deform solid with force	Strong metal parts, high volume
Machining	Remove material with tools	Precision parts, any material
Joining	Combine multiple parts	Assembly of components
Coating	Apply protective layer	Corrosion/wear protection
Additive	Build layer by layer	Prototypes, complex geometry

1.14.1 Key Takeaways

1. **No single process is best for everything** - Selection depends on material, volume, complexity, and cost constraints
2. **Volume drives economics** - High tooling costs require high volumes to amortize
3. **Consider the complete supply chain** - Secondary operations, assembly, and finishing affect total cost
4. **Sustainability matters** - Modern manufacturing must minimize waste and energy use
5. **Hybrid approaches are growing** - Combining processes optimizes cost and performance

1.15 References

1. Groover, M.P. (2020). *Fundamentals of Modern Manufacturing* (7th ed.). Wiley.
2. Kalpakjian, S., & Schmid, S.R. (2020). *Manufacturing Engineering and Technology* (8th ed.). Pearson.
3. DeGarmo, E.P., Black, J.T., & Kohser, R.A. (2019). *DeGarmo's Materials and Processes in Manufacturing* (13th ed.). Wiley.
4. Afzal, M. "Types of Manufacturing Processes." *Engineering Articles*.

Chapter 2

Process and Design

2.1 Learning Objectives

By the end of this chapter, you will be able to:

1. Describe the stages of process plant project development from concept to operation
 2. Differentiate between fixed, programmable, and flexible automation systems
 3. Interpret Process Flow Diagrams (PFDs) and Piping & Instrumentation Diagrams (P&IDs)
 4. Explain the purpose and content of Front-End Engineering Design (FEED)
 5. Apply Design for Manufacturing (DFM) and Design for Assembly (DFA) principles
 6. Understand the role of HAZOP studies in process safety
 7. Identify key engineering deliverables for each project phase
-

2.2 Introduction to Process Engineering

Process engineering is a specialized branch of engineering that focuses on the design, optimization, and implementation of manufacturing processes and production systems. Process engineers work at the intersection of design and production, ensuring that products can be manufactured efficiently, safely, and economically.

What is the role of a process engineer?

Process engineers are responsible for:

- **Designing production processes** - Selecting equipment, defining sequences, optimizing flow
- **Improving existing processes** - Reducing waste, increasing throughput, improving quality
- **Scaling up from lab to production** - Taking R&D concepts to full-scale manufacturing
- **Ensuring safety and compliance** - Meeting regulatory and environmental requirements
- **Supporting production** - Troubleshooting issues, training operators
- **Cost optimization** - Reducing manufacturing costs while maintaining quality

2.3 Types of Manufacturing Automation

Automation is essential for achieving high productivity, consistent quality, and competitive manufacturing costs. There are three fundamental types of automation, each suited to different production scenarios.

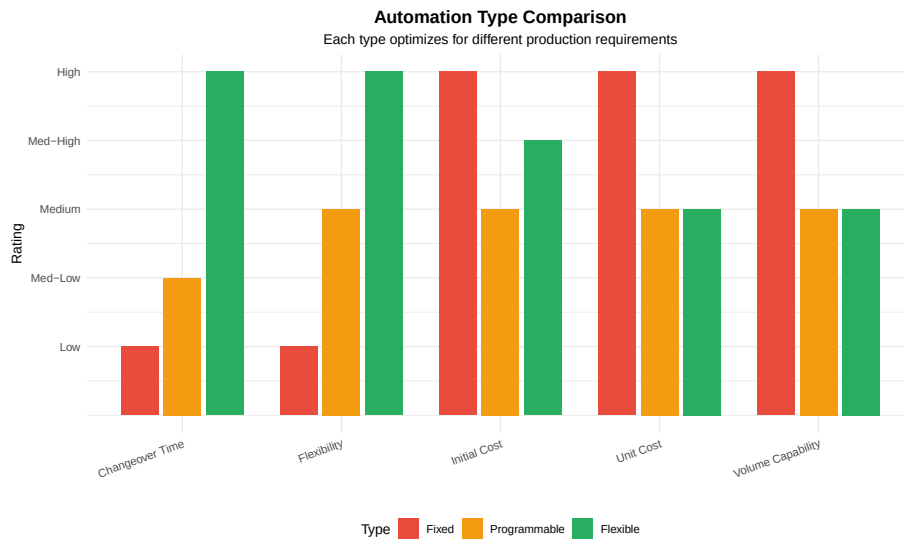


Figure 2.1: Comparison of Automation Types

2.3.1 Fixed Automation

Fixed automation (also called “hard automation”) uses specialized equipment designed for a specific product. The sequence of operations is determined by

the equipment configuration and cannot be easily changed.

Characteristics: - Very high production rates (thousands per hour) - Low per-unit cost at high volumes - High initial capital investment - Inflexible - dedicated to one product

Examples: - Automotive transfer lines for engine blocks - Beverage bottling lines - Chemical processing plants - Paper manufacturing

```
# Fixed Automation Economic Analysis
# When does fixed automation make sense?

# Example: Automotive transfer line for cylinder heads
fixed_automation_cost <- 5000000 # Initial equipment cost
annual_production <- 500000      # Parts per year
fixed_cost_per_part <- 2.50      # Operating cost per part
equipment_life_years <- 10

# Calculate total cost per part including amortization
annual_equipment_cost <- fixed_automation_cost / equipment_life_years
total_annual_cost <- annual_equipment_cost + (fixed_cost_per_part * annual_production)
cost_per_part <- total_annual_cost / annual_production

cat("Fixed Automation Analysis:\n")
```

Fixed Automation Analysis:

```
cat("=====\n")
```

=====

```
cat(sprintf("Equipment cost: %s\n", format(fixed_automation_cost, big.mark=",")))
```

Equipment cost: \$5e+06

```
cat(sprintf("Annual production: %s parts\n", format(annual_production, big.mark=",")))
```

Annual production: 5e+05 parts

```
cat(sprintf("Operating cost per part: %.2f\n", fixed_cost_per_part))
```

Operating cost per part: \$2.50

```
cat(sprintf("Amortized equipment cost per part: %.2f\n", annual_equipment_cost/annual_production))
```

Amortized equipment cost per part: \$1.00

```
cat(sprintf("Total cost per part: %.2f\n", cost_per_part))
```

Total cost per part: \$3.50

2.3.2 Programmable Automation

Programmable automation allows the production equipment to be reprogrammed for different products. It's suited for batch production where products change periodically.

Characteristics: - Medium production rates - Significant changeover time between products - Lower initial cost than fixed automation - Suitable for batch sizes of 100-10,000

Examples: - CNC machining centers - Industrial robots - PLC-controlled assembly machines - Batch chemical reactors

Discussion: When should you choose programmable over fixed automation?

Choose programmable automation when:

1. **Product variety** - You make multiple products on the same equipment
2. **Volume uncertainty** - Demand may shift between products
3. **Product evolution** - Frequent design changes expected
4. **Lower volumes** - Not enough volume to justify dedicated equipment
5. **Capital constraints** - Can't afford multiple dedicated lines

Example scenario: A machine shop that makes 20 different part numbers for aerospace customers would use CNC machines (programmable) rather than dedicated transfer lines (fixed) because: - Volumes per part number are low (100-1,000/year) - New part designs are introduced regularly - Flexibility to respond to customer changes is critical

2.3.3 Flexible Automation

Flexible automation can produce a variety of parts with minimal changeover time. It combines the flexibility of programmable automation with the productivity approaching fixed automation.

Characteristics: - Medium-high production rates - Very fast changeover (minutes, not hours) - High initial investment - Suitable for medium variety, medium volume

Examples: - Flexible Manufacturing Systems (FMS) - Robotic assembly cells - Automated guided vehicle (AGV) systems - Modern automotive final assembly lines

Table 2.1: Automation Type Selection Guide

Production Characteristic	Fixed Automation	Programmable Automation
Annual Volume	> 1,000,000 units	1,000 - 100,000 units
Product Variety	Single product	Several products in batches
Changeover Frequency	Rarely (years)	Weekly to monthly
Initial Investment	Very High (\$5M+)	Medium (\$500K-\$2M)

Operating Cost	Lowest per unit	Medium per unit	Low-medium
Best Industries	Automotive, Beverage, Chemical	Job shops, Aerospace, Medical	Electronics,

List industries where you can find various automated process systems

By automation type:

Fixed Automation: - Oil refineries - Chemical plants - Food processing (high-volume) - Beverage bottling - Automotive powertrain - Steel mills - Paper/pulp mills

Programmable Automation: - Aerospace manufacturing - Medical device production - Pharmaceutical (batch) - Job shops - Tool & die making - Defense contractors

Flexible Automation: - Electronics assembly - Automotive final assembly - Warehouse/distribution - Semiconductor fabrication - Consumer appliances - Furniture manufacturing

2.3.4 Automation Advantages and Disadvantages

Table 2.2: Advantages and Disadvantages of Manufacturing Automation

Category	Point
Advantages	Lowered Operating Costs - Reduced labor per unit
Advantages	Improved Worker Safety - Removes humans from hazardous operations
Advantages	Reduced Factory Lead Times - Faster, more predictable production
Advantages	Increased Production Output - 24/7 operation possible
Advantages	Smaller Environmental Footprint - Optimized resource usage
Advantages	Increased Productivity and Efficiency - Consistent cycle times
Advantages	Increased System Versatility - Modern systems adapt to changes
Disadvantages	Higher Start-up Cost - Significant capital investment required
Disadvantages	Higher Cost of Maintenance - Specialized technicians needed
Disadvantages	Obsolescence/Depreciation - Technology changes rapidly
Disadvantages	Workforce Displacement - Fewer direct labor jobs
Disadvantages	Not Economical for Small Scale - Minimum volumes required

2.4 Project Development Phases

Manufacturing projects follow a structured development process from initial concept to full operation. Understanding these phases is essential for process engineers.

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
 i Please use `linewidth` instead.

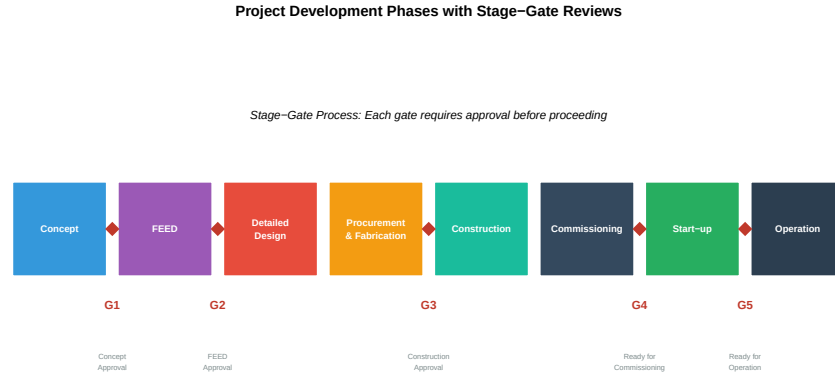


Figure 2.2: Project Development Phases and Gate Reviews

2.4.1 Phase 1: Concept Development

The initial phase defines the project scope, evaluates feasibility, and develops preliminary cost estimates.

Key Deliverables: - Project charter and business case - Preliminary process flow diagrams - Order-of-magnitude cost estimate ($\pm 30\text{-}50\%$) - Initial schedule - Risk assessment

2.4.2 Phase 2: Front-End Engineering Design (FEED)

FEED (also called FEL - Front-End Loading) develops the project definition to a level sufficient for final investment decision.

FEED Process Overview: <https://www.youtube.com/watch?v=gSkoGFLDxF0>

FEED Deliverables include:

- Project organization chart
- Defined project scope
- Process Flow Diagrams (PFDs)
- Piping & Instrumentation Diagrams (P&IDs)
- Equipment datasheets and specifications
- Major equipment list
- 2D and 3D preliminary models
- Equipment layout and installation plan
- HAZOP and safety studies

- Automation strategy
- Budget estimate ($\pm 10\text{-}15\%$)
- Project timeline
- Fixed-bid quote capability

What are the steps of Process System Design and Engineering?

1. **Process Development**
 - Develop PFDs & P&IDs
 - Process simulation
 - Heat and mass balance
2. **Equipment Engineering**
 - 2D & 3D models
 - Equipment layout and installation plan
 - Skid design
 - Mechanical & structural design
3. **Systems Engineering**
 - Piping design
 - Electrical design
 - Instrumentation design
 - Control system architecture
4. **Installation Planning**
 - Lifts & installation planning
 - Construction sequencing
 - Tie-in planning

2.4.3 Phase 3: Detailed Engineering

Detailed engineering produces all documents needed for procurement and construction.

Table 2.3: Engineering Disciplines and Deliverables

Discipline	Key Deliverables	Systems Provided
Process Mechanical Piping Electrical I&C	P&IDs, datasheets, process packages, operating procedures	Process units, utility
	Vessel drawings, heat exchanger specs, rotating equipment specs	Pressure vessels, tank
	Isometrics, pipe specs, stress analysis, 3D models	Process piping, utility
	Single-line diagrams, load lists, cable schedules, lighting	Power distribution, m
	Logic diagrams, instrument index, control narratives, HMI specs	DCS/PLC, safety sys
Civil/Structural	Foundation drawings, structural steel, buildings, roads	Foundations, structur

Automation and Controls Engineering needs to include which tasks?

Control System Design: - Automation architecture design - Control panel fabrication drawings - PLC/DCS programming - HMI/SCADA design - Safety system design (SIS)

Documentation: - Control narratives - Logic diagrams (cause & effect) - Instrument datasheets - Loop diagrams - Cable schedules

Integration: - Controls integration services - Network architecture - Cybersecurity - Historian configuration - MES integration

2.4.4 Phase 4-7: Construction, Commissioning, and Start-up

Table 2.4: Later Project Phases

Phase	Key Activities	
Procurement & Fabrication	Purchase equipment, fabricate skids, manufacture custom items	I
Construction	Civil work, install equipment, piping, electrical, instrumentation	S
Commissioning	System checkout, loop testing, safety system validation	V
Start-up	Initial operation, performance testing, operator training	C

What needs to be planned for Testing & Commissioning?

Pre-Commissioning: - Mechanical completion checks - Piping pressure tests
- Electrical continuity tests - Instrument calibration

Commissioning: - Loop checking - Control system function tests - Safety system (SIS) validation - Utility systems start-up - Dry run testing

Performance Testing: - Factory Acceptance Tests (FAT) - Site Acceptance Tests (SAT) - Performance guarantee tests - Reliability testing

2.5 Process Documentation

2.5.1 Process Flow Diagrams (PFDs)

PFDs show the overall process flow, major equipment, and key operating conditions. They are the “big picture” view of the process.

Table 2.5: Process Flow Diagram (PFD) Content

Element	What's Shown	What's NOT Shown
Major Equipment	Reactors, vessels, heat exchangers, pumps, compressors	Pipe sizes, valve
Process Streams	Main process flow lines with arrows	Minor bypasses,
Operating Conditions	Temperature, pressure, flow rates at key points	All intermediate
Control Loops	Major control loops only	Local instrument
Utility Streams	Steam, cooling water, nitrogen (simplified)	Detailed utility c

Stream Data	Stream numbers with heat/mass balance table	All intermediate streams
--------------------	---	--------------------------

2.5.2 Piping & Instrumentation Diagrams (P&IDs)

P&IDs are the detailed “roadmap” of the process, showing all equipment, piping, valves, and instrumentation.

How to Read P&IDs: <https://www.youtube.com/watch?v=j4EOTerfyTY>

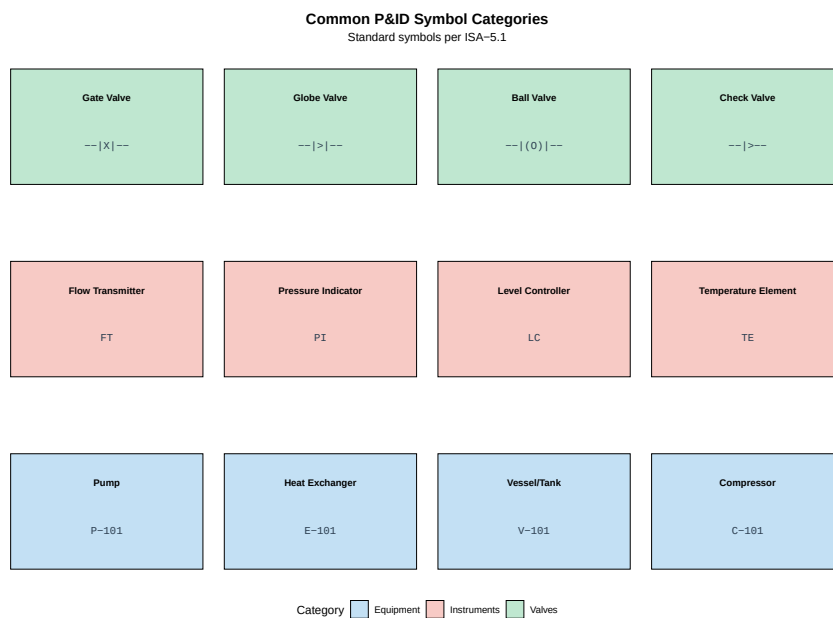


Figure 2.3: Common P&ID Symbols (Simplified)

Table 2.6: ISA Instrument Tag Structure

First Letter	Measured Variable	Modifier Letters	Example Tag
F	Flow	T = Transmitter	FT-101 (Flow Transmitter)
L	Level	C = Controller	LC-201 (Level Controller)
P	Pressure	I = Indicator	PI-301 (Pressure Indicator)
T	Temperature	E = Element/Sensor	TE-401 (Temperature Element)
A	Analysis	V = Valve	AT-501 (Analyzer Transmitter)
S	Speed	A = Alarm	SI-601 (Speed Indicator)

Quick Quiz: Decode these instrument tags

Decode the following P&ID tags:

1. **FIC-101** = ?
2. **TT-205** = ?
3. **PSV-301** = ?
4. **LCV-402** = ?

Answers:

1. **FIC-101** = Flow Indicating Controller (loop 101)
2. **TT-205** = Temperature Transmitter (loop 205)
3. **PSV-301** = Pressure Safety Valve (loop 301)
4. **LCV-402** = Level Control Valve (loop 402)

2.6 Design for Manufacturing (DFM) and Assembly (DFA)

DFM and **DFA** are methodologies that consider manufacturing and assembly constraints during product design, reducing cost and improving quality.

2.6.1 DFM Principles

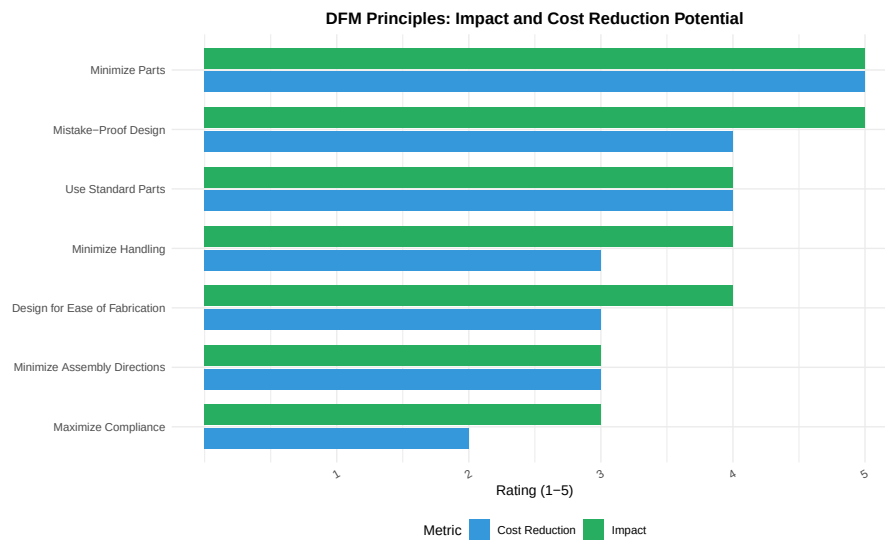


Figure 2.4: DFM Guidelines

Table 2.7: Design for Manufacturing Guidelines

2.6. DESIGN FOR MANUFACTURING (DFM) AND ASSEMBLY (DFA) 37

DFM Guideline	Why It Matters	Example
Minimize total number of parts	Fewer parts = fewer chances for failure, less inventory, lower cost	Combine
Use standard components	Standard parts are cheaper, faster to procure, easier to replace	Use M6 b
Design for ease of fabrication	Complex features increase manufacturing cost and defect rates	Avoid un
Design for ease of assembly	Reduces assembly time and errors	Use snap
Minimize assembly directions	Multiple directions require repositioning, increasing time	All parts
Maximize compliance in assembly	Tight tolerances increase cost; allow self-alignment where possible	Use tape
Design for ease of service	Products will need maintenance; design for technician access	Locate se

2.6.2 DFA Analysis

DFA systematically evaluates assembly operations to identify improvement opportunities.

```
# DFA Analysis Example: Simple Assembly
# Calculate assembly efficiency using Boothroyd-Dewhurst method

# Assembly data (simplified)
parts <- data.frame(
  Part = c("Base", "PCB", "Cover", "Screw 1", "Screw 2", "Screw 3", "Screw 4", "Label"),
  Handling_Time = c(2.5, 3.0, 2.5, 3.5, 3.5, 3.5, 3.5, 4.0), # seconds
  Insertion_Time = c(3.0, 4.0, 3.5, 6.0, 6.0, 6.0, 6.0, 2.0), # seconds
  Theoretically_Necessary = c(TRUE, TRUE, TRUE, FALSE, FALSE, FALSE, FALSE, FALSE)
)

# Calculations
total_parts <- nrow(parts)
total_time <- sum(parts$Handling_Time + parts$Insertion_Time)
min_parts <- sum(parts$Theoretically_Necessary)
ideal_time <- min_parts * 3 # 3 seconds is theoretical minimum per part

efficiency <- (ideal_time / total_time) * 100

cat("DFA Analysis Results:\n")
```

DFA Analysis Results:

```
cat("=====\n")
```

=====

```
cat(sprintf("Total parts: %d\n", total_parts))
```

Total parts: 8

```
cat(sprintf("Theoretically minimum parts: %d\n", min_parts))
```

Theoretically minimum parts: 3

```
cat(sprintf("Total assembly time: %.1f seconds\n", total_time))
```

Total assembly time: 62.5 seconds

```
cat(sprintf("Ideal assembly time: %.1f seconds\n", ideal_time))
```

Ideal assembly time: 9.0 seconds

```
cat(sprintf("Design Efficiency: %.1f%%\n", efficiency))
```

Design Efficiency: 14.4%

```
cat("\nOpportunity: Combine 4 screws into snap-fit design\n")
```

Opportunity: Combine 4 screws into snap-fit design

Case Study: Redesigning for DFM/DFA

Original Design: - 15 parts - 4 different screw types - Assembly time: 180 seconds - Multiple assembly directions - Special tools required

Redesigned using DFM/DFA: - 8 parts (47% reduction) - 1 standard screw type - Assembly time: 75 seconds (58% reduction) - Single assembly direction (top-down) - No special tools

Cost Impact: - Part cost reduced 35% - Assembly labor reduced 58% - Quality defects reduced 60% - Total product cost reduced 40%

2.7 HAZOP Studies

HAZOP (Hazard and Operability Study) is a systematic method to identify hazards and operability problems in process plants.

HAZOP Study Overview: <https://www.youtube.com/watch?v=6AqtX8oCpKI&t>

HAZOP Study Overview: <https://www.youtube.com/watch?v=ukn0RRt0ReA&list=PLeTiXOrLeXhI5IZKv3GeOUM0Ypz5mG36S>

2.7.1 HAZOP Methodology

Table 2.8: HAZOP Guide Words and Examples

Guide Word	Meaning	Example with FLOW
NO/NOT MORE LESS AS WELL AS PART OF	Complete negation of design intent Quantitative increase Quantitative decrease Qualitative modification/addition Qualitative decrease	No flow - pump failure, blocked line More flow - control valve fails open Less flow - partial blockage, pump wear Flow + contamination - upstream leak Only part of intended flow path active
REVERSE OTHER THAN	Logical opposite of intent Complete substitution	Reverse flow - check valve failure Wrong material flowing

2.7.2 HAZOP Example

Table 2.9: 1

Node	Parameter	Guide Word	Deviation	Cause
Feed Pump P-101 to Reactor R-101	Flow	No	No Flow	Pump failure, blocked suction
Feed Pump P-101 to Reactor R-101	Flow	More	More Flow	Control valve fails open
Feed Pump P-101 to Reactor R-101	Pressure	More	High Pressure	Downstream blockage
Feed Pump P-101 to Reactor R-101	Temperature	Less	Low Temperature	Cooling water leak into feed

Discussion: Why is HAZOP done during FEED, not later?

HAZOP should be completed during FEED because:

1. **Cost of changes** - Changes during FEED cost 1x; during detailed design cost 10x; during construction cost 100x
2. **Design influence** - P&IDs are still being developed and can be modified
3. **Equipment selection** - Safety requirements may affect equipment sizing
4. **Budget accuracy** - Safety systems must be included in project budget
5. **Regulatory approval** - Many jurisdictions require HAZOP before construction permits

Best practice: Conduct preliminary HAZOP early in FEED, then detailed HAZOP when P&IDs are 60-80% complete.

2.8 Cost Estimation

Accurate cost estimation is critical for project approval and budget management.

Table 2.10: Cost Estimate Classification (AACE International)

AACE Class	Project Phase	Engineering Complete	Accuracy Range	Purpose
Class 5	Concept Screening	0-2%	-50% to +100%	Screening alte
Class 4	Concept Study	1-15%	-30% to +50%	Feasibility
Class 3	FEED/Budget	10-40%	-20% to +30%	Authorization
Class 2	Detailed Design	30-75%	-15% to +20%	Control
Class 1	Construction	65-100%	-10% to +15%	Bid/Tender

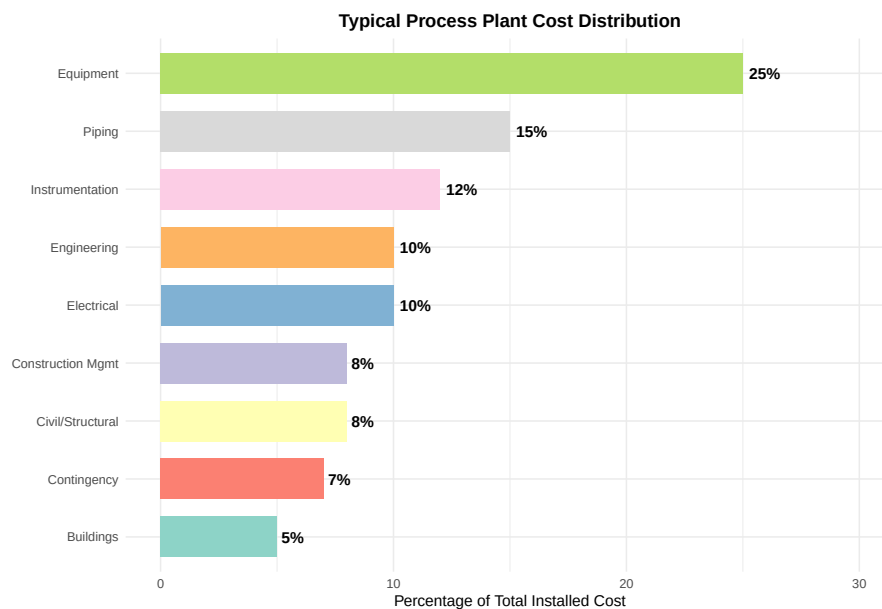


Figure 2.5: Typical Process Plant Cost Breakdown

2.9 Case Study: Automotive Paint Line Project

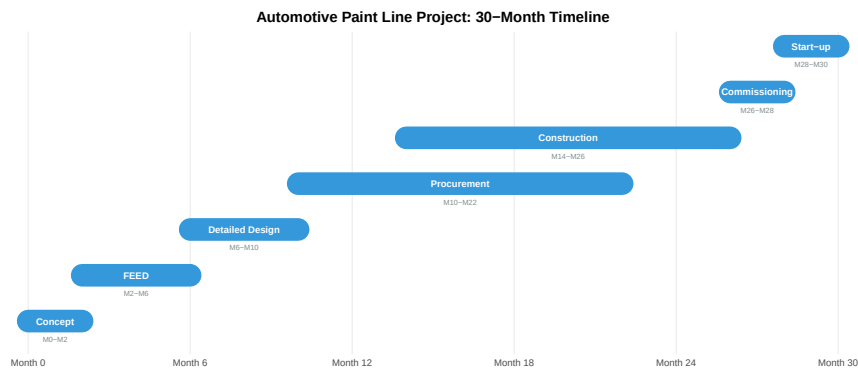


Figure 2.6: Automotive Paint Line Project Timeline

Case Study Details: Paint Line Engineering Challenges

Project Overview: - New automotive paint line for SUV body shop - Capacity: 60 jobs per hour (JPH) - Process: E-coat, primer, basecoat, clearcoat

Key Engineering Challenges:

- 1. Environmental Control** - Temperature: $\pm 1^{\circ}\text{C}$ throughout paint booth - Humidity: $65\% \pm 5\%$ RH - Air cleanliness: Class 10,000
- 2. Automation Requirements** - 48 paint robots (8 per zone) - Conveyor system with 2m pitch - Zone tracking and recipe management
- 3. Safety Systems** - Explosion-proof electrical classification - Fire suppression throughout - VOC monitoring and control
- 4. Quality Systems** - Inline thickness measurement - Automated visual inspection - Recipe management and traceability

Project Outcome: - On-time completion - Under budget by 3% - Quality metrics exceeded targets - 99.2% first-pass yield achieved

2.10 Review Questions

Question 1: Automation Selection

A medical device company needs to produce 5,000 units per year of a surgical instrument. The design is mature and not expected to change. Volumes could grow to 50,000 units if successful. Which automation type should they initially choose?

Answer: Programmable automation (CNC machining, robotic cells)

Reasoning: - Current volume (5,000/year) doesn't justify fixed automation - Flexibility allows for minor design refinements - Can scale up by adding shifts or machines - Lower initial investment preserves capital - If volume grows to 50,000, can justify dedicated equipment later

Question 2: P&ID Interpretation

Decode the following instrument tags and explain their function:

- a) FIC-201
- b) PSV-305
- c) TT-401
- d) LCV-150

Answers:

- a) **FIC-201** - Flow Indicating Controller (loop 201)
 - Measures flow, displays value, and controls a valve
- b) **PSV-305** - Pressure Safety Valve (loop 305)
 - Relieves pressure if it exceeds setpoint (safety device)
- c) **TT-401** - Temperature Transmitter (loop 401)
 - Converts temperature measurement to 4-20mA signal
- d) **LCV-150** - Level Control Valve (loop 150)
 - Valve that is manipulated by a level controller

Question 3: Project Phases

Why is FEED often considered the most critical project phase?

Answer: FEED is critical because:

1. **Defines scope** - All subsequent work based on FEED deliverables
2. **Locks in 80% of cost** - Design decisions determine equipment and construction costs
3. **Lowest cost to change** - Changes cost 10-100x more in later phases
4. **Authorization basis** - Management approves project based on FEED estimate
5. **Risk identification** - HAZOP and risk studies identify safety requirements
6. **Contractor selection** - FEED package used for competitive bidding

Poor FEED = project overruns, scope changes, and budget problems.

Question 4: DFM Application

A product currently uses 12 screws of 3 different sizes for assembly. Apply DFM principles to improve this design.

Answer: Apply these DFM principles:

1. **Minimize parts:** Can some screws be eliminated by using integral snap-fits?
2. **Standardize:** Use one screw size instead of three
 - Reduces inventory complexity
 - Single tool for assembly
 - Lower procurement cost
3. **Design for ease:** Consider alternatives:
 - Snap-fit connections (no tools)
 - Twist-lock features
 - Press-fit pins

Possible redesign: - Reduce from 12 screws to 4 screws (for serviceability) - All same size (M3 $\times$ 8) - Add 4 snap-fits for initial positioning - Result: 67% fewer fasteners, single tool, faster assembly

Question 5: HAZOP Analysis

For a reactor feed pump, apply the HAZOP guide word “REVERSE” to the parameter “FLOW”. What could cause this? What are the consequences? What safeguards would you recommend?

Answer:

Deviation: Reverse flow through feed pump

Causes: - Pump stops while discharge valve open - Check valve fails (stuck open or missing) - Parallel pump creates backflow - Reactor pressure exceeds pump shutoff head

Consequences: - Reactor contents backflow into feed tank - Contamination of feed material - Possible chemical reaction in feed system - Pump damage (running backward)

Safeguards: - Check valve on pump discharge - Automatic pump discharge block valve (closes on pump stop) - Low flow alarm and trip - Reactor pressure monitoring - Backflow-preventing orifice

2.11 Summary

Table 2.11: Chapter 2 Summary

Topic	Key Takeaway
Automation Types	Fixed for high volume single product; Programmable for batch; Flexible for variety
Project Phases	Concept $\rightarrow$ FEED $\rightarrow$ Detailed Design $\rightarrow$ Construction $\rightarrow$ Commissioning $\rightarrow$ Start-up

PFDs vs P&IDs	PFD = big picture (equipment, flows); P&ID = detailed (all instrument
DFM/DFA	Design for easy manufacturing and assembly reduces cost 20-40%
HAZOP	Systematic hazard identification using guide words; do it during FEED
Cost Estimation	Estimate accuracy improves with engineering completion; AACE Class

2.11.1 Key Takeaways

1. **Automation selection** depends on production volume, variety, and changeover requirements
 2. **FEED phase** defines 80% of project cost with only 10-15% of engineering effort
 3. **P&IDs** are the critical document connecting design to construction
 4. **DFM/DFA** should be applied early in design to maximize impact
 5. **HAZOP** identifies hazards systematically and must be done before construction
 6. **Cost estimates** improve in accuracy as engineering progresses
-

2.12 References

1. Towler, G., & Sinnott, R. (2021). *Chemical Engineering Design* (7th ed.). Elsevier.
2. AACE International. (2020). *Cost Estimate Classification System*.
3. ISA-5.1. (2022). *Instrumentation Symbols and Identification*.
4. Boothroyd, G., Dewhurst, P., & Knight, W.A. (2011). *Product Design for Manufacture and Assembly* (3rd ed.). CRC Press.
5. CCPS. (2008). *Guidelines for Hazard Evaluation Procedures* (3rd ed.). Wiley.

Chapter 3

Integrated Manufacturing Systems

3.1 Learning Objectives

By the end of this chapter, you will be able to:

1. Compare different types of production facility layouts and material handling methods
 2. Calculate Manufacturing Cycle Time (MCT) and Manufacturing Cycle Efficiency (MCE)
 3. Analyze production line performance including the impact of station failures
 4. Apply line balancing techniques to optimize workstation assignments
 5. Explain the concepts of takt time, cycle time, and their relationship
 6. Describe Flexible Manufacturing Systems (FMS) and their applications
 7. Understand modern concepts including digital twins and Industry 4.0
-

3.2 Material Handling Methods & Systems

There are four common types of production facility layouts, each with distinct features and material handling requirements:

Table 3.1: Material Handling Methods by Plant Layout

Layout Type	Product Characteristics	Material Handling
Fixed-Position	Large, heavy, or immobile products	Cranes, hoists, fork lifts bring materials
Process (Job Shop)	High variety, low volume, custom work	Fork lifts, AGVs, carts move WIP
Cellular	Part families, medium variety/volume	Conveyors within cells, carts between cells
Product (Flow Line)	Standardized products, high volume	Conveyors, automated transfer systems

Discussion: How do you choose between layout types?

Selection criteria:

Factor	Favors Process Layout	Favors Product Layout
Volume	Low (< 1,000/year)	High (> 10,000/year)
Variety	High (many products)	Low (1-2 products)
Routing	Variable by product	Fixed, same for all
Equipment	General-purpose	Specialized
Worker skills	High, varied	Specific, repetitive
WIP inventory	High	Low
Lead time	Long	Short

When in doubt: If volume and variety are moderate, consider cellular manufacturing as a compromise.

3.3 Fundamentals of Production Lines

A **production line** consists of workstations arranged so that the product moves from one station to the next, with a portion of the total work performed at each location.

Warning: Using ``size`` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use ``linewidth`` instead.

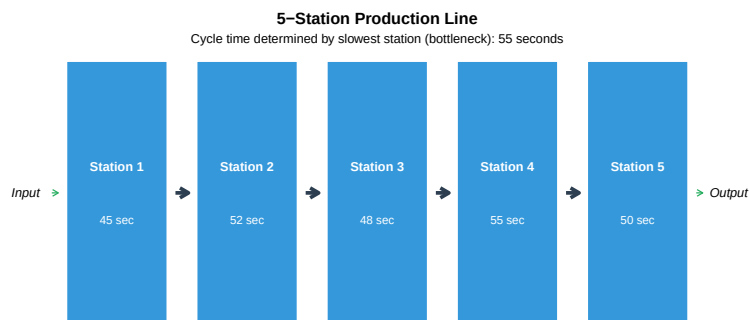


Figure 3.1: Production Line Concept

3.3.1 Methods of Work Transport

Table 3.2: Work Transport M

Method	Description	Advantages
Manual	Workers pass parts by hand or using simple carts	Low cost, flexible, easy to
Continuous	Conveyor moves at constant speed; work done while moving	Smooth flow, no transfer t
Synchronous	All units move simultaneously in discrete steps	Fixed cycle time, easy to c
(Intermittent)		
Asynchronous	Units move independently when released by worker	Absorbs variation, no blo

```
Warning in geom_segment(aes(x = 0.5, xend = 5.5, y = 3, yend = 3), color = "#3498DB", : All aesthetic mappings should be inside `aes()`
i Please consider using `annotate()` or provide this layer with data containing a single row.
```

```
Warning in geom_segment(aes(x = 0.7, xend = 1.3, y = 2, yend = 2), color = "#E74C3C", : All aesthetic
i Please consider using `annotate()` or provide this layer with data containing
  a single row.
```

```
Warning in geom_segment(aes(x = 1.7, xend = 2.3, y = 2, yend = 2), color = "#E74C3C", : All aesthetic mappings should return a single value for each row. Please consider using `annotate()` or provide this layer with data containing a single row.
```

```
Warning in geom_segment(aes(x = 2.7, xend = 3.3, y = 2, yend = 2), color = "#E74C3C", : All aesthetic mappings should be inside `aes()`
i Please consider using `annotate()` or provide this layer with data containing a single row.
```

```
Warning in geom_segment(aes(x = 3.7, xend = 4.3, y = 2, yend = 2), color = "#E74C3C", : All aesthetic mappings should be inside `aes()` or `inherit_aesthetics = FALSE`. Please consider using `annotate()` or provide this layer with data containing a single row.
```

```
Warning in geom_segment(aes(x = 4.7, xend = 5.3, y = 2, yend = 2), color = "#E74C3C", : All aesthetic
i Please consider using `annotate()` or provide this layer with data containing
  a single row.
```

Warning in geom_segment(aes(x = 0.7, xend = 1.1, y = 1, yend = 1), color = "#27AE60",
i Please consider using `annotate()` or provide this layer with data containing
a single row.

Warning in geom_segment(aes(x = 1.9, xend = 2.5, y = 1, yend = 1), color = "#27AE60",
i Please consider using `annotate()` or provide this layer with data containing
a single row.

Warning in geom_segment(aes(x = 2.7, xend = 3.1, y = 1, yend = 1), color = "#27AE60",
i Please consider using `annotate()` or provide this layer with data containing
a single row.

Warning in geom_segment(aes(x = 4, xend = 4.4, y = 1, yend = 1), color = "#27AE60", :
i Please consider using `annotate()` or provide this layer with data containing
a single row.

Warning in geom_segment(aes(x = 4.8, xend = 5.3, y = 1, yend = 1), color = "#27AE60",
i Please consider using `annotate()` or provide this layer with data containing
a single row.

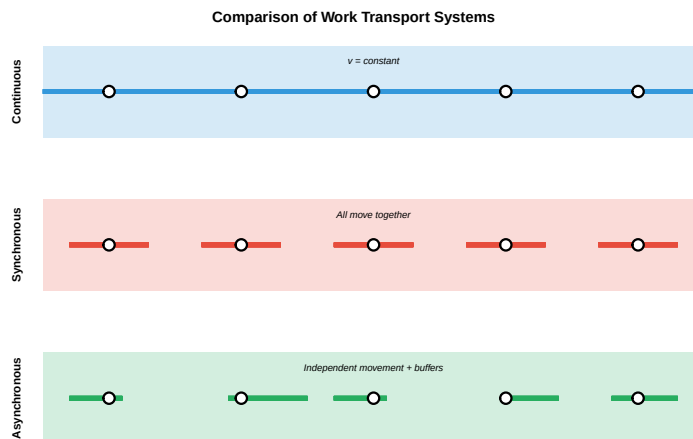


Figure 3.2: Work Transport System Types

What causes blocking and starving in production lines?

Starving: A station is ready to work but has no parts to process. - **Causes:** Upstream station is slower, upstream breakdown, material shortage

Blocking: A station finishes but cannot release the part. - **Causes:** Downstream station still working, downstream breakdown, no buffer space

Solutions: 1. **Buffers** - Storage between stations absorbs variation 2. **Line balancing** - Equalize work content across stations 3. **Parallel stations** - Add capacity at bottlenecks 4. **Preventive maintenance** - Reduce breakdowns

3.3.2 Work Cycle Types

Warning in geom_tile(aes(x = 50, y = 3), width = 100, height = 0.5, fill = "#F39C12"): All aesthetic mappings should only involve a single value. You can map from a value in the data to a single aesthetic, but if you map from a function (or from the output of a function like aes()) to an aesthetic, you will get multiple values. Please consider using `annotate()` or provide this layer with data containing a single row.

Warning in geom_tile(aes(x = 20, y = 2), width = 40, height = 0.5, fill = "#F39C12"): All aesthetic mappings should only involve a single value. You can map from a value in the data to a single aesthetic, but if you map from a function (or from the output of a function like aes()) to an aesthetic, you will get multiple values. Please consider using `annotate()` or provide this layer with data containing a single row.

Warning in geom_tile(aes(x = 70, y = 2), width = 60, height = 0.5, fill = "#3498DB"): All aesthetic mappings should only involve a single value. You can map from a value in the data to a single aesthetic, but if you map from a function (or from the output of a function like aes()) to an aesthetic, you will get multiple values. Please consider using `annotate()` or provide this layer with data containing a single row.

Warning in geom_tile(aes(x = 2.5, y = 1), width = 5, height = 0.5, fill = "#F39C12"): All aesthetic mappings should only involve a single value. You can map from a value in the data to a single aesthetic, but if you map from a function (or from the output of a function like aes()) to an aesthetic, you will get multiple values. Please consider using `annotate()` or provide this layer with data containing a single row.

Warning in geom_tile(aes(x = 52.5, y = 1), width = 95, height = 0.5, fill = "#3498DB"): All aesthetic mappings should only involve a single value. You can map from a value in the data to a single aesthetic, but if you map from a function (or from the output of a function like aes()) to an aesthetic, you will get multiple values. Please consider using `annotate()` or provide this layer with data containing a single row.

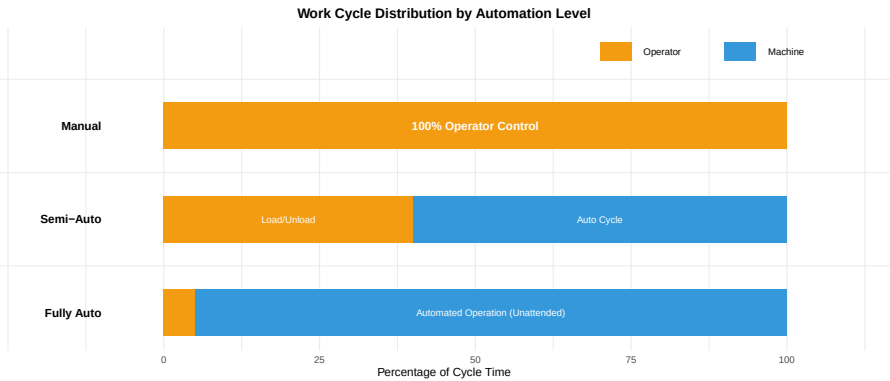


Figure 3.3: Manual, Semi-Automated, and Fully Automated Machine Cycles

3.4 Key Time Metrics

Understanding time metrics is essential for analyzing and improving production systems.

Table 3.3: Key Manufacturing Time Metrics

Metric	Definition	Formula
--------	------------	---------

Takt Time	Available production time $\div$ Customer demand	$T_{\text{takt}} = \frac{\text{text}}{\text{demand}}$
Cycle Time	Time between units coming off the line	$T_c = \frac{60}{R_p}$
Lead Time	Total time from order to delivery	Order processing + Manuf
Throughput Time	Time from raw material to finished goods	Processing + Waiting + M

3.4.1 Takt Time vs. Cycle Time

```
# Takt Time Calculation Example
# Automotive assembly plant

# Given data
shift_length_min <- 480      # 8 hours = 480 minutes
breaks_min <- 30            # Two 15-minute breaks
planned_downtime_min <- 20  # Changeover, meetings
customer_demand <- 60       # Cars per shift

# Calculate available time
available_time <- shift_length_min - breaks_min - planned_downtime_min
cat("Available Production Time:", available_time, "minutes per shift\n")
```

Available Production Time: 430 minutes per shift

```
# Calculate Takt Time
takt_time <- available_time / customer_demand
cat("Takt Time:", round(takt_time, 2), "minutes per car\n")
```

Takt Time: 7.17 minutes per car

```
cat("      = ", round(takt_time * 60, 1), "seconds per car\n\n")
```

= 430 seconds per car

```
# Compare to actual cycle time
actual_cycle_time <- 7.5 # minutes (current performance)
cat("Actual Cycle Time:", actual_cycle_time, "minutes per car\n")
```

Actual Cycle Time: 7.5 minutes per car

```
if (actual_cycle_time <= takt_time) {
  cat("Status: MEETING DEMAND - Cycle time is within takt time\n")
  cat("Capacity margin:", round((1 - actual_cycle_time/takt_time) * 100, 1), "%\n")
} else {
  cat("Status: CANNOT MEET DEMAND - Cycle time exceeds takt time\n")
  cat("Shortfall:", round((actual_cycle_time/takt_time - 1) * 100, 1), "% over capacity\n")
}
```

Status: CANNOT MEET DEMAND - Cycle time exceeds takt time

Shortfall: 4.7 % over capacity

Discussion: What happens when cycle time exceeds takt time?

When Cycle Time > Takt Time, you cannot meet customer demand.

Options to fix this:

1. **Reduce cycle time:**
 - Kaizen improvements at bottleneck
 - Better tools/fixtures
 - Automation of slow tasks
2. **Increase available time:**
 - Add overtime
 - Add shifts
 - Reduce breaks (carefully!)
3. **Add capacity:**
 - Parallel stations at bottleneck
 - Additional production lines
 - Outsourcing
4. **Manage demand:**
 - Negotiate delivery schedules
 - Build inventory in advance
 - Redirect to other facilities

Key insight: Takt time is the “heartbeat” of lean manufacturing - everything should be synchronized to it.

3.4.2 Manufacturing Cycle Time and Efficiency

```
# Manufacturing Cycle Time (MCT) and Efficiency (MCE) Example

# Given production data
production_time_min <- 480 # Total time equipment ran
units_produced <- 60      # Good units produced

# MCT Calculation
MCT <- production_time_min / units_produced
cat("Manufacturing Cycle Time (MCT):", MCT, "minutes per unit\n\n")
```

Manufacturing Cycle Time (MCT): 8 minutes per unit

```
# MCE Calculation requires understanding of value-added time
# Typical breakdown of production time:
value_added_time <- 3.5 # Actual processing time (minutes)
inspection_time <- 0.5  # Quality checks
wait_time <- 2.5        # Queuing between operations
move_time <- 1.5        # Transport between stations

total_time_per_unit <- value_added_time + inspection_time + wait_time + move_time
```

```
cat("Time breakdown per unit:\n")
```

Time breakdown per unit:

```
cat("  Value-added (processing):", value_added_time, "min\n")
```

Value-added (processing): 3.5 min

```
cat("  Inspection:", inspection_time, "min\n")
```

Inspection: 0.5 min

```
cat("  Waiting:", wait_time, "min\n")
```

Waiting: 2.5 min

```
cat("  Moving:", move_time, "min\n")
```

Moving: 1.5 min

```
cat("  Total:", total_time_per_unit, "min\n\n")
```

Total: 8 min

```
# MCE Calculation
```

```
MCE <- (value_added_time / total_time_per_unit) * 100
```

```
cat("Manufacturing Cycle Efficiency (MCE):", round(MCE, 1), "%\n")
```

Manufacturing Cycle Efficiency (MCE): 43.8 %

```
cat("\nInterpretation: Only", round(MCE, 1), "% of time adds value.\n")
```

Interpretation: Only 43.8 % of time adds value.

```
cat("Opportunity:", round(100 - MCE, 1), "% of time is waste that could be reduced.\n")
```

Opportunity: 56.2 % of time is waste that could be reduced.

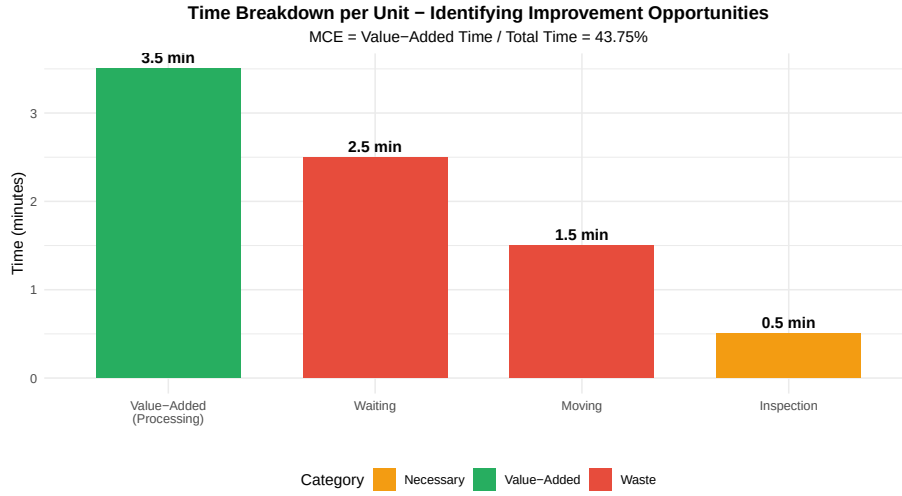


Figure 3.4: Manufacturing Cycle Efficiency - Where Does Time Go?

3.5 Manual Assembly Lines

Manual assembly lines use human workers at each station. The efficiency depends on how well work is balanced across stations.

3.5.1 Line Balancing

Line balancing assigns tasks to workstations to minimize idle time while meeting production rate requirements.

Key formulas:

$$T_c = \frac{\text{Available Time}}{\text{Required Output}} = \frac{60}{R_p}$$

$$TM = \frac{\sum t_i}{T_c} = \frac{T_{wc}}{T_c}$$

$$E_b = \frac{T_{wc}}{n \times T_c} \times 100\%$$

Where: - T_c = Cycle time (time available per unit) - R_p = Production rate (units per hour) - TM = Theoretical minimum stations - T_{wc} = Total work content (sum of all task times) - n = Actual number of stations - E_b = Line efficiency (balance efficiency)

3.5.2 Line Balancing Example: Electronics Assembly

```
# Line Balancing Example: Tablet Computer Assembly

# Task data
tasks <- data.frame(
  Task = c("A", "B", "C", "D", "E", "F", "G", "H"),
  Description = c("Install battery", "Mount display", "Connect cables",
    "Install motherboard", "Add memory", "Install camera",
    "Attach case back", "Final test"),
  Time_sec = c(30, 45, 20, 55, 15, 25, 35, 40),
  Predecessors = c("-", "A", "A", "B,C", "D", "D", "E,F", "G")
)

# Display task data
cat("Assembly Tasks:\n")
```

Assembly Tasks:

```
print(tasks[, c("Task", "Description", "Time_sec", "Predecessors")])
```

	Task	Description	Time_sec	Predecessors
1	A	Install battery	30	-
2	B	Mount display	45	A
3	C	Connect cables	20	A
4	D	Install motherboard	55	B,C
5	E	Add memory	15	D
6	F	Install camera	25	D
7	G	Attach case back	35	E,F
8	H	Final test	40	G

```
# Calculate metrics
total_work_content <- sum(tasks$Time_sec)
cat("\nTotal Work Content:", total_work_content, "seconds\n")
```

Total Work Content: 265 seconds

```
# Production requirements
desired_output <- 45 # units per hour
available_time <- 3600 # seconds per hour

# Step 1: Calculate cycle time
cycle_time <- available_time / desired_output
cat("\nStep 1 - Cycle Time:")
```

Step 1 - Cycle Time:

```
cat("\n Required output:", desired_output, "units/hour")
```

Required output: 45 units/hour

```
cat("\n Cycle time = 3600 /", desired_output, "=", cycle_time, "seconds\n")
```

Cycle time = 3600 / 45 = 80 seconds

```
# Step 2: Calculate theoretical minimum stations
```

```
TM <- total_work_content / cycle_time
```

```
cat("\nStep 2 - Theoretical Minimum Stations:")
```

Step 2 - Theoretical Minimum Stations:

```
cat("\n TM =", total_work_content, "/", cycle_time, "=", round(TM, 2))
```

TM = 265 / 80 = 3.31

```
cat("\n Minimum stations required:", ceiling(TM), "\n")
```

Minimum stations required: 4

```
# Step 3: Assign tasks to stations (using largest task time rule)
```

```
cat("\nStep 3 - Station Assignments (respecting precedence):\n")
```

Step 3 - Station Assignments (respecting precedence):

```
cat(" Station 1: A (30s) + C (20s) + B (45s) = 95s > 80s... EXCEEDS\n")
```

Station 1: A (30s) + C (20s) + B (45s) = 95s > 80s... EXCEEDS

```
cat(" Let's try: A (30s) + C (20s) = 50s [30s idle]\n")
```

Let's try: A (30s) + C (20s) = 50s [30s idle]

```
cat(" Station 2: B (45s) + E (15s) = 60s... wait, E needs D\n")
```

Station 2: B (45s) + E (15s) = 60s... wait, E needs D

```
cat(" Station 2: B (45s) + D (55s) = 100s > 80s... EXCEEDS\n")
```

Station 2: B (45s) + D (55s) = 100s > 80s... EXCEEDS

```
cat(" Station 2: B (45s) = 45s [35s idle]\n")
```

Station 2: B (45s) = 45s [35s idle]

```
cat("  Station 3: D (55s) = 55s [25s idle]\n")
```

```
  Station 3: D (55s) = 55s [25s idle]
```

```
cat("  Station 4: E (15s) + F (25s) + G (35s) = 75s [5s idle]\n")
```

```
  Station 4: E (15s) + F (25s) + G (35s) = 75s [5s idle]
```

```
cat("  Station 5: H (40s) = 40s [40s idle]\n")
```

```
  Station 5: H (40s) = 40s [40s idle]
```

```
n_stations <- 5
efficiency <- (total_work_content / (n_stations * cycle_time)) * 100
balance_delay <- 100 - efficiency

cat("\nStep 4 - Results:")
```

```
Step 4 - Results:
```

```
cat("\n  Number of stations:", n_stations)
```

```
  Number of stations: 5
```

```
cat("\n  Line efficiency:", round(efficiency, 1), "%")
```

```
  Line efficiency: 66.2 %
```

```
cat("\n  Balance delay (idle time):", round(balance_delay, 1), "%")
```

```
  Balance delay (idle time): 33.8 %
```

```
cat("\n\n  This is poor balance - consider redesigning tasks or adding parallel stations.")
```

```
  This is poor balance - consider redesigning tasks or adding parallel stations.
```

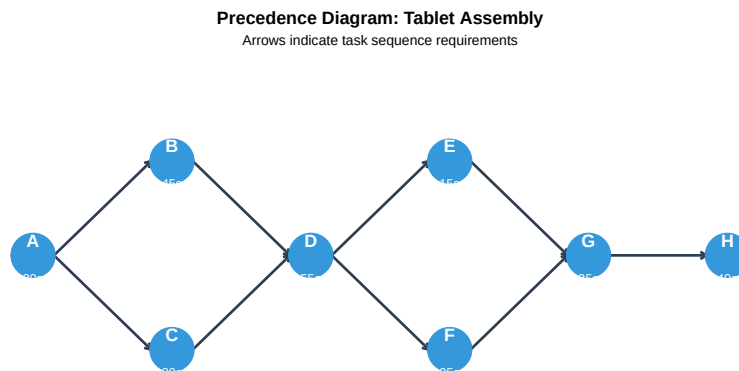


Figure 3.5: Precedence Diagram for Tablet Assembly

Try It: Can you find a better balance?

Challenge: Reassign tasks to improve efficiency above 80%.

Hints: - Can task A be split into two smaller tasks? - Could parallel workstations handle the bottleneck task D? - What if we allow 85 seconds per station (slower line, fewer stations)?

One solution with parallel stations: - Station 1: A + C = 50s - Station 2a: B = 45s (parallel) - Station 2b: B = 45s (parallel) - Station 3: D = 55s - Station 4: E + F = 40s - Station 5: G + H = 75s

With parallelism at Station 2, effective cycle time stays at 55s (Station 3 bottleneck), but we can now achieve higher throughput.

3.6 Automated Production Lines

Automated lines reduce human intervention using mechanized transfer systems and automated workstations. They're used for high-volume production with well-defined work content.

3.6.1 Impact of Station Failures

The performance of automated lines is degraded by station failures. Even small failure probabilities can significantly reduce output.

Actual Cycle Time:

$$T_p = T_c + pT$$

Actual Production Rate:

$$R_p = \frac{60}{T_p} = \frac{60}{T_c + pT}$$

Where: - T_c = Ideal cycle time (minutes) - p = Probability of station failure per cycle - T = Average downtime per failure (minutes)

```
# Automated Line Performance Analysis

# Line parameters
ideal_cycle_time <- 1.0      # minutes per part (ideal)
n_stations <- 10            # Number of stations

# Scenario comparison
scenarios <- data.frame(
  Scenario = c("World Class", "Good", "Average", "Poor"),
  Failure_Prob = c(0.005, 0.02, 0.05, 0.10), # Per station per cycle
  Repair_Time = c(2, 5, 10, 15) # Minutes average
)

# Calculate line performance for each scenario
cat("Automated Line Performance Analysis\n")

Automated Line Performance Analysis

cat("=====\n")

=====

cat("Ideal cycle time:", ideal_cycle_time, "min/part\n")

Ideal cycle time: 1 min/part

cat("Number of stations:", n_stations, "\n")

Number of stations: 10

cat("Ideal production rate:", 60/ideal_cycle_time, "parts/hour\n\n")

Ideal production rate: 60 parts/hour

for(i in 1:nrow(scenarios)) {
  p <- scenarios$Failure_Prob[i]
  T <- scenarios$Repair_Time[i]

  # Line failure probability (any station)
  p_line <- 1 - (1 - p)^n_stations

  # Actual cycle time
```

```

Tp <- ideal_cycle_time + p_line * T

# Actual production rate
Rp <- 60 / Tp

# Efficiency
efficiency <- (ideal_cycle_time / Tp) * 100

cat(sprintf("%s Performance:\n", scenarios$Scenario[i]))
cat(sprintf("  Station failure prob: %.1f%%\n", p * 100))
cat(sprintf("  Line failure prob: %.1f%%\n", p_line * 100))
cat(sprintf("  Average repair time: %d min\n", T))
cat(sprintf("  Actual cycle time: %.2f min\n", Tp))
cat(sprintf("  Actual production: %.1f parts/hour\n", Rp))
cat(sprintf("  Line efficiency: %.1f%%\n\n", efficiency))
}

```

World Class Performance:

Station failure prob: 0.5%
 Line failure prob: 4.9%
 Average repair time: 2 min
 Actual cycle time: 1.10 min
 Actual production: 54.7 parts/hour
 Line efficiency: 91.1%

Good Performance:

Station failure prob: 2.0%
 Line failure prob: 18.3%
 Average repair time: 5 min
 Actual cycle time: 1.91 min
 Actual production: 31.3 parts/hour
 Line efficiency: 52.2%

Average Performance:

Station failure prob: 5.0%
 Line failure prob: 40.1%
 Average repair time: 10 min
 Actual cycle time: 5.01 min
 Actual production: 12.0 parts/hour
 Line efficiency: 19.9%

Poor Performance:

Station failure prob: 10.0%
 Line failure prob: 65.1%
 Average repair time: 15 min

Actual cycle time: 10.77 min
 Actual production: 5.6 parts/hour
 Line efficiency: 9.3%

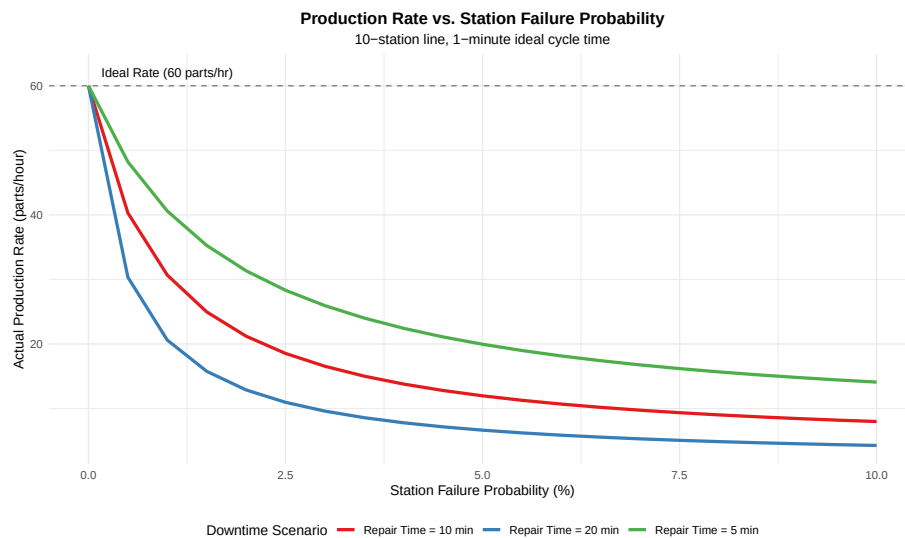


Figure 3.6: Impact of Station Failures on Production Rate

Discussion: Why is preventive maintenance critical for automated lines?

The math shows why: - At 5% failure probability with 10-minute repairs, you lose 25% of capacity - This costs more than the maintenance to prevent it

Cost comparison (example): - Lost production: 15 parts/hour $\times$ \$50/part $\times$ 8 hours = \$6,000/day - Preventive maintenance: \$500/day - **ROI of PM: 12:1**

Best practices: 1. Track failure data by station 2. Prioritize PM on high-failure stations 3. Stock critical spare parts 4. Train operators on quick changeover/repair 5. Consider redundant stations for bottlenecks

3.6.2 Buffer Sizing

Buffers between stations decouple operations and improve overall line availability.

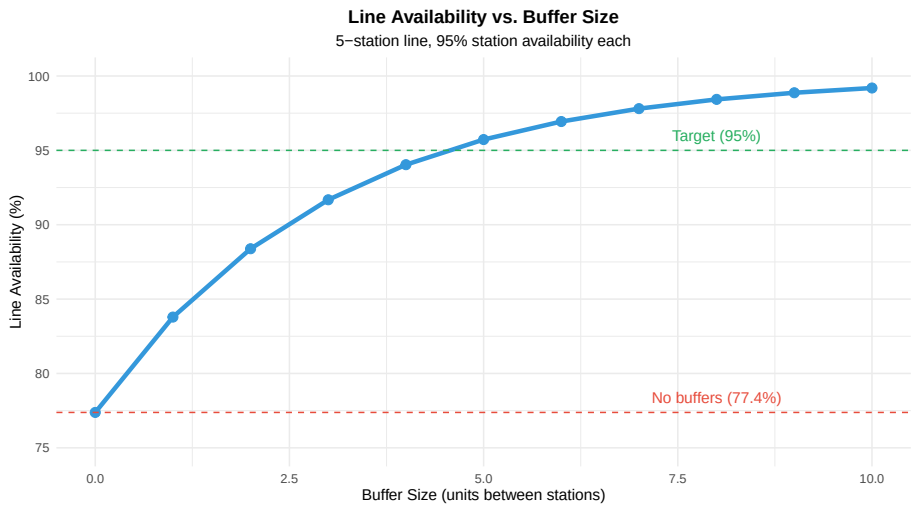


Figure 3.7: Effect of Buffers on Line Availability

3.7 Cellular Manufacturing

Cellular manufacturing applies Group Technology to organize production into cells that specialize in “families” of similar parts.

3.7.1 Part Families and Machine Cells

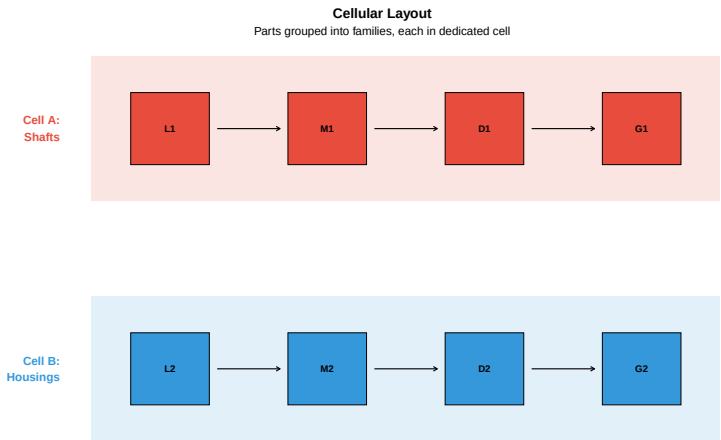


Figure 3.8: Cellular Manufacturing: From Process Layout to Cells

Table 3.4: Cellular Manufacturing Benefits vs. Traditional Process Layout

Metric	Traditional (Process)	Cellular	Typical Improvement
Setup time	High - frequent changeovers	Low - dedicated to family	50-90% reduction
Work-in-process	High - batches waiting	Low - continuous flow	50-90% reduction
Lead time	Long - complex routing	Short - U-cell flow	50-80% reduction
Quality defects	Higher - multiple handoffs	Lower - cell ownership	30-50% reduction
Material handling	High - long distances	Low - within cell	40-70% reduction
Floor space	More - large aisles	Less - compact cells	20-50% reduction
Worker skills	Specialized by machine	Cross-trained on cell	Increased flexibility

3.8 Flexible Manufacturing Systems (FMS)

An **FMS** is a highly automated cell consisting of CNC machines interconnected by automated material handling, all controlled by a central computer.

3.8.1 FMS Components

```
Warning in geom_segment(aes(x = 4, xend = 2.5, y = 2.4, yend = 2.3), linetype = "dotted") :
i Please consider using `annotate()` or provide this layer with data containing a single row.
```

```
Warning in geom_segment(aes(x = 4, xend = 4, y = 2.4, yend = 2.6), linetype = "dotted") :
i Please consider using `annotate()` or provide this layer with data containing a single row.
```

```
Warning in geom_segment(aes(x = 4, xend = 5.5, y = 2.4, yend = 2.3), linetype = "dotted") :
i Please consider using `annotate()` or provide this layer with data containing a single row.
```

```
Warning in geom_segment(aes(x = 4, xend = 4, y = 1.6, yend = 1.4), linetype = "dotted") :
i Please consider using `annotate()` or provide this layer with data containing a single row.
```

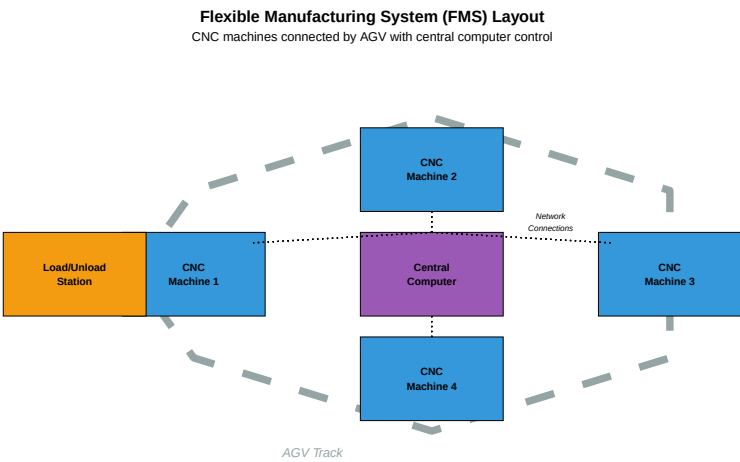


Figure 3.9: Flexible Manufacturing System Components

Table 3.5: FMS Characteristics and Applications

Characteristic	FMS Capability
Production Volume	Medium (2,000 - 100,000/year per part type)
Part Variety	Medium (4-100 different part types)
Batch Size	Small to medium (1-500 per batch)
Setup Time	Minimal (automatic pallet/fixture changes)
Typical Parts	Prismatic parts (housings, brackets, covers)
Investment	\$5M - \$50M+ depending on size
Best Suited For	Aerospace, automotive components, job shops with repeat parts

3.9 Modern Manufacturing Concepts

3.9.1 SMED (Single-Minute Exchange of Die)

SMED is a lean manufacturing technique to reduce changeover time to under 10 minutes (“single digit minutes”).

Table 3.6: SMED Methodology

Step	Description	Example
1. Separate	Distinguish internal setup (machine stopped) from external setup (machine running)	Pre-st

2. Convert	Convert as much internal setup to external setup as possible
3. Streamline	Reduce time for remaining internal and external activities

Case Study: Injection Molding Changeover

Before SMED: - Changeover time: 90 minutes - Machine stopped for entire process - One operator working alone

After SMED analysis:

Activity	Before	Type	After	Change
Find tools	10 min	Internal	0	External - tools
Remove old mold	15 min	Internal	5 min	pre-staged
Get new mold	10 min	Internal	0	Quick-release clamps
Install new mold	20 min	Internal	8 min	External - mold
Connect utilities	10 min	Internal	4 min	pre-staged at machine
Adjust settings	15 min	Internal	3 min	Standardized mold heights
First article	10 min	Internal	5 min	Quick-connect fittings
				Pre-programmed recipes
				Improved documentation

Results: - Total changeover: 25 minutes (72% reduction) - Additional capacity: +15 changeovers/week possible - Smaller batch sizes now economical

3.9.2 AGV and AMR Systems

Table 3.7: AGV vs. AMR Comparison

Feature	AGV (Automated Guided Vehicle)	AMR (Autonomous Mobile Robot)
Navigation	Fixed path (wires, magnets, tape)	Dynamic (SLAM, vision, sensors)
Flexibility	Low - follows predetermined routes	High - calculates optimal routes
Infrastructure	Requires installation (floor modifications)	Minimal (maps environment)

Cost	Lower vehicle cost, higher infrastructure	Higher vehicle cost, lower infrastructure
Path Changes	Requires physical modification	Software update only
Obstacle Handling	Stops and waits	Navigates around obstacles
Best Application	High-volume, repetitive routes	Variable routes, dynamic environments

3.9.3 Digital Twin

A **digital twin** is a virtual representation of a physical manufacturing system that is updated in real-time with sensor data.

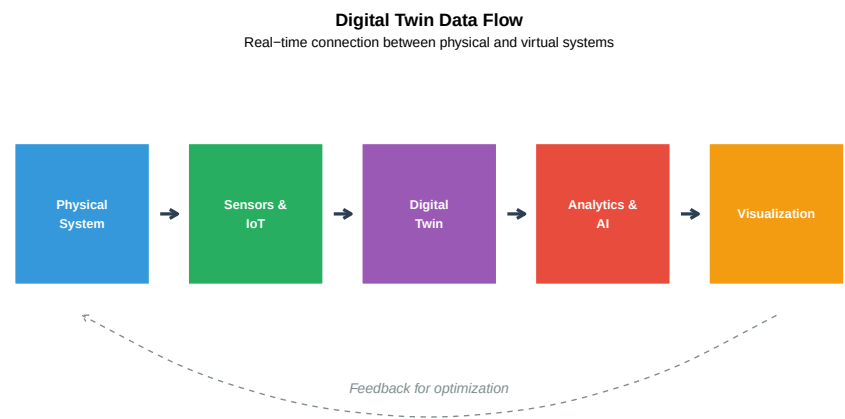


Figure 3.10: Digital Twin Concept

Digital Twin Applications: - Predictive maintenance (predict failures before they occur) - Process optimization (simulate changes before implementation) - Training (virtual commissioning and operator training) - Quality prediction (correlate parameters with outcomes)

3.10 Industry Applications

Table 3.8: Manufacturing System Applications by Industry

System Type	Automotive	Food Processing
Transfer Line	Engine block machining, cylinder head lines	Beverage bottling, canning lines
Manual Assembly	Final vehicle assembly, interior trim	Packaging, quality inspection
FMS	Transmission components, brake parts	Multi-product bakery equipment
Cellular	Subassemblies, wiring harnesses	Specialty product lines

AGV/AMR

Body shop material delivery, parts sequencing

Ingredient delivery, packaging

3.11 Review Questions

Question 1: Takt Time Calculation

A plant operates 8-hour shifts with 30 minutes of breaks. Daily demand is 400 units. Calculate the takt time.

Solution:

Available time = 8 hours $\times$ 60 min - 30 min = 450 minutes

Takt time = 450 min / 400 units = **1.125 minutes per unit** = 67.5 seconds

If actual cycle time is 60 seconds, the plant has $(67.5 - 60)/67.5 =$ **11% capacity margin**.

Question 2: Line Efficiency

A 6-station assembly line has a cycle time of 2 minutes. The task times at each station are: 1.8, 1.9, 2.0, 1.7, 1.6, and 1.5 minutes. Calculate the line efficiency.

Solution:

Total work content = 1.8 + 1.9 + 2.0 + 1.7 + 1.6 + 1.5 = 10.5 minutes

Line efficiency = $(10.5) / (6 \times 2.0) \times 100\% = 10.5/12 \times 100\% =$ **87.5%**

Balance delay (idle time) = $100\% - 87.5\% =$ **12.5%**

Question 3: Downtime Impact

An automated line has 8 stations, each with 3% failure probability per cycle and 8-minute average repair time. The ideal cycle time is 0.5 minutes. What is the actual production rate?

Solution:

Line failure probability = $1 - (1 - 0.03)^8 = 1 - 0.97^8 = 1 - 0.784 =$ **21.6%**

Actual cycle time = $0.5 + (0.216 \times 8) = 0.5 + 1.73 =$ **2.23 minutes**

Actual production rate = $60 / 2.23 =$ **26.9 parts/hour**

(vs. ideal of 120 parts/hour - only 22% of ideal capacity!)

This shows why reliability is critical in automated systems.

Question 4: FMS Selection

A company makes 15 different part numbers with annual volumes of 500-5,000 each. Parts are machined from aluminum and require milling, drilling, and tapping. Which system is most appropriate: dedicated transfer line, FMS, or CNC job shop?

Answer: FMS is most appropriate because:

- **Volume range (500-5,000)** is ideal for FMS
- **Part variety (15 types)** requires flexibility
- **Similar operations** (milling, drilling, tapping) can share equipment
- **Material (aluminum)** machines well on CNC

Transfer line would require too much volume per part. Job shop would have high setup times and low efficiency for these volumes.

Question 5: SMED Application

A stamping press has a 45-minute die change. Internal activities are 35 minutes, external are 10 minutes but currently done with machine stopped. How much can SMED reduce this?

Answer:

Step 1 - Separate: Do the 10 minutes of external work while press runs. - New changeover: 35 minutes (30% reduction)

Step 2 - Convert: Analyze the 35 minutes: - If 15 minutes can be converted to external (pre-staging, etc.): New changeover = 20 minutes

Step 3 - Streamline: Quick-release clamps, standardization might save another 5 minutes. - Final changeover: **15 minutes (67% reduction)**

This enables smaller batch sizes and more frequent changeovers.

3.12 Summary

Table 3.9: Chapter 3 Summary

Topic	Key Points
Production Lines	Manual, continuous, synchronous, or asynchronous transfer; each has trade-offs
Time Metrics	Takt time = demand pace; Cycle time = actual pace; MCE measures value-added %
Line Balancing	Assign tasks to minimize idle time; Efficiency = work content / (stations × cycle time)
Automated Lines	Reliability is critical; Small failure probabilities cause large capacity losses
Cellular Manufacturing	Group Technology groups part families; Reduces setup, WIP, lead time 50-90%
FMS	Automated cells for medium variety/volume; Computer-controlled flexibility
Modern Concepts	SMED for quick changeover; AGV/AMR for material handling; Digital twins for opt

3.12.1 Key Takeaways

1. **Match system to product** - Volume and variety determine optimal manufacturing system
 2. **Takt time sets the pace** - Everything should be designed to meet customer demand rate
 3. **Balance matters** - Unbalanced lines waste capacity through idle time
 4. **Reliability is critical** - Small failures compound to large losses in automated systems
 5. **Flexibility has value** - FMS and cellular systems enable quick response to change
 6. **Technology evolves** - Digital twins and AMRs are transforming manufacturing
-

3.13 References

1. Groover, M.P. (2020). *Automation, Production Systems, and Computer-Integrated Manufacturing* (5th ed.). Pearson.
2. Liker, J.K. (2004). *The Toyota Way*. McGraw-Hill.
3. Shingo, S. (1985). *A Revolution in Manufacturing: The SMED System*. Productivity Press.
4. Black, J.T. (1991). *The Design of the Factory with a Future*. McGraw-Hill.

Chapter 4

Plant Layout and Facility Design

4.1 Learning Objectives

By the end of this chapter, you will be able to:

- Identify and describe the four basic types of facility layouts
- Compare the advantages and disadvantages of each layout type
- Apply the steps involved in designing a process layout
- Calculate cycle time, theoretical minimum stations, and line efficiency for product layouts
- Understand the principles of warehouse and office layout design

Why is Plant Layout Important?

Plant layout directly impacts:

- **Productivity:** Efficient layouts minimize wasted movement and time
 - **Cost:** Poor layouts increase material handling costs by 20-50%
 - **Safety:** Well-designed layouts reduce accidents and injuries
 - **Flexibility:** The right layout allows adaptation to changing demands
 - **Employee Morale:** Good layouts improve working conditions
-

4.2 Types of Facility Layouts

There are **four basic layout types**, each suited to different production requirements:

Table 4.1: Overview of Facility Layout Types

Layout Type	Also Known As	Best For	Ex
Process Layout	Functional Layout, Job Shop	High variety, low volume	Ho
Product Layout	Flow Line, Assembly Line	Low variety, high volume	Au
Hybrid/Cellular Layout	Group Technology, Cell Layout	Medium variety, medium volume	El
Fixed-Position Layout	Project Layout	Very large or immobile products	Sh

4.2.1 Visualizing the Layout Spectrum

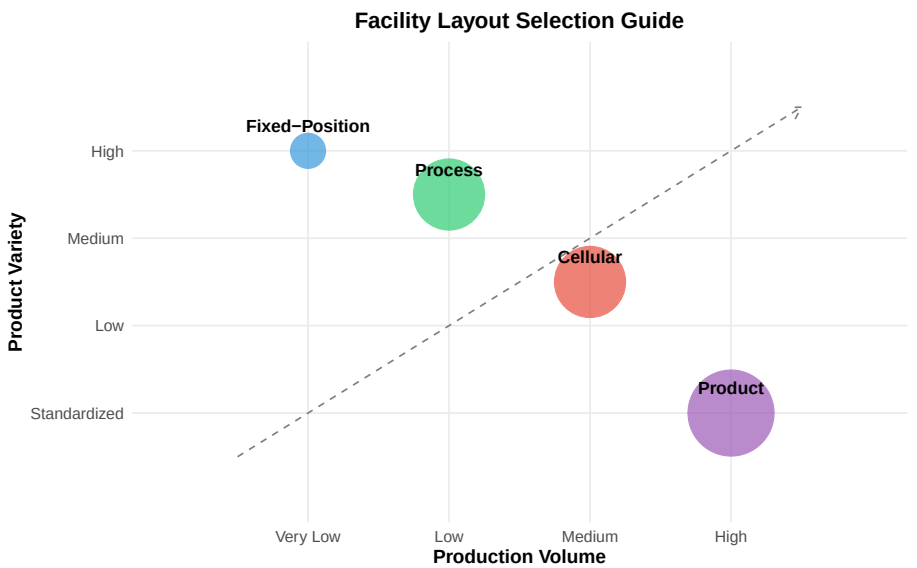


Figure 4.1: Product Variety vs. Production Volume for Different Layouts

4.3 Process Layout (Functional Layout)

In a **process layout**, similar resources (machines, equipment, workers with similar skills) are grouped together. Work flows between departments based on the specific requirements of each job.

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
 i Please use `linewidth` instead.

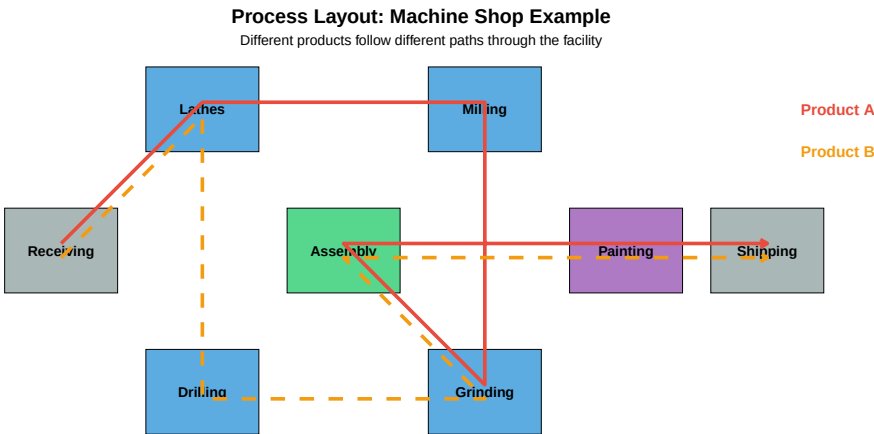


Figure 4.2: Example Process Layout - Machine Shop

4.3.1 Characteristics of Process Layouts

Table 4.2: Process Layout Characteristics

Characteristic	Description
Equipment	General-purpose machines
Labor	Skilled workers required
Flexibility	High - can handle variety
Processing Speed	Slower due to varied routing
Material Handling	Higher costs (complex paths)
Scheduling	Complex - different routes
Space Requirements	Higher - WIP inventory storage

Discussion Question: Can you identify a process layout in your daily life?

Think about: - A hospital emergency room (patients routed based on their needs)
 - A university campus (students move between buildings for different

classes) - A grocery store (customers choose their own path) - A machine shop (parts routed based on required operations)

What makes these process layouts? Similar functions are grouped together, and “products” (patients, students, customers) follow different paths based on their individual needs.

4.3.2 Real-World Examples

4.4 Product Layout (Assembly Line)

In a **product layout**, equipment and workstations are arranged in a line according to the sequence of operations needed to produce the product. Every unit follows the same path.

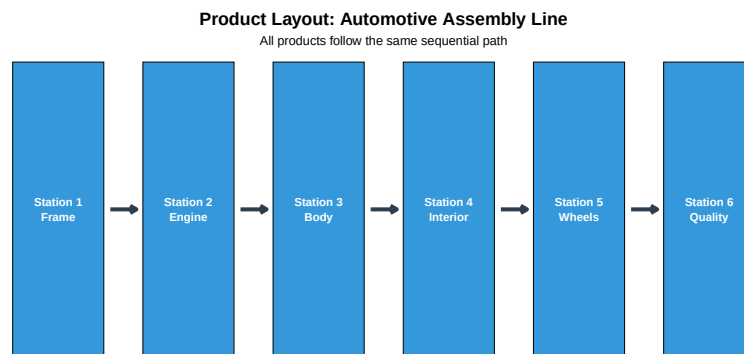


Figure 4.3: Product Layout - Assembly Line

4.4.1 Characteristics of Product Layouts

Table 4.3: Product Layout: Advantages vs. Disadvantages

Advantage	Disadvantage
High production rate	High initial investment
Low unit cost	Low flexibility
Low material handling	Line stops affect all
Simple scheduling	Monotonous work
Less WIP inventory	Requires balanced workloads

Quick Quiz: Product Layout

Question: A car wash where vehicles move through a series of cleaning stations is an example of which layout type?

Answer: Product Layout - all cars follow the same path through the same sequence of operations.

4.5 Hybrid Layout (Cellular Manufacturing)

Hybrid layouts combine the flexibility of process layouts with the efficiency of product layouts. The most common type is the **cellular layout** using Group Technology.

4.5.1 Group Technology Concept

Group Technology (GT) identifies parts with similar characteristics and groups them into **part families**. Machines are then arranged into **cells** to process these families.

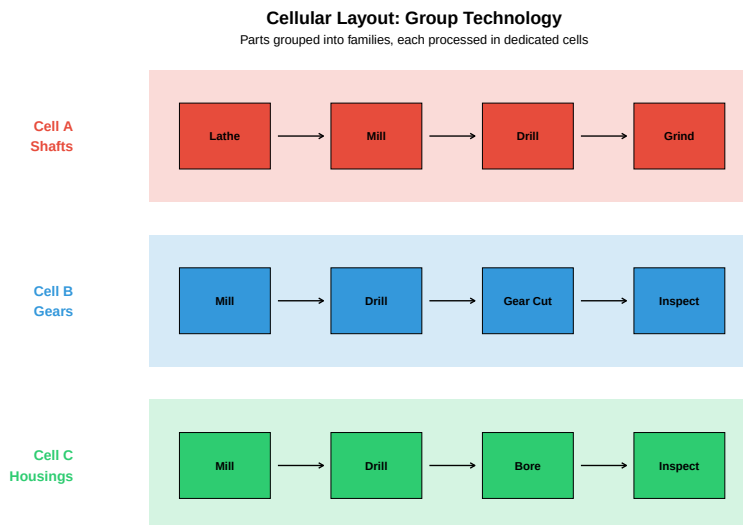


Figure 4.4: Cellular Layout with Manufacturing Cells

Discussion Question: Benefits of Cellular Manufacturing

What are the main benefits of cellular manufacturing over traditional process layouts?

1. **Reduced material handling** - Parts stay within the cell
2. **Shorter lead times** - No waiting between departments

3. **Less WIP inventory** - Smaller batches, faster flow
 4. **Improved quality** - Workers responsible for complete part
 5. **Team accountability** - Cell teams own their output
-

4.6 Fixed-Position Layout

In a **fixed-position layout**, the product remains stationary while workers, equipment, and materials are brought to it. This is used when the product is too large or heavy to move.

4.6.1 Examples of Fixed-Position Layouts

- **Shipbuilding** - Ships built in dry docks
- **Aircraft manufacturing** - Large aircraft assembled in hangars
- **Construction** - Buildings, bridges, dams
- **Surgery** - Patient remains stationary

Challenge Question: Managing a Fixed-Position Layout

What are the unique challenges of managing a fixed-position layout?

Think about: - Scheduling deliveries of materials and equipment - Coordinating multiple contractors/teams - Limited space around the product - Weather and environmental factors (outdoor projects) - Ensuring safety with many workers in one area

4.7 Designing Process Layouts

Designing an effective process layout involves **three main steps**:

4.7.1 Step 1: Gather Information

You need to determine: - **Space requirements** for each department - **Available space** in the facility - **Closeness relationships** between departments

4.7.1.1 From-To Matrix (Load Matrix)

A From-To matrix shows the number of trips or loads between departments:

Table 4.4: From-To Matrix: Loads per Day Between Departments

	Receiving	Machining	Assembly	Painting	Shipping
Receiving	-	100	50	0	0

Machining	0	-	200	50	0
Assembly	0	0	-	100	60
Painting	0	0	0	-	150
Shipping	0	0	0	0	-

4.7.2 Step 2: Develop Block Plans

Use the **Load-Distance Model** to evaluate layout alternatives:

$$\text{Total Cost} = \sum_{i=1}^n \sum_{j=1}^n L_{ij} \times D_{ij} \times C$$

Where: - L_{ij} = Number of loads between departments i and j - D_{ij} = Distance between departments i and j - C = Cost per unit distance

4.7.3 Interactive Example: Comparing Two Layouts

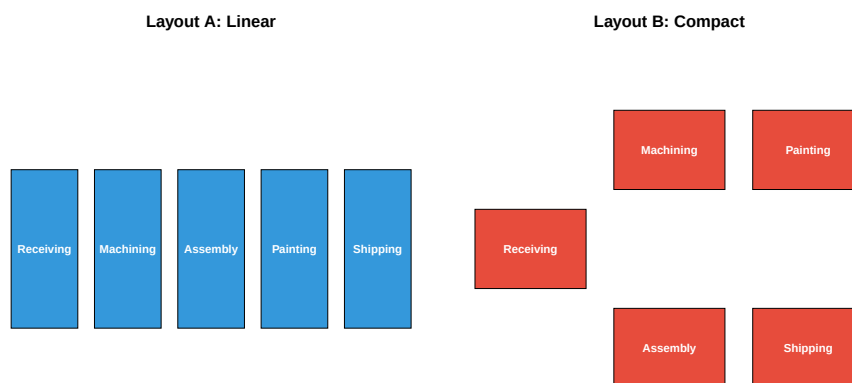


Figure 4.5: Comparing Two Process Layout Alternatives

```
# Calculate Load-Distance scores for both layouts
# From-To data: Receiving->Machining=100, Machining->Assembly=200,
#               Assembly->Painting=100, Painting->Shipping=150

# Layout A distances (linear): all adjacent = 1 unit
layout_A_score <- 100*1 + 200*1 + 100*1 + 150*1
cat("Layout A Total Load-Distance:", layout_A_score, "\n")
```

Layout A Total Load-Distance: 550

```
# Layout B distances (compact): most departments closer together
# Receiving to Machining = 1.12 (diagonal)
# Machining to Assembly = 1
# Assembly to Painting = 1.12 (diagonal)
# Painting to Shipping = 1
layout_B_score <- 100*1.12 + 200*1 + 100*1.12 + 150*1
cat("Layout B Total Load-Distance:", round(layout_B_score, 1), "\n")
```

Layout B Total Load-Distance: 574

```
cat("\nLayout A is better by:", round(layout_B_score - layout_A_score, 1), "units")
```

Layout A is better by: 24 units

Why does the linear layout win in this case?

In this example, the linear layout (A) wins because the process flow is essentially sequential (Receiving → Machining → Assembly → Painting → Shipping).

When flow is **sequential**, a **product layout** (linear arrangement) is more efficient. Process layouts are better when there's **varied routing** between departments.

4.7.4 Step 3: Develop Detailed Layout

Once the block plan is selected: - Determine exact sizes and shapes of departments - Plan aisle locations and widths - Consider utilities, safety exits, and accessibility - Use CAD software or 3D modeling for visualization

4.8 Designing Product Layouts (Line Balancing)

The key challenge in product layout design is **line balancing** - assigning tasks to workstations to minimize idle time while meeting production requirements.

4.8.1 Line Balancing Steps

1. Identify tasks and precedence relationships
2. Calculate required cycle time
3. Calculate theoretical minimum number of stations
4. Assign tasks to stations
5. Calculate efficiency

4.8.2 Key Formulas

Cycle Time:

$$C = \frac{\text{Available Production Time}}{\text{Desired Output}}$$

Theoretical Minimum Stations:

$$TM = \frac{\sum t_i}{C}$$

Line Efficiency:

$$\text{Efficiency} = \frac{\sum t_i}{n \times C} \times 100\%$$

Where: - C = Cycle time - $\sum t_i$ = Total task time - n = Number of workstations

4.8.3 Interactive Example: Pizza Assembly Line

Table 4.5: Pizza Assembly Tasks

Task	Description	Time (sec)	Predecessors
A	Roll dough	40	-
B	Spread sauce	25	A
C	Add cheese	20	B
D	Add toppings	35	B
E	Season	15	C, D
F	Box pizza	30	E

Precedence Diagram: Pizza Assembly

Arrows show required sequence of operations

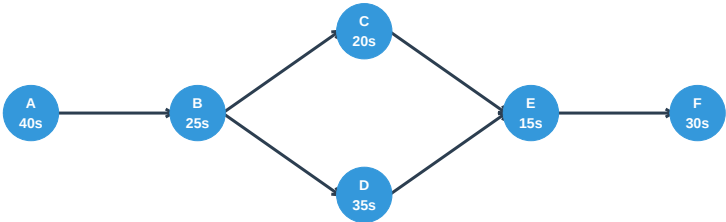


Figure 4.6: Precedence Diagram for Pizza Assembly

4.8.4 Line Balancing Calculation

```
# Given data
total_task_time <- 40 + 25 + 20 + 35 + 15 + 30 # seconds
desired_output <- 60 # pizzas per hour
available_time <- 3600 # seconds per hour

# Step 1: Calculate Cycle Time
cycle_time <- available_time / desired_output
cat("Cycle Time:", cycle_time, "seconds per pizza\n")

Cycle Time: 60 seconds per pizza

# Step 2: Calculate Theoretical Minimum Stations
TM <- total_task_time / cycle_time
cat("Theoretical Minimum Stations:", TM, "=", ceiling(TM), "stations\n")

Theoretical Minimum Stations: 2.75 = 3 stations

# Step 3: Assign tasks to stations (one possible solution)
cat("\n--- Workstation Assignments ---\n")

--- Workstation Assignments ---
cat("Station 1: A (40s) + B (25s) = 65s > 60s ... EXCEEDS!\n")

Station 1: A (40s) + B (25s) = 65s > 60s ... EXCEEDS!
cat("Let's try again:\n")

Let's try again:
cat("Station 1: A (40s) = 40s [Idle: 20s]\n")

Station 1: A (40s) = 40s [Idle: 20s]
cat("Station 2: B (25s) + D (35s) = 60s [Idle: 0s]\n")

Station 2: B (25s) + D (35s) = 60s [Idle: 0s]
cat("Station 3: C (20s) + E (15s) + F (30s) = 65s > 60s... EXCEEDS!\n")

Station 3: C (20s) + E (15s) + F (30s) = 65s > 60s... EXCEEDS!
cat("Revised:\n")

Revised:
cat("Station 3: C (20s) + E (15s) = 35s [Idle: 25s]\n")

Station 3: C (20s) + E (15s) = 35s [Idle: 25s]
```

```
cat("Station 4: F (30s) = 30s [Idle: 30s]\n")
```

```
Station 4: F (30s) = 30s [Idle: 30s]
```

```
# With 4 stations
```

```
n_stations <- 4
```

```
efficiency <- (total_task_time / (n_stations * cycle_time)) * 100
```

```
cat("\n--- Results ---\n")
```

```
--- Results ---
```

```
cat("Number of Stations:", n_stations, "\n")
```

```
Number of Stations: 4
```

```
cat("Line Efficiency:", round(efficiency, 1), "%\n")
```

```
Line Efficiency: 68.8 %
```

```
cat("Balance Delay (Idle Time):", round(100 - efficiency, 1), "%\n")
```

```
Balance Delay (Idle Time): 31.2 %
```

Try It Yourself: Can you find a better balance?

Challenge: Can you assign tasks to only 3 stations while respecting the precedence constraints?

Hint: Consider these assignments: - Station 1: A (40s) + ? - Station 2: B (25s) + ? + ? - Station 3: ? + ?

Remember: Total time per station cannot exceed 60 seconds!

Solution: It's actually possible with careful planning: - Station 1: A (40s) = 40s - Station 2: B (25s) + C (20s) + E (15s) = 60s (but E needs C AND D complete!)

So 3 stations is NOT feasible due to precedence constraints. The minimum is 4 stations for this problem.

4.9 Warehouse Layout Design

Warehouse layouts are a special case of process layouts focused on **minimizing material handling**.

4.9.1 Key Principles

1. Place high-volume items near the dock
2. Group items that are often picked together

3. Use **ABC analysis** for storage assignment:
- **A items** (20% of SKUs, 80% of picks): Prime locations
 - **B items** (30% of SKUs, 15% of picks): Secondary locations
 - **C items** (50% of SKUs, 5% of picks): Remote locations

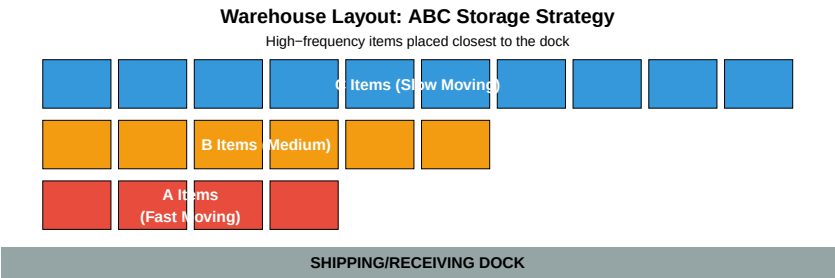


Figure 4.7: Warehouse Layout: ABC Storage Strategy

4.10 Office Layout Design

Office layouts balance **communication needs** with **privacy requirements**.

4.10.1 Two Main Approaches

Table 4.6: Office Layout Comparison

Aspect	Open Plan	Traditional/Closed
Space	Shared workspaces	Private offices
Walls	Partitions/dividers	Permanent walls
Flexibility	High - easy to reconfigure	Low - expensive to change
Communication	Excellent	Limited
Privacy	Low	High
Cost	Lower	Higher

4.10.2 Office Ergonomics Checklist

Click to expand: Office Ergonomics Best Practices

Posture: - Support the small of the back - Keep shoulders relaxed - Maintain neutral wrist position - Feet flat on floor or footrest

Lighting: - Position monitor to reduce glare - Adjust brightness for screen vs. paper work - Use task lighting when needed

Workstation: - Monitor at arm's length - Top of screen at or below eye level - Keyboard and mouse at elbow height

Work Habits: - Take breaks every 30-60 minutes - Vary tasks to prevent repetitive strain - Use keyboard shortcuts to reduce mouse use

4.10.3 The Future of Office Design

4.11 Summary: Choosing the Right Layout

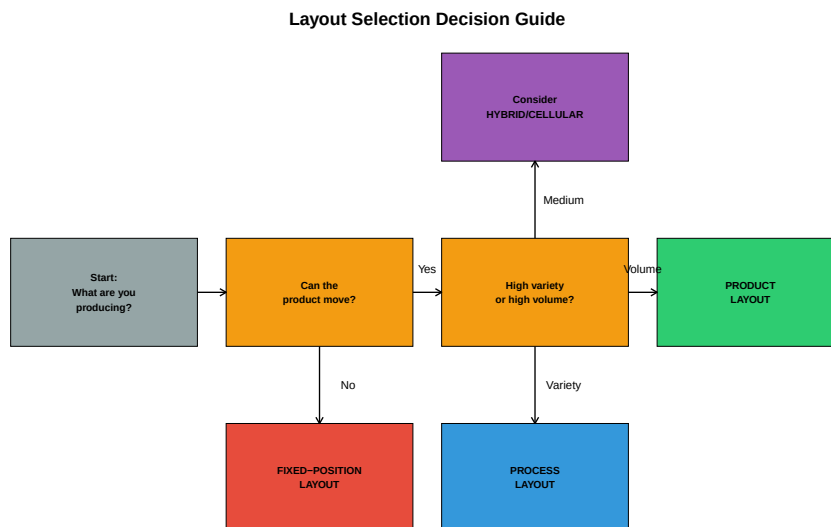


Figure 4.8: Layout Selection Decision Guide

4.11.1 Key Takeaways

1. **Process layouts** offer flexibility for varied products but have higher material handling costs
2. **Product layouts** are efficient for high-volume, standardized products

- 3. **Cellular layouts** provide a middle ground with benefits of both
- 4. **Fixed-position layouts** are necessary when products cannot be moved
- 5. **Line balancing** is critical for efficient product layouts
- 6. **Warehouse layouts** should minimize travel distance for high-frequency items

4.12 Industry Case Studies

4.12.1 Case Study 1: Food Processing Plant Layout

Food processing facilities have unique layout requirements due to food safety, hygiene, and regulatory compliance.

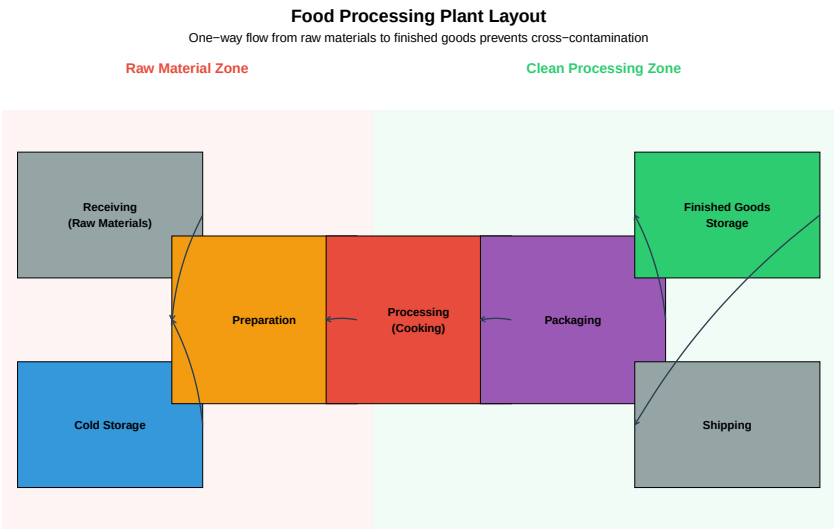


Figure 4.9: Food Processing Plant Layout Example

Key Design Principles for Food Processing:

Table 4.7: Food Processing Layout Design Principles

Principle	Description	Regulation
Linear Flow	Raw materials → Processing → Packaging (no backtracking)	FSMA
Zone Separation	Physical barriers between raw and ready-to-eat areas	HACCP
Cleanability	Smooth, non-porous surfaces; rounded corners; proper drainage	3-A Star
Temperature Control	Maintain cold chain; separate refrigerated zones	FDA 21

Sanitary Design	Handwashing stations, foot baths, air curtains at zone transitions	USDA FSIS
Allergen Control	Dedicated lines or thorough cleaning between allergen products	FALCPA

Discussion Question: Cross-Contamination Prevention

Question: A food processing plant produces both peanut butter products and tree nut-free products. What layout considerations are essential?

Key Considerations:

- 1. **Physical Separation:** Completely separate production lines with physical barriers (walls, not just distance)
- 2. **Air Handling:** Separate HVAC systems to prevent airborne allergen transfer
- 3. **Personnel Flow:** Dedicated workers for each line, or strict gowning/cleaning procedures when crossing zones
- 4. **Scheduling:** If shared equipment is unavoidable, schedule allergen products last before deep cleaning
- 5. **Traffic Patterns:** Forklift and cart paths should not cross between allergen zones
- 6. **Verification:** Air sampling and surface swabs to verify effectiveness

4.12.2 Case Study 2: Aerospace Manufacturing Facility

Aerospace facilities often use **fixed-position layouts** combined with **process layouts** for component fabrication.

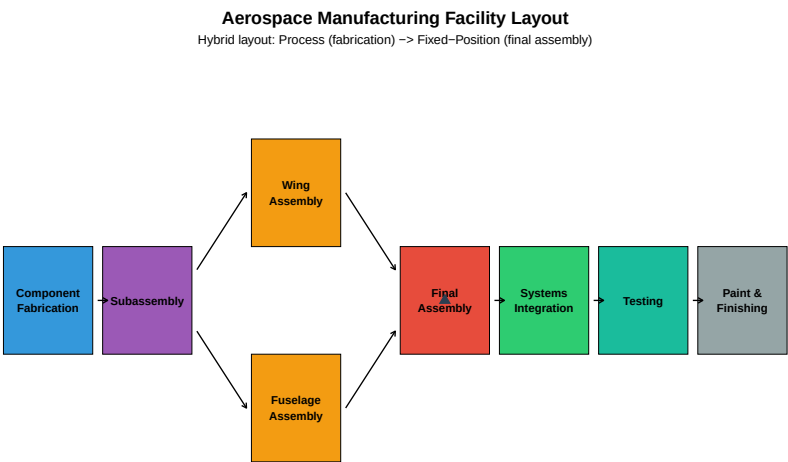


Figure 4.10: Aerospace Assembly Facility Layout

Aerospace Layout Characteristics:

- **Clean rooms** for precision components (hydraulics, avionics)
- **High-bay areas** for large assembly operations
- **Overhead cranes** for moving heavy components
- **Flow-line final assembly** (aircraft moves through stations) for high-volume commercial aircraft
- **Fixed-position** for military aircraft or low-volume production
- **Strict FOD (Foreign Object Debris)** control throughout

Video: Boeing 737 Assembly

Watch how Boeing uses a moving assembly line for high-volume aircraft production:

4.12.3 Case Study 3: Automotive Supplier - Hybrid Cell Layout

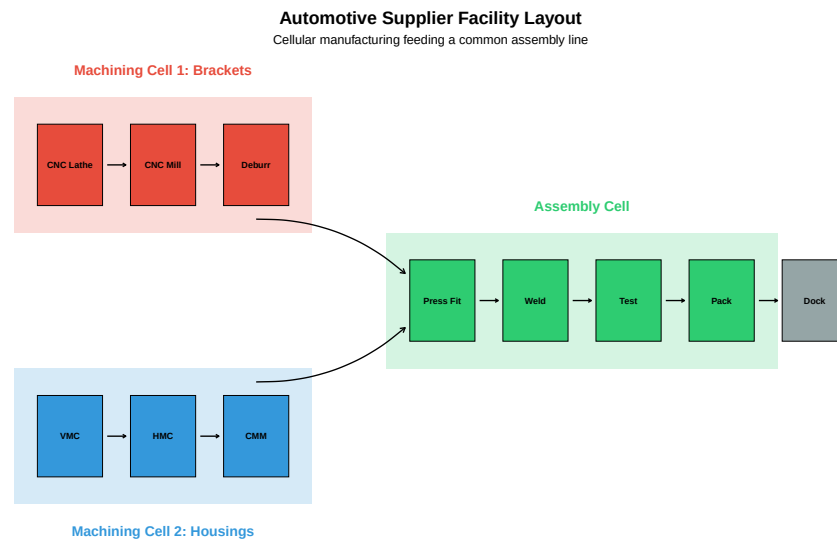


Figure 4.11: Automotive Supplier Facility with Cellular Layout

JIT Delivery Requirements:

Automotive suppliers must often deliver directly to the assembly line in **sequence** (JIS - Just-In-Sequence):

Table 4.8: JIT/JIS Requirements and Layout Implications

Requirement	Typical Standard	Layout Impact
-------------	------------------	---------------

Delivery Window	±30 minutes of scheduled time	Dedicated shipping lane, staging area near dock
Sequence Accuracy	100% (0 sequence errors)	Pick-to-light systems, visual management
Quality Level	0 PPM target (Six Sigma)	Inline inspection, mistake-proofing (poka-yoke)
Packaging	Returnable containers to line side	Container cleaning/storage area needed
Traceability	Full lot/serial traceability required	Barcode/RFID scanning stations throughout

4.13 Ergonomics in Manufacturing

Ergonomics (human factors engineering) is critical for plant layout design to ensure worker safety, reduce injuries, and improve productivity.

4.13.1 The NIOSH Lifting Equation

The National Institute for Occupational Safety and Health (NIOSH) developed an equation to evaluate manual lifting tasks:

$$RWL = LC \times HM \times VM \times DM \times AM \times FM \times CM$$

Where **RWL** = Recommended Weight Limit (in pounds or kg)

Table 4.9: NIOSH Lifting Equation Factors

Factor	Name	Formula	Description
LC	Load Constant	51 lb (23 kg)	Maximum weight under ideal conditions
HM	Horizontal Multiplier	10/H	H = horizontal distance from spine to load
VM	Vertical Multiplier	$1 - 0.0075 \times V - 30 \times 10^{-6} \times V^2$	V = vertical height of hands at start (inches)
DM	Distance Multiplier	$0.82 + 1.8/D$	D = vertical travel distance (inches)
AM	Asymmetric Multiplier	$1 - 0.0032A$	A = angle of asymmetry (degrees)
FM	Frequency Multiplier	Table lookup	Based on lift frequency and duration
CM	Coupling Multiplier	Table lookup	Based on grip quality (good/fair/poor)

4.13.2 Lifting Index Calculation

$$LI = \frac{\text{Actual Weight}}{\text{RWL}}$$

Table 4.10: Lifting Index Interpretation

Lifting Index	Risk Level	Action Required
LI 1.0	Low	Task is acceptable for most workers

1.0 < LI	3.0	Moderate	Task poses risk; engineering controls recommended
LI > 3.0		High	Task is unacceptable; immediate redesign required

4.13.3 NIOSH Lifting Example

```
# Example: Worker lifts 35 lb boxes from pallet to conveyor
# Conditions:
# - Horizontal distance (H) = 15 inches
# - Vertical height at start (V) = 10 inches
# - Vertical travel distance (D) = 20 inches
# - Asymmetry angle (A) = 30 degrees
# - Frequency = 4 lifts per minute, 2 hours
# - Coupling = Fair (handles present)
```

```
LC <- 51 # Load constant (lb)
```

```
# Calculate multipliers
```

```
HM <- 10 / 15 # Horizontal multiplier
```

```
VM <- 1 - 0.0075 * abs(10 - 30) # Vertical multiplier
```

```
DM <- 0.82 + (1.8 / 20) # Distance multiplier
```

```
AM <- 1 - 0.0032 * 30 # Asymmetric multiplier
```

```
FM <- 0.72 # From NIOSH table: 4 lifts/min, 1-2 hours
```

```
CM <- 0.95 # Fair coupling
```

```
cat("Multiplier Values:\n")
```

```
Multiplier Values:
```

```
cat("  HM (Horizontal):", round(HM, 3), "\n")
```

```
HM (Horizontal): 0.667
```

```
cat("  VM (Vertical):", round(VM, 3), "\n")
```

```
VM (Vertical): 0.85
```

```
cat("  DM (Distance):", round(DM, 3), "\n")
```

```
DM (Distance): 0.91
```

```
cat("  AM (Asymmetry):", round(AM, 3), "\n")
```

```
AM (Asymmetry): 0.904
```

```
cat("  FM (Frequency):", FM, "\n")
```

```
FM (Frequency): 0.72
```

```
cat("  CM (Coupling):", CM, "\n")
```

```
CM (Coupling): 0.95
```

```
# Calculate RWL
```

```
RWL <- LC * HM * VM * DM * AM * FM * CM
```

```
cat("\nRecommended Weight Limit (RWL):", round(RWL, 1), "lb\n")
```

```
Recommended Weight Limit (RWL): 16.3 lb
```

```
# Calculate Lifting Index
```

```
actual_weight <- 35
```

```
LI <- actual_weight / RWL
```

```
cat("Lifting Index (LI):", round(LI, 2), "\n")
```

```
Lifting Index (LI): 2.15
```

```
if (LI <= 1.0) {
```

```
  cat("\nRisk Level: LOW - Task is acceptable\n")
```

```
} else if (LI <= 3.0) {
```

```
  cat("\nRisk Level: MODERATE - Consider engineering controls\n")
```

```
} else {
```

```
  cat("\nRisk Level: HIGH - Immediate redesign required\n")
```

```
}
```

```
Risk Level: MODERATE - Consider engineering controls
```

Discussion Question: Reducing the Lifting Index

Based on the example above, what layout or workstation changes could reduce the Lifting Index?

Solutions (in order of effectiveness):

1. **Reduce horizontal distance (H):** Move conveyor closer to pallet position
 - If H = 10": HM improves from 0.67 to 1.0 → RWL increases by 50%
2. **Raise the starting height (V):** Use elevated pallet positions or pallet lifters
 - If V = 30" (optimal): VM improves from 0.85 to 1.0 → RWL increases by 18%
3. **Eliminate asymmetry (A):** Reposition conveyor directly in front of pallet
 - If A = 0°: AM improves from 0.90 to 1.0 → RWL increases by 11%
4. **Reduce frequency:** Add a second worker or use automation
 - If 1 lift/min: FM improves from 0.72 to 0.94 → RWL increases by 31%
5. **Improve coupling:** Use boxes with good handles

- If good coupling: CM improves from 0.95 to 1.0 $\rightarrow$ RWL increases by 5%

Best solution: Implement a scissor lift for the pallet (adjustable height) and move the conveyor closer. This addresses the largest multiplier reductions.

4.13.4 Ergonomic Workstation Design

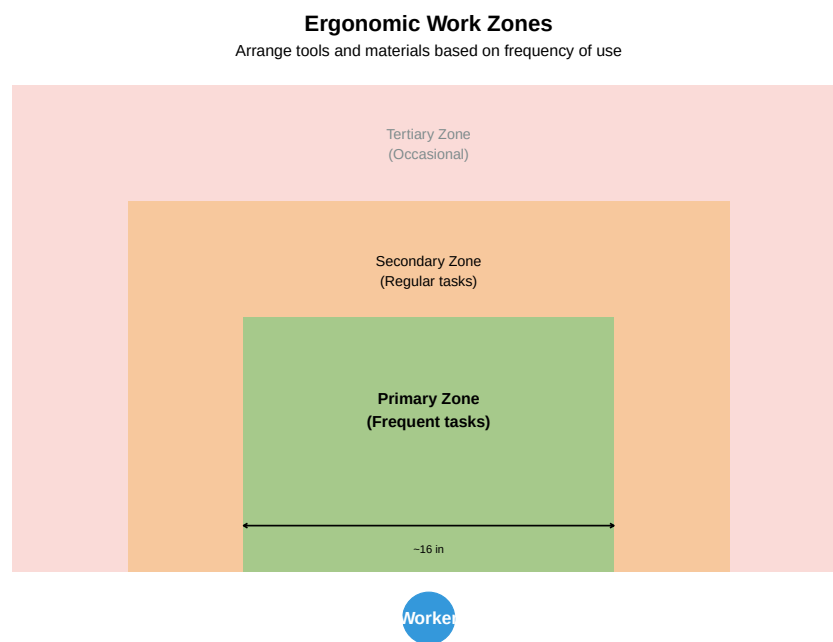


Figure 4.12: Ergonomic Work Zones for Standing Operations

Layout Implications:

- **Primary zone:** Most frequently used tools and parts
- **Secondary zone:** Regularly used items, occasional reaches
- **Tertiary zone:** Rarely needed items, should trigger redesign if frequent use required

4.14 Modern Layout Trends and Industry 4.0

4.14.1 Flexible Manufacturing Layouts

Modern facilities must adapt quickly to changing product demands. Key trends include:

Table 4.11: Modern Flexible Layout Trends

Trend	Description	Benefits
Modular Workstations Reconfigurable Cells Mobile Equipment Flexible Utilities Digital Layout Planning	Pre-built workstation modules that can be relocated in hours Cells with standardized machine interfaces for quick changeover Equipment on wheels or air bearings for rapid repositioning Overhead utility drops and floor trenches allow equipment mobility Digital twins enable virtual layout testing before physical changes	Rapid responses Switch between Eliminate fixed No hardwired Reduce trial-a

4.14.2 Industry 4.0 Layout Considerations

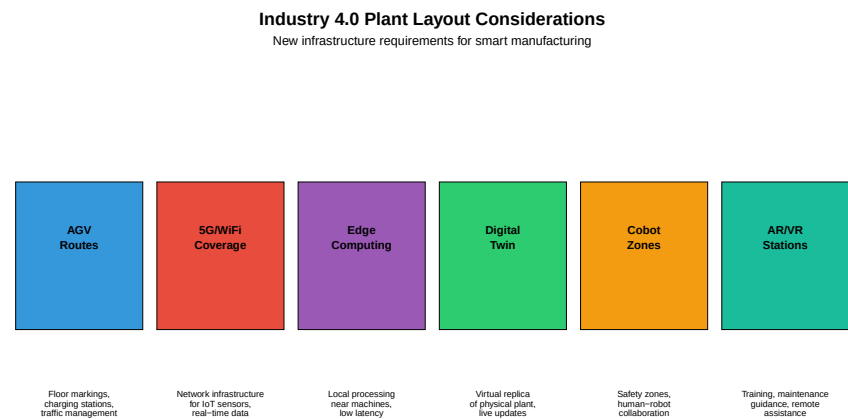


Figure 4.13: Industry 4.0 Enabled Plant Layout Elements

4.14.3 AGV and AMR Traffic Planning

Automated Guided Vehicles (AGVs) and Autonomous Mobile Robots (AMRs) require careful layout planning:

Table 4.12: AGV/AMR Layout Planning Guidelines

Consideration	Design Guidelines
Route Design	Unidirectional loops preferred; minimize intersections; avoid steep grade
Charging Locations	Opportunity charging at pickup/dropoff points; dedicated charging bays
Traffic Intersections	Yield zones, traffic signals, or elevation changes at crossings
Floor Requirements	Smooth, level surfaces; magnetic tape or QR codes for navigation; no oil
Safety Zones	Minimum 1m clearance from pedestrian paths; light curtains at crossing
Staging Areas	Buffer areas for queue management; waiting positions clear of traffic

Video: AGV Systems in Modern Warehouses

4.15 Layout Simulation Software

Modern plant layout design relies heavily on simulation software to test alternatives before physical implementation.

4.15.1 Common Layout Planning Software

Table 4.13: Plant Layout Planning Sof

Software	Primary Use	Key Features
AutoCAD Factory Design Suite	2D/3D CAD layout design	Extensive equipment libraries, interference
FlexSim	3D discrete event simulation	Drag-and-drop modeling, VR capability,
Arena	Process simulation	Statistical analysis, what-if scenarios, bo
Plant Simulation (Siemens)	Digital factory simulation	Full Siemens integration, AGV simulation
SketchUp + Extensions	Quick 3D visualization	Low cost, easy learning curve, walkthrou

4.15.2 Simulation Benefits

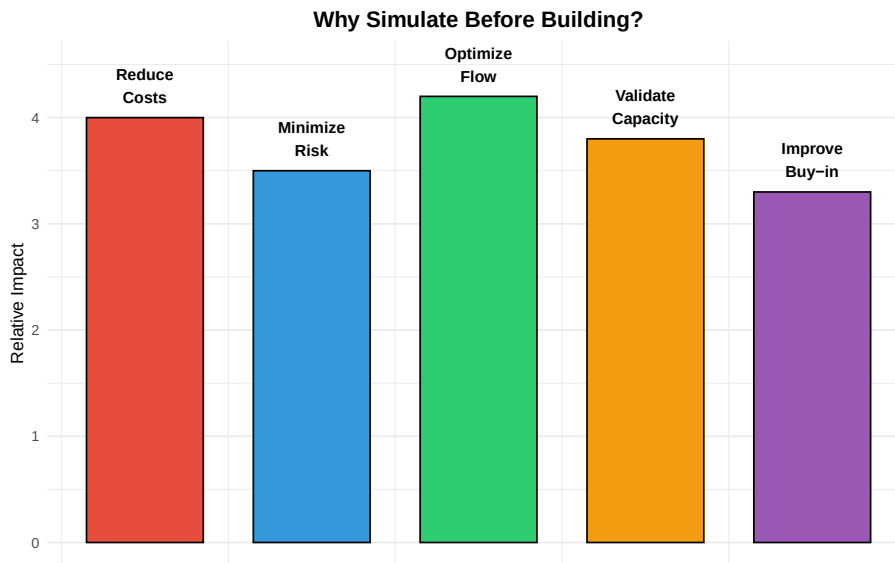


Figure 4.14: Benefits of Layout Simulation

ROI of Simulation:

- **10-20x** return on simulation investment typical
- **30-50%** reduction in layout change costs
- **Weeks to months** saved in ramp-up time
- **Stakeholder alignment** - visual communication of concepts

Video: Plant Simulation Demo

4.16 Practice Problems

Problem 1: Layout Selection

Scenario: A company manufactures custom kitchen cabinets. Each order is unique, with different dimensions, materials, and finishes. Production volume is about 50 units per month.

Question: Which layout type would you recommend and why?

Answer: A **process layout** would be most appropriate because: - High product variety (custom orders) - Low production volume - Different operations needed for each order - Flexibility is more important than efficiency

Problem 2: Line Balancing

Given: - Total task time: 240 seconds - Desired output: 30 units per hour - Available time: 3600 seconds per hour

Calculate: 1. Cycle time 2. Theoretical minimum number of stations 3. If you use 3 stations, what is the efficiency?

Solution: 1. Cycle time = $3600 / 30 = 120$ seconds 2. TM = $240 / 120 = 2$ stations 3. Efficiency = $(240 / (3 \times 120)) \times 100 = 66.7\%$

Problem 3: Warehouse Layout

Scenario: A warehouse has the following items: - Item X: 500 picks/day - Item Y: 100 picks/day - Item Z: 50 picks/day

Question: How should these items be positioned relative to the shipping dock?

Answer: Using ABC analysis: - Item X (high frequency): **Closest to dock** (A zone) - Item Y (medium frequency): **Middle distance** (B zone) - Item Z (low frequency): **Farthest from dock** (C zone)

4.17 Review Questions

Question 1: What distinguishes a cellular layout from both process and product layouts?

Answer: A cellular layout combines characteristics of both:

- **From process layout:** Equipment variety within each cell, flexibility to handle part variations
- **From product layout:** Sequential flow within the cell, dedicated equipment for part families
- **Unique characteristics:**
 - Parts grouped into families using Group Technology
 - Cells are self-contained mini-factories
 - Workers often cross-trained to operate multiple machines
 - Reduced material handling compared to process layout
 - More flexibility than pure product layout

Question 2: Calculate the Lifting Index for the following scenario

Scenario: A worker lifts 25 kg boxes from floor level ($V=0$) to a shelf at waist height. The horizontal distance is 40 cm, vertical travel is 75 cm, no asymmetry, frequency is 2 lifts per minute for 4 hours, and coupling is poor (no handles).

Given multipliers: - LC = 23 kg - HM = 25/H (H in cm) - VM = 1 - 0.003|V - 75| (V in cm) - DM = 0.82 + 4.5/D (D in cm) - AM = 1.0 (no asymmetry) - FM = 0.65 (from tables) - CM = 0.90 (poor coupling)

Solution:

$$HM = 25/40 = 0.625$$

$$VM = 1 - 0.003|0 - 75| = 1 - 0.225 = 0.775$$

$$DM = 0.82 + 4.5/75 = 0.82 + 0.06 = 0.88$$

$$AM = 1.0$$

$$FM = 0.65$$

$$CM = 0.90$$

$$RWL = 23 \times 0.625 \times 0.775 \times 0.88 \times 1.0 \times 0.65 \times 0.90$$

$$RWL = 23 \times 0.625 \times 0.775 \times 0.88 \times 0.65 \times 0.90$$

$$RWL = 5.7 \text{ kg}$$

$$LI = 25/5.7 = 4.4$$

Risk Level: HIGH (LI > 3.0) - Immediate redesign required

Recommended actions: Raise starting height (use pallet lifter), reduce horizontal distance, add handles to boxes, reduce frequency.

Question 3: List three Industry 4.0 technologies that impact plant layout design

Answer: (Any three of the following)

1. **AGVs/AMRs:** Require route planning, charging stations, floor markings, safety zones
2. **Collaborative robots (cobots):** Need safety zones, but smaller footprint than traditional robot cells
3. **Digital twins:** Enable virtual layout testing, reduce physical prototyping
4. **IoT sensors:** Require network infrastructure (5G/WiFi), edge computing locations
5. **AR/VR systems:** Training stations, remote assistance capabilities
6. **Flexible automation:** Modular equipment, quick-connect utilities

Question 4: What are the key differences between food processing plant layouts and general manufacturing?

Answer:

Aspect	Food Processing	General Manufacturing
Flow direction	Strictly one-way (raw → finished)	Can have backtracking
Zone separation	Physical barriers between raw/clean	Logical separation often sufficient

Aspect	Food Processing	General Manufacturing
Surfaces	Sanitary design, smooth, cleanable	Durability focused
Temperature	Multiple temperature zones (cold chain)	Generally ambient
Regulatory	HACCP, FSMA, FDA oversight	OSHA, industry standards
Allergen control	Dedicated lines or validated cleaning	Not typically a concern
Traceability	Lot-level required by regulation	Often batch-level sufficient

Question 5: A warehouse has three product categories with the following pick frequencies. Design the storage zones.

Data: - Category A: 1200 picks/day, 500 SKUs - Category B: 600 picks/day, 1500 SKUs - Category C: 200 picks/day, 3000 SKUs

Solution:

Using ABC analysis based on pick frequency: - **Category A** (60% of picks, 10% of SKUs): Prime locations closest to shipping dock - **Category B** (30% of picks, 30% of SKUs): Secondary locations, moderate distance - **Category C** (10% of picks, 60% of SKUs): Remote locations, maximum distance from dock

Additional considerations: - Within each zone, use cube utilization for dense storage of slow movers - Consider pick path optimization (serpentine vs. return routing) - High-frequency items at ergonomic pick heights (waist level) - Reserve space near dock for cross-docking high-velocity items

4.18 Chapter Summary

Table 4.14: Chapter 4 Summary: Plant Layout

Topic	Key Concepts
Layout Types	Fixed-position, Process, Product, Hybrid/Cellular - selected based on volume
Process Layout Design	From-To matrix, Load-Distance model, Block plans, Closeness relationships
Product Layout (Line Balancing)	Cycle time, Theoretical minimum stations, Precedence diagrams, Line efficiency
Cellular Manufacturing	Group Technology, Part families, Self-contained cells, Reduced material handling
Warehouse Design	ABC analysis, High-frequency items near dock, Pick path optimization
Ergonomics	NIOSH lifting equation, RWL, Lifting Index, Work zones, Workstation design

Modern Trends	Flexible layouts, Industry 4.0, AGV/AMR planning, Digital twins
Simulation	FlexSim, Arena, Plant Simulation - virtual testing before physical changes

4.19 References

- Reid, R. D., & Sanders, N. R. (2019). *Operations Management: An Integrated Approach* (7th ed.). Wiley. Chapter 10.
- Groover, M. P. (2020). *Automation, Production Systems, and Computer-Integrated Manufacturing* (5th ed.). Pearson.
- Waters, T. R., Putz-Anderson, V., & Garg, A. (1994). *Applications Manual for the Revised NIOSH Lifting Equation*. NIOSH Publication No. 94-110.
- Tompkins, J. A., White, J. A., Bozer, Y. A., & Tanchoco, J. M. A. (2010). *Facilities Planning* (4th ed.). Wiley.
- FDA. (2021). *Current Good Manufacturing Practice, Hazard Analysis, and Risk-Based Preventive Controls for Human Food*. 21 CFR Part 117.
- OSHA. (2021). *Ergonomics: The Study of Work*. OSHA Publication 3125.

Chapter 5

Lean Manufacturing

5.1 Learning Objectives

By the end of this chapter, you will be able to:

- Define Lean Manufacturing and explain its origins
- Identify and describe the 3 M's of Lean (Muda, Mura, Muri)
- Recognize and eliminate the seven types of waste
- Apply the 5S methodology to workplace organization
- Understand Just-in-Time (JIT) principles and Kanban systems
- Calculate Takt time and apply line balancing concepts
- Implement setup reduction techniques (SMED)

“Perfection is not attainable. But if we chase perfection, we can catch excellence.” — Vince Lombardi

5.2 Introduction to Lean Manufacturing

Lean Manufacturing is the systematic elimination of waste. The term can be traced to Jim Womack, Daniel Jones, and Daniel Roos' book *The Machine that Changed the World* (1991), which examined the Toyota Production System.

What does “Lean” actually mean?

The term “Lean” refers to cutting “fat” from production activities — eliminating anything that doesn't add value to the customer. Think of it like a lean athlete: no excess weight, maximum efficiency, peak performance.

5.2.1 Definition of Lean

Table 5.1: Lean Manufacturing Targets (Womack, Jones, Roos 1990)

Metric	Lean Target
Human effort in factory	Half the hours
Defects in finished product	Half the defects
Engineering effort	One-third the hours
Factory space for same output	Half the space
In-process inventories	A tenth or less

5.3 Evolution of Manufacturing Systems

Manufacturing has evolved through three major paradigms. Understanding this evolution helps us appreciate why Lean emerged as the dominant philosophy.

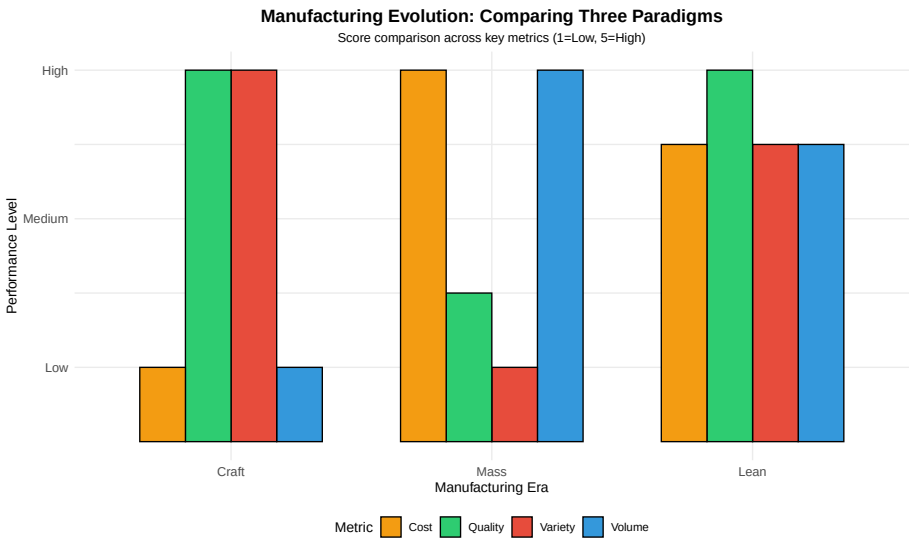


Figure 5.1: Evolution of Manufacturing Systems

5.3.1 Comparison of Manufacturing Systems

Table 5.2: Evolution of Manufacturing Systems

Characteristic	Craft Manufacturing	Mass Manufacturing	Lean Manufacturing
Time Period	Late 1800s	1920s (Ford)	1970s (Toyota)
Process	Built on blocks, workers walk around	Assembly line	Cellular manufacturing
Workforce	Craftsmen with pride	Low skilled, simplistic jobs	Highly skilled, multi-tasking
Components	Hand-crafted, hand-fitted	Interchangeable parts	Standardized parts
Quality	Excellent	Lower	Excellent
Cost	Very expensive	Affordable	Low
Volume	Few produced	Billions - identical	Highly variable
Flexibility	Very high	Very low	High

Discussion: Why did Mass Manufacturing dominate for so long?

Mass manufacturing dominated because:

- 1. **Economies of scale** - Higher volume = lower unit cost
- 2. **Predictable demand** - Post-war boom created stable markets
- 3. **Limited competition** - Few global competitors
- 4. **Consumer acceptance** - “Any color as long as it’s black” (Henry Ford)

What changed? - Global competition (especially from Japan) - Customers demanded variety and quality - Product lifecycles shortened - Technology enabled flexibility

5.4 The Toyota Production System (TPS)

The most influential lean manufacturing model is the **Toyota Production System (TPS)**, developed by Taiichi Ohno and Shigeo Shingo at Toyota.

5.4.1 Historical Context

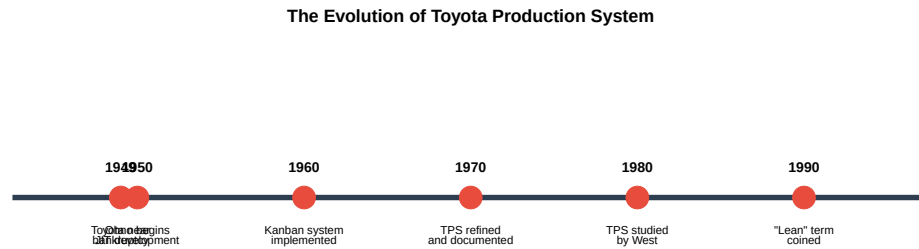


Figure 5.2: Toyota's Journey to Lean Excellence

In 1949, Toyota was on the brink of bankruptcy. Ford's car production was at least **8 times more efficient** than Toyota's.

Kiichiro Toyota's Challenge: "To achieve the same rate of production as the United States in three years."

Taiichi Ohno accepted this challenge. Inspired by American supermarkets, he developed the Just-in-Time method.

5.4.2 Two Pillars of TPS

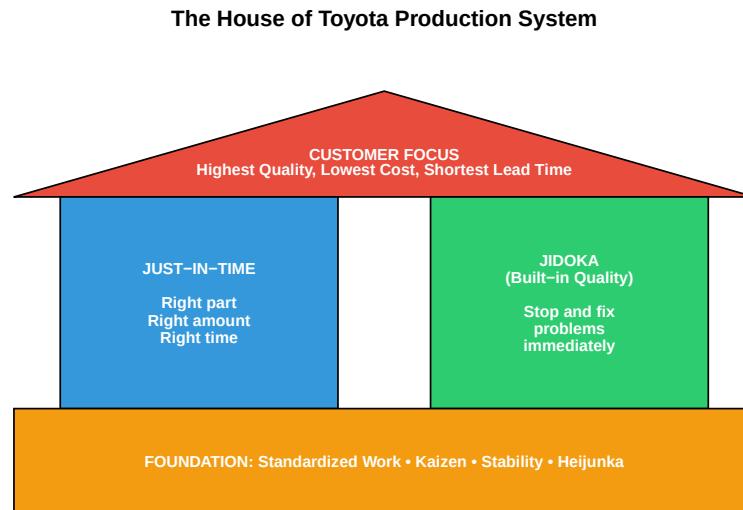


Figure 5.3: The Two Pillars of Toyota Production System

1. **Just-in-Time (JIT):** Produce only what is needed, when it is needed, in the amount needed.
 2. **Jidoka (Built-in Quality):** Automation with a human touch — stop production immediately when a defect is detected.
-

5.5 The 3 M's of Lean

Lean manufacturing focuses on eliminating three types of inefficiency, known as the **3 M's**:

The 3 M's of Lean



Figure 5.4: The 3 M's of Lean Manufacturing

Table 5.3: The 3 M's Explained

Japanese	English	Description
Muda (ムダ) Waste	Waste	Activities that consume resources without adding value
Mura (ムラ) Inconsistency	Inconsistency/Unevenness	Variation and lack of uniformity in processes
Muri (ムリ) Overburden	Overburden/Unreasonableness	Overburdening people or equipment beyond capacity

5.6 The Seven Types of Waste (MUDA)

Shigeo Shingo identified seven categories of waste common to manufacturing. These are activities that add cost without adding value.

“Waste is everything that is not absolutely essential.” — Hiroyuki Hirano

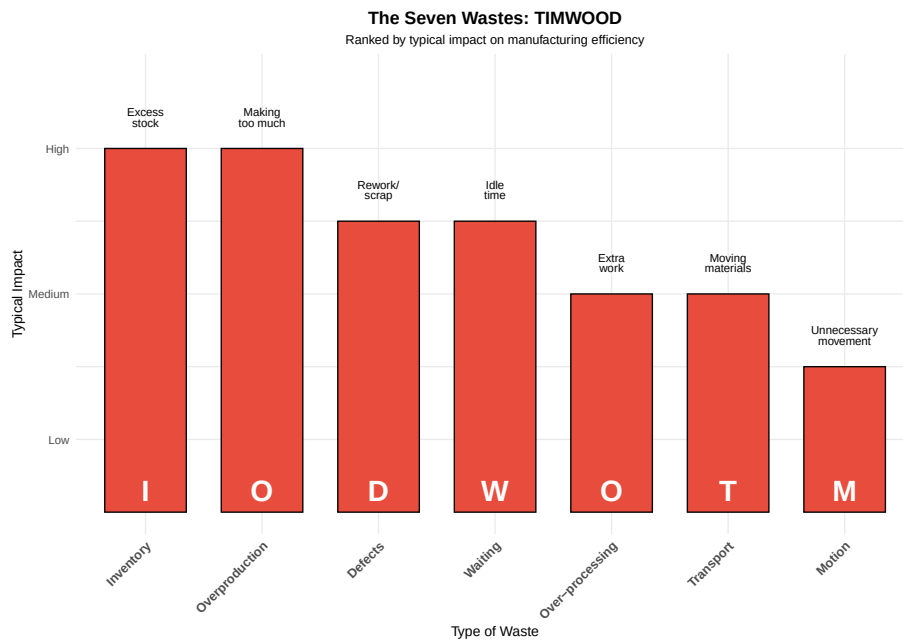


Figure 5.5: The Seven Types of Waste (TIMWOOD)

5.6.1 Detailed Breakdown of the Seven Wastes

Table 5.4: The Seven Wastes: Detailed

#	Waste Type	Description	Examples
1	**Overproduction**	Producing more than needed, earlier than needed	Building to forecast
2	**Inventory**	Excess raw materials, WIP, or finished goods	Safety stock, excess stock
3	**Waiting**	Idle time waiting for materials, information, or equipment	Machine down, waiting for materials
4	**Transportation**	Unnecessary movement of materials between processes	Long distances, unnecessary handling
5	**Over-processing**	Doing more work than the customer requires	Tighter tolerances, unnecessary steps
6	**Motion**	Unnecessary movement of people	Reaching, bending, carrying
7	**Defects**	Products that don't meet specifications	Scrap, rework, returns

Memory Aid: TIMWOOD

Use **TIMWOOD** to remember the seven wastes:

- **T**ransportation
- **I**nventory
- **M**otion
- **W**aiting

- **Overproduction**
- **Over-processing**
- **Defects**

Some people also use **DOWNTIME** (adding “Non-utilized talent” as an 8th waste).

Interactive Exercise: Identify the Waste

Scenario 1: A worker walks 50 feet to get a tool, uses it for 30 seconds, then walks back.

Answer: This is **Motion** waste. The solution would be to place tools at the point of use (5S).

Scenario 2: A machine produces 1000 parts, but only 800 are needed this week.

Answer: This is **Overproduction** waste. The solution would be to implement pull production based on actual demand.

Scenario 3: Parts sit in a queue for 3 days before being processed at the next station.

Answer: This is both **Inventory** and **Waiting** waste. The solution would be to balance the line and implement one-piece flow.

5.7 The 5S Methodology

5S is a workplace organization methodology that creates a clean, efficient, and safe working environment.



Figure 5.6: The 5S Methodology

Table 5.5: The 5S Steps Explained

Step	Japanese	English	Action	Key Question
1S	**Seiri**	Sort	Remove unnecessary items from the workplace	Do we need this?
2S	**Seiton**	Set in Order	Organize items so they are easy to find and use	Where does this belong?
3S	**Seiso**	Shine	Clean the workplace regularly	Is everything clean?
4S	**Seiketsu**	Standardize	Create standards for maintaining 1S-3S	How do we keep it this way?
5S	**Shitsuke**	Sustain	Build discipline to maintain standards	Are we following our standards?

5.7.1 Visual Factory

“The ability to understand the status of a production area in **5 minutes or less** by simple observation without use of computers or speaking to anyone.”

A well-implemented 5S creates a **visual factory** where problems are immediately apparent.

5.8 Just-in-Time (JIT) Production

5.8.1 The JIT Philosophy

“Deliver the right material, in the exact quantity, with perfect quality, in the right place, just before it is needed.” — Ohno and Shingo

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use `linewidth` instead.

Warning in geom_segment(aes(x = 5.4, xend = 5.9, y = 1, yend = 1), arrow = arrow(length = unit(1, "cm"))):
i Please consider using `annotate()` or provide this layer with data containing a single row.

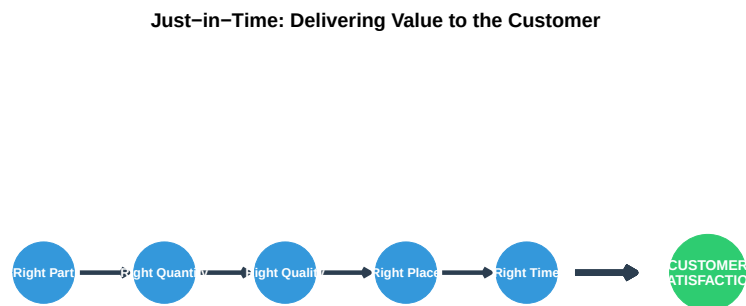


Figure 5.7: Just-in-Time: The Right Everything

5.8.2 Push vs. Pull Systems

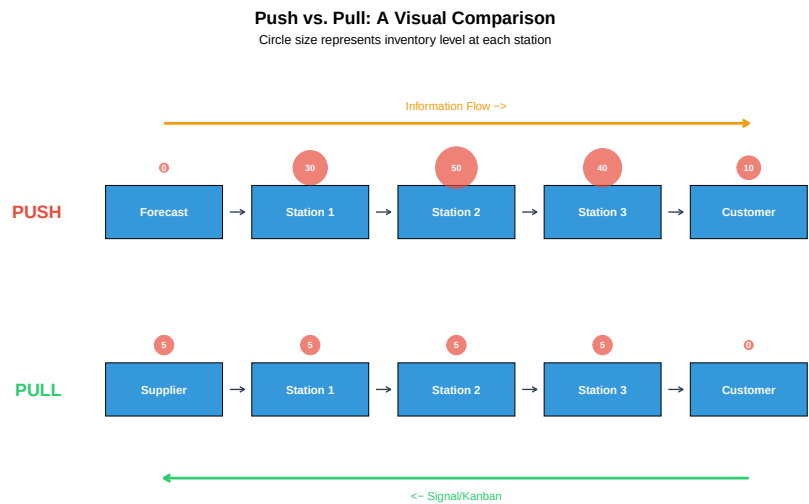


Figure 5.8: Push vs. Pull Production Systems

Table 5.6: Push vs. Pull System Comparison

Aspect	Push System	Pull System
Production trigger	Forecast/Schedule	Actual demand/Kanban signal
Information flow	Forward (upstream to downstream)	Backward (downstream to upstream)
Inventory levels	High (buffers at each station)	Low (minimal buffers)
Flexibility	Low	High
Problem visibility	Problems hidden by inventory	Problems immediately visible
Customer responsiveness	Slow	Fast

5.8.3 Kanban System

Kanban () is Japanese for “signboard” or “billboard.” It’s a scheduling system for lean and JIT production.

Sample Production Kanban Card

PRODUCTION KANBAN

Part Number:	3278784		
Part Name:	Securing Bracket		
From Process:	CNC Turning (CNC-6)		
To Process:	CNC Machining (CNC-M7)		
Container Qty:	12	Container Type:	A1

Figure 5.9: Example Kanban Card

5.9 Key Time Metrics

Understanding time metrics is essential for lean manufacturing analysis and improvement.

5.9.1 Definitions

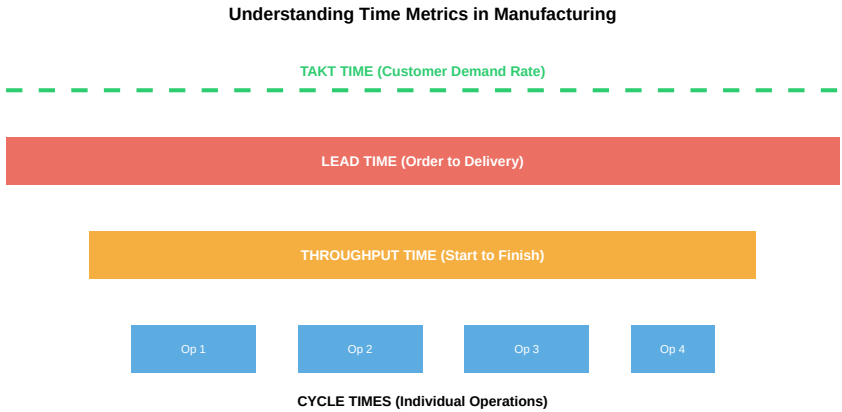


Figure 5.10: Relationship Between Time Metrics

5.9.2 Formulas and Calculations

Takt Time — The pace of production to meet customer demand:

$$\text{Takt Time} = \frac{\text{Available Production Time}}{\text{Customer Demand}}$$

Cycle Time — Time to complete one unit at a workstation:

$$\text{Cycle Time} = \frac{\text{Net Operating Time}}{\text{Units Produced}}$$

Throughput Time — Total time from start to finish:

$$\text{Throughput Time} = \text{Processing} + \text{Inspection} + \text{Queue} + \text{Move Time}$$

5.9.3 Interactive Example: Calculating Takt Time

```
# Given data
available_time_per_day <- 8 * 60 # 8 hours = 480 minutes
breaks_and_meetings <- 60      # 60 minutes for breaks/meetings
customer_demand <- 240         # 240 units per day

# Calculate net available time
net_available_time <- available_time_per_day - breaks_and_meetings
cat("Net Available Time:", net_available_time, "minutes/day\n")
```

Net Available Time: 420 minutes/day

```
# Calculate Takt Time
takt_time <- net_available_time / customer_demand
cat("Takt Time:", takt_time, "minutes per unit\n")
```

Takt Time: 1.75 minutes per unit

```
cat("Takt Time:", takt_time * 60, "seconds per unit\n")
```

Takt Time: 105 seconds per unit

```
# Interpretation
cat("\n--- Interpretation ---\n")
```

--- Interpretation ---

```
cat("To meet customer demand, we must produce 1 unit every",
    takt_time, "minutes (", takt_time * 60, "seconds).\n")
```

To meet customer demand, we must produce 1 unit every 1.75 minutes (105 seconds).

Practice Problem: Calculate Your Takt Time

Given: - Shift length: 10 hours - Two 15-minute breaks and one 30-minute lunch - Customer requires 300 units per shift

Calculate: 1. Net available production time 2. Takt time in minutes 3. Takt time in seconds

Solution:

Net time = $(10 \times 60) - (15 + 15 + 30) = 600 - 60 = 540$ minutes

Takt time = $540 / 300 = 1.8$ minutes = 108 seconds per unit

5.10 Setup Reduction (SMED)

SMED (Single Minute Exchange of Dies) is a methodology developed by Shigeo Shingo to dramatically reduce changeover time.

5.10.1 The SMED Concept

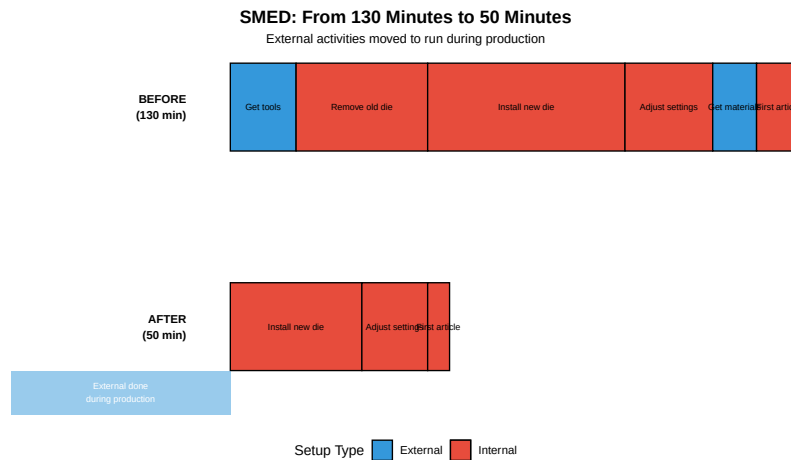


Figure 5.11: SMED: Internal vs External Setup

5.10.2 SMED Methodology

Table 5.7: The Four Steps of

Step	Action	Description
1	**Document current process**	Video the entire changeover, identify all steps

2	**Separate internal and external**	Internal = machine must be stopped; External = can be done
3	**Convert internal to external**	Find ways to perform 'internal' tasks while machine is running
4	**Streamline all operations**	Reduce time for remaining internal tasks through better metho

Case Study: Press Setup Reduction

Problem: Presses were idle more than 50% of the time due to setup. - Average production run: 1-2 days - Setup time: 1-2 days

Root Cause Analysis: - Using standard bolt fasteners with open-end wrenches - No pre-staging of tools or dies - Sequential operations that could be parallel

Solutions Implemented:

Change	Time Saved
Socket sets + power tools	10%
Quick-release clamps	50%
Pre-staging materials	20%
Parallel operations	20%

Result: Setup time reduced from 1-2 days to 4-6 hours, with a target of under 1 hour.

5.11 Kaizen: Continuous Improvement

Kaizen () means “change for the better” — the philosophy of continuous, incremental improvement.

5.11.1 Kaizen Principles

Plan–Do–Check–Act: The Engine of Kaizen

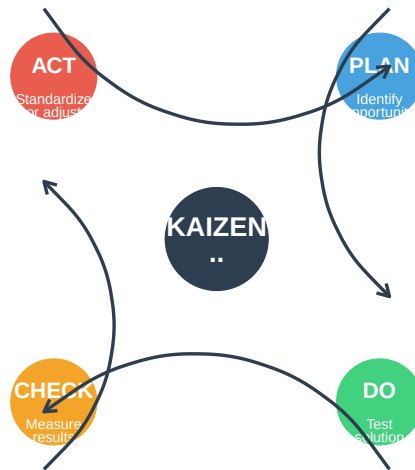


Figure 5.12: The Kaizen Continuous Improvement Cycle

5.11.2 Key Kaizen Concepts

- **Everyone participates** — from CEO to frontline workers
 - **Small, incremental changes** — not major overhauls
 - **Focus on process** — blame the process, not the person
 - **Data-driven decisions** — measure before and after
 - **Standardize improvements** — lock in gains
-

5.12 Value Stream Mapping (VSM)

Value Stream Mapping is a lean tool for analyzing the flow of materials and information required to bring a product to the customer.

5.12.1 VSM Symbols

Table 5.8: Key Metrics in Value Stream Maps

Metric	Description	Typical Location
Process Time (PT)	Time to actually process one unit	In process box
Lead Time (LT)	Total time from raw material to finished good	Timeline at bottom
Changeover Time (C/O)	Time to switch between products	In process box
Uptime	Percentage of time equipment is available	In process box
Takt Time	Required pace to meet demand	Noted on map
WIP Inventory	Units waiting between processes	Triangle symbol between processes

5.13 Summary

Table 5.9: Lean Manufacturing: Key Concepts Summary

Concept	Definition
Lean Manufacturing	Systematic elimination of waste
3 M's	Muda (waste), Mura (inconsistency), Muri (overburden)
7 Wastes	TIMWOOD: Transport, Inventory, Motion, Waiting, Overproduction, Over-processing
5S	Sort, Set in Order, Shine, Standardize, Sustain
JIT	Right part, right quantity, right quality, right place, right time
Kanban	Visual signal system for pull production
SMED	Single Minute Exchange of Dies - rapid changeover
Kaizen	Continuous incremental improvement

5.14 Review Questions

Question 1: What are the seven types of waste, and which is often considered the most impactful?

The seven types of waste (TIMWOOD) are: 1. **T**ransportation 2. **I**nventory 3. **M**otion 4. **W**aiting 5. **O**verproduction 6. **O**ver-processing 7. **D**efects

Inventory is often considered the most impactful because it hides other problems, ties up capital, and can become obsolete.

Question 2: Explain the difference between Push and Pull production systems.

Push System: - Production based on forecasts - Materials pushed through the system - Results in high inventory - Problems hidden by buffer stock

Pull System: - Production triggered by actual demand - Materials pulled by downstream operations - Minimal inventory - Problems immediately visible

Question 3: Calculate the Takt time for a facility with 450 minutes of available time and demand of 150 units.

$$\text{Takt Time} = \frac{450 \text{ minutes}}{150 \text{ units}} = 3 \text{ minutes per unit}$$

This means we need to produce one unit every 3 minutes (180 seconds) to meet customer demand.

Question 4: What is the difference between internal and external setup in SMED?

Internal Setup: Activities that can ONLY be performed when the machine is stopped (e.g., physically removing the old die).

External Setup: Activities that CAN be performed while the machine is still running (e.g., getting tools, pre-staging the next die, preparing materials).

The key to SMED is converting as many internal activities to external as possible.

5.15 References

- Womack, J., Jones, D., & Roos, D. (1990). *The Machine that Changed the World*.
- Ohno, T. (1988). *Toyota Production System: Beyond Large-Scale Production*.
- Shingo, S. (1985). *A Revolution in Manufacturing: The SMED System*.
- Liker, J. (2004). *The Toyota Way*.
- Wang, H.P., Chang, T.C., & Wysk, R.A. (2007). *Computer Aided Manufacturing*, Chapter 18.

Chapter 6

Machine Guarding and Functional Safety

6.1 Learning Objectives

By the end of this chapter, you will be able to:

- Apply the Hierarchy of Controls to manufacturing safety design
- Identify and specify appropriate physical guarding and interlock systems
- Select and position presence-sensing devices (light curtains, area scanners)
- Calculate safety distances for protective device placement
- Understand collaborative robot safety requirements
- Design emergency stop systems according to standards
- Differentiate between safety integrity levels (SIL) and performance levels (PL)

“Safety isn’t expensive, it’s priceless.” — Anonymous

6.2 Introduction: The Safety Hierarchy

In process engineering, safety is not merely a feature added at the end of a project; it is a **fundamental design constraint**. Before deploying safety devices, the engineer must apply the **Hierarchy of Controls** — a systematic approach to eliminating or reducing workplace hazards.

Warning: Using ``size`` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use ``linewidth`` instead.

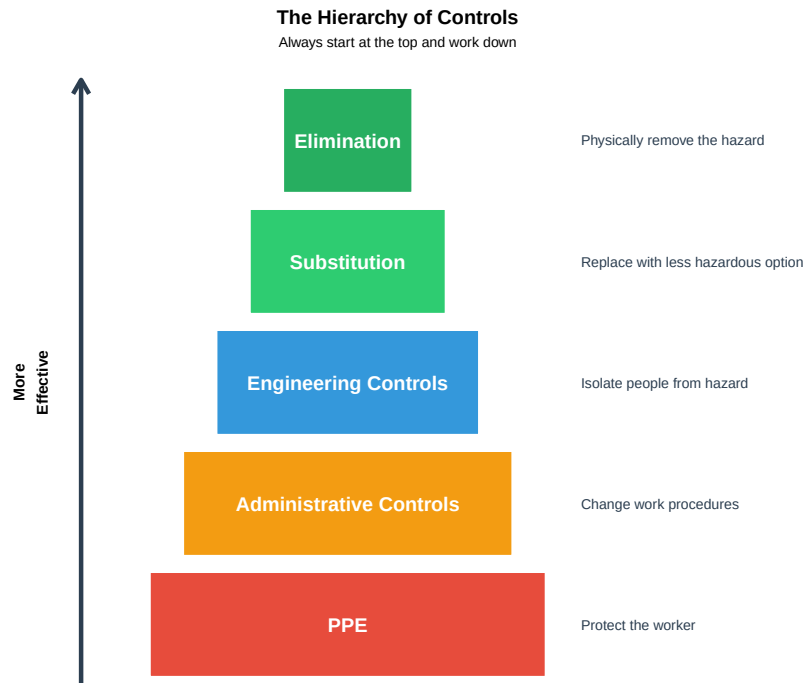


Figure 6.1: The Hierarchy of Controls (Most to Least Effective)

Table 6.1: Hierarchy of Controls: Detailed

Priority	Control Level	Description	Example
1	**Elimination**	Physically remove the hazard entirely	Elimination
2	**Substitution**	Replace with something less hazardous	Use low
3	**Engineering Controls**	Isolate people from the hazard through design	Install r
4	**Administrative Controls**	Change the way people work	Safety p
5	**PPE**	Protect the worker with equipment	Safety g

Discussion: Why not just rely on PPE?

PPE (Personal Protective Equipment) is the least effective control because:

1. **It doesn't eliminate the hazard** — the danger still exists
2. **It depends on human compliance** — workers may forget or choose not to wear it
3. **It can fail** — equipment degrades, doesn't fit properly, or is damaged
4. **It's the last line of defense** — if PPE fails, the worker is exposed

Key Principle: The more we can design out hazards through engineering controls, the less we depend on human behavior to keep people safe.

“If you have to post a warning sign, you’ve already failed at design.”

6.3 Physical Guarding and Interlocks

Physical barriers are the most intuitive form of protection. They create a “hard” separation between the operator and moving parts, ensuring that humans cannot enter the danger zone during machine operation.

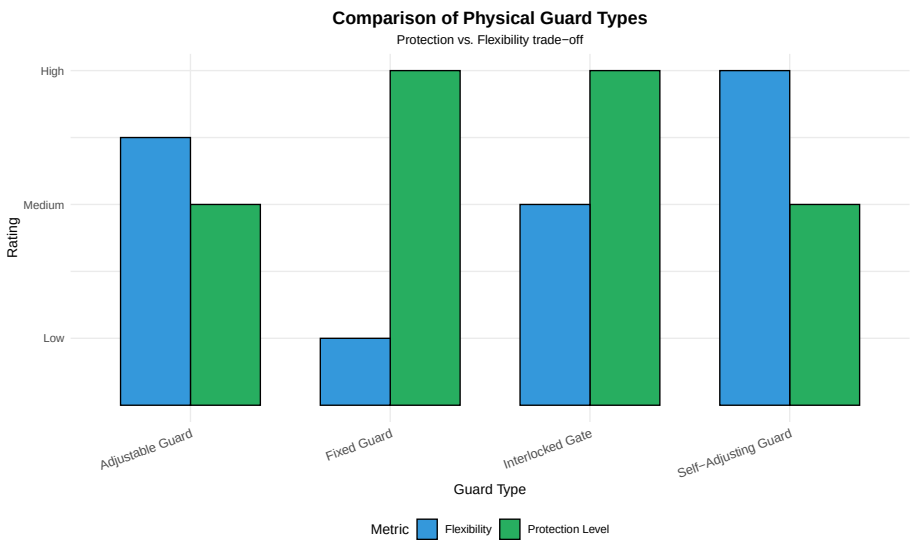


Figure 6.2: Types of Physical Guarding

6.3.1 Fixed Guards

Fixed guards are permanent barriers that require tools to remove. They are the simplest and most reliable form of protection.

Table 6.2: Fixed Guards: Key Characteristics

Characteristic	Description
Construction	Wire mesh, polycarbonate sheets, or solid metal panels
Removal	Requires tools (screws, bolts) to remove
Best Application	Areas that need infrequent access for maintenance only
Advantages	Simple, reliable, low cost, no moving parts to fail

Disadvantages	Impedes visibility, slows maintenance, can be removed and not replaced
---------------	--

6.3.2 Interlocked Guards

Interlocked guards are access points equipped with sensors. When the guard is opened, the safety controller initiates a stop.

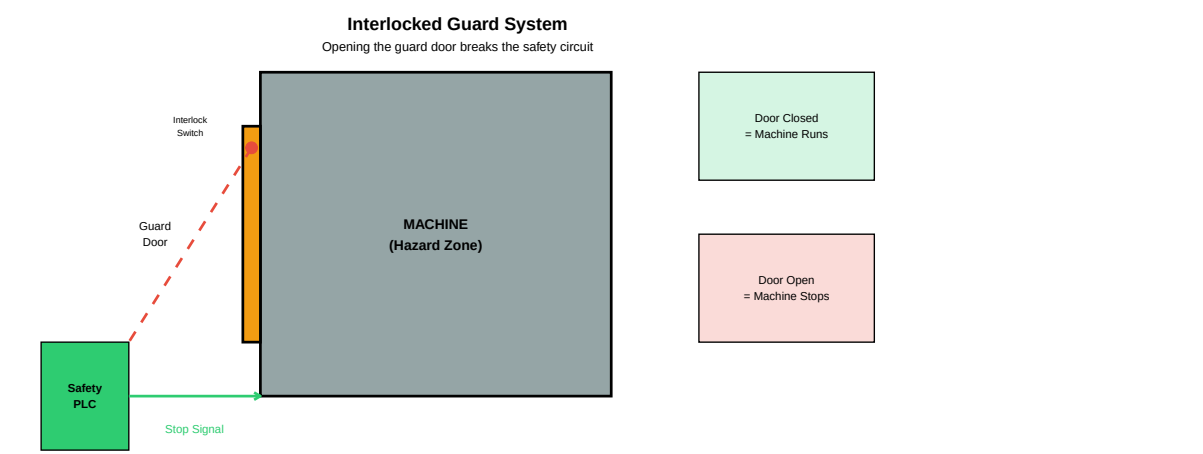


Figure 6.3: Interlocked Guard Operation Principle

6.3.3 Stop Categories

When an interlock is triggered, the machine must stop. The **stop category** determines how this happens:

Table 6.3: Machine Stop Categories (IEC 60204-1)

Category	Type	Method	Application
Category 0	Uncontrolled Stop	Immediate removal of power to actuators	Emergency stop
Category 1	Controlled Stop	Controlled deceleration, then power removed	High-inertia loads
Category 2	Controlled Stop	Controlled stop with power maintained	Process that must be maintained

6.3.4 Trapped Key Systems (Lock-Out/Tag-Out)

Trapped key systems use a mechanical sequence to ensure that a machine cannot be energized unless all access keys are returned to the control panel.

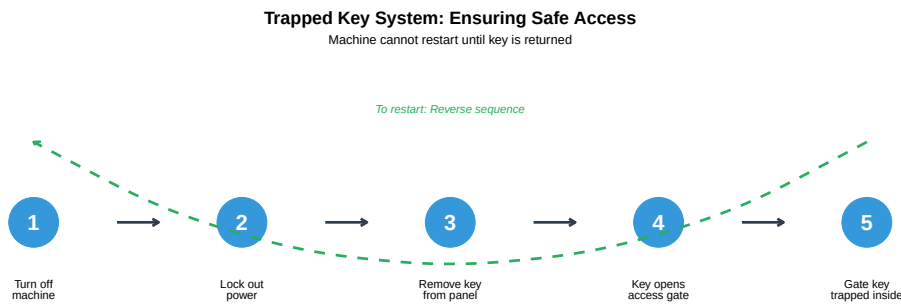


Figure 6.4: Trapped Key System Sequence

Case Study: The Fatal Bypass

Incident: A maintenance worker was killed when a robot arm unexpectedly activated while he was inside a robotic cell.

What Happened: - The guard interlock had been bypassed with a “defeat device” (a magnet taped to fool the sensor) - Workers had bypassed the interlock because it slowed down troubleshooting - The bypass had been in place for months without management knowledge

Root Causes: 1. Interlock caused inconvenience during frequent troubleshooting 2. No monitoring system to detect bypasses 3. Culture that tolerated “workarounds”

Lessons Learned: - Design interlocks that don’t impede normal operations - Use tamper-evident or tamper-resistant devices - Regular safety audits to detect bypasses - Zero-tolerance policy for defeating safety devices

Never bypass a safety device, even temporarily.

6.4 Presence-Sensing Devices

Presence-sensing devices allow for a “fence-less” environment, improving visibility and ergonomics while maintaining high safety levels. They detect when a person enters a hazardous zone and trigger a machine stop.

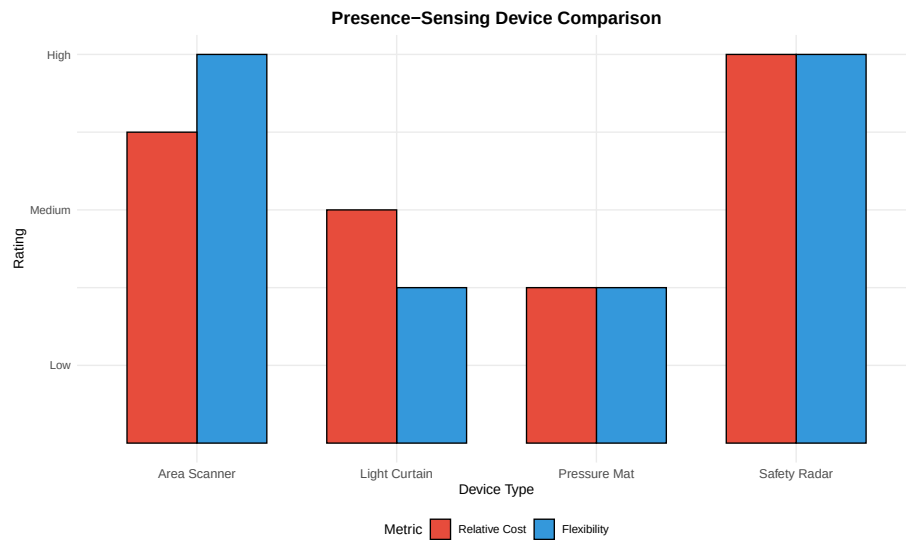


Figure 6.5: Types of Presence-Sensing Devices

6.4.1 Light Curtains

Light curtains use a transmitter and receiver to create an array of infrared beams. If any beam is broken, the safety circuit is interrupted.

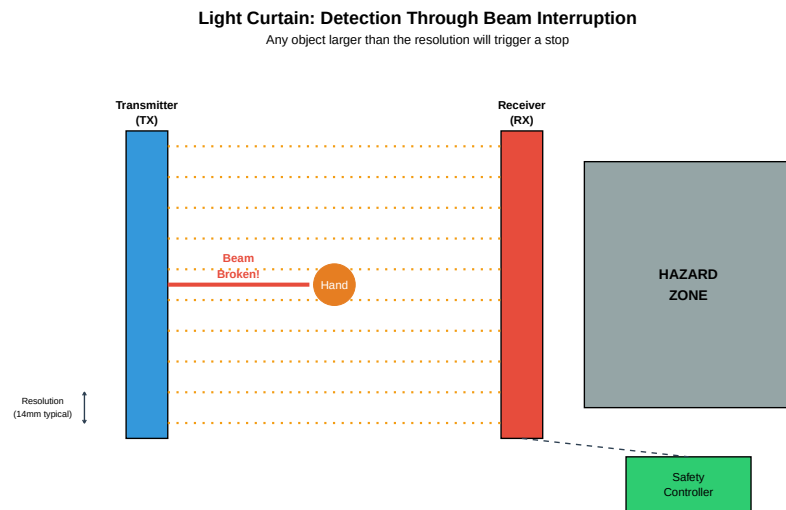


Figure 6.6: Light Curtain Operating Principle

Table 6.4: Light Curtain Specifications by Application

Parameter	Finger Detection (14mm)	Hand Detection (30mm)	Body Detection (40mm)
Resolution	14mm beam spacing	30mm beam spacing	40mm+ beam spacing
Height	150-1800mm	300-1800mm	900-2000mm
Range	0.5-20m	0.5-20m	0.5-30m
Response Time	5-15ms	10-20ms	15-30ms
Application	Point of operation guarding	Perimeter guarding	Area access detection

6.4.2 Laser Area Scanners

Laser area scanners use LiDAR technology to monitor a 2D plane. They are highly flexible and allow for programmable zones.

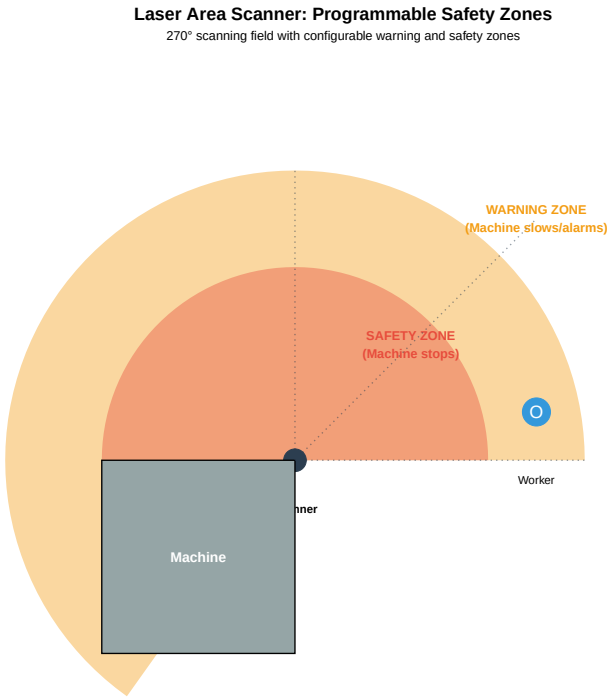


Figure 6.7: Laser Area Scanner Zones

Table 6.5: Light Curtains vs. Area Scanners

Feature	Light Curtains	Area Scanners
---------	----------------	---------------

Detection Type	Vertical/Linear Barrier	Horizontal/Area Coverage
Flexibility	Fixed installation	Programmable zones
Zone Configuration	Single detection plane	Multiple warning + safety zones
Cost	Generally lower (\$1,000-5,000)	Higher (\$3,000-10,000)
Best Use Case	Clear entry/exit points, press brakes	Large open floors, AGV paths, fl
Environmental Limits	Dust/debris can cause false trips	More tolerant of dust, outdoor ra

6.4.3 Pressure-Sensitive Safety Mats

Pressure-sensitive mats detect the presence of a person standing on them. They are used primarily in legacy systems or specific zones where optical sensors may be obscured.

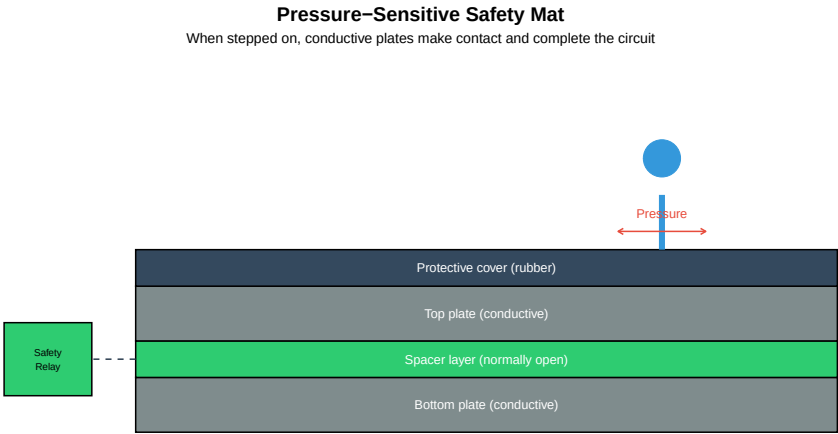


Figure 6.8: Pressure-Sensitive Safety Mat Construction

When to Use Pressure Mats vs. Optical Sensors

Use Pressure Mats When: - Environment has heavy dust, smoke, or steam (blinds optical sensors) - Detection area is well-defined and doesn't change - Workers need to stand in a specific location - Budget is limited

Use Optical Sensors When: - Flexibility in zone configuration is needed - Environment is relatively clean - Detection area is large or needs to change - Higher integrity level is required

Hybrid Approach: Many modern systems use both — area scanners for perimeter protection and pressure mats for specific danger zones near the machine.

6.5 Control-Actuated Safety Devices

These devices ensure that the operator’s body—specifically their hands—is in a predetermined **safe location** before the machine can cycle.

6.5.1 Two-Hand Controls

Two-hand controls are common in pressing or stamping operations. To initiate a cycle, the operator must press two buttons simultaneously.

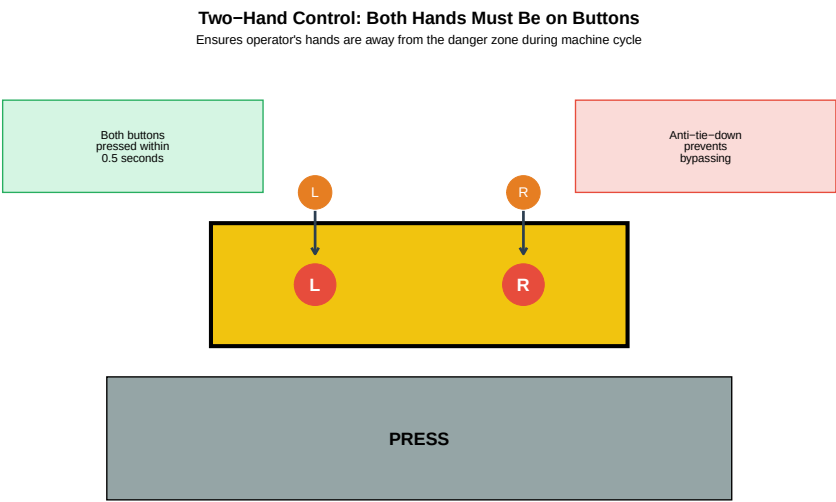


Figure 6.9: Two-Hand Control System

Anti-Tie-Down Requirement: Modern systems require both buttons to be pressed within **0.5 seconds** of each other. This prevents operators from taping one button down to work with one hand.

Table 6.6: Two-Hand Control Requirements

Requirement	Standard Value	Purpose
Synchronous activation	Within 0.5 seconds	Prevents one-hand operation
Continuous pressure	Must be held throughout cycle	Ensures hands stay on controls
Release before restart	Both must be released before next cycle	Prevents automatic cycling
Button spacing	Minimum 260mm (10 inches) apart	Cannot press both with one hand/arm
Guards around buttons	Prevent accidental activation	Prevents hip, elbow, or object activation

6.5.2 Enable/Deadman Switches

Enable switches (also called deadman switches) are used during **Teach Mode** for robotics. The operator must hold a three-position trigger in the **middle** position.

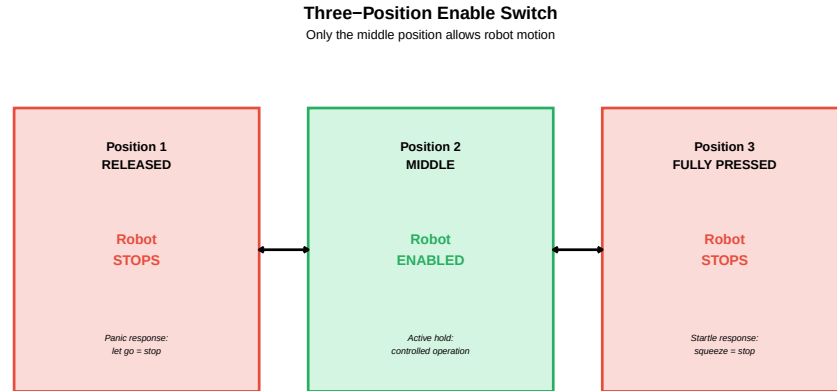


Figure 6.10: Three-Position Enable Switch Operation

Why Three Positions?

The three-position design accounts for **two natural human reactions** to danger:

1. **Panic (Release):** When frightened, people often release what they’re holding — robot stops.
2. **Startle (Squeeze):** When startled, people often grip tighter — robot stops.

Only a deliberate, controlled **middle hold** allows the robot to move. This is fundamental to safe teach pendant operation.

6.6 Collaborative Robotics (Cobots)

Collaborative robots (cobots) represent a shift from “separation” to “collaboration.” They rely on sophisticated internal sensors rather than external cages, allowing humans and robots to work in the same space.

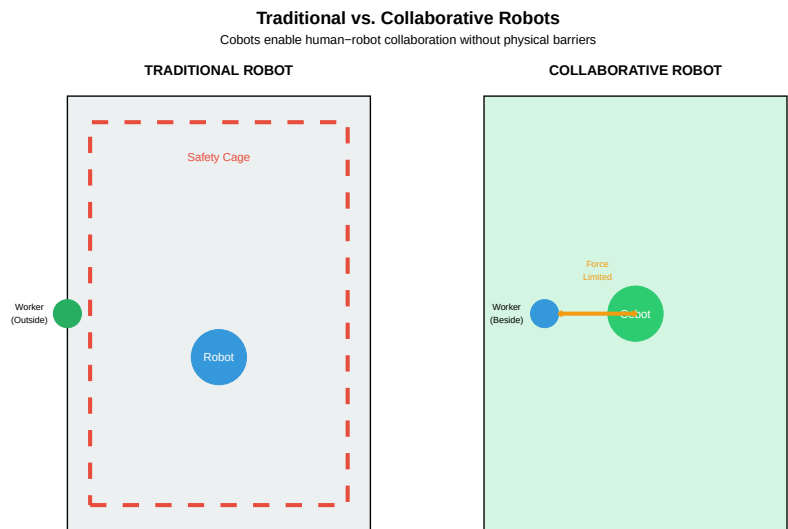


Figure 6.11: Traditional Robot vs. Collaborative Robot

6.6.1 Collaborative Operation Methods

ISO 10218 and ISO/TS 15066 define **four methods** for safe collaborative operation:

Table 6.7: Four Methods of Collaborative Robot Operation

Method	How It Works	Sensors Used
Safety-Rated Monitored Stop	Robot stops when human enters workspace, resumes when clear	Area scanners
Hand Guiding	Operator physically guides robot through motions	Force/torque sensors
Speed and Separation Monitoring	Robot slows or stops based on human proximity	Area scanners
Power and Force Limiting	Robot limits force/power to safe levels on contact	Joint torque sensors

6.6.2 Power and Force Limiting (PFL)

The most common cobot safety method is **Power and Force Limiting**. The robot detects a change in torque in its joints. If it bumps into a human, it stops before a regulated amount of force is exceeded.

Table 6.8: ISO/TS 15066 Biomechanical Limits (Quasi-static contact)

Body Region	Maximum Pressure (N/cm ²)	Maximum Force (N)	Risk Level
Skull/Forehead	130	130	Critical
Face	65	65	Critical
Neck	145	150	Critical
Back/Shoulders	210	210	Moderate
Chest	140	140	Moderate
Abdomen	110	110	Moderate
Hand/Fingers	300	140	Lower

Discussion: Are Cobots Always Safe?

Common Misconception: “Cobots are safe, so we don’t need to do a risk assessment.”

Reality: Cobots are *potentially* safe, but a **risk assessment is always required**.

Factors that can make a cobot unsafe:

1. **End-of-arm tooling** — A soft gripper is different from a sharp blade
2. **Workpiece** — Carrying a heavy or sharp object increases risk
3. **Speed** — Even force-limited robots can cause injury at high speed
4. **Application** — Some tasks bring humans closer to hazards
5. **Environment** — Slippery floors, confined spaces, etc.

Every collaborative application requires a documented risk assessment per ISO 12100.

6.7 Safety Distance Calculation

A safety device cannot be placed arbitrarily. It must be far enough away that the machine comes to a **complete halt** before the human can reach the hazard.

6.7.1 The Safety Distance Formula

The minimum safety distance S is calculated as:

$$S = (K \times T) + C$$

Where:

- K : The hand/body approach speed (standardized values)
- T : The total stopping time of the system (device response + machine stop time)

- C : The “penetration depth” (how far a hand can reach through before being detected)



Figure 6.12: Safety Distance Components

6.7.2 Standard Values for K

Table 6.9: Standard Approach Speed Values (ISO 13855)

Approach Type	K Value (mm/s)	When to Use
Hand/Arm Approach (fast)	2000	Close approach to point of operation
Hand/Arm Approach (normal)	1600	General approach to machines
Walking Approach	1600	Area access detection
Standing Reach	0 (static)	Worker already in position

6.7.3 Penetration Depth (C)

The penetration depth depends on the **resolution** of the sensing device:

Table 6.10: Penetration Depth Values Based on Resolution

Resolution (mm)	C Value (mm)	Detection Type
14	0	Finger detection
>14 to 20	80	Finger/Hand
>20 to 30	130	Hand detection
>30 to 40	240	Hand/Arm

>40

850

Body detection

6.7.4 Example Calculation

```
# Given parameters
K <- 2000          # Approach speed (mm/s) - fast hand approach
T_device <- 0.020  # Light curtain response time (20 ms = 0.020 s)
T_machine <- 0.150 # Machine stopping time (150 ms = 0.150 s)
C <- 0            # Penetration depth for 14mm resolution
```

```
# Calculate total stopping time
T_total <- T_device + T_machine
cat("Total stopping time (T):", T_total * 1000, "ms\n")
```

Total stopping time (T): 170 ms

```
# Calculate minimum safety distance
S <- (K * T_total) + C
cat("Minimum safety distance (S):", S, "mm\n")
```

Minimum safety distance (S): 340 mm

```
cat("Minimum safety distance (S):", S / 25.4, "inches\n")
```

Minimum safety distance (S): 13.38583 inches

```
# Interpretation
cat("\n--- Interpretation ---\n")
```

--- Interpretation ---

```
cat("The light curtain must be at least", S, "mm from the hazard.\n")
```

The light curtain must be at least 340 mm from the hazard.

```
cat("This ensures the machine stops before a person can reach the danger zone.\n")
```

This ensures the machine stops before a person can reach the danger zone.

Practice Problem: Calculate Safety Distance

Given: - Light curtain resolution: 30mm (hand detection) - Light curtain response time: 15ms - Machine stopping time: 200ms - Application: Operator hand approach

Calculate the minimum safety distance.

Solution:

K = 1600 mm/s (normal hand approach)

$T = 0.015 + 0.200 = 0.215 \text{ seconds}$
 $C = 130 \text{ mm (for 30mm resolution)}$

$S = (K \times T) + C$
 $S = (1600 \times 0.215) + 130$
 $S = 344 + 130$
 $S = 474 \text{ mm (approximately 18.7 inches)}$

The light curtain must be installed at least **474mm** from the nearest hazard point.

6.8 Emergency Stop (E-Stop) Systems

The **Emergency Stop** is the “last resort” — it is not a safety device but a **complementary protective measure**. It must be available to stop the machine when all other measures have failed.

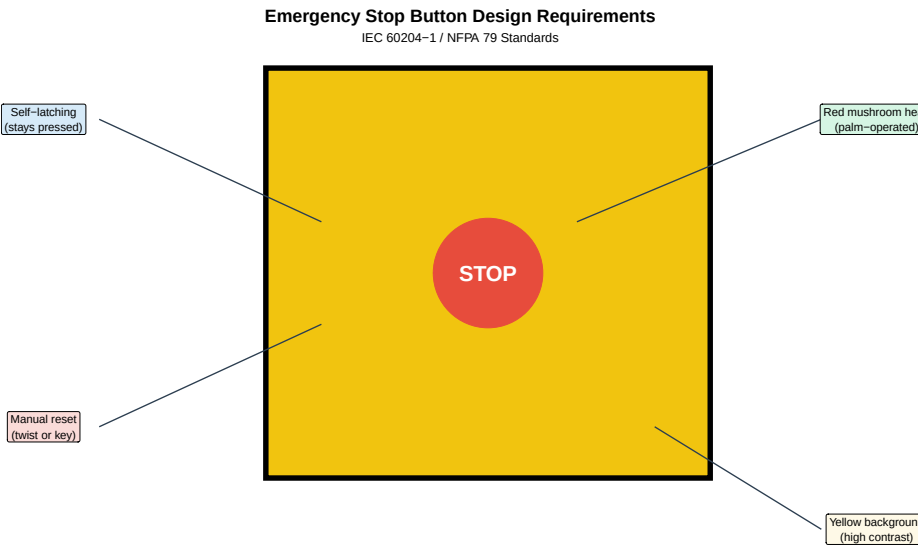


Figure 6.13: E-Stop Design Requirements

Table 6.11: E-Stop Requirements per IEC 60204-1

Requirement	Standard
Color	Red (RAL 3000 or equivalent)
Shape	Mushroom head (palm or fist operated)

Background	Yellow (high contrast)
Operation	Self-latching (stays activated when pressed)
Reset	Manual reset required (twist, pull, or key)
Accessibility	Within easy reach of all operators
Wiring	Normally closed contacts (fail-safe)
Function	Category 0 or Category 1 stop

6.8.1 E-Stop Pull Cords

For long conveyors or machines where an operator cannot quickly reach a fixed button, **pull cords** provide continuous E-Stop coverage.

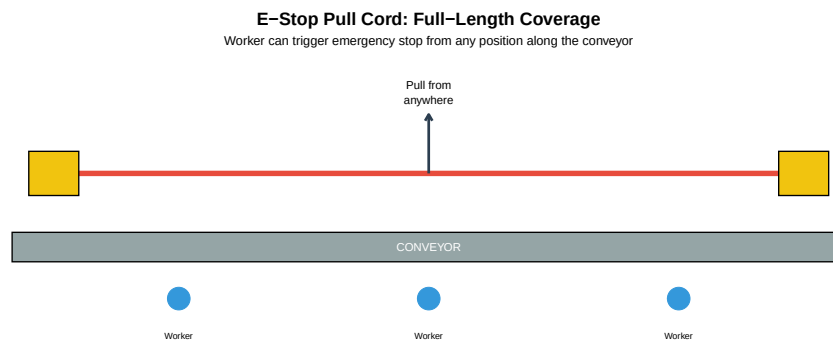


Figure 6.14: E-Stop Pull Cord System

Common E-Stop Mistakes

Mistake 1: Using E-Stop for normal stopping - E-Stops are for emergencies only - Normal stops should use a separate control - Frequent E-Stop use causes wear and desensitizes operators

Mistake 2: E-Stop that doesn't stop everything - All hazardous motion must stop - Auxiliary equipment (conveyors, feeders) often forgotten - Review entire system, not just the primary machine

Mistake 3: Automatic restart after E-Stop reset - Machine must NOT automatically restart when E-Stop is released - Separate "Start" action required - This prevents unexpected motion after reset

Mistake 4: Hidden or blocked E-Stops - E-Stops must be visible and accessible - Guard placement sometimes blocks access - Regular audits needed to ensure accessibility

6.9 Functional Safety Standards

Modern safety systems must meet specific **performance levels** to ensure reliability. Two main frameworks exist:

6.9.1 Safety Integrity Levels (SIL) - IEC 62061

Table 6.12: Safety Integrity Levels (PFH = Probability of Dangerous Failure per Hour)

SIL Level	PFH Range	Approximate Meaning	Typical Application
SIL 1	10 to <10	Dangerous failure less than once per 11 years	Low-risk tasks
SIL 2	10 to <10	Dangerous failure less than once per 114 years	Most industrial machinery
SIL 3	10 to <10	Dangerous failure less than once per 1,140 years	High-risk processes

6.9.2 Performance Levels (PL) - ISO 13849-1

Table 6.13: Performance Levels per ISO 13849-1

Performance Level	PFH Range	Risk Reduction	Equivalent SIL
PL a	10 to <10	Lowest	< SIL 1
PL b	3×10 to <10	Low	SIL 1
PL c	10 to <3×10	Medium	SIL 1
PL d	10 to <10	High	SIL 2
PL e	10 to <10	Highest	SIL 3

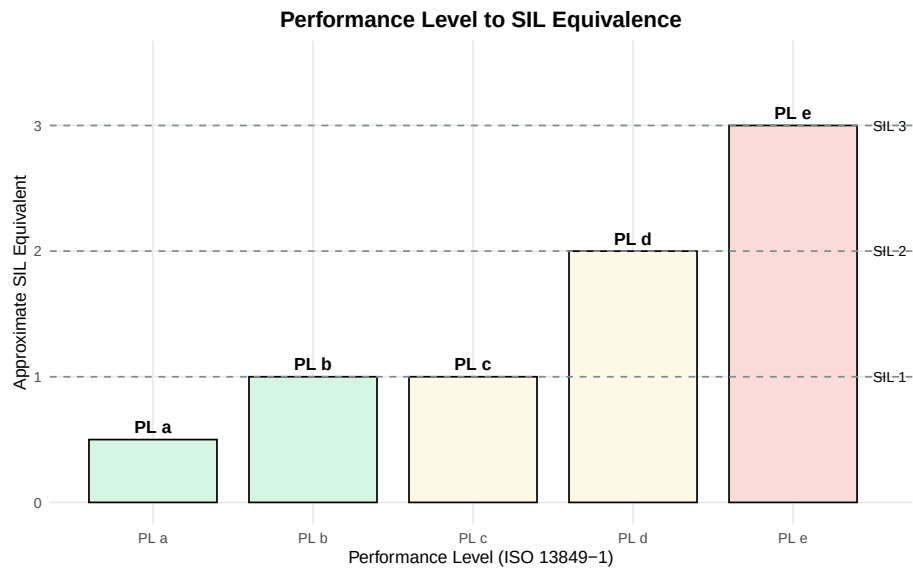


Figure 6.15: Relationship Between SIL and PL

Which Standard to Use: SIL or PL?

Use ISO 13849-1 (Performance Levels) when: - Designing safety functions for standard machinery - Using off-the-shelf safety components - Simpler systems with well-defined safety functions

Use IEC 62061 (SIL) when: - Complex programmable systems (safety PLCs) - Process industries - When customer or regulation specifies SIL

Note: Many modern systems use both standards, as they are harmonized and can be used together. The choice often depends on industry practice and customer requirements.

6.10 Risk Assessment Process

Before selecting any safety device, a **risk assessment** must be performed. This is required by ISO 12100.

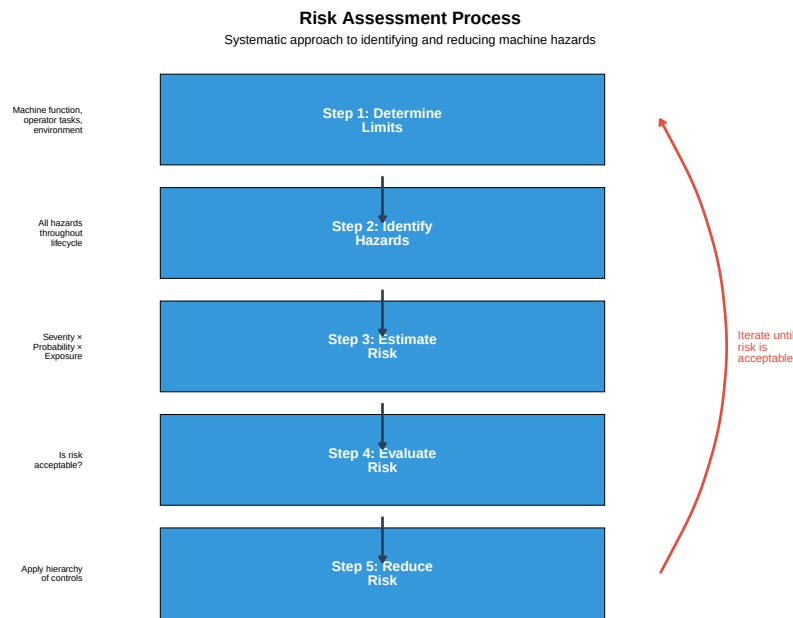


Figure 6.16: Risk Assessment Process (ISO 12100)

6.10.1 Risk Estimation

Risk is typically estimated using three factors:

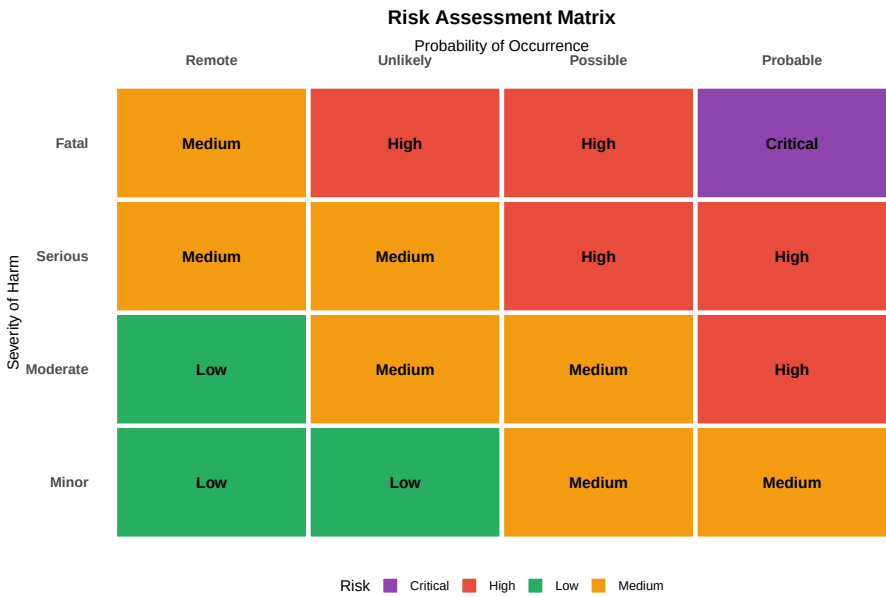


Figure 6.17: Risk Estimation Matrix

6.11 Summary

Table 6.14: Machine Guarding and Safety: Key Concepts

Topic	Key Points
Hierarchy of Controls	Elimination > Substitution > Engineering > Administrative > PPE
Physical Guarding	Fixed guards, interlocked gates, trapped key systems
Presence Sensing	Light curtains, area scanners, pressure mats
Control-Actuated Devices	Two-hand controls, enable/deadman switches
Collaborative Robots	PFL, speed/separation monitoring, hand guiding
Safety Distance	$S = (K \times T) + C$ formula for device placement
E-Stop Systems	Red mushroom on yellow, self-latching, manual reset
Functional Safety	SIL (IEC 62061) and PL (ISO 13849-1) standards

6.12 Review Questions

Question 1: What are the five levels of the Hierarchy of Controls, and why is PPE the least effective?

The five levels are (from most to least effective):

1. **Elimination** — Physically remove the hazard
2. **Substitution** — Replace with something less hazardous
3. **Engineering Controls** — Isolate people from the hazard
4. **Administrative Controls** — Change how people work
5. **PPE** — Protect the worker with equipment

PPE is least effective because: - The hazard still exists - It depends on human compliance - Equipment can fail or be worn incorrectly - It's the last line of defense

Question 2: A light curtain has a response time of 12ms and resolution of 14mm. The machine takes 180ms to stop. Calculate the minimum safety distance for hand approach.

Given: - $K = 2000$ mm/s (hand approach, use higher value for safety) - $T = 0.012 + 0.180 = 0.192$ seconds - $C = 0$ mm (14mm resolution)

Calculation:

$$S = (K \times T) + C$$

$$S = (2000 \times 0.192) + 0$$

$$S = 384 \text{ mm}$$

The light curtain must be installed at least **384mm** (approximately 15 inches) from the hazard.

Question 3: Explain why a three-position enable switch stops the robot in both position 1 (released) and position 3 (fully pressed).

The three-position design accounts for two natural human reactions to danger:

Position 1 (Released): - When frightened, people often release what they're holding (panic response) - Robot stops immediately

Position 3 (Fully Pressed): - When startled, people often grip tighter (startle response) - Robot stops immediately

Position 2 (Middle): - Only a deliberate, controlled hold allows operation - Requires conscious effort to maintain - This ensures the operator is alert and in control

Question 4: What are the four methods of collaborative robot operation according to ISO 10218?

1. **Safety-Rated Monitored Stop**

- Robot stops when human enters workspace
 - Resumes when human leaves
 - Uses area scanners or light curtains
2. **Hand Guiding**
 - Operator physically guides robot
 - Force/torque sensors enable safe teaching
 3. **Speed and Separation Monitoring**
 - Robot speed varies based on human proximity
 - Uses external sensors to track human position
 4. **Power and Force Limiting (PFL)**
 - Robot limits contact force to safe levels
 - Built-in joint torque sensors
 - Most common cobot method

Question 5: What are the requirements for an E-Stop button according to IEC 60204-1?

Physical Requirements: - **Color:** Red - **Shape:** Mushroom head (palm or fist operated) - **Background:** Yellow (high contrast)

Functional Requirements: - **Self-latching:** Stays activated when pressed - **Manual reset:** Requires deliberate action to release - **Accessibility:** Within easy reach of all operators - **Wiring:** Normally closed contacts (fail-safe) - **Function:** Category 0 or Category 1 stop - **No automatic restart:** Separate start action required after reset

6.13 References

- ISO 12100:2010 — Safety of machinery — General principles for design — Risk assessment and risk reduction
- ISO 13849-1:2015 — Safety of machinery — Safety-related parts of control systems
- ISO 13855:2010 — Safety of machinery — Positioning of safeguards with respect to approach speeds
- ISO 10218-1/2:2011 — Robots and robotic devices — Safety requirements for industrial robots
- ISO/TS 15066:2016 — Robots and robotic devices — Collaborative robots
- IEC 60204-1:2016 — Safety of machinery — Electrical equipment of machines
- IEC 62061:2021 — Safety of machinery — Functional safety of safety-related control systems
- OSHA 29 CFR 1910.212 — General requirements for all machines
- ANSI/RIA TR R15.306 — Task-based risk assessment methodology

Chapter 7

Ergonomics in Automated Manufacturing

7.1 Learning Objectives

By the end of this chapter, you will be able to:

- Define ergonomics and explain its importance in manufacturing
- Identify the seven major ergonomic risk factors
- Recognize common musculoskeletal disorders (MSDs) and their causes
- Apply ergonomic design principles to workstation design
- Conduct a REBA (Rapid Entire Body Assessment) analysis
- Understand the role of AI and automation in ergonomic assessment
- Design workstations that optimize human performance and safety

“Ergonomics is the science of fitting the job to the worker, not forcing the worker to fit the job.” — International Ergonomics Association

7.2 What is Ergonomics?

Ergonomics (from Greek *ergon* = work, *nomos* = laws) is the scientific discipline focused on understanding the interactions between humans and other elements of a system, with the goal of optimizing human well-being and overall system performance.

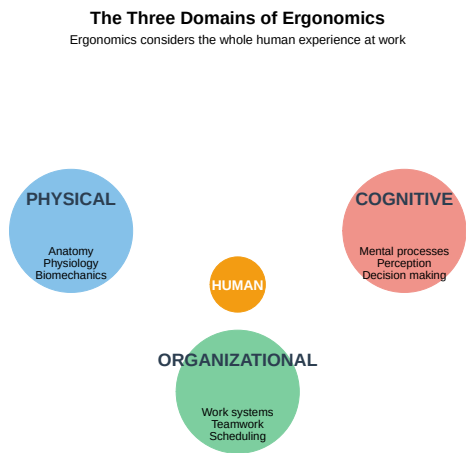


Figure 7.1: The Three Domains of Ergonomics

Table 7.1: The Three

Domain	Focus	Key Topics
Physical Ergonomics	Human body’s response to physical stress	Posture, material han
Cognitive Ergonomics	Mental processes and human-system interaction	Mental workload, dec
Organizational Ergonomics	Optimization of sociotechnical systems	Communication, team

7.2.1 Why Ergonomics Matters in Manufacturing

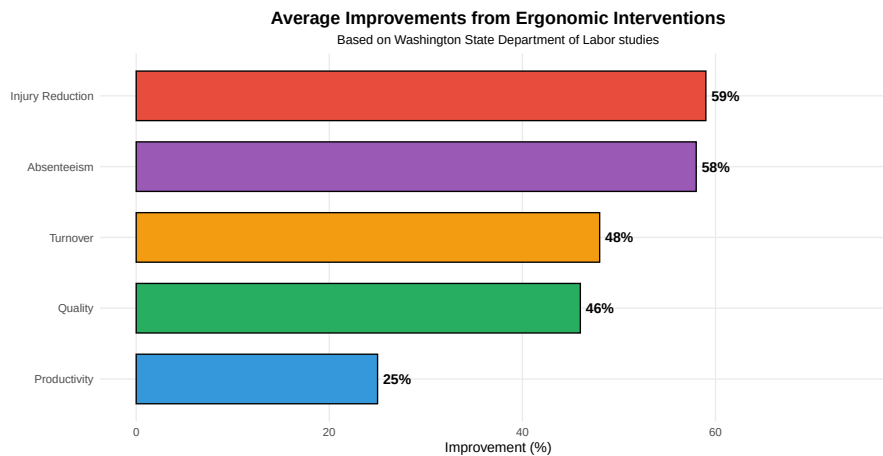


Figure 7.2: The Business Case for Ergonomics

The Cost of Ignoring Ergonomics

Direct Costs: - Workers' compensation claims - Medical expenses - Legal fees
- Increased insurance premiums

Indirect Costs (often 4-10x direct costs): - Lost productivity - Training replacement workers - Reduced quality - Overtime to cover absent workers - Administrative time - Low morale

Statistics: - MSDs account for **33%** of all workplace injuries - Average MSD claim costs **\$15,000-\$20,000** - Lost workdays due to MSDs average **12 days** per case - Carpal tunnel surgery costs approximately **\$30,000** per case (including lost time)

7.3 The Seven Ergonomic Risk Factors

The **Initial Ergonomic Risk Assessment (INERA)** identifies seven primary risk factors that contribute to musculoskeletal disorders. Understanding these factors is the first step in prevention.

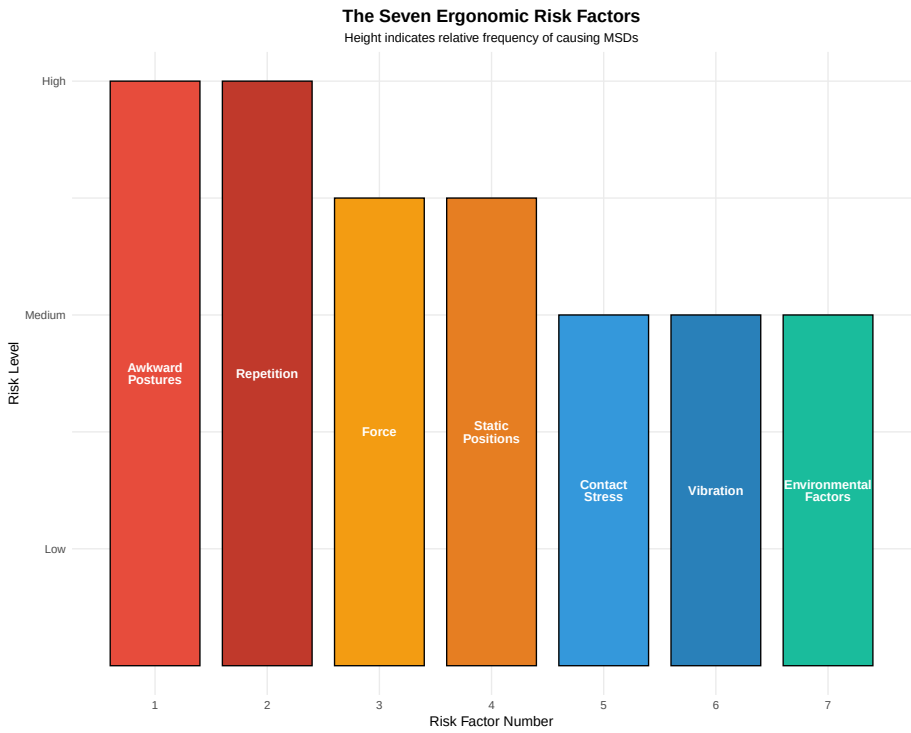


Figure 7.3: The Seven Ergonomic Risk Factors

Table 7.2: The Seven Ergonomic Risk Factors

#	Risk Factor	Definition
1	Awkward Postures	Positions that deviate from neutral body alignment
2	Repetition	Performing the same motion repeatedly
3	Force	Amount of physical effort required to do a task
4	Static Positions	Maintaining the same position for extended periods
5	Contact Stress	Pressure from hard surfaces or edges on body tissues
6	Vibration	Oscillating movements transferred to the body
7	Environmental Factors	Temperature, lighting, noise affecting work performance

7.3.1 Risk Factor 1: Awkward Postures

Neutral posture is the position where joints are naturally aligned, minimizing stress on muscles, tendons, and skeletal system. Any deviation from neutral increases injury risk.

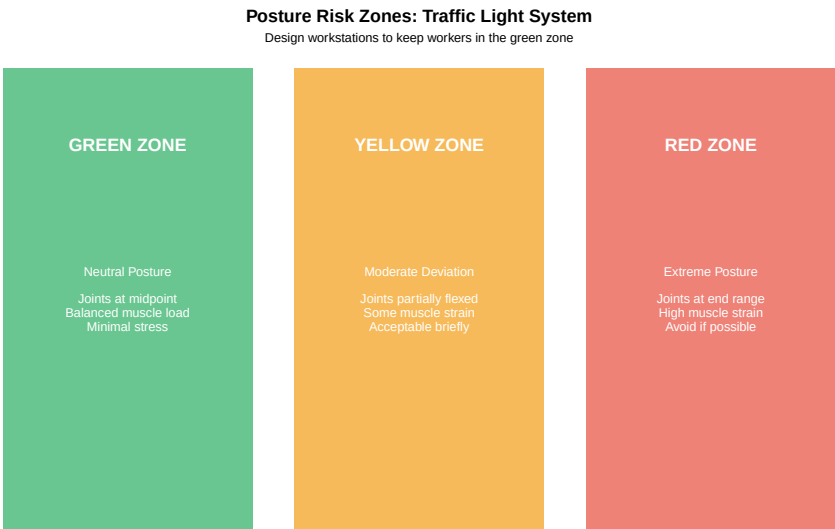


Figure 7.4: Posture Risk Zones

Table 7.3: Neutral vs. Awkward Postures by Body Part

Body Part	Neutral Position	Awkward Position	Risk Level
Head/Neck	Balanced on spine, looking straight ahead	Bent forward >20°, tilted, twisted	N
Shoulders	Relaxed, arms at sides	Raised, reaching overhead, behind body	SI
Elbows	Close to body, bent 90-120°	Fully extended or tightly bent	T
Wrists	Straight, in line with forearm	Bent up/down, twisted side-to-side	C
Back	Natural S-curve maintained	Bent forward, twisted, arched	L
Hips/Knees	Thighs parallel to floor, feet flat	Squatting, kneeling, twisted	K

7.3.2 Risk Factor 2: Repetition

Repetitive motion is one of the most significant risk factors in manufacturing. The risk increases with:

- **Frequency:** How often the motion occurs
- **Duration:** How long the task is performed
- **Recovery time:** Rest between repetitions

Table 7.4: Repetition Risk Thresholds

Cycle Time	Repetitions/Hour	Risk Level	Action Required
> 30 seconds	< 120	Low	Monitor

15-30 seconds	120-240	Moderate	Investigate and consider changes
< 15 seconds	> 240	High	Immediate intervention needed

7.3.3 Risk Factor 3: Force

The amount of **physical effort** required significantly impacts injury risk. Force requirements depend on:

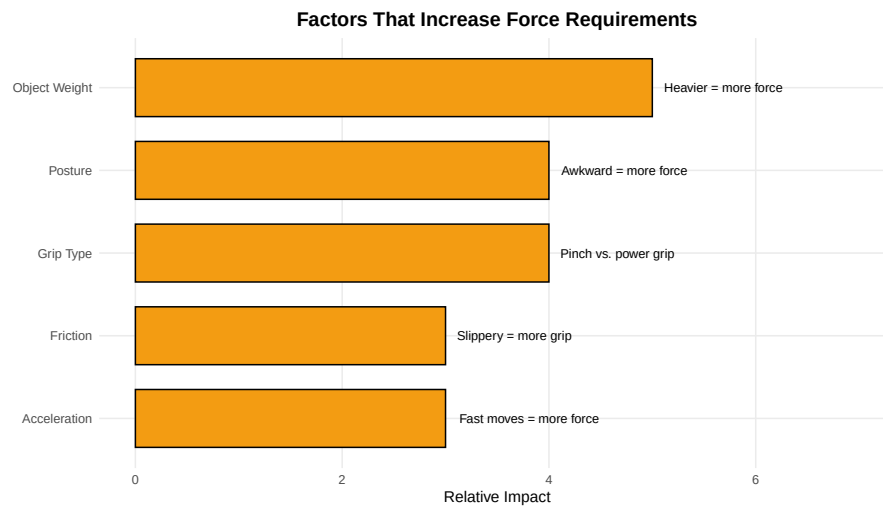


Figure 7.5: Factors Affecting Force Requirements

Interactive Exercise: Identify the Risk Factors

Scenario: An assembly line worker performs the following task 400 times per shift:

1. Reaches overhead to grab a part from a bin
2. Holds the part while inserting 4 screws with a power screwdriver
3. Places the completed assembly on a conveyor
4. The workstation has poor lighting and the floor is concrete

Identify all risk factors present:

Answer: 1. **Awkward Posture** - Reaching overhead 2. **Repetition** - 400 cycles per shift 3. **Force** - Gripping parts, controlling screwdriver 4. **Static Position** - Holding part during assembly 5. **Vibration** - Power screwdriver 6. **Contact Stress** - Standing on concrete (feet) 7. **Environmental** - Poor lighting

This task has ALL SEVEN risk factors present!

7.4 Musculoskeletal Disorders (MSDs)

Musculoskeletal Disorders (MSDs) are injuries and disorders affecting muscles, nerves, tendons, ligaments, joints, cartilage, and spinal discs. They are the most common and costly occupational health problem.

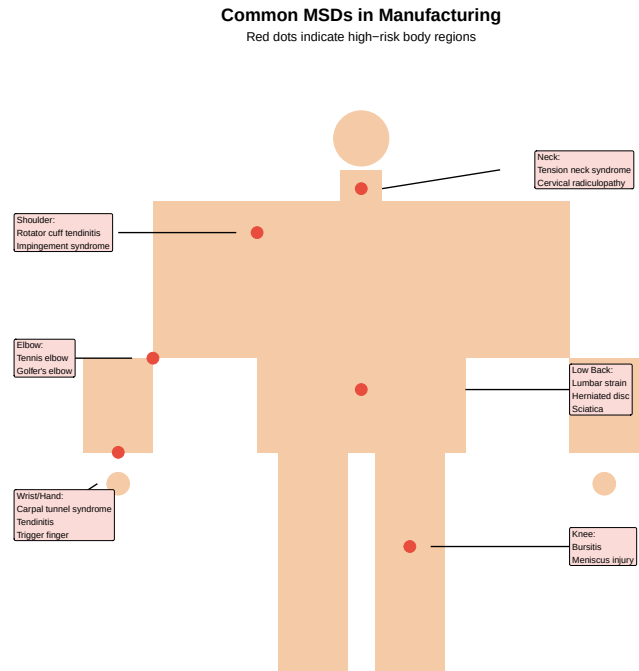


Figure 7.6: Common MSDs by Body Region

Table 7.5: Common Musculoskeletal Disorders in Manufacturing

Disorder	Description	Causes
Carpal Tunnel Syndrome	Compression of median nerve in the wrist	Repetitive wrist motions, forceful exertions
Tendinitis	Inflammation of tendons from overuse	Repetitive motions, awkward postures
Low Back Pain	Strain or injury to muscles/discs of lower back	Heavy lifting, bending, twisting
Rotator Cuff Injury	Damage to shoulder tendons	Overhead work, repetitive motions
Epicondylitis	Inflammation of elbow tendons (tennis/golfer's elbow)	Repetitive arm/wrist motions
Trigger Finger	Finger gets stuck in bent position	Repetitive gripping, hand tools

7.4.1 The MSD Development Cycle

MSDs typically develop gradually through a predictable cycle:

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use `linewidth` instead.

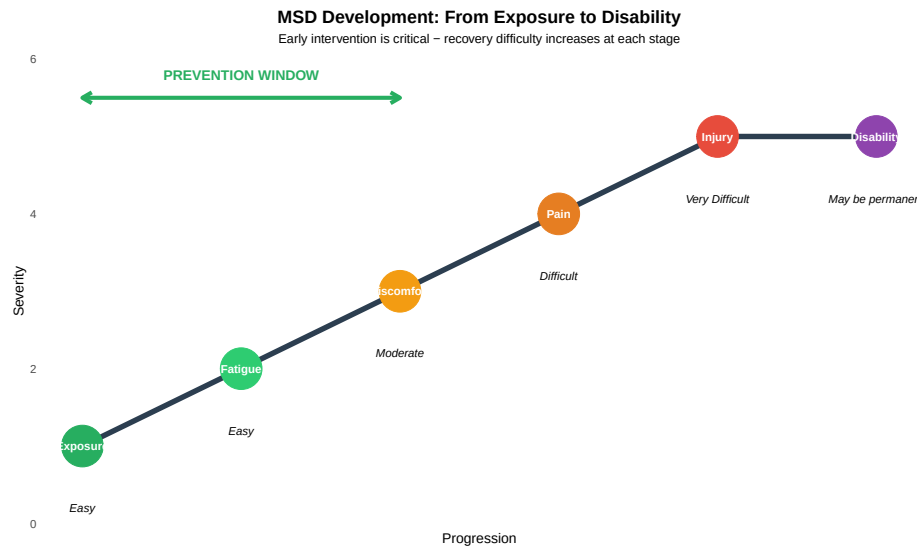


Figure 7.7: The MSD Development Cycle

Warning Signs: When to Take Action

Early Warning Signs (Act Immediately): - Persistent fatigue in specific body parts - Discomfort during or after work - Tightness or stiffness - Minor aching or soreness

Serious Warning Signs (Seek Medical Attention): - Persistent pain that doesn't go away with rest - Numbness or tingling - Loss of strength or grip - Swelling or inflammation - Reduced range of motion - Pain that wakes you at night

Key Message: Report symptoms early! The earlier the intervention, the better the outcome.

7.5 Preventing MSDs: Best Practices

Prevention is far more effective and less costly than treatment. Here are evidence-based strategies for MSD prevention:

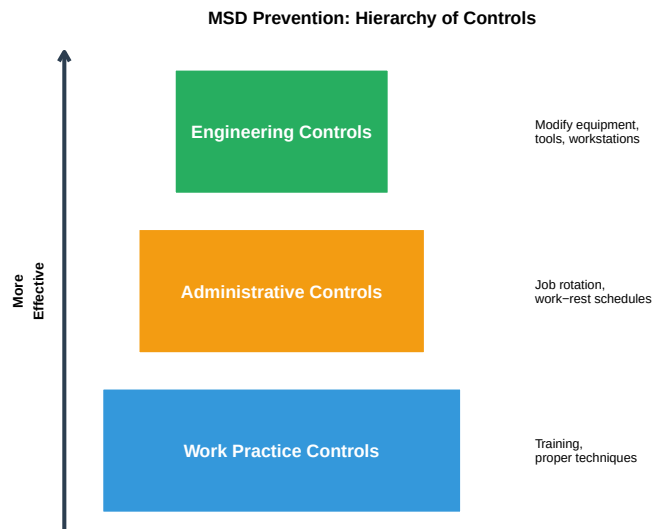


Figure 7.8: MSD Prevention Hierarchy

Table 7.6: MSD Prevention Strategies

Strategy	Engineering Solutions	Worker Actions
Maintain Neutral Posture	Adjustable workstations, proper tool selection	Awareness of body position, s
Reduce Repetition	Automation, job rotation between stations	Vary tasks when possible
Minimize Force	Mechanical assists, better handles, lighter parts	Use tools properly, ask for he
Avoid Static Positions	Sit-stand workstations, adjustable fixtures	Shift weight, change position
Eliminate Contact Stress	Padding, rounded edges, anti-fatigue mats	Use padding, wear appropriat
Control Vibration	Vibration-dampening tools, isolation mounts	Limit exposure time, grip too
Optimize Environment	Proper lighting, climate control, noise reduction	Report issues, use available c
Allow Recovery	Rest break areas, micro-break reminders	Take breaks, report fatigue

7.5.1 Proper Lifting Technique

Improper lifting is a leading cause of back injuries. The NIOSH lifting equation provides guidelines, but proper technique is fundamental.



Figure 7.9: Proper Lifting Technique

7.6 Ergonomic Design Principles

Effective ergonomic design follows established principles that account for human capabilities and limitations.

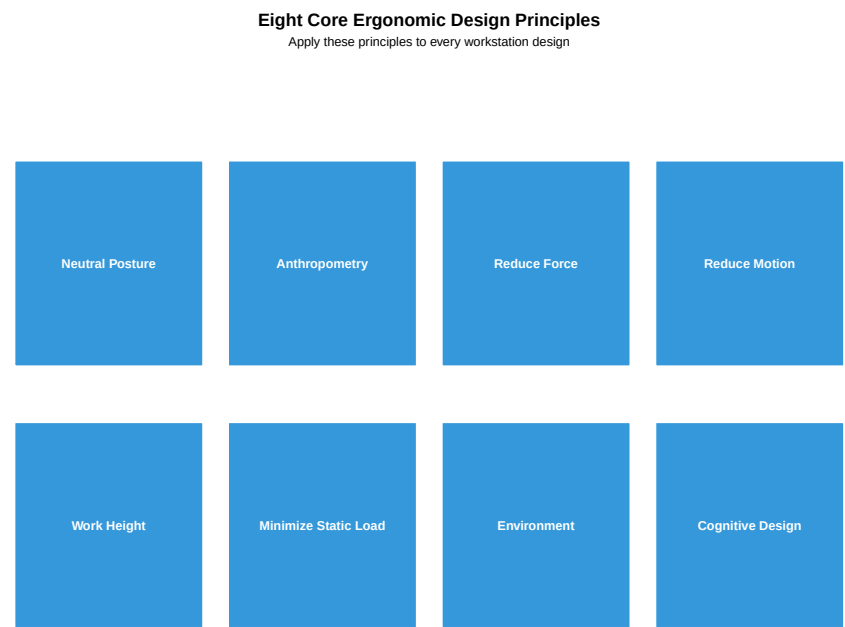


Figure 7.10: Ergonomic Design Principles

Table 7.7: Ergonomic Design Principles in Detail

Principle	Description	Implementation
1. Neutral Posture	Design to promote natural, balanced body positions	Adjustable workstation
2. Accommodate Anthropometry	Accommodate different body sizes (5th-95th percentile)	Adjustable equipment
3. Reduce Excessive Force	Minimize force requirements for all tasks	Mechanical assists, bearings
4. Reduce Excessive Motion	Reduce extreme motions, frequencies, and durations	Bring work closer, eliminate unnecessary motions
5. Optimize Work Height	Match work surface height to task requirements	Precision work higher, general work lower
6. Minimize Static Load	Avoid holding same position for extended periods	Support arms, provide rest breaks
7. Environmental Conditions	Optimize lighting, temperature, noise, air quality	Task lighting, climate control
8. Cognitive Support	Design interfaces for easy understanding and use	Clear displays, logical layouts

7.6.1 Anthropometry: Designing for Human Dimensions

Anthropometry is the scientific study of human body measurements. Workstations must accommodate the range of workers who will use them.

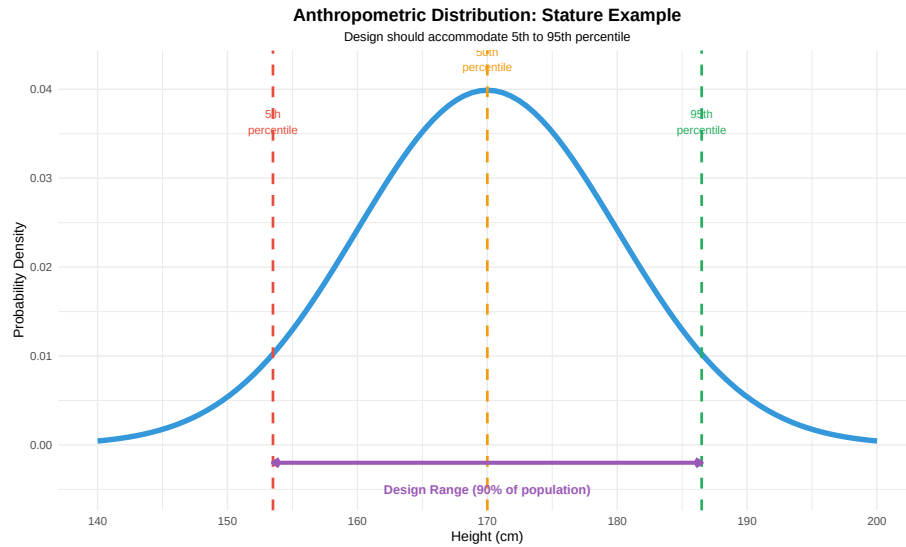


Figure 7.11: Anthropometric Design Considerations

Table 7.8: Key Anthropometric Measurements for Workstation Design

Measurement	5th % Female (cm)	50th % Combined (cm)	95th % Male (cm)
Stature (Standing Height)	150	170	188
Eye Height (Standing)	138	158	175
Shoulder Height	121	140	160
Elbow Height	93	104	120
Knuckle Height	64	74	86
Sitting Height	79	87	95
Seated Eye Height	68	76	83
Seated Elbow Height	48	56	64
Thigh Clearance	12	15	18
Forward Reach	64	73	82

7.6.2 Work Surface Height Guidelines

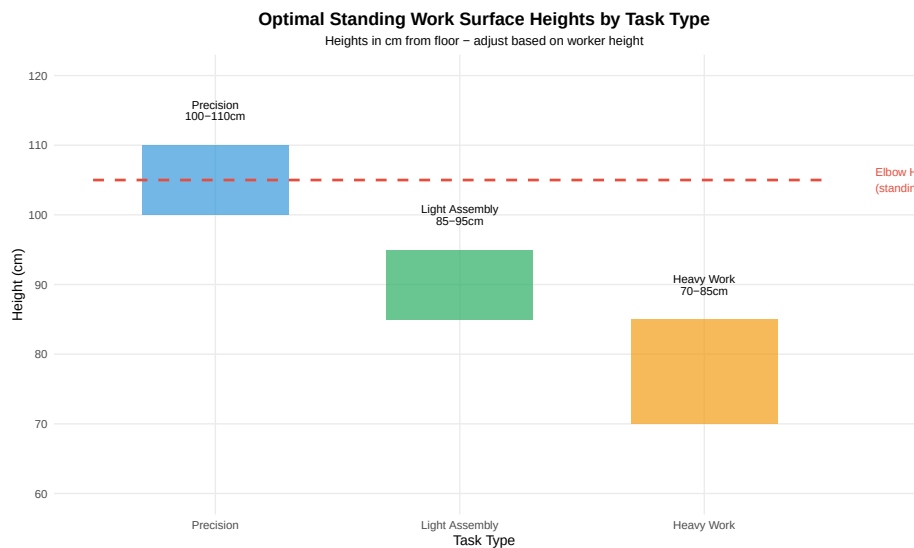


Figure 7.12: Recommended Work Surface Heights

Discussion: Why Different Heights for Different Tasks?

Precision Work (100-110 cm): - Requires close visual inspection - Hands need to be at or above eye level - Examples: Electronics assembly, inspection, watchmaking

Light Assembly (85-95 cm): - General manipulation tasks - Hands at about elbow height - Examples: Packaging, general assembly, sorting

Heavy Work (70-85 cm): - Requires pushing, pressing, or lifting - Lower height allows use of body weight - Examples: Packing boxes, pressing operations, heavy assembly

Key Principle: The work surface height should allow the worker to maintain **neutral posture** while performing the specific task.

7.7 Ergonomic Assessment Tools

Several standardized tools help assess ergonomic risk and guide interventions. Understanding these tools is essential for the process engineer.

Table 7.9: Common Ergonomic Assessment Tools

Tool	Full Name	Focus Area	Best Used For
RULA	Rapid Upper Limb Assessment	Upper body postures	Sedentary/computer work
REBA	Rapid Entire Body Assessment	Whole body postures	Manufacturing tasks
NIOSH Lifting Equation	NIOSH Lifting Equation	Manual lifting tasks	Lifting, lowering, pushing, pulling
OCRA	Occupational Repetitive Action	Repetitive upper limb tasks	Assembly line work
EAWS	Ergonomic Assessment Worksheet	Comprehensive workstation	Complete work environment
Snook Tables	Snook Psychophysical Tables	Manual material handling	Push, pull, lift, carry

7.7.1 REBA: Rapid Entire Body Assessment

REBA is one of the most widely used ergonomic assessment tools in manufacturing. It evaluates the whole body posture and provides a risk score.

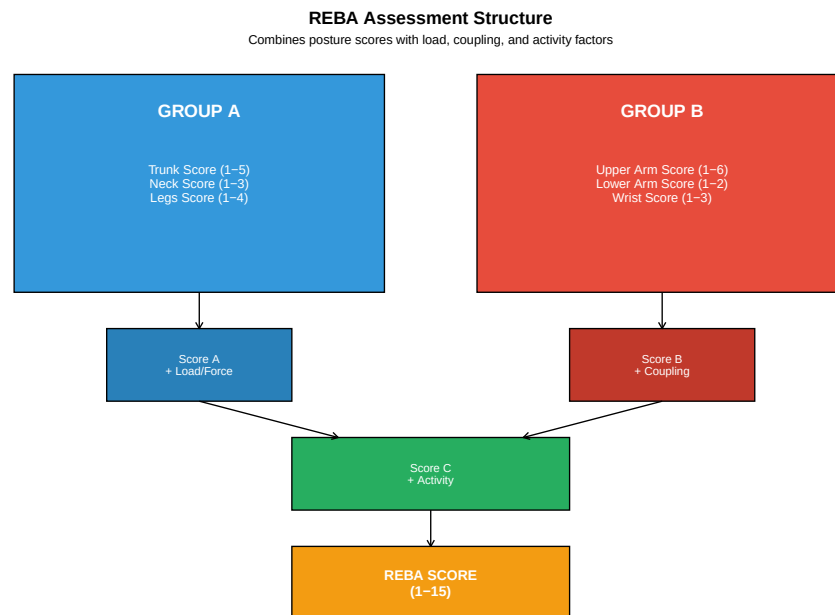


Figure 7.13: REBA Assessment Framework

7.7.2 REBA Scoring Tables

Trunk Posture Scoring:

Table 7.10: REBA Trunk Posture Scores

Position	Score	Adjustment
Upright (0°)	1	—
0-20° flexion/extension	2	+1 if twisted
20-60° flexion, >20° extension	3	+1 if twisted
>60° flexion	4	+1 if twisted or side-bending

Neck Posture Scoring:

Table 7.11: REBA Neck Posture Scores

Position	Score	Adjustment
0-20° flexion	1	+1 if twisted or side-bending
>20° flexion or extension	2	+1 if twisted or side-bending

REBA Action Levels:

Table 7.12: REBA Action Levels

REBA Score	Risk Level	Action
1	Negligible	None necessary
2-3	Low	May be necessary
4-7	Medium	Necessary
8-10	High	Necessary soon
11-15	Very High	Necessary NOW

7.7.3 REBA Employee Assessment Worksheet

The REBA Employee Assessment Worksheet provides a systematic approach to evaluating whole-body posture risk. This worksheet is based on the original work by Hignett and McAtamney (2000) and is widely used in manufacturing ergonomic assessments.

7.7.3.1 Group A: Neck, Trunk, and Leg Analysis**Step 1: Neck Posture Score**

Table 7.13: REBA Neck Posture Scoring

Position	Base Score	Adjustment	Max Score
0-20° flexion	1	+1 if twisted or side-bending	2

>20° flexion	2	+1 if twisted or side-bending	3
In extension	2	+1 if twisted or side-bending	3

Step 2: Trunk Posture Score

Table 7.14: REBA Trunk Posture Scoring

Position	Base Score	Adjustment	Max Score
Upright (0°)	1	—	1
0-20° flexion or extension	2	+1 if twisted or side-bending	3
20-60° flexion or >20° extension	3	+1 if twisted or side-bending	4
>60° flexion	4	+1 if twisted or side-bending	5

Step 3: Legs Posture Score

Table 7.15: REBA Legs Posture Scoring

Position	Base Score	Knee Adjustment
Bilateral weight bearing, walking, or sitting	1	+1 if knees 30-60° flexi
Unilateral weight bearing, featherweight, or unstable posture	2	+1 if knees 30-60° flexi

Step 4: Look Up Table A Score

Table 7.16: REBA Table A: Posture Score A (Trunk × Neck × Legs)

Trunk Score	Neck Score	Legs = 1	Legs = 2	Legs = 3	Legs = 4
1	1	1	1	3	4
1	2	2	2	3	4
1	3	2	3	4	5
2	1	2	3	4	5
2	2	3	4	5	6
2	3	4	5	6	7
3	1	3	4	5	6
3	2	4	5	6	7
3	3	5	6	7	8
4	1	4	5	6	7
4	2	5	6	7	8
4	3	6	7	8	9
5	1	6	7	8	9
5	2	7	8	9	9

5	3	8	9	9	9
---	---	---	---	---	---

Step 5: Add Load/Force Score

Table 7.17: REBA Load/Force Scoring

Load/Force	Score	Shock Adjustment
< 5 kg (< 11 lbs)	0	—
5-10 kg (11-22 lbs)	1	+1 if shock or rapid build-up of force
> 10 kg (> 22 lbs)	2	+1 if shock or rapid build-up of force

$$\text{Score A} = \text{Table A Score} + \text{Load/Force Score}$$

7.7.3.2 Group B: Arm and Wrist Analysis**Step 6: Upper Arm Posture Score**

Table 7.18: REBA Upper Arm Posture Scoring

Position	Base Score	Adjustments
20° extension to 20° flexion	1	+1 if shoulder raised; +1 if arm abducted; -1 if leaning/suppo
>20° extension	2	+1 if shoulder raised; +1 if arm abducted; -1 if leaning/suppo
20-45° flexion	2	+1 if shoulder raised; +1 if arm abducted; -1 if leaning/suppo
45-90° flexion	3	+1 if shoulder raised; +1 if arm abducted; -1 if leaning/suppo
>90° flexion	4	+1 if shoulder raised; +1 if arm abducted; -1 if leaning/suppo

Step 7: Lower Arm Posture Score

Table 7.19: REBA Lower Arm Posture Scoring

Position	Score
60-100° flexion (optimal range)	1
< 60° or > 100° flexion	2

Step 8: Wrist Posture Score

Table 7.20: REBA Wrist Posture Scoring

Position	Base Score	Adjustment	Max Score
----------	------------	------------	-----------

0-15° flexion or extension (neutral)	1	+1 if wrist is twisted or deviated	2
>15° flexion or extension	2	+1 if wrist is twisted or deviated	3

Step 9: Look Up Table B ScoreTable 7.21: REBA Table B: Posture Score B (Upper Arm $\times$ Lower Arm $\times$ Wrist)

Upper Arm Score	Lower Arm Score	Wrist = 1	Wrist = 2	Wrist = 3
1	1	1	1	2
1	2	2	2	3
2	1	1	2	3
2	2	2	3	4
3	1	3	4	5
3	2	4	5	5
4	1	4	5	6
4	2	5	6	7
5	1	6	7	8
5	2	7	8	8
6	1	7	8	9
6	2	8	9	9

Step 10: Add Coupling Score

Table 7.22: REBA Coupling Score

Coupling Quality	Description
Good	Well-fitting handle and mid-range power grip
Fair	Hand hold acceptable but not ideal; coupling acceptable via other body
Poor	Hand hold not acceptable although possible; no handles
Unacceptable	Awkward, unsafe grip; no handles; coupling unacceptable using other bo

$$\text{Score B} = \text{Table B Score} + \text{Coupling Score}$$

7.7.3.3 Calculating the Final REBA Score**Step 11: Look Up Table C Score**

Table 7.23: REBA Table C: Combined Score (Score A $\times$ Score B)

Score A	B=1	B=2	B=3	B=4	B=5	B=6	B=7	B=8	B=9	B=10	B=11	B=12
1	1	1	1	2	3	3	4	5	6	7	7	7
2	1	2	2	3	4	4	5	6	6	7	7	8
3	1	2	3	3	4	5	6	7	7	8	8	8
4	2	3	3	4	5	6	7	8	8	9	9	9
5	3	4	4	5	6	7	8	8	9	9	9	10
6	3	4	5	6	7	8	8	9	9	10	10	10
7	4	5	6	7	8	8	9	9	10	10	11	11
8	5	6	7	8	8	9	9	10	10	11	11	11
9	6	6	7	8	9	9	10	10	10	11	11	12
10	7	7	8	9	9	10	10	11	11	11	12	12
11	7	7	8	9	9	10	11	11	11	12	12	12
12	7	8	8	9	9	10	11	11	12	12	12	12

Step 12: Add Activity Score

Table 7.24: REBA Activity Score (Add +1 for each condition present)

Activity Condition	Score
One or more body parts are static (held > 1 minute)	+1
Repeated small range actions (> 4 $\times$ per minute, excluding walking)	+1
Action causes rapid large range changes in postures or unstable base	+1

REBA Score = Table C Score + Activity Score

7.7.3.4 REBA Score Interpretation

Table 7.25: REBA Action Level Guidelines

REBA Score	Risk Level	Action Required	Priority
1	Negligible	None necessary	Continue monitoring
2-3	Low	May be necessary	Investigate further when convenient
4-7	Medium	Necessary	Implement changes to reduce risk
8-10	High	Necessary soon	Investigate and implement changes soon
11-15	Very High	Necessary NOW	Stop task and make immediate changes

7.7.4 REBA Example Calculation: Step-by-Step Walk-through

Let's work through a complete REBA assessment for a manufacturing worker performing a packaging task.

Scenario: A worker stands at a packaging station, bending forward to pick up items from a low bin and placing them into boxes on a conveyor. The task is performed continuously for 4-hour shifts.

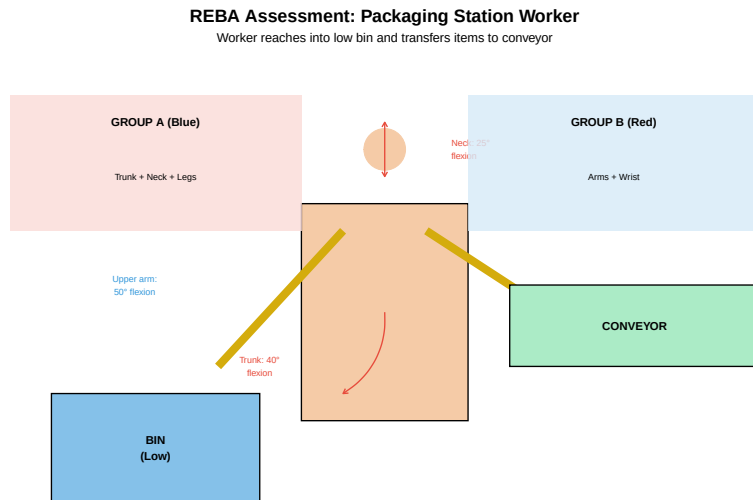


Figure 7.14: REBA Assessment Scenario: Packaging Worker

7.7.4.1 Step-by-Step Assessment

```
# =====
# REBA Assessment: Packaging Station Worker
# =====
# Worker bends forward to pick items from low bin and place on conveyor
# Items weigh approximately 7 kg each
# Task performed continuously with repetitive motions

cat("===== GROUP A: TRUNK, NECK, LEGS =====\n\n")

===== GROUP A: TRUNK, NECK, LEGS =====

# Step 1: Neck Score
# Worker looks down into bin - approximately 25° flexion
neck_base <- 2      # >20° flexion
neck_twist <- 0     # No twist or side-bending
```



```
neck_score <- neck_base + neck_twist
cat("Step 1 - Neck Score:", neck_score, "\n")
```

Step 1 - Neck Score: 2

```
cat("  Position: >20° flexion (looking down into bin)\n")
```

Position: >20° flexion (looking down into bin)

```
cat("  Base score: 2, Twist adjustment: 0\n\n")
```

Base score: 2, Twist adjustment: 0

```
# Step 2: Trunk Score
# Worker bends forward approximately 40° to reach bin
trunk_base <- 3      # 20-60° flexion
trunk_twist <- 1     # Slight twist when reaching
trunk_score <- trunk_base + trunk_twist
cat("Step 2 - Trunk Score:", trunk_score, "\n")
```

Step 2 - Trunk Score: 4

```
cat("  Position: 40° forward flexion with slight twist\n")
```

Position: 40° forward flexion with slight twist

```
cat("  Base score: 3, Twist adjustment: +1\n\n")
```

Base score: 3, Twist adjustment: +1

```
# Step 3: Legs Score
# Worker stands with weight distributed evenly
legs_base <- 1      # Bilateral weight bearing
legs_knee <- 0      # Knees not flexed significantly
legs_score <- legs_base + legs_knee
cat("Step 3 - Legs Score:", legs_score, "\n")
```

Step 3 - Legs Score: 1

```
cat("  Position: Standing, bilateral weight bearing\n")
```

Position: Standing, bilateral weight bearing

```
cat("  Base score: 1, Knee adjustment: 0\n\n")
```

Base score: 1, Knee adjustment: 0

```
# Step 4: Table A Lookup
# Trunk = 4, Neck = 2, Legs = 1
# From Table A: Score = 5
table_a_score <- 5
cat("Step 4 - Table A Score:", table_a_score, "\n")
```

Step 4 - Table A Score: 5

```
cat(" Lookup: Trunk=4, Neck=2, Legs=1 → Table A = 5\n\n")
```

Lookup: Trunk=4, Neck=2, Legs=1 → Table A = 5

```
# Step 5: Load/Force Score
# Items weigh approximately 7 kg
load_force <- 1      # 5-10 kg
shock_force <- 0     # No shock/rapid buildup
load_score <- load_force + shock_force
cat("Step 5 - Load/Force Score:", load_score, "\n")
```

Step 5 - Load/Force Score: 1

```
cat(" Load: 7 kg (in 5-10 kg range) = 1\n\n")
```

Load: 7 kg (in 5-10 kg range) = 1

```
# SCORE A CALCULATION
score_a <- table_a_score + load_score
cat(">>> SCORE A = Table A + Load/Force =", table_a_score, "+", load_score, "=", score_a, "\n")
```

```
>>> SCORE A = Table A + Load/Force = 5 + 1 = 6
```

```
cat("===== GROUP B: UPPER ARM, LOWER ARM, WRIST =====\n\n")
```

```
===== GROUP B: UPPER ARM, LOWER ARM, WRIST =====
```

```
# Step 6: Upper Arm Score
# Arms reaching forward/down approximately 50° flexion
upper_arm_base <- 3 # 45-90° flexion
shoulder_raised <- 0 # Not raised
arm_abducted <- 0   # Not abducted
arm_support <- 0    # Not supported
upper_arm_score <- upper_arm_base + shoulder_raised + arm_abducted + arm_support
cat("Step 6 - Upper Arm Score:", upper_arm_score, "\n")
```

Step 6 - Upper Arm Score: 3

```
cat(" Position: 50° flexion reaching into bin\n\n")
```

Position: 50° flexion reaching into bin

```
cat(" Base score: 3, No adjustments needed\n\n")
```

Base score: 3, No adjustments needed

```
# Step 7: Lower Arm Score
# Elbow bent approximately 70° (in optimal range)
lower_arm_score <- 1 # 60-100° flexion
cat("Step 7 - Lower Arm Score:", lower_arm_score, "\n")
```

Step 7 - Lower Arm Score: 1

```
cat(" Position: 70° elbow flexion (optimal range)\n\n")
```

Position: 70° elbow flexion (optimal range)

```
# Step 8: Wrist Score
# Wrist in moderate flexion to grasp items
wrist_base <- 2      # >15° flexion
wrist_twist <- 0     # No significant twist
wrist_score <- wrist_base + wrist_twist
cat("Step 8 - Wrist Score:", wrist_score, "\n")
```

Step 8 - Wrist Score: 2

```
cat(" Position: ~20° wrist flexion when grasping\n")
```

Position: ~20° wrist flexion when grasping

```
cat(" Base score: 2, Twist adjustment: 0\n\n")
```

Base score: 2, Twist adjustment: 0

```
# Step 9: Table B Lookup
# Upper Arm = 3, Lower Arm = 1, Wrist = 2
# From Table B: Score = 4
table_b_score <- 4
cat("Step 9 - Table B Score:", table_b_score, "\n")
```

Step 9 - Table B Score: 4

```
cat(" Lookup: Upper Arm=3, Lower Arm=1, Wrist=2 → Table B = 4\n\n")
```

Lookup: Upper Arm=3, Lower Arm=1, Wrist=2 → Table B = 4

```
# Step 10: Coupling Score
# Worker grasps boxes - acceptable grip but not ideal handles
coupling_score <- 1  # Fair coupling
cat("Step 10 - Coupling Score:", coupling_score, "\n")
```

Step 10 - Coupling Score: 1

```
cat(" Coupling: Fair - hand hold acceptable but not ideal\n\n")
```

Coupling: Fair - hand hold acceptable but not ideal

```
# SCORE B CALCULATION
score_b <- table_b_score + coupling_score
cat(">>> SCORE B = Table B + Coupling =", table_b_score, "+", coupling_score, "=", score_b, "\n\n")
```

```
>>> SCORE B = Table B + Coupling = 4 + 1 = 5
```

```

cat("=====  

===== FINAL REBA SCORE CALCULATION =====\n\n")

===== FINAL REBA SCORE CALCULATION =====
# Step 11: Table C Lookup
# Score A = 6, Score B = 5
# From Table C: Score = 7
table_c_score <- 7
cat("Step 11 - Table C Score:", table_c_score, "\n")

Step 11 - Table C Score: 7
cat("  Lookup: Score A=6, Score B=5 → Table C = 7\n\n")

  Lookup: Score A=6, Score B=5 → Table C = 7
# Step 12: Activity Score
# Check all three conditions:
static_posture <- 0 # Body parts not held >1 minute
repeated_actions <- 1 # Repeated small range actions (continuous picking)
rapid_changes <- 0 # No rapid large range changes
activity_score <- static_posture + repeated_actions + rapid_changes
cat("Step 12 - Activity Score:", activity_score, "\n")

Step 12 - Activity Score: 1
cat("  Static posture >1 min: No (+0)\n")

  Static posture >1 min: No (+0)
cat("  Repeated actions >4×/min: Yes (+1)\n")

  Repeated actions >4×/min: Yes (+1)
cat("  Rapid large changes: No (+0)\n\n")

  Rapid large changes: No (+0)
# FINAL REBA SCORE
reba_final <- table_c_score + activity_score
cat("                                \n")

cat("      FINAL REBA SCORE:", reba_final, " \n")

      FINAL REBA SCORE: 8
cat("                                \n\n")

```

```
# Interpretation
cat("INTERPRETATION:\n")
```

INTERPRETATION:

```
cat("                                \n")
```

```
if (reba_final == 1) {
  cat("Risk Level: NEGLIGIBLE\n")
  cat("Action: None necessary\n")
} else if (reba_final <= 3) {
  cat("Risk Level: LOW\n")
  cat("Action: May be necessary\n")
} else if (reba_final <= 7) {
  cat("Risk Level: MEDIUM\n")
  cat("Action: Necessary\n")
} else if (reba_final <= 10) {
  cat("Risk Level: HIGH\n")
  cat("Action: Necessary soon\n")
} else {
  cat("Risk Level: VERY HIGH\n")
  cat("Action: Necessary NOW - Stop task immediately\n")
}
```

Risk Level: HIGH

Action: Necessary soon

```
cat("                                \n")
```

7.7.4.2 Recommendations for This Assessment

Based on the REBA score of **8 (HIGH risk)**, the following interventions should be implemented soon:

Table 7.26: Recommended Interventions Based on REBA Assessment

Priority	Intervention	Target Risk Factor	Expected Impact
1	Raise bin height	Trunk flexion	Reduce trunk score from 4 to 2
2	Add tilt mechanism	Neck flexion	Reduce neck score from 2 to 1
3	Reduce load weight	Load/force	Reduce load score from 1 to 0
4	Implement job rotation	Repetition	Reduce activity score

7.7.5 REBA Example Calculation

```
# REBA Assessment Example: Assembly Worker

# Group A Scores (Trunk, Neck, Legs)
trunk_score <- 3      # 20-60° forward bend
neck_score <- 2       # >20° flexion
legs_score <- 1       # Bilateral weight bearing

# Look up Table A score (trunk + neck + legs)
# For this combination: Score A = 4
table_a_score <- 4

# Load/Force Score
load_force <- 1       # 5-10 kg intermittent

# Score A with load
score_a <- table_a_score + load_force
cat("Score A (posture + load):", score_a, "\n")
```

Score A (posture + load): 5

```
# Group B Scores (Upper arm, Lower arm, Wrist)
upper_arm_score <- 3  # 45-90° flexion
lower_arm_score <- 2  # <60° or >100° flexion
wrist_score <- 2      # >15° flexion/extension

# Look up Table B score
# For this combination: Score B = 5
table_b_score <- 5

# Coupling Score
coupling <- 1         # Acceptable grip

# Score B with coupling
score_b <- table_b_score + coupling
cat("Score B (posture + coupling):", score_b, "\n")
```

Score B (posture + coupling): 6

```
# Look up Table C (Score A × Score B)
# For Score A = 5 and Score B = 6: Score C = 8
score_c <- 8

# Activity Score
activity <- 1         # One or more body parts static >1 min
```

```
# Final REBA Score
reba_final <- score_c + activity
cat("\n=== FINAL REBA SCORE:", reba_final, "===\n")
```

```
=== FINAL REBA SCORE: 9 ===
```

```
# Interpretation
cat("\nInterpretation:\n")
```

Interpretation:

```
if (reba_final <= 1) {
  cat("Risk Level: Negligible - No action necessary\n")
} else if (reba_final <= 3) {
  cat("Risk Level: Low - Action may be necessary\n")
} else if (reba_final <= 7) {
  cat("Risk Level: Medium - Action necessary\n")
} else if (reba_final <= 10) {
  cat("Risk Level: High - Action necessary soon\n")
} else {
  cat("Risk Level: Very High - Action necessary NOW\n")
}
```

Risk Level: High - Action necessary soon

Practice Problem: REBA Assessment

Scenario: A worker is performing a task with the following postures:

- **Trunk:** 30° forward flexion, twisted
- **Neck:** 15° flexion
- **Legs:** Weight on one leg
- **Upper Arm:** 60° flexion, shoulder raised
- **Lower Arm:** 80° flexion
- **Wrist:** Neutral
- **Load:** 8 kg carried
- **Coupling:** Fair grip (handles exist but not ideal)
- **Activity:** Repeated small range actions

Calculate the REBA score and determine the action level.

Solution:

Trunk: 3 + 1 (twisted) = 4
 Neck: 1 (0-20° flexion)
 Legs: 2 (weight on one leg)
 Table A = 5
 Load/Force = 1 (5-10kg)

Score A = 6

Upper Arm: 3 + 1 (raised) = 4

Lower Arm: 1 (60-100°)

Wrist: 1 (neutral)

Table B = 4

Coupling = 1 (fair)

Score B = 5

Table C (Score A=6, Score B=5) = 8

Activity = +1 (repeated actions)

REBA Score = 9

Risk Level: HIGH - Action necessary soon

7.7.6 NIOSH Lifting Equation

The **NIOSH Lifting Equation** calculates a **Recommended Weight Limit (RWL)** for lifting tasks.

$$RWL = LC \times HM \times VM \times DM \times AM \times FM \times CM$$

Where:

Table 7.27: NIOSH Lifting Equation Factors

Factor	Name	Value	Description
LC	Load Constant	23 kg (51 lb)	Maximum weight under ideal c
HM	Horizontal Multiplier	25/H	H = horizontal distance from r
VM	Vertical Multiplier	1 - 0.003|V-75|;	V = vertical height of hands at
DM	Distance Multiplier	0.82 + 4.5/D	D = vertical travel distance (c
AM	Asymmetric Multiplier	1 - 0.0032A	A = angle of asymmetry (degre
FM	Frequency Multiplier	Table lookup	Based on lift frequency and du
CM	Coupling Multiplier	Table lookup	Based on hand-load coupling q

Lifting Index (LI) indicates risk level:

$$LI = \frac{\text{Actual Weight}}{\text{RWL}}$$

Table 7.28: Lifting Index Interpretation

Lifting Index	Risk	Action
LI 1.0	Low	Task acceptable for most workers
1.0 < LI 2.0	Moderate	Some workers may be at risk - consider changes
2.0 < LI 3.0	High	Many workers at risk - changes recommended
LI > 3.0	Very High	Unacceptable - immediate changes required

```
# NIOSH Lifting Equation Example

# Task parameters
H <- 40 # Horizontal distance (cm)
V <- 30 # Vertical height at start (cm)
D <- 60 # Vertical travel distance (cm)
A <- 30 # Asymmetry angle (degrees)
F <- 2 # Lifts per minute
duration <- 2 # Hours of lifting

# Constants
LC <- 23 # Load constant (kg)

# Calculate multipliers
HM <- 25 / H
VM <- 1 - 0.003 * abs(V - 75)
DM <- 0.82 + 4.5 / D
AM <- 1 - 0.0032 * A

# Frequency multiplier (from table, for 2 lifts/min, 2 hours, V<75cm)
FM <- 0.84

# Coupling multiplier (assume "fair" coupling)
CM <- 0.95

cat("Multipliers:\n")

Multipliers:
cat("HM =", round(HM, 3), "\n")

HM = 0.625
cat("VM =", round(VM, 3), "\n")

VM = 0.865
cat("DM =", round(DM, 3), "\n")

DM = 0.895
```

```
cat("AM =", round(AM, 3), "\n")
```

```
AM = 0.904
```

```
cat("FM =", FM, "\n")
```

```
FM = 0.84
```

```
cat("CM =", CM, "\n\n")
```

```
CM = 0.95
```

```
# Calculate RWL
```

```
RWL <- LC * HM * VM * DM * AM * FM * CM
```

```
cat("Recommended Weight Limit (RWL):", round(RWL, 1), "kg\n\n")
```

```
Recommended Weight Limit (RWL): 8 kg
```

```
# Calculate Lifting Index for actual load
```

```
actual_weight <- 15 # kg
```

```
LI <- actual_weight / RWL
```

```
cat("Actual Weight:", actual_weight, "kg\n")
```

```
Actual Weight: 15 kg
```

```
cat("Lifting Index (LI):", round(LI, 2), "\n\n")
```

```
Lifting Index (LI): 1.87
```

```
# Interpretation
```

```
if (LI <= 1.0) {
```

```
  cat("Risk Level: LOW - Task acceptable\n")
```

```
} else if (LI <= 2.0) {
```

```
  cat("Risk Level: MODERATE - Consider changes\n")
```

```
} else if (LI <= 3.0) {
```

```
  cat("Risk Level: HIGH - Changes recommended\n")
```

```
} else {
```

```
  cat("Risk Level: VERY HIGH - Immediate changes required\n")
```

```
}
```

```
Risk Level: MODERATE - Consider changes
```

7.8 AI-Powered Ergonomic Assessment

Artificial intelligence is revolutionizing ergonomic assessment by enabling **real-time, automated analysis** of worker postures without disrupting operations.

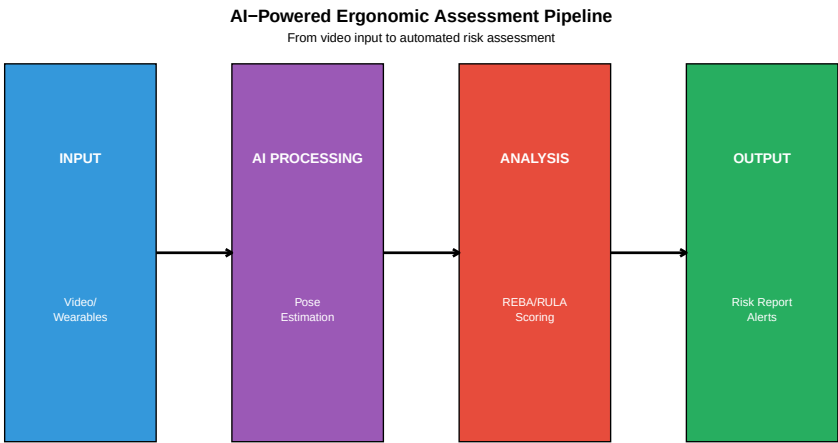


Figure 7.15: AI Ergonomics Assessment Pipeline

Table 7.29: AI-Powered Ergonomic Assessment Tools

Tool	Technology	Key Features
TuMeke Ergonomics	Computer vision + wearables	Real-time REBA scoring, multi-camera support
VelocityEHS	AI video analysis	Automated job analysis, risk prioritization
Protex AI	Real-time video AI	Privacy-preserving analysis, floor-wide monitoring
SoterTask	Wearable sensors + AI	Wearable clips, real-time coaching, haptic feedback
Viso.ai	Custom AI models	Custom pose detection, integration APIs
ErgoPlus Platform	Mobile app + AI	Mobile assessment, improvement tracking

7.8.1 Benefits of AI Ergonomic Assessment

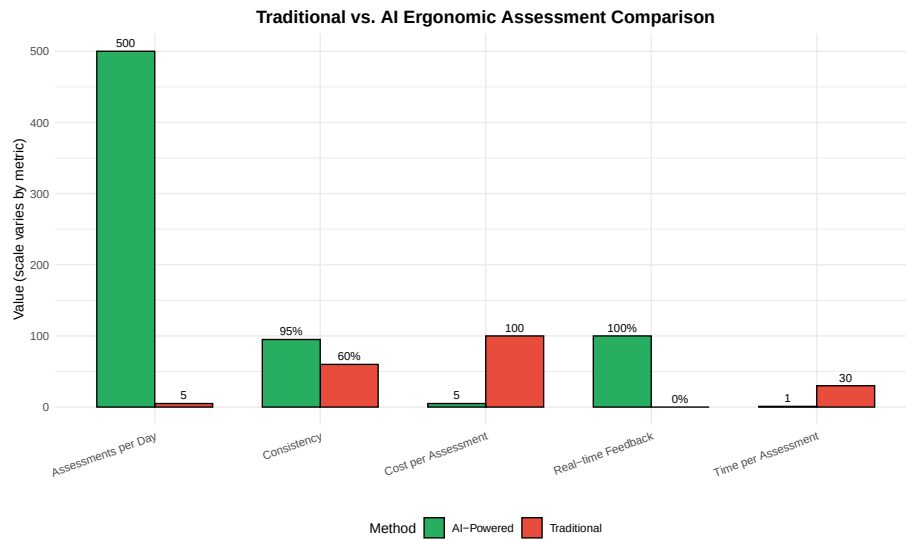


Figure 7.16: Traditional vs. AI Ergonomic Assessment

7.9 Ergonomics in Automated Manufacturing

Industrial automation inherently involves the mechanization of processes traditionally carried out by human operators. In the automation design phase, engineers must strike a balance between mechanization and the necessary human interaction with these systems.

7.9.1 Human-Automation Interaction Points

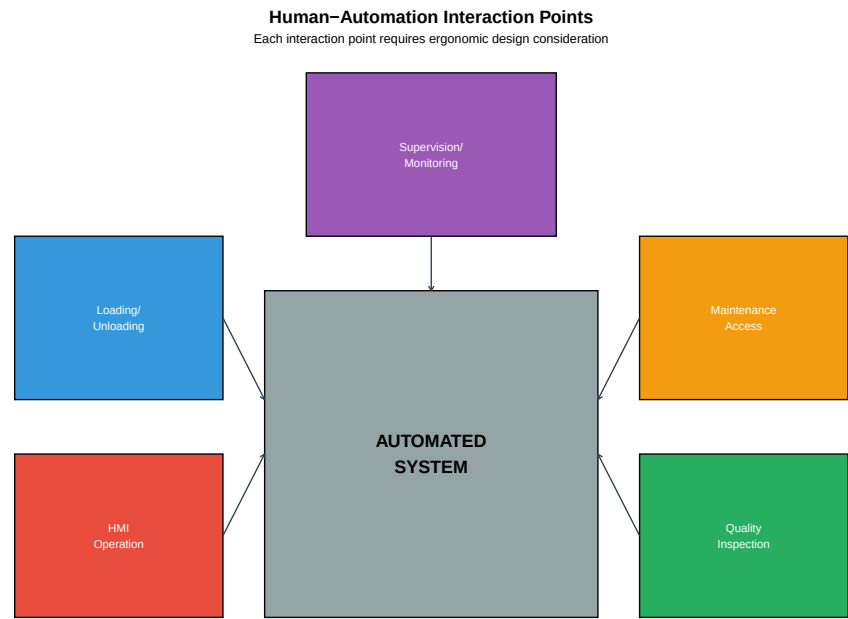


Figure 7.17: Ergonomic Considerations in Automated Systems

Table 7.30: Ergonomic Considerations for Automated Systems

Interaction Point	Ergonomic Challenges	Design Solutions
Loading/Unloading	Repetitive motion, lifting, reaching, awkward postures	Height-adjustable conveyors
HMI Operation	Static posture, visual strain, cognitive load	Adjustable screens, proper
Maintenance	Awkward access, confined spaces, tool use	Adequate access space, tool
Quality Inspection	Static positions, visual strain, fine motor tasks	Adjustable fixtures, magnif
Supervision	Sedentary position, cognitive fatigue, vigilance	Multiple monitors at eye le

7.9.2 Collaborative Robot Ergonomics

Cobots present unique ergonomic opportunities and challenges:

Table 7.31: Ergonomic Considerations for Collaborative Robots

Aspect	Opportunity	Challenge
Task Allocation	Robot handles heavy, repetitive, or precision tasks	Determining optimal task di

Workstation Layout	Shared workspace allows flexible positioning	Ensuring adequate
Pacing	Robot adapts to human pace, not vice versa	Avoiding pressure
Force Assistance	Robot provides powered assist for lifting	Proper force limits
Cognitive Load	Robot handles routine tasks, human focuses on judgment	Maintaining situational awareness

7.10 Employer Responsibilities

Employers have both legal and ethical obligations to protect workers from ergonomic hazards.

Table 7.32: Employer Ergonomics Program Responsibilities

Responsibility	Actions
Management Commitment	Allocate resources, set goals, lead by example
Worker Involvement	Include workers in assessments, design teams, solution development
Training	Ergonomics awareness, proper techniques, symptom recognition
Hazard Identification	Regular assessments, worker surveys, injury analysis
Early Reporting	Non-punitive reporting system, prompt response to symptoms
Hazard Control	Engineering controls, work organization, PPE as last resort
Program Evaluation	Track injuries, measure improvements, adjust programs

OSHA Ergonomics Guidelines

While OSHA does not have a specific ergonomics standard, employers are still responsible under the **General Duty Clause** (Section 5(a)(1)) which requires employers to provide a workplace “free from recognized hazards.”

OSHA’s Recommended Program Elements: 1. Management leadership 2. Worker participation 3. Hazard identification and assessment 4. Hazard prevention and control 5. Education and training 6. Program evaluation

Industry-Specific Guidelines: - Poultry Processing - Nursing Homes - Retail Grocery Stores - Shipyards

Visit: OSHA Ergonomics eTool

7.11 Case Study: Ergonomics in Automated Assembly

Company: Automotive parts manufacturer

Problem: High rate of upper extremity MSDs in assembly department - 15 recordable injuries per year - Lost workdays averaging 20 days per case - Workers' comp costs exceeding \$300,000 annually

Assessment Findings:

Table 7.33: Ergonomic Assessment Findings

Workstation	Primary Issues	REBA Score	Risk Level
Sub-assembly	Overhead reaching, high repetition	9	High
Main line	Forward bending, static standing	8	High
Inspection	Awkward wrist postures, visual strain	7	Medium
Packaging	Lifting, carrying, repetition	10	Very High

Interventions Implemented:

1. **Sub-assembly:**
 - Tilting fixtures to bring work closer
 - Parts bins repositioned to eliminate overhead reaching
 - Cobot added for repetitive insertion tasks
2. **Main line:**
 - Height-adjustable workstations installed
 - Anti-fatigue mats added
 - Job rotation implemented
3. **Inspection:**
 - Magnifying task lights installed
 - Angled fixtures to reduce wrist bending
 - Ergonomic seating provided
4. **Packaging:**
 - Vacuum lift assists installed
 - Conveyor heights adjusted
 - Case erectors automated

Results After 18 Months:

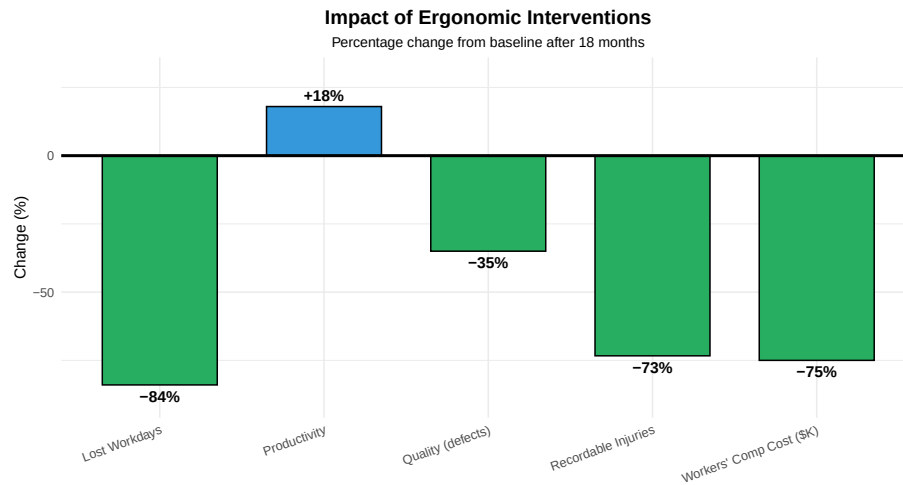


Figure 7.18: Ergonomic Intervention Results

ROI Analysis:

```
# Investment
equipment_cost <- 150000 # Lift assists, fixtures, cobots
training_cost <- 15000
total_investment <- equipment_cost + training_cost

# Annual Savings
injury_reduction <- (15 - 4) * 20000 # Avg cost per injury
productivity_gain <- 0.18 * 500000 # 18% improvement on labor cost
quality_improvement <- 0.35 * 50000 # 35% defect reduction

annual_savings <- injury_reduction + productivity_gain + quality_improvement

cat("Total Investment: $", format(total_investment, big.mark = ","), "\n")

Total Investment: $ 165,000

cat("Annual Savings: $", format(annual_savings, big.mark = ","), "\n")

Annual Savings: $ 327,500

cat("Payback Period:", round(total_investment / annual_savings, 1), "years\n")

Payback Period: 0.5 years

cat("5-Year ROI:", round((annual_savings * 5 - total_investment) / total_investment * 100, 1), "%\n")

5-Year ROI: 892 %
```


7.12 Summary

Table 7.34: Ergonomics in Manufacturing: Key Concepts Summary

Topic	Key Points
Ergonomics Definition	Fitting the job to the worker; physical, cognitive, organizational domains
Risk Factors	Posture, repetition, force, static positions, contact stress, vibration, environment
MSDs	Injuries to muscles, nerves, tendons; develop gradually from exposure to disability
Prevention	Engineering controls most effective; proper lifting, neutral postures, recovery time
Design Principles	Neutral posture, anthropometry, work height optimization, environmental control
Assessment Tools	REBA for whole body, RULA for upper limb, NIOSH for lifting tasks
AI in Ergonomics	Real-time monitoring, automated REBA/RULA scoring, continuous assessment
Employer Role	Management commitment, worker involvement, training, hazard control, evaluation

7.13 Review Questions

Question 1: What are the seven ergonomic risk factors, and which two are most commonly associated with carpal tunnel syndrome?

The seven ergonomic risk factors are: 1. Awkward Postures 2. Repetition 3. Force 4. Static Positions 5. Contact Stress 6. Vibration 7. Environmental Factors

Carpal tunnel syndrome is most commonly associated with: - **Repetition** - Repeated wrist movements compress the median nerve - **Force** - Forceful gripping increases pressure in the carpal tunnel - Also contributing: awkward wrist postures and vibration

Question 2: A worker performs a task 8 times per minute for a 4-hour shift. The cycle time is 7.5 seconds. Is this considered high repetition? Why?

Analysis: - Cycle time: 7.5 seconds (< 15 seconds threshold) - Repetitions per hour: $8 \times 60 = 480$ (> 240 threshold)

Yes, this is HIGH repetition because: 1. Cycle time is less than 15 seconds
2. Repetitions exceed 240 per hour

Risk Level: High - Immediate intervention needed

Recommended actions: - Job rotation with different tasks - Automation of repetitive elements - Micro-breaks every 20-30 minutes - Workstation redesign to reduce cycle elements

Question 3: Explain why ergonomic design should accommodate the 5th to 95th percentile of the population rather than designing for the “average” person.

Designing for the average excludes most people: - The “average” person in ALL dimensions doesn’t exist - A person may be average height but have long arms or short legs - Designing for only the 50th percentile fits only about 50% of users

The 5th-95th percentile range: - Accommodates 90% of the population - Addresses both small and large users - Provides adjustability rather than fixed dimensions

Application rules: - **Clearances** (overhead, legroom): Design for 95th percentile (largest) - **Reach distances:** Design for 5th percentile (smallest) - **Work surfaces:** Make adjustable to accommodate range

Example: A fixed workstation at 95cm height: - Too high for 5th percentile female (elbow at ~93cm) - Too low for 95th percentile male (elbow at ~117cm) - Adjustable range of 85-115cm accommodates both

Question 4: Calculate the NIOSH Lifting Index for the following task and determine if intervention is needed.

Task Parameters: - Horizontal distance (H): 35 cm - Vertical height (V): 80 cm - Travel distance (D): 50 cm - Asymmetry (A): 0° (symmetric lift) - Frequency: 4 lifts/minute for 1 hour - Coupling: Good (handles) - Actual load: 18 kg

Solution:

$$LC = 23 \text{ kg}$$

$$HM = 25/35 = 0.714$$

$$VM = 1 - 0.003|80-75| = 0.985$$

$$DM = 0.82 + 4.5/50 = 0.91$$

$$AM = 1 - 0.0032(0) = 1.0$$

$$FM = 0.75 \text{ (4/min, 1 hour, } V > 75\text{cm, from table)}$$

$$CM = 1.0 \text{ (good coupling)}$$

$$RWL = 23 \times 0.714 \times 0.985 \times 0.91 \times 1.0 \times 0.75 \times 1.0$$

$$RWL = 11.0 \text{ kg}$$

$$LI = 18 / 11.0 = 1.64$$

Risk Level: MODERATE ($1.0 < LI < 2.0$)

Action: Some workers may be at risk - consider changes

Recommendations: - Reduce horizontal distance (bring load closer) - Reduce lifting frequency - Use mechanical assist for loads >12 kg

Question 5: What are three advantages of AI-powered ergonomic assessment over traditional methods?

1. Scale and Coverage: - Traditional: 5-10 assessments per day by trained ergonomist - AI: Hundreds or thousands of assessments simultaneously - Can monitor entire facility continuously

2. Consistency and Objectivity: - Traditional: Inter-rater reliability issues; different assessors may score differently - AI: Consistent scoring algorithm applied uniformly - Removes subjective interpretation

3. Real-time Feedback: - Traditional: Assessment completed, report generated days/weeks later - AI: Immediate scoring and alerts - Can provide real-time coaching to workers

Additional advantages: - Lower cost per assessment - Non-disruptive (workers not aware of assessment) - Longitudinal tracking of posture patterns - Data for predictive analytics

7.14 Additional Resources

7.14.1 Videos

Ergonomics Fundamentals: - Introduction to Workplace Ergonomics - Safe Manual Handling Techniques

Assessment Tools: - REBA Assessment Tutorial - RULA Assessment Guide - NIOSH Lifting Equation Explained

AI Ergonomics: - TuMeke AI Ergonomics Demo - VelocityEHS Industrial Ergonomics

7.14.2 Online Tools

- ErgoPlus REBA Calculator
- NIOSH Lifting Equation Calculator
- Cornell University Ergonomics Web

7.15 References

- Berlin, C., & Adams, C. (2017). *Production Ergonomics: Designing Work Systems to Support Optimal Human Performance*. Ubiquity Press.
- Hignett, S., & McAtamney, L. (2000). Rapid Entire Body Assessment (REBA). *Applied Ergonomics*, 31(2), 201-205.
- McAtamney, L., & Corlett, E.N. (1993). RULA: A Survey Method for Investigation of Work-Related Upper Limb Disorders. *Applied Ergonomics*, 24(2), 91-99.

- NIOSH. (1994). *Applications Manual for the Revised NIOSH Lifting Equation*. DHHS (NIOSH) Publication No. 94-110.
 - OSHA. (2000). *Ergonomics: The Study of Work*. OSHA 3125.
 - Waters, T.R., Putz-Anderson, V., & Garg, A. (1993). Revised NIOSH Equation for the Design and Evaluation of Manual Lifting Tasks. *Ergonomics*, 36(7), 749-776.
 - ISO 11228-1:2021. Ergonomics — Manual handling — Part 1: Lifting, lowering and carrying.
 - ISO 11228-3:2007. Ergonomics — Manual handling — Part 3: Handling of low loads at high frequency.
-

Chapter 8

Industrial Robotics

8.1 Learning Objectives


After completing this chapter, you will be able to:

1. Define industrial robots and explain their role in modern manufacturing
 2. Identify the main types of robot configurations and their applications
 3. Describe robot specifications including payload, reach, repeatability, and speed
 4. Explain the components of a robotic system (manipulator, controller, teach pendant, end effector)
 5. Understand robot coordinate systems and motion types
 6. Identify common robot applications in automotive, food, and defense industries
 7. Apply robot safety standards and safeguarding methods
 8. Describe collaborative robot (cobot) technology and applications
 9. Understand basic robot programming concepts
-

8.2 Introduction to Industrial Robotics


An **industrial robot** is defined by ISO 8373 as “an automatically controlled, reprogrammable, multipurpose manipulator, programmable in three or more axes, which can be either fixed in place or mobile for use in industrial automation applications.”

8.2.1 Why Use Robots?

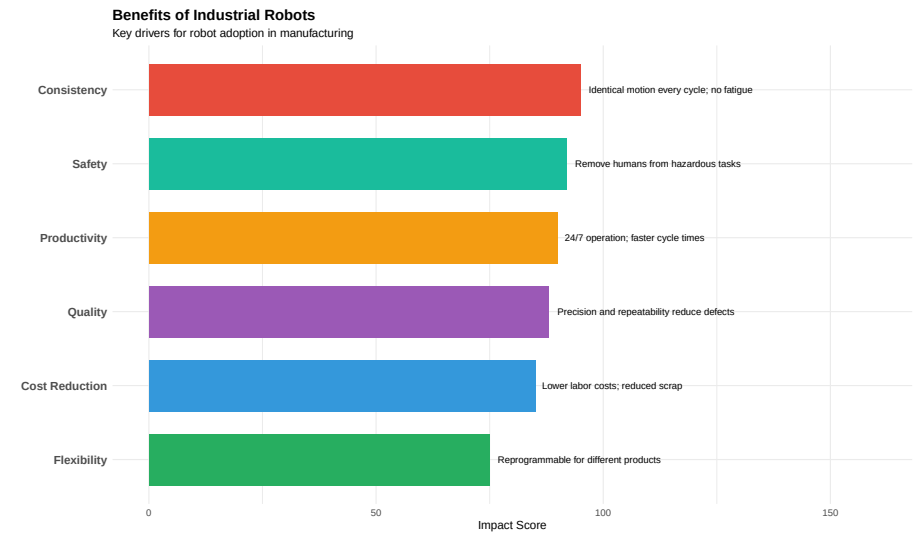

8.2.2 Robot Market Growth

``geom_smooth()`` using formula = 'y ~ x'`

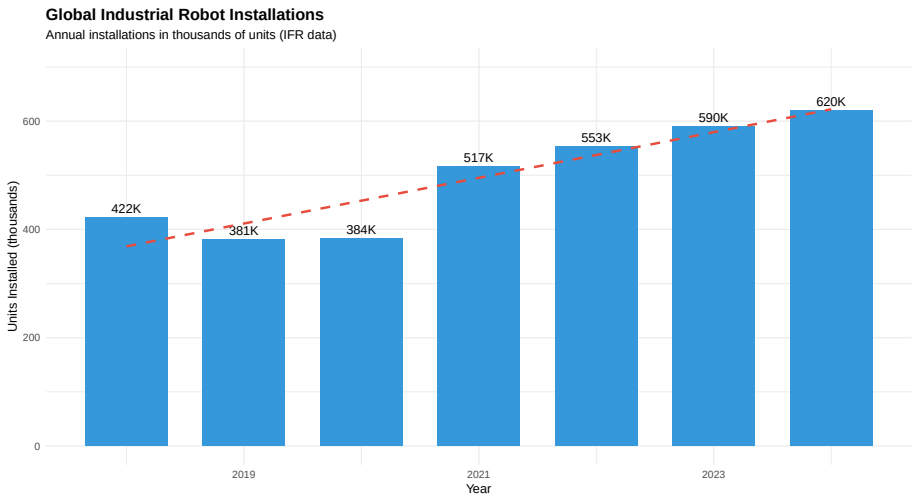

8.2.3 Industries Using Robots

Table 8.1: Industrial Robot Usage by Industry Sector


Industry	Market Share (%)	Key Applications	Growth Rate (%)
----------	------------------	------------------	-----------------

Automotive	30	Welding, painting, assembly, material handling	Stable
Electrical/Electronics	25	Assembly, testing, packaging, dispensing	High
Metal & Machinery	12	Machine tending, welding, cutting	Moderate
Food & Beverage	8	Palletizing, packaging, pick-and-place	High
Plastics & Chemicals	5	Injection molding, packaging, assembly	Moderate
Aerospace/Defense	4	Drilling, fastening, inspection, composite layup	High

8.3 Robot Configurations

Industrial robots come in various mechanical configurations, each suited to different applications.

8.3.1 Common Robot Types

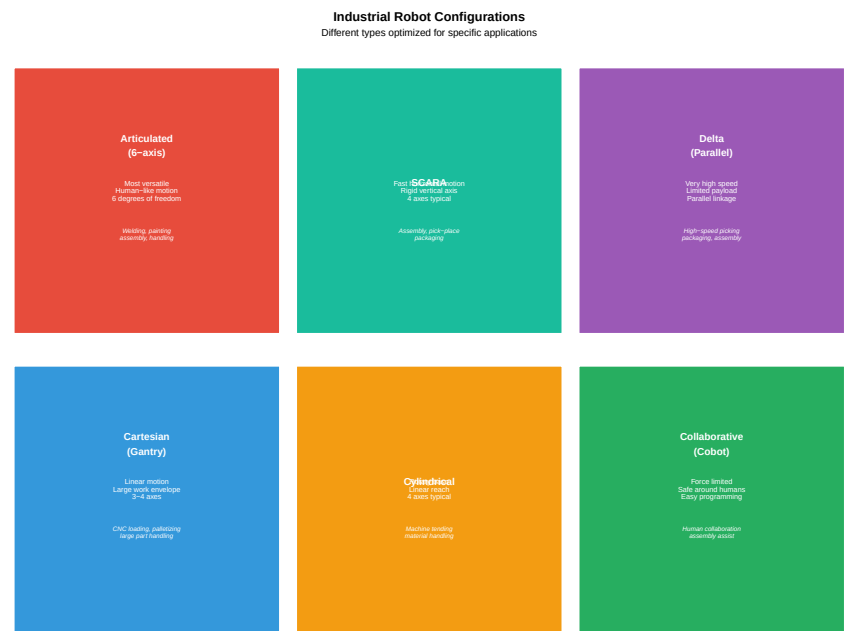

8.3.2 Detailed Configuration Comparison


Table 8.2: Robot Configuration Comparison

Configuration	Axes	Payload Range	Reach	Repeatability	Speed	Cost
6-Axis Articulated	6	3-2300 kg	0.5-4 m	±0.02-0.1 mm	Moderate-Fast	\$\$-\$\$\$\$

SCARA	4	1-20 kg	0.2-1.2 m	± 0.01 - 0.05 mm	Very Fast
Delta/Parallel	3-4	0.5-12 kg	0.5-1.5 m	± 0.05 - 0.1 mm	Extremely Fast
Cartesian/Gantry	3-6	5-1000+ kg	Custom (meters)	± 0.05 - 0.5 mm	Moderate

8.3.3 Degrees of Freedom

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use `linewidth` instead.

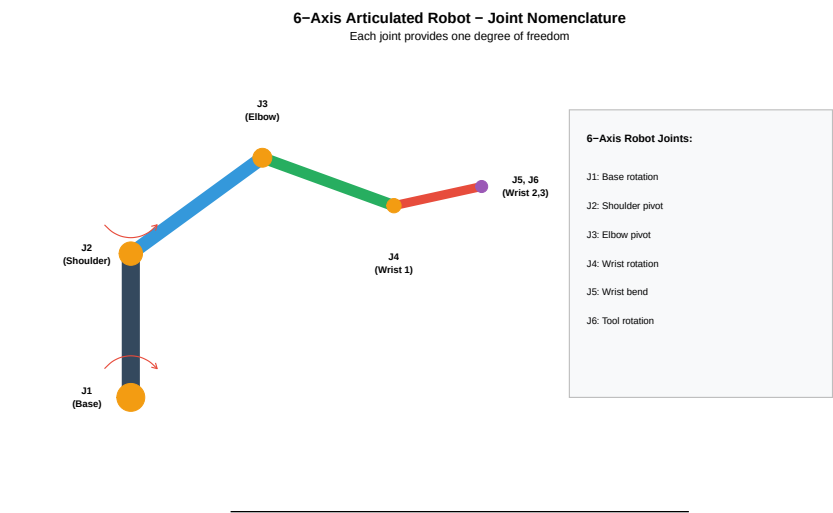

8.4 Robot Specifications

Understanding robot specifications is essential for proper selection and application.

8.4.1 Key Specifications


Table 8.3: Key Robot Specifications

Specification	Definition	Typical Values
Payload	Maximum mass the robot can handle at full speed	3-2300 kg (varies with speed)
Reach	Maximum distance from base to tool center point	500-4000 mm for articulated; 100-1000 mm for SCARA
Repeatability	Ability to return to same position repeatedly	± 0.01 to ± 0.1 mm
Accuracy	Ability to reach a commanded position exactly	± 0.1 to ± 1.0 mm
Maximum Speed	Maximum velocity at tool center point or joint speeds	1-12 m/s TCP; 100-300 deg/s joints
Degrees of Freedom	Number of independent axes of motion	4-7 axes
Mounting	How robot is installed (floor, ceiling, wall, angle)	Floor (most common); Ceiling; Wall; Angle

IP Rating	Ingress Protection rating for dust/water resistance	IP40 (standard) to IP67 (harsh
-----------	---	--------------------------------

8.4.2 Work Envelope

The **work envelope** (or workspace) is the three-dimensional space the robot can reach.

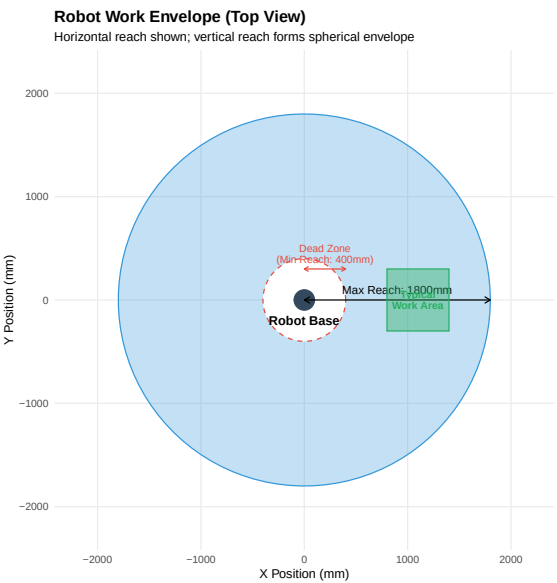

8.4.3 Payload Considerations

```
# Payload Calculation Example
robot_max_payload <- 10 # kg
gripper_weight <- 2.5 # kg
part_weight <- 5.0 # kg
safety_factor <- 1.2 # 20% safety margin

total_load <- gripper_weight + part_weight
required_capacity <- total_load * safety_factor
available_capacity <- robot_max_payload - gripper_weight

cat("Payload Analysis:\n")
```

Payload Analysis:

```
cat("          \n")
```

```
cat("Robot maximum payload:", robot_max_payload, "kg\n")
```

Robot maximum payload: 10 kg

```
cat("Gripper weight:", gripper_weight, "kg\n")
```

Gripper weight: 2.5 kg

```
cat("Part weight:", part_weight, "kg\n")
```

Part weight: 5 kg

```
cat("Total load:", total_load, "kg\n")
```

Total load: 7.5 kg

```
cat("With safety factor (", safety_factor, "x):", required_capacity, "kg\n")
```

With safety factor (1.2 x): 9 kg

```
cat("          \n")
```

```
cat("Available capacity for part:", available_capacity, "kg\n")
```

Available capacity for part: 7.5 kg

```
if(required_capacity <= robot_max_payload) {
  cat("Result: ACCEPTABLE - Robot can handle this load\n")
} else {
  cat("Result: EXCEEDED - Select larger robot or lighter gripper\n")
}
```

Result: ACCEPTABLE - Robot can handle this load

```
# Note about moment load
```

```
cat("\nNote: Also verify moment load (payload × distance from flange)\n")
```

Note: Also verify moment load (payload × distance from flange)


```
cat("Moment at wrist:", part_weight, "kg ×", 0.3, "m =", part_weight * 0.3, "kg·m\n")
```

Moment at wrist: 5 kg × 0.3 m = 1.5 kg·m

8.4.4 Repeatability vs Accuracy

Warning in geom_point(aes(x = 0, y = 0), color = "red", size = 4, shape = 3, : All aes i Please consider using `annotate()` or provide this layer with data containing a single row.

Warning in geom_circle(aes(x0 = 0, y0 = 0, r = 0.05), inherit.aes = FALSE, : All aesthetics have i Please consider using `annotate()` or provide this layer with data containing a single row.

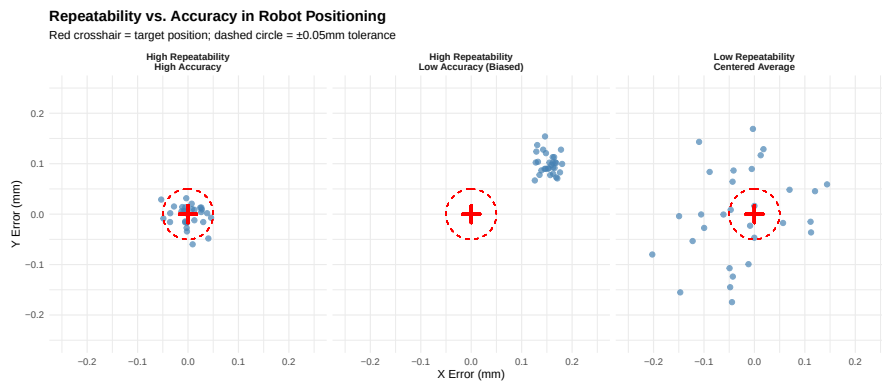

Understanding the Difference

Repeatability: - Ability to return to the SAME taught position - More important for most applications - Quoted spec (e.g., $\pm 0.05\text{mm}$) is typically 3 - Achieved through consistent mechanical design and servo control


Accuracy: - Ability to reach a COMMANDED position - Important for offline programming - Affected by mechanical tolerances, deflection, calibration - Can be improved through calibration

Why Repeatability Matters More: In most applications, the robot is taught positions by jogging to them. As long as it returns to those positions consistently (repeatability), accuracy doesn't matter. Accuracy only matters when positions are calculated (offline programming) rather than taught.

8.5 Robot System Components

A complete robotic system consists of several integrated components.

8.5.1 System Architecture

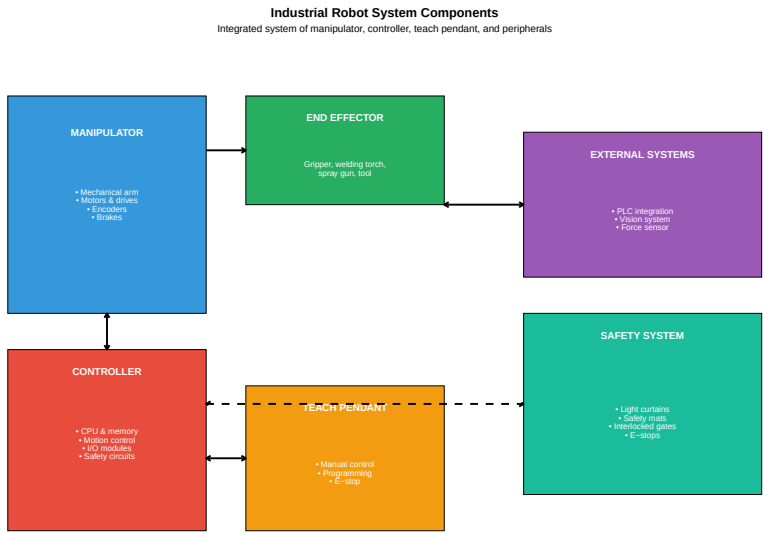

8.5.2 End Effectors (EOAT)

End of Arm Tooling (EOAT) is the device attached to the robot’s wrist to interact with parts.

Table 8.4: Common End Effector Types

EOAT Type	Operating Principle	Applications
Mechanical Gripper	Fingers actuated by pneumatic, electric, or hydraulic	General part handling
Vacuum Gripper	Suction cups powered by venturi or vacuum pump	Flat surfaces; sheet
Magnetic Gripper	Electromagnetic or permanent magnet	Ferrous metal parts
Welding Torch	MIG, TIG, spot welding equipment	Automotive body, f
Spray Gun	Paint, adhesive, sealant dispensing	Automotive painting
Deburring Tool	Rotary tool for edge finishing	Casting, machining
Force/Torque Sensor	Measures forces and torques at tool	Assembly; polishing
Vision Camera	2D or 3D imaging for guidance	Part location; inspe

8.5.3 Gripper Selection Example

```
# Gripper Force Calculation
part_mass <- 3.0          # kg
acceleration <- 15        # m/s2 (robot acceleration)
gravity <- 9.81           # m/s2
```

```

safety_factor <- 2.0    # Minimum safety factor
friction_coefficient <- 0.3 # Steel on rubber

# Calculate forces
weight_force <- part_mass * gravity
inertia_force <- part_mass * acceleration
total_force <- sqrt(weight_force^2 + inertia_force^2)

# Required grip force (friction gripper)
required_grip <- total_force / friction_coefficient * safety_factor

cat("Gripper Force Calculation:\n")

```

Gripper Force Calculation:

```
cat("          \n")
```

```
cat("Part mass:", part_mass, "kg\n")
```

Part mass: 3 kg

```
cat("Weight force:", round(weight_force, 1), "N\n")
```

Weight force: 29.4 N

```
cat("Inertia force:", round(inertia_force, 1), "N\n")
```

Inertia force: 45 N

```
cat("Combined force:", round(total_force, 1), "N\n")
```

Combined force: 53.8 N

```
cat("Friction coefficient:", friction_coefficient, "\n")
```

Friction coefficient: 0.3

```
cat("Safety factor:", safety_factor, "\n")
```

Safety factor: 2

```
cat("          \n")
```

```
cat("Required grip force:", round(required_grip, 1), "N\n")
```

Required grip force: 358.5 N


```
cat("\nSelect gripper with grip force ", ceiling(required_grip/10)*10, "N\n")
```

Select gripper with grip force 360 N

8.6 Coordinate Systems and Motion

Understanding coordinate systems is essential for robot programming.


8.6.1 Coordinate Frames

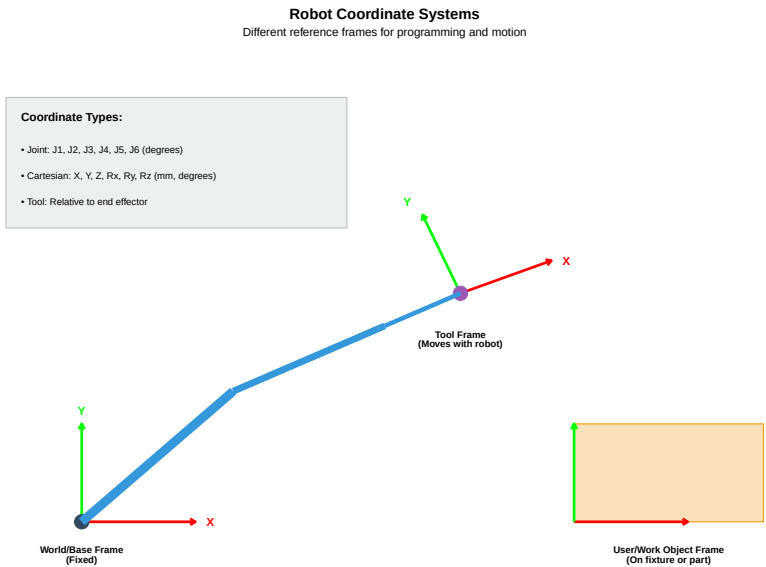

8.6.2 Motion Types


Table 8.5: Robot Motion

Motion Type	Path Characteristic	Speed Control
Joint Move (MoveJ)	Unpredictable path; each joint moves at constant speed	Joint velocity
Linear Move (MoveL)	Straight line from start to end; TCP follows linear path	TCP velocity
Circular Move (MoveC)	Arc or circle; defined by start, via, and end points	TCP velocity

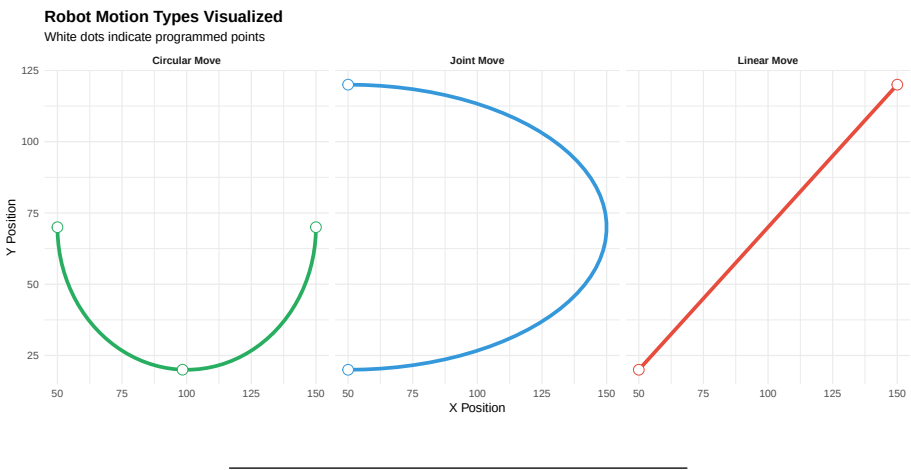

8.7 Robot Applications

8.7.1 Automotive Applications

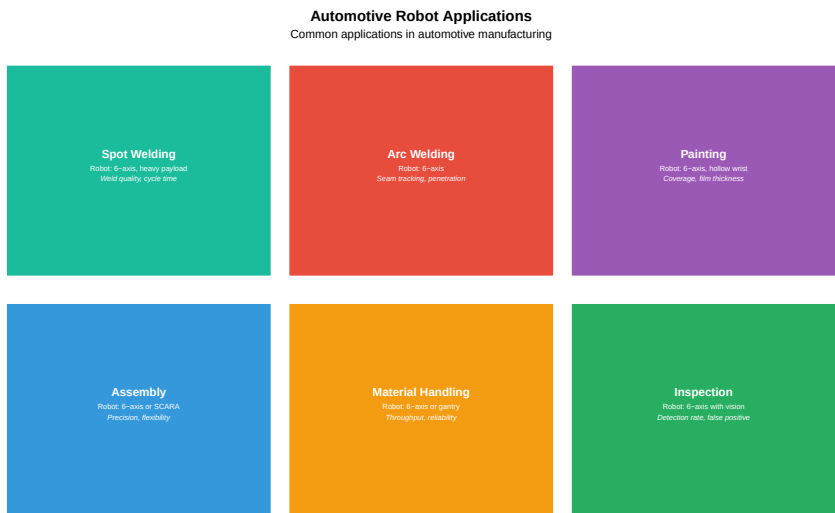

8.7.2 Food & Beverage Applications

Table 8.6: Food & Beverage Robot Applications

Application	Description	Robot Type	Special Re
Palletizing Case Packing	Stack cases/bags onto pallets in patterns Load products into cases/cartons	4-axis palletizer, 6-axis Delta, SCARA, 6-axis	IP65+, wa High speed

Pick and Place	Transfer products between conveyors/stations	Delta (high speed), SCARA
Cutting/Portioning	Protein portioning, cake cutting	6-axis with vision
Decorating	Applying icing, toppings, decorations	6-axis, delta
Quality Inspection	Vision-based defect detection, grading	6-axis with vision

8.7.3 Aerospace/Defense Applications

Table 8.7: Aerospace/Defense Robot Applications

Application	Description	Accuracy Required
Drilling & Fastening	Precision hole drilling; rivet/bolt installation	$\pm 0.05\text{mm}$ position
Composite Layup	Automated fiber placement (AFP); tape laying	$\pm 0.25\text{mm}$ fiber placement
NDT/Inspection	Ultrasonic, X-ray, visual inspection of structures	Full coverage
Surface Treatment	Painting, coating, surface prep for bonding	Consistent thickness
Assembly	Large structure assembly; wing-to-fuselage	$\pm 0.5\text{mm}$

8.8 Robot Safety

Robot safety is critical to protect workers from potential hazards.

8.8.1 Hazard Categories

Table 8.8: Robot Hazard Categories and Mitigation

Hazard	Description	Risk_Factors
Impact	Robot strikes person with arm or tooling	Speed, mass, sharp edges, unexpected movement
Crushing	Person caught between robot and fixed object	Limited escape space, high force
Trapping	Body part caught in articulating joints or mechanisms	Pinch points at joints, insufficient clearance
Ejection	Part or tool flies off due to grip failure or breakage	Grip force, centrifugal force, tool condition
Other	Electrical, thermal, noise, radiation hazards	Voltage, heat, welding arc, laser


8.8.2 Safety Standards

Table 8.9: Key Robot Safety Standards

Standard	Scope	Key Requirements
ISO 10218-1:2011	Robot manufacturer requirements	Stop functions, speed limiting, singular point avoidance
ISO 10218-2:2011	Robot system integrator requirements	Risk assessment, safeguarding, layout

ISO/TS 15066:2016	Collaborative robot safety	Force/pressure limits, speed/separation monitoring
ANSI/RIA R15.06	US equivalent to ISO 10218	Safeguarding devices, risk assessment
ANSI/RIA R15.08	Industrial mobile robots	Navigation safety, personnel detection

8.8.3 Safeguarding Methods

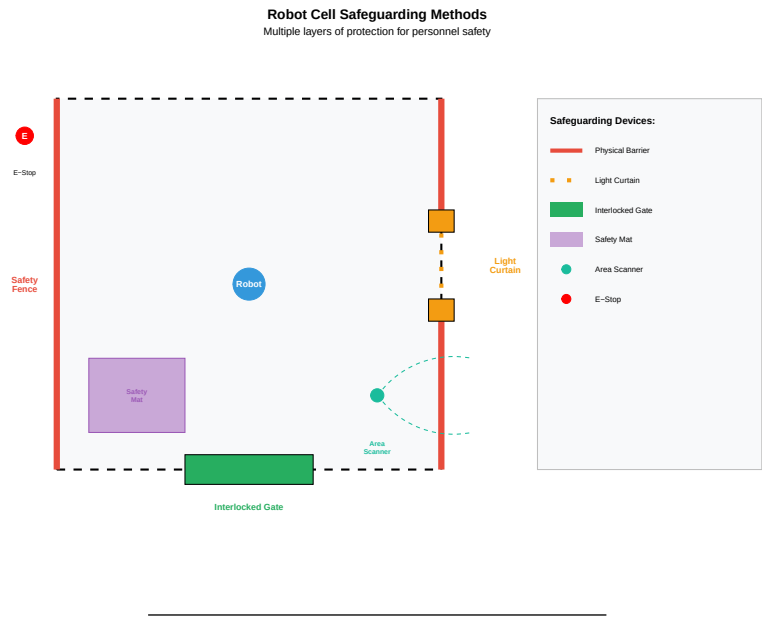

8.9 Collaborative Robots (Cobots)

Collaborative robots are designed to work safely alongside humans without traditional guarding.

8.9.1 Cobot Characteristics

Table 8.10: Traditional Robot vs. Collaborative Robot Comparison

	Traditional Industrial Robot	Collaborative Robot
Safety Approach	Safeguarded cell; humans excluded	Inherently safe; force/speed limited
Payload	Up to 2300 kg	Typically 3-35 kg
Speed	Very high (>2 m/s)	Limited (<1.5 m/s typically)
Reach	Up to 4 m	500-1300 mm typical
Programming	Specialized programmers	Intuitive; hand guiding
Guarding	Required (fences, curtains)	Often not required
Investment	High (\$50K-500K+ with cell)	Lower (\$25K-75K typical)

Applications	High-volume, dedicated tasks	Flexible, shared workspace
--------------	------------------------------	----------------------------

8.9.2 Collaborative Operation Modes (ISO/TS 15066)

Table 8.11: ISO/TS 15066

Collaboration Mode	Description
Safety-Rated Monitored Stop	Robot stops when human enters collaborative zone; resumes
Hand Guiding	Operator physically guides robot; robot follows input forces
Speed and Separation Monitoring	Robot adjusts speed based on distance to human; stops if too close
Power and Force Limiting	Robot limits force/pressure on contact to safe levels

8.9.3 Force and Pressure Limits

ISO/TS 15066 specifies maximum contact forces and pressures for different body areas:

Table 8.12: ISO/TS 15066 Biomechanical Limits (Selected Values)

Body Area	Max Pressure (N/cm ²)	Quasi-Static Pressure	Max Force (N)	Quasi-Static Force
Skull/Forehead	130	130	130	130
Face	65	65	65	65
Neck (front/back)	145	145	150	150
Chest	140	140	140	140
Abdomen	110	110	110	110
Hand/Finger	280	280	140	140
Arm	190	190	150	150
Leg	220	220	220	220

8.10 Robot Programming Basics

8.10.1 Programming Methods

Table 8.13: Robot Programming Methods

Method	Description
Online/Teach Pendant	Use teach pendant to jog robot to positions and record
Lead-Through/Hand Guiding	Physically move robot arm to desired positions
Offline Programming	Create programs on PC without robot; download later

Simulation-Based

Program and test in virtual environment; transfer to real robot Risk-free test

8.10.2 Basic Program Structure

Example Robot Program (ABB RAPID-style pseudocode):

```
PROGRAM Main()

  ! Initialize
  HomePosition()
  GripperOpen()

  ! Main cycle
  WHILE running DO

    ! Move to pick position
    MoveJ pApproach, v500, z50, tool1
    MoveL pPick, v100, fine, tool1

    ! Pick part
    GripperClose()
    WaitTime 0.2

    ! Move to place position
    MoveL pApproach, v200, z50, tool1
    MoveJ pPlaceApproach, v500, z50, tool1
    MoveL pPlace, v100, fine, tool1

    ! Place part
    GripperOpen()
    WaitTime 0.2

    ! Return
    MoveL pPlaceApproach, v200, z50, tool1

    ! Increment counter
    PartCount := PartCount + 1

  ENDWHILE

ENDPROGRAM
```

8.10.3 Key Programming Concepts

Table 8.14: Key Robot Programming Concepts

Concept	Description	Example
Position/Target	Stored robot position (joint angles or Cartesian coordinates)	pHome, pE
Motion Instruction	Command to move robot (MoveJ, MoveL, MoveC)	MoveL pT
Speed Data	Velocity parameter (mm/s for TCP, % for joints)	v100 = 100
Zone Data	Corner path blending (fine = stop at point, z10 = 10mm blend)	fine = stop
Tool Data	Definition of tool center point relative to flange	tool1 with
Work Object	Definition of work coordinate system for part positions	wobj_fixtu
I/O Commands	Control external devices (SetDO, WaitDI, etc.)	SetDO doC

8.11 Video Resources

8.11.1 Introduction to Industrial Robots

8.11.2 Collaborative Robots Explained

8.12 Summary

Industrial robotics is a fundamental technology in modern manufacturing:

1. **Robot types** include articulated (most versatile), SCARA (fast assembly), delta (high-speed picking), and cartesian (large work areas)
 2. **Key specifications** include payload, reach, repeatability, speed, and degrees of freedom
 3. **System components** work together: manipulator, controller, teach pendant, end effector, and safety system
 4. **Coordinate systems** (world, tool, user) enable flexible programming and positioning
 5. **Applications** span automotive, food & beverage, and aerospace with industry-specific requirements
 6. **Safety** requires comprehensive risk assessment and appropriate safeguarding
 7. **Collaborative robots** enable human-robot cooperation with force/speed limiting
 8. **Programming** can be online (teach pendant), lead-through, or offline
-

8.13 Review Questions

Question 1: Compare articulated (6-axis) robots, SCARA robots, and delta robots. For each, describe the typical applications and key advantages.

Answer:

Robot Type	Configuration	Key Advantages	Typical Applications
6-Axis Articulated	6 revolute joints; human-like arm	Maximum flexibility; can reach any orientation; large payload range	Welding, painting, assembly, material handling, machine tending
SCARA	4 axes; selective compliance	Very fast horizontal motion; rigid vertical; compact; precise	Pick-and-place, assembly, screw driving, packaging
Delta (Parallel)	3-4 axes; parallel linkage	Extremely fast (150+ picks/min); low moving mass	High-speed picking, packaging, sorting, light assembly

Detailed Comparison:

6-Axis Articulated: - Most versatile - can position tool at any angle - Wide payload range (3 kg to 2300+ kg) - Can reach around obstacles - Complex programming possible - *Best for:* Tasks requiring complex orientations, welding seams, painting

SCARA: - Inherently rigid in Z (vertical) - good for insertion - Very fast in X-Y plane - Lower cost than 6-axis - Compact footprint - *Best for:* Assembly operations, circuit board population, packaging

Delta: - Highest speed of any configuration - Low inertia (motors at base, not moving) - Limited payload (typically <15 kg) - Requires overhead mounting - *Best for:* High-speed sorting, packaging lines, food handling

Question 2: A robot has a maximum payload of 15 kg. The gripper weighs 4 kg and the part weighs 8 kg. Is this robot suitable? What other factors should be considered?

Answer:

Initial Assessment:

Total load = Gripper weight + Part weight

Total load = 4 kg + 8 kg = 12 kg

Robot capacity: 15 kg
 Load: 12 kg
 Remaining margin: 3 kg (20%)

Consideration with Safety Factor:

Typical safety factor: 1.2 - 1.5
 Required capacity = $12 \text{ kg} \times 1.25 = 15 \text{ kg}$

This equals the robot's maximum capacity - marginal!

Additional Factors to Consider:

1. Moment Load (Torque at Wrist)

- Distance from flange to center of gravity matters
- If part is held 300mm from flange: Moment = $8 \text{ kg} \times 0.3 \text{ m} = 2.4 \text{ kg} \cdot \text{m}$
- Robot specs include moment limits - must verify

2. Inertia

- Fast motion requires acceleration
- Higher mass + longer distance = higher inertia
- May need to derate payload for high-speed applications

3. Payload Derating with Reach

- Many robots derate payload at extended reach
- 15 kg at 500mm may become 10 kg at 1500mm
- Check payload diagram in robot specifications

4. Orientation

- Payload may vary with wrist orientation
- Horizontal reach vs. vertical lift differ

5. Acceleration Requirements

- Higher acceleration = higher effective load
- May need to reduce speed/acceleration

Recommendation: The 15 kg robot is marginal for this application. Consider:
 - Select next size up (20 kg) for adequate margin - Use lighter gripper (3 kg or less) - Reduce part handling distance from flange - Limit acceleration/speed if using this robot

Question 3: Explain the difference between repeatability and accuracy. Why is repeatability often more important than accuracy for robot applications?

Answer:

Definitions:

Repeatability: - Ability to return to the **same taught position** multiple times - Measures consistency/precision of motion - Quoted as $\pm$ value (e.g., $\pm 0.05 \text{ mm}$ at 3) - Affected by: mechanical wear, servo control, thermal effects

Accuracy: - Ability to reach a **commanded position** exactly - Measures how close actual position is to theoretical position - Typically worse than repeatability

bility (e.g., ± 0.5 mm) - Affected by: manufacturing tolerances, calibration, deflection, backlash

Why Repeatability is Usually More Important:

1. Teaching Method

- Most robots are programmed by teaching (jogging to positions)
- Robot doesn't need to know where it "should" be - just return to where it was taught
- As long as it returns consistently (repeatability), accuracy doesn't matter

2. Process Requirements

- Welding: Need to follow same seam every time $\rightarrow$ repeatability
- Assembly: Need to insert part in same hole every time $\rightarrow$ repeatability
- Pick-place: Need to pick from same fixture position $\rightarrow$ repeatability

3. Compensation Possible

- Poor accuracy can be compensated by adjusting taught points
- Poor repeatability cannot be compensated

When Accuracy Matters:

1. Offline Programming

- Positions calculated from CAD data, not taught
- Robot must go where commanded, first time
- Common in aerospace (large parts, tight access)

2. Multi-Robot Systems

- Robots must agree on positions
- Calibration to common frame requires accuracy

3. Frequent Program Changes

- If programs are frequently changed without re-teaching
- Offline modifications need accurate execution

Bottom Line: For most industrial applications, ± 0.05 mm repeatability is far more valuable than ± 0.5 mm accuracy because taught positions are used.

Question 4: Describe the four collaborative operation modes defined in ISO/TS 15066. Give an example application for each.

Answer:

1. Safety-Rated Monitored Stop

Description: Robot operates at normal speed when workspace is clear. When a person enters the collaborative zone, the robot stops and holds position. Robot resumes automatically when person exits.

Technical Requirements: - Safety-rated sensors (light curtains, scanners) - Safety-rated monitored stop function - Clearly defined collaborative zone

Example Application: Machine tending cell where operator occasionally loads

raw material. Robot works at full speed during machining cycle but stops safely when operator enters to load/unload.

2. Hand Guiding

Description: Operator physically contacts the robot through a hand guiding device and manually moves it. Robot follows operator's force input.

Technical Requirements: - Hand guiding device (force/torque sensing) - Emergency stop accessible at guiding device - Speed reduction while guiding - Safe torque control

Example Application: Teaching a paint path on an aerospace component. Operator guides robot along surface contour while robot records positions. Also used for "collaborative finishing" where operator guides robot holding a polishing tool.

3. Speed and Separation Monitoring

Description: Robot continuously monitors distance to the nearest person. Speed adjusts based on separation: full speed when far, reduced speed when closer, stop if minimum distance breached.

Technical Requirements: - Safety-rated distance monitoring (usually area scanners) - Safety-rated speed control - Multiple speed/distance zones defined - Real-time separation calculation

Example Application: Shared packaging area where robot palletizes cases while operator moves around the cell. Robot slows when operator approaches, stops if too close, and resumes at appropriate speed as operator moves away.

4. Power and Force Limiting

Description: Robot is designed so that forces and pressures from any contact are below injury thresholds. Contact is allowed because it cannot cause harm.

Technical Requirements: - Inherently safe design (compliant joints, low mass, rounded surfaces) - Force/torque sensing or current monitoring - Verified force limits per ISO/TS 15066 body area tables - May include padding/soft covers

Example Application: Assembly assist where robot holds a heavy part while human worker installs fasteners. Robot and human are in direct contact, with robot providing position support and human providing dexterity. Force is limited so accidental contact causes no injury.

Question 5: Calculate the required gripper force for a robot picking a 2 kg part with a friction coefficient of 0.4. The robot accelerates at 10 m/s². Use a safety factor of 2.0.

Answer:

```
# Given values
mass <- 2.0          # kg
acceleration <- 10   # m/s2
gravity <- 9.81       # m/s2
friction_coef <- 0.4 # Coefficient of friction
safety_factor <- 2.0 # Safety factor

# Calculate forces
# Weight force (vertical)
F_gravity <- mass * gravity

# Inertia force (from acceleration)
F_inertia <- mass * acceleration

# Combined force (vector sum for worst case)
# Worst case: acceleration horizontal while holding against gravity
F_combined <- sqrt(F_gravity2 + F_inertia2)

# Required friction force to hold part
# F_friction = μ × F_normal
# F_normal = Grip force
# F_friction must overcome F_combined

# Without safety factor:
F_grip_min <- F_combined / friction_coef

# With safety factor:
F_grip_required <- F_grip_min * safety_factor

cat("Gripper Force Calculation:\n")
```

Gripper Force Calculation:

```
cat("                                \n\n")
```

```
cat("Input Parameters:\n")
```

Input Parameters:

```
cat("  Part mass:", mass, "kg\n")
```

Part mass: 2 kg

```
cat("  Robot acceleration:", acceleration, "m/s2\n")
```

Robot acceleration: 10 m/s²

```
cat("  Friction coefficient:", friction_coef, "\n")
```

Friction coefficient: 0.4

```
cat("  Safety factor:", safety_factor, "\n\n")
```

Safety factor: 2

```
cat("Force Analysis:\n")
```

Force Analysis:

```
cat("  Gravity force: F_g = m × g =", mass, "×", gravity, "=",  
    round(F_gravity, 1), "N\n")
```

Gravity force: $F_g = m \times g = 2 \times 9.81 = 19.6$ N

```
cat("  Inertia force: F_i = m × a =", mass, "×", acceleration, "=",  
    round(F_inertia, 1), "N\n")
```

Inertia force: $F_i = m \times a = 2 \times 10 = 20$ N

```
cat("  Combined force: F_c =  $\sqrt{F_g^2 + F_i^2}$  =", round(F_combined, 1), "N\n\n")
```

Combined force: $F_c = \sqrt{F_g^2 + F_i^2} = 28$ N

```
cat("Grip Force Calculation:\n")
```

Grip Force Calculation:

```
cat("  F_friction =    × F_grip  F_combined\n")
```

$F_{friction} = \quad \times F_{grip} \quad F_{combined}$

```
cat("  F_grip  F_combined /    =", round(F_combined, 1), "/", friction_coef,  
    "=", round(F_grip_min, 1), "N\n")
```

$F_{grip} \quad F_{combined} / \quad = 28 / 0.4 = 70$ N

```
cat("  With safety factor:", round(F_grip_min, 1), "×", safety_factor,  
    "=", round(F_grip_required, 1), "N\n\n")
```

With safety factor: $70 \times 2 = 140.1$ N

```
cat("                                \n")
```

```
cat("REQUIRED GRIPPER FORCE:", ceiling(F_grip_required), "N minimum\n")
```

REQUIRED GRIPPER FORCE: 141 N minimum

```
cat("Select gripper rated for ", ceiling(F_grip_required/10)*10, "N\n")
```

Select gripper rated for 150 N

Question 6: List and describe five safety devices used to protect personnel around industrial robots.

Answer:

1. Physical Barriers (Safety Fencing)

Description: Fixed guards or fencing that physically prevent access to the robot work envelope.

Characteristics: - Rigid construction (steel, aluminum, polycarbonate) - Must withstand expected impact forces - Minimum height (typically 1.8 m) - Properly anchored to floor - May include interlocked gates for authorized entry

Application: Primary safeguard for most traditional robot cells.

2. Light Curtains (AOPD - Active Opto-electronic Protective Device)

Description: Transmitter and receiver create a sensing field of infrared beams. Breaking any beam triggers a stop.

Characteristics: - Type 2 or Type 4 (safety-rated) - Resolution (14mm for finger, 40mm for hand/arm) - Muting capability for material transfer - Very fast response (<20ms)

Application: Access points where frequent entry needed; allows material flow while protecting personnel.

3. Safety Mats (Pressure-Sensitive Mats)

Description: Floor mats that detect weight/pressure and trigger stop when stepped on.

Characteristics: - Placed in hazardous zones - Withstand industrial environment (oil, debris) - Fast response - Self-monitoring for failures

Application: Areas where overhead detection isn't practical; around robot bases.

4. Area Scanners (Safety Laser Scanners)

Description: Laser scanner detects objects/personnel entering defined zones. Multiple warning and stop zones configurable.

Characteristics: - 270° field of view typical - Multiple programmable zones - Warning zone (slow robot) and stop zone (stop robot) - Type 3 safety rating - Detects at floor level

Application: Open cells requiring flexibility; mobile robot protection; speed/separation monitoring.

5. Interlocked Gates/Doors

Description: Access gates with safety switches that stop robot when opened.

Characteristics: - Mechanical or magnetic interlock switches - Trapped key systems for lockout - May include guard locking (prevent opening while robot moving) - Escape release from inside - Meets ISO 14119

Application: Authorized entry points for maintenance, setup, troubleshooting.

Additional Devices:

- **E-Stop (Emergency Stop):** Palm-operated buttons to immediately stop robot
- **Two-Hand Controls:** Require both hands on buttons to initiate motion
- **Enabling Devices:** 3-position switches held by personnel in restricted area
- **Presence-Sensing Devices:** Capacitive, radar, or vision-based detection

Question 7: Explain the difference between MoveJ (Joint Move) and MoveL (Linear Move). When would you use each?

Answer:

MoveJ (Joint Move)

How It Works: - Each joint moves from start to end angle independently - All joints start and stop together (coordinated) - Path of TCP (Tool Center Point) is unpredictable - curved - Robot calculates joint interpolation, not TCP path

Characteristics: - Fastest point-to-point motion - No singularity issues during move - Path may vary depending on starting configuration - Speed specified in % of max or joint velocity (°/s)

When to Use: - Moving between distant points through free space - Approach movements before precise positioning - Home position moves - Any time when path doesn't matter, only endpoints - Escaping from near-singularity positions

MoveL (Linear Move)

How It Works: - TCP follows a straight line from start to end - Robot calculates joint positions to maintain linear TCP path - Orientation is interpolated linearly as well - All axes coordinated to produce straight line

Characteristics: - Guaranteed straight path - Consistent, predictable motion - Slower than MoveJ for same endpoint distance - Can encounter singularities during move - Speed specified in mm/s at TCP

When to Use: - Process paths (welding, sealing, cutting) - Insertion/extraction operations - Approach to pick/place positions - Any time path must be straight - When moving close to obstacles

Practical Example:

Imagine picking a part from a fixture:

```
! Move from home to near pick position - path doesn't matter
MoveJ pApproach, v1000, z50, tool1    ! Joint move - fast

! Move down to pick - must be straight to avoid collision
MoveL pPick, v100, fine, tool1        ! Linear move - controlled

! Pick part, then retract straight up
GripperClose()
MoveL pApproach, v200, z10, tool1     ! Linear move - straight up

! Move to place area - through open space
MoveJ pPlaceApproach, v1000, z50, tool1 ! Joint move - fast
```

Key Decision: - If path matters → MoveL - If only destination matters → MoveJ

Question 8: A manufacturing engineer needs to select a robot for a palletizing application. The requirements are: 25 kg payload, 2.2 m horizontal reach, 10 cycles per minute, floor-mounted. Recommend a robot type and justify your selection.

Answer:

Application Analysis:

Requirement	Value	Implication
Payload	25 kg	Medium-heavy; rules out delta and most SCARA
Reach	2.2 m	Large work envelope needed
Cycle rate	10/min	6 seconds/cycle; moderate speed

Requirement	Value	Implication
Mounting	Floor	Typical industrial installation
Motion type	Palletizing	Mainly vertical and horizontal; some rotation

Robot Type Evaluation:

1. 4-Axis Palletizing Robot (RECOMMENDED) - Specifically designed for palletizing - 4 axes: base rotation, arm, elbow, wrist - High payload capability (25-700+ kg available) - Long reach available (up to 3.2m) - Fast for palletizing motions - Lower cost than 6-axis - Examples: FANUC M-410iC, KUKA KR QUANTEC PA, ABB IRB 460

Verdict: Excellent match for this application

2. 6-Axis Articulated Robot - Maximum flexibility - Can handle complex pallet patterns - Higher cost than 4-axis for same payload - May be over-specified for simple palletizing - Examples: FANUC M-710iC/50, ABB IRB 6700

Verdict: Capable but potentially over-specified and more expensive

3. Cartesian/Gantry Robot - Can cover very large areas - Simple motion control - Higher installation complexity - Less common for palletizing applications

Verdict: Possible but not ideal for this payload/cycle rate

Recommended Selection:

FANUC M-410iC/185 or similar 4-axis palletizer - Payload: 185 kg (well above 25 kg requirement with margin for gripper) - Reach: 3.143 m (exceeds 2.2 m requirement) - Repeatability: ± 0.5 mm - Axes: 4

Justification: 1. **Purpose-built:** Designed specifically for palletizing 2. **Adequate payload:** 185 kg allows for heavy gripper + multiple parts 3. **Reach:** 3.1 m provides margin for future needs 4. **Speed:** Optimized kinematics for palletizing motion profile 5. **Reliability:** Proven in thousands of palletizing applications 6. **Cost:** Lower than equivalent 6-axis robot 7. **Simplicity:** 4 axes easier to program and maintain than 6

Additional Recommendations: - Vacuum or mechanical gripper depending on product - Vision system for product detection if variety exists - Safety scanner for operator access during pallet changes - Interface to conveyor for product delivery

8.14 References

1. Siciliano, B., & Khatib, O. (Eds.). (2016). *Springer Handbook of Robotics* (2nd ed.). Springer.
2. ISO 10218-1:2011. *Robots and Robotic Devices - Safety Requirements for Industrial Robots - Part 1: Robots*.
3. ISO 10218-2:2011. *Robots and Robotic Devices - Safety Requirements for Industrial Robots - Part 2: Robot Systems and Integration*.
4. ISO/TS 15066:2016. *Robots and Robotic Devices - Collaborative Robots*.
5. International Federation of Robotics. (2023). *World Robotics Report*. IFR.
6. Niku, S.B. (2020). *Introduction to Robotics: Analysis, Control, Applications* (3rd ed.). Wiley.
7. Craig, J.J. (2018). *Introduction to Robotics: Mechanics and Control* (4th ed.). Pearson.
8. FANUC Corporation. (2023). *Robot Technical Manuals*. FANUC.
9. ABB Robotics. (2023). *Technical Reference Manual - RAPID Instructions*. ABB.
10. Robotic Industries Association. (2023). *ANSI/RIA R15.06-2012: Industrial Robots and Robot Systems - Safety Requirements*. RIA.

Chapter 9

Industrial Automation Fundamentals

9.1 Learning Objectives


After completing this chapter, you will be able to:

1. Define industrial automation and explain its role in modern manufacturing
 2. Distinguish between fixed, programmable, and flexible automation
 3. Describe the architecture and function of Programmable Logic Controllers (PLCs)
 4. Identify common industrial sensors and their applications
 5. Explain motor control fundamentals including VFDs and servo systems
 6. Understand industrial communication protocols and networking
 7. Describe the role of HMI and SCADA in process monitoring
 8. Apply safety principles to automated systems
 9. Explain Industry 4.0 concepts and the Industrial Internet of Things (IIoT)
-

9.2 Introduction to Industrial Automation

Industrial automation is the use of control systems, machinery, and information technologies to handle processes and machinery in an industry, replacing human intervention where possible to increase efficiency, quality, and safety.

9.2.1 Why Automate?

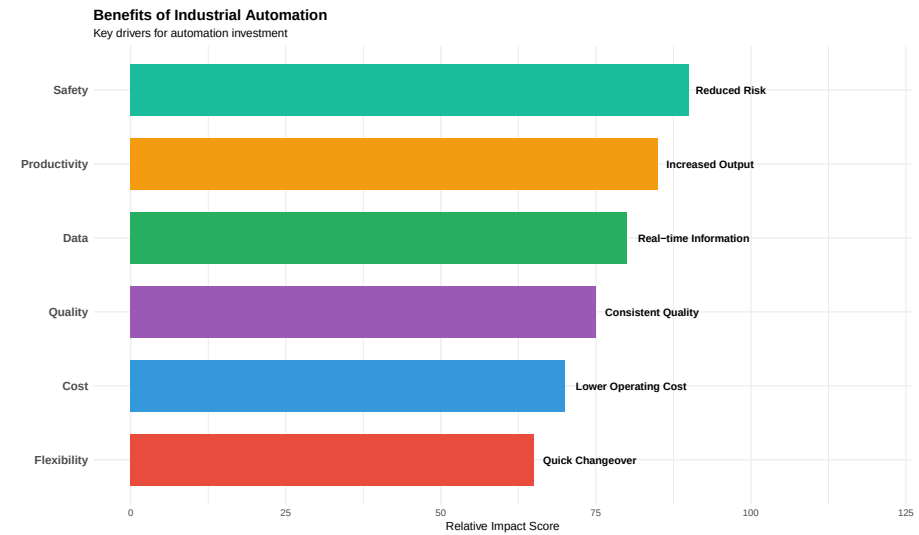

9.2.2 Automation in Key Industries

Table 9.1: Automation Applications by Industry

Industry	Application	Technology	Benefit
Automotive			
Automotive	Robotic welding and assembly	6-axis robots, PLCs	Consistent w
Automotive	Automated paint systems	Conveyors, spray robots	Uniform coat
Automotive	Vision inspection	Machine vision, AI	100% inspect
Food & Beverage			
Food & Beverage	Filling and packaging lines	Servo drives, sensors	High speed,
Food & Beverage	Pasteurization control	PLCs, temperature control	Food safety,
Food & Beverage	Sorting and grading	Vision systems, conveyors	Quality sorti
Aerospace/Defense			
Aerospace/Defense	CNC precision machining	CNC, CMM integration	Tight toleran
Aerospace/Defense	Automated testing systems	Automated test equipment	Comprehensi
Aerospace/Defense	Clean room automation	Robotics, HEPA systems	Contaminati

9.3 Types of Automation

Industrial automation systems can be classified based on their flexibility and programming capability.

9.3.1 Automation Classification


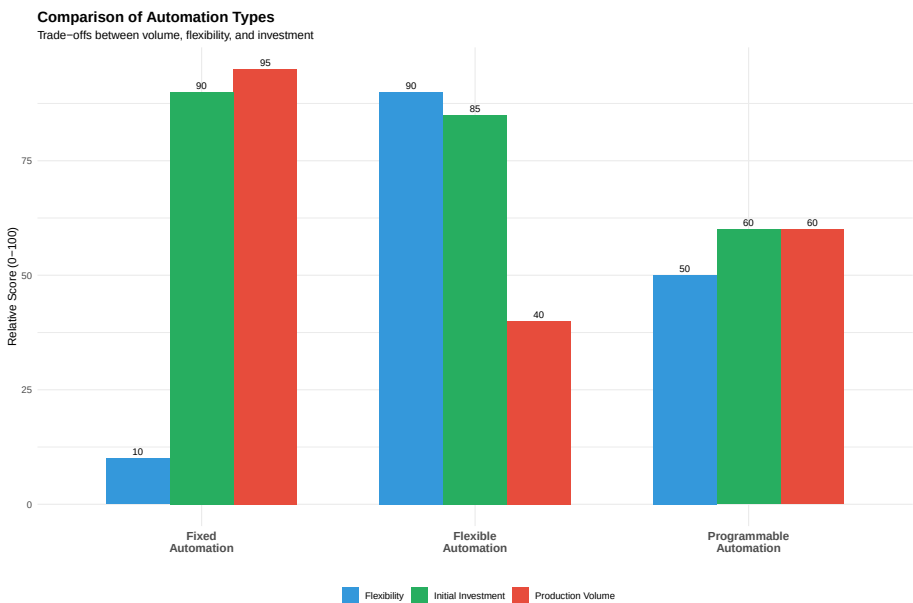


Table 9.2: Comparison of Automation Types

	Fixed Automation	Programmable Automation
Definition	Hard-wired, dedicated equipment for single product	Equipment can be reprogrammed for different products
Product Variety	Single product or very similar variants	Batches of different products
Production Volume	Very high (millions of units)	Medium to high
Changeover	Difficult, expensive, time-consuming	Requires reprogramming and setup
Initial Investment	Very high	High
Unit Cost	Very low per unit	Medium
Typical Equipment	Transfer lines, dedicated assembly machines	CNC machines, PLCs, industrial robots
Best For	Automotive components, fasteners, bottles	Batch manufacturing, job shops

9.3.2 The Automation Pyramid

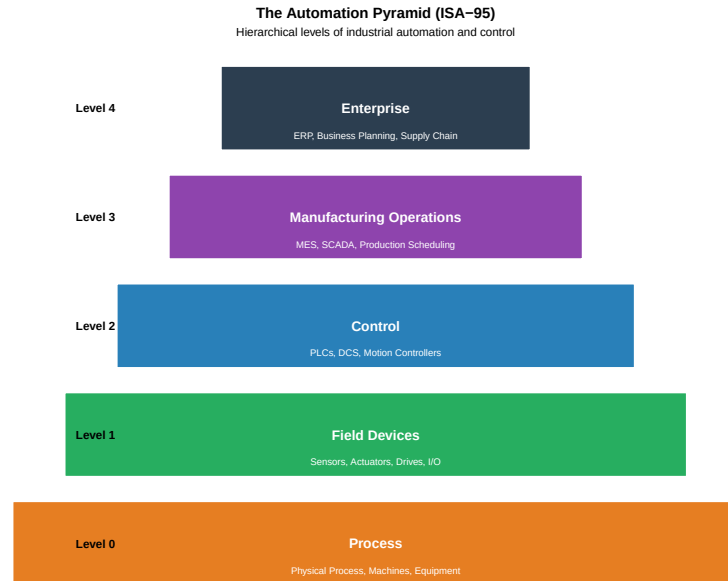

Understanding the Pyramid Levels

Level 0 - Process: The actual physical equipment, machines, and processes being controlled. This includes conveyors, motors, valves, tanks, and the product being manufactured.

Level 1 - Field Devices: Sensors that measure process variables (temperature, pressure, flow, position) and actuators that affect the process (motors, valves, solenoids, drives).

Level 2 - Control: The “brain” of automation - PLCs, DCS, and motion controllers that execute control logic, process sensor inputs, and command actuators. Also includes HMI for operator interaction.

Level 3 - Manufacturing Operations: MES (Manufacturing Execution Systems), SCADA, production scheduling, quality management, and maintenance management. Bridges plant floor and business systems.

Level 4 - Enterprise: ERP systems, business intelligence, supply chain management, financial systems. Makes business decisions based on plant floor data.


Key Principle: Data flows up (process information), commands flow down (control directives).

9.4 Programmable Logic Controllers (PLCs)

The **PLC (Programmable Logic Controller)** is the workhorse of industrial automation, providing reliable, real-time control of machines and processes.

9.4.1 What is a PLC?

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use `linewidth` instead.

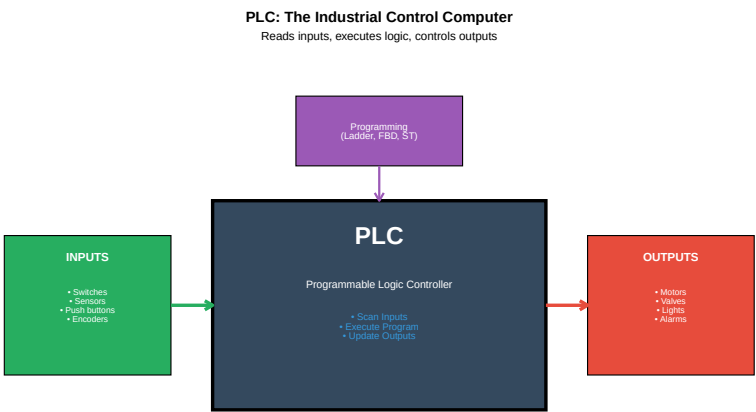

9.4.2 PLC Hardware Components

Table 9.3: PLC Hardware Components


Component	Function
CPU (Processor)	Executes the control program, manages memory, coordinates all modules
Power Supply	Converts AC power to DC voltages required by PLC components
Input Modules	Interface field devices (sensors, switches) to CPU; converts signals to digital
Output Modules	Interface CPU to field devices (motors, valves); converts digital to power signals
Communication Modules	Enable networking: Ethernet/IP, Profinet, Modbus, DeviceNet
Programming Device	Laptop/PC with programming software for creating and downloading programs

9.4.3 The PLC Scan Cycle

PLCs operate in a continuous scan cycle:

PLC Scan Cycle

Continuous loop executing at predictable intervals

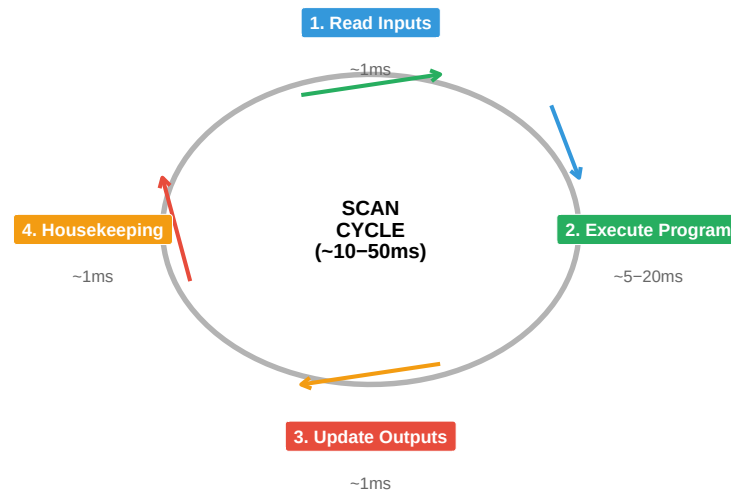

```
# Scan Time Calculation Example
input_scan_time <- 1.2      # ms
program_execution <- 15.5   # ms (depends on program size)
output_update <- 1.0        # ms
housekeeping <- 2.3         # ms

total_scan_time <- input_scan_time + program_execution + output_update + housekeeping

cat("PLC Scan Time Calculation:\n")
```

PLC Scan Time Calculation:

```
cat("          \n")
```

```
cat("Input Scan:      ", input_scan_time, "ms\n")
```

Input Scan: 1.2 ms

```
cat("Program Execution:", program_execution, "ms\n")
```

Program Execution: 15.5 ms

```
cat("Output Update:    ", output_update, "ms\n")
```

Output Update: 1 ms

```
cat("Housekeeping:    ", housekeeping, "ms\n")
```

Housekeeping: 2.3 ms

```
cat("                  \n")
```

```
cat("Total Scan Time:  ", total_scan_time, "ms\n")
```

Total Scan Time: 20 ms

```
cat("\nScans per second: ", round(1000/total_scan_time, 0), "\n")
```


Scans per second: 50

9.4.4 PLC Programming Languages (IEC 61131-3)

Table 9.4: IEC 61131-3 PLC Programming Languages

Language	Type	Description
Ladder Diagram (LD)	Graphical	Resembles electrical relay circuits; most common in discrete
Function Block Diagram (FBD)	Graphical	Uses function blocks connected by lines; good for analog/pro
Structured Text (ST)	Textual	High-level language similar to Pascal; powerful for complex c
Instruction List (IL)	Textual	Low-level assembly-like language; rarely used today
Sequential Function Chart (SFC)	Graphical	Sequence/state-based programming; excellent for batch proce

9.4.5 Ladder Logic Example

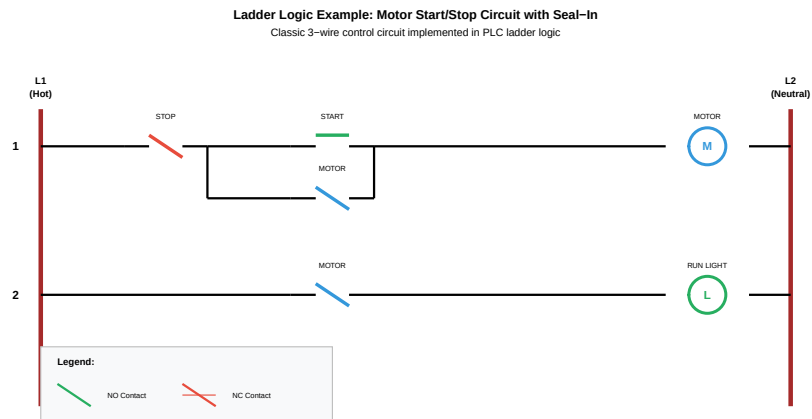

How the Start/Stop Circuit Works

Rung 1 - Motor Control: 1. Power flows from L1 through the NC (Normally Closed) STOP button 2. If STOP is pressed, the circuit breaks and motor stops 3. START is NO (Normally Open) - pressing it allows power to flow to the MOTOR coil 4. When MOTOR energizes, its NO contact in the parallel branch closes 5. This “seals in” the circuit - motor stays running even after START is released 6. To stop, press STOP which breaks the seal-in circuit

Rung 2 - Run Indicator: 1. When MOTOR coil is energized, the MOTOR contact closes 2. This allows power to flow to the RUN LIGHT output 3. Light is ON whenever motor is running

This is called a “3-wire control” circuit - it provides: - Low voltage release protection (motor won’t restart after power failure) - Maintained contact operation (don’t need to hold START button)

9.5 Industrial Sensors

Sensors are the “eyes and ears” of automation systems, providing feedback about the process to the control system.

9.5.1 Sensor Classification


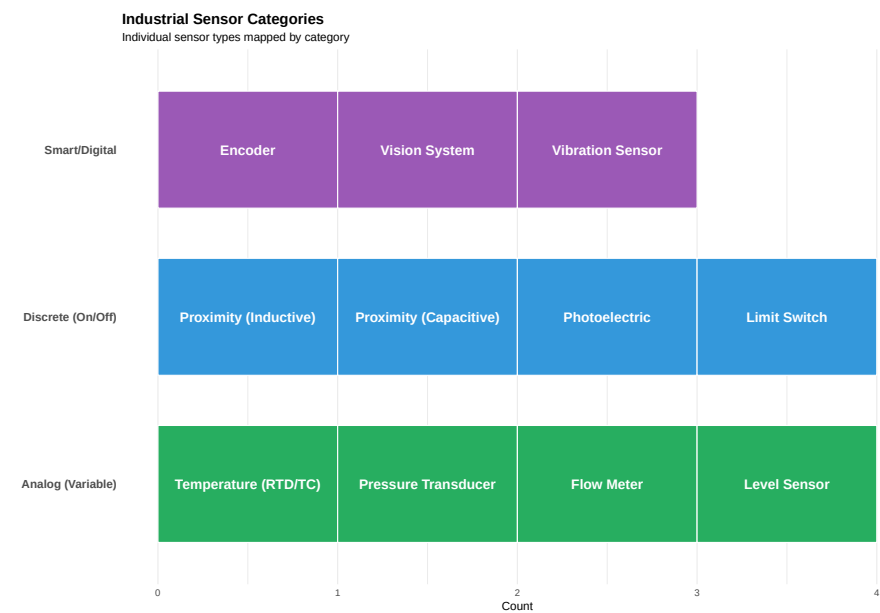


Table 9.5: Common Industrial Sensor Specifications

Sensor	Principle	Range	Advantages
Inductive Proximity	Eddy current change in oscillating field	2-40mm typical	Durable, no con
Capacitive Proximity	Capacitance change with target approach	2-25mm typical	Detects any ma
Photoelectric	Light beam interrupted or reflected	0.1-30m	Long range, ver
RTD (PT100)	Resistance changes with temperature	-200 to 850°C	Accurate, stable
Thermocouple	Voltage generated at junction of dissimilar metals	-200 to 2300°C	Wide range, fas
Pressure Transducer	Diaphragm deflection converted to electrical signal	0-10000 psi	Accurate, wide
Incremental Encoder	Optical/magnetic pulses per revolution	100-10000 PPR	Simple, low cost
Absolute Encoder	Unique code for each position	12-25 bit	Position known

9.5.2 Sensor Wiring: PNP vs NPN

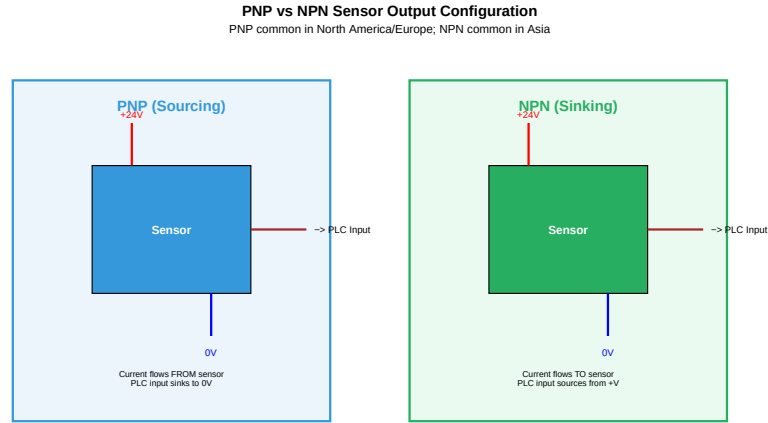

9.6 Actuators and Motor Control

Actuators convert control signals into physical motion or action.


9.6.1 Types of Industrial Actuators

Table 9.6: Industrial Actuator Types and Applications

Category	Type	Application	Control
Electric			
Electric Motors	AC Induction Motor	Conveyors, pumps, fans, compressors	VFD for variable speed
Electric Motors	Servo Motor	Precise positioning, robotics, CNC	Servo drive with feedback
Electric Motors	Stepper Motor	Indexing, low-speed positioning	Stepper drive (open loop)
Electric Motors	DC Motor	Battery vehicles, legacy systems	PWM, SCR drive
Pneumatic			
Pneumatic	Cylinder	Clamping, pushing, lifting	Solenoid valves, pressure control
Pneumatic	Rotary Actuator	Rotating grippers, indexing	Solenoid valves, pressure control
Hydraulic			
Hydraulic	Cylinder	Heavy lifting, presses	Proportional/servo valves
Hydraulic	Motor	Heavy machinery, mobile equipment	Proportional/servo valves

9.6.2 Variable Frequency Drives (VFDs)

A **Variable Frequency Drive (VFD)** controls AC motor speed by varying the frequency and voltage of the power supplied to the motor.

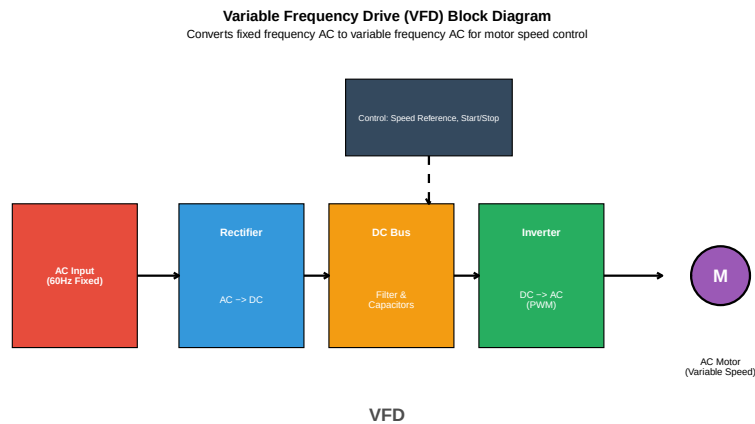

```
# VFD Speed and Torque Calculations
```

```
# Motor nameplate data
```

```
motor_hp <- 10
```

```
poles <- 4
```

```
rated_voltage <- 460 # V
```

```
rated_frequency <- 60 # Hz
```

```
rated_rpm <- 1750
```

```
slip_rpm <- (120 * rated_frequency / poles) - rated_rpm
```

```
# Synchronous speed at rated frequency
```

```
sync_speed_60 <- 120 * rated_frequency / poles
```

```
cat("Motor Data:\n")
```

```
Motor Data:
```

```
cat("Synchronous speed at 60Hz:", sync_speed_60, "RPM\n")
```

```
Synchronous speed at 60Hz: 1800 RPM
```

```
cat("Rated speed:", rated_rpm, "RPM\n")
```

```
Rated speed: 1750 RPM
```

```
cat("Slip:", slip_rpm, "RPM (", round(slip_rpm/sync_speed_60*100, 1), "%)\n\n")
```

```
Slip: 50 RPM ( 2.8 %)
```

```
# Calculate speed at different frequencies
```

```
frequencies <- c(15, 30, 45, 60, 75)
```

```
speeds <- sapply(frequencies, function(f) {
```

```
  sync <- 120 * f / poles
```

```
  sync - slip_rpm # Assuming constant slip (approximation)
```

```
})
```

```
cat("Speed vs Frequency (V/Hz mode):\n")
```

```
Speed vs Frequency (V/Hz mode):
```

```
cat("                \n")
```

```
for(i in seq_along(frequencies)) {
  cat(sprintf("%2d Hz: %4d RPM\n", frequencies[i], speeds[i]))
}
```

```
15 Hz:  400 RPM
```

```
30 Hz:  850 RPM
```

```
45 Hz: 1300 RPM
```

```
60 Hz: 1750 RPM
```

```
75 Hz: 2200 RPM
```

```
# V/Hz ratio
```

```
vhz_ratio <- rated_voltage / rated_frequency
```

```
cat("\nV/Hz Ratio:", round(vhz_ratio, 2), "V/Hz\n")
```

```
V/Hz Ratio: 7.67 V/Hz
```

```
cat("At 30Hz, voltage should be:", 30 * vhz_ratio, "V\n")
```

```
At 30Hz, voltage should be: 230 V
```

9.6.3 VFD Benefits

Table 9.7: Variable Frequency Drive Benefits

Benefit	Description
Energy Savings	Match motor speed to load requirements; huge savings on fans/pumps
Soft Start/Stop	Ramp up/down gradually; eliminates inrush current (6-8x normal)
Speed Control	Precise speed control from 0-100%+ of base speed
Process Control	Maintain constant pressure, flow, or tension
Reduced Mechanical Stress	Reduced wear on belts, gears, couplings from smooth acceleration
Power Factor	VFD presents near-unity power factor to supply

9.6.4 Servo Systems

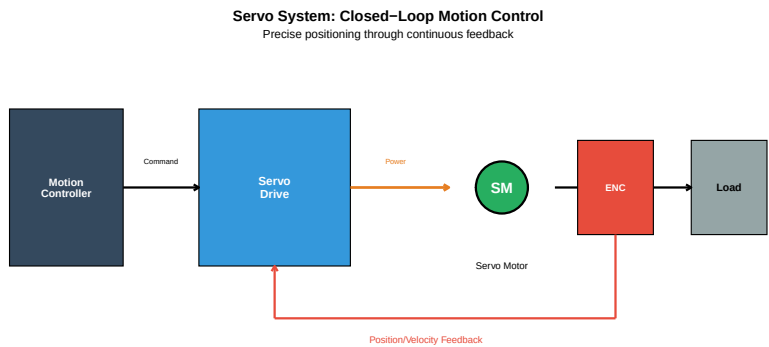



Table 9.8: VFD vs. Servo System Comparison

Characteristic	VFD + Induction Motor	Servo System
Control Type	Open loop (usually)	Closed loop (always)
Feedback	Optional encoder	High-resolution encoder required
Positioning Accuracy	$\pm 1\text{-}5\%$ of speed	$\pm 0.01^\circ$ or better
Dynamic Response	Moderate (100-500ms)	Fast (1-10ms)
Torque at Zero Speed	Limited (10-20%)	100% continuous
Cost	Lower (\$500-5000)	Higher (\$2000-20000)
Typical Application	Fans, pumps, conveyors	Robotics, CNC, packaging

9.7 Industrial Communication Networks

Modern automation systems rely on communication networks to connect devices, share data, and enable coordinated control.

9.7.1 Network Architecture

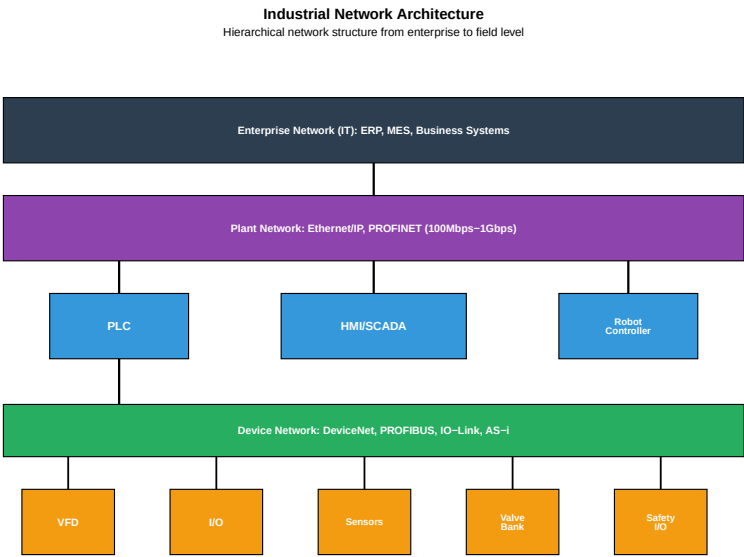

9.7.2 Common Industrial Protocols

Table 9.9: Common Industrial Communication Protocols

Protocol	Developer	Medium	Speed	Application
Ethernet/IP	ODVA (Rockwell)	Ethernet	100Mbps/1Gbps	General automation, I/O
PROFINET	PI (Siemens)	Ethernet	100Mbps/1Gbps	Siemens ecosystem, motion control
Modbus TCP	Modicon/Schneider	Ethernet	100Mbps	Simple, open, legacy systems
EtherCAT	Beckhoff	Ethernet	100Mbps	High-speed motion, precision positioning
DeviceNet	ODVA	CAN-based	500kbps	I/O, drives (legacy)
PROFIBUS	PI (Siemens)	RS-485	12Mbps	I/O, drives (legacy)
IO-Link	IO-Link Consortium	Point-to-point	230.4kbps	Smart sensors
OPC UA	OPC Foundation	Ethernet/Any	Varies	IT/OT integration, IIoT

Protocol Selection Guide

Choose Ethernet/IP if: - Using Allen-Bradley/Rockwell equipment - Need general-purpose industrial Ethernet - Require seamless integration with IT networks

Choose PROFINET if: - Using Siemens equipment - Need deterministic communication for motion control - Require IRT (Isochronous Real-Time) performance

Choose EtherCAT if: - Need highest speed/lowest latency - High-precision motion control - Many axes of coordinated motion


Choose Modbus TCP if: - Simple, low-cost solution needed - Connecting legacy equipment - Open protocol preference (no licensing)

Choose OPC UA if: - Need IT/OT convergence - IIoT/Industry 4.0 implementation - Secure, platform-independent communication

9.8 Human-Machine Interface (HMI) and SCADA

9.8.1 HMI Overview

An **HMI (Human-Machine Interface)** provides operators with a visual interface to monitor and control automated processes.

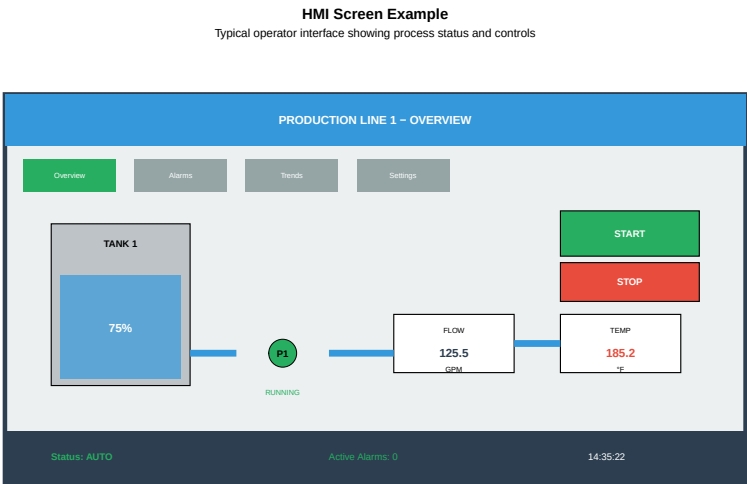

9.8.2 HMI Design Best Practices

Table 9.10: HMI Design Best Practices

Principle	Best Practice
Situational Awareness	Show abnormal conditions prominently; operator should know status at a glance
Alarm Management	Prioritize alarms (critical/warning/info); avoid alarm floods; require acknowledgment
Navigation	Consistent layout; max 3 clicks to any screen; clear hierarchy
Color Usage	Use color sparingly for meaning; gray for normal; avoid red/green for critical info (color blindness)

Data Display	Show trends, not just values; use appropriate precision; include units
Controls	Confirm destructive actions; use interlocks; provide feedback

9.8.3 SCADA Systems

SCADA (Supervisory Control and Data Acquisition) systems provide centralized monitoring and control across multiple locations or processes.


Table 9.11: SCADA System Components

Component	Function
MTU (Master Terminal Unit)	Central server running SCADA software; processes data, executes
RTU (Remote Terminal Unit)	Field device that collects data from sensors and sends to MTU
Communication Network	Links MTU to RTUs; can be radio, cellular, satellite, fiber
HMI/Workstations	Operator interface for monitoring and control
Historian Database	Stores historical process data for trending and analysis
Alarm Server	Manages alarm generation, notification, and logging

9.9 Safety in Automation

Safety is paramount in automated systems. Safety systems protect personnel and equipment from harm.

9.9.1 Safety System Architecture

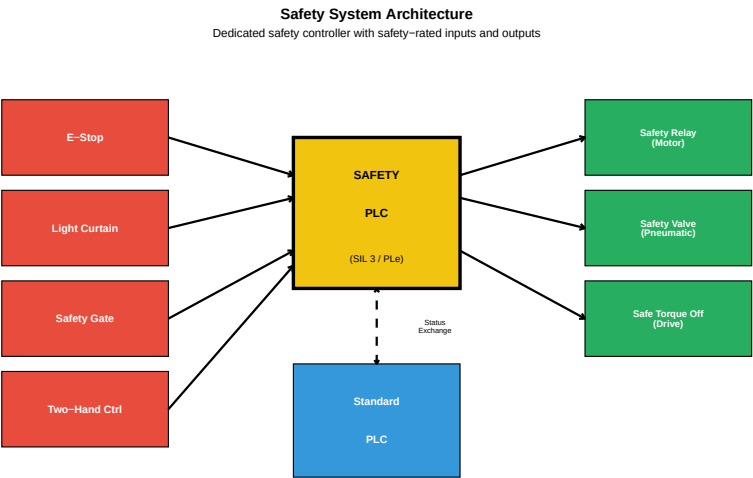

9.9.2 Safety Integrity Levels (SIL)


Table 9.12: Safety Integrity Levels (IEC 61508)

SIL Level	PFD (avg)	Risk Reduction Factor	Risk Level	Example
SIL 1	10 ⁻² to <10 ⁻¹	10-100	Minor injury possible; first line of defense	Warning
SIL 2	10 ⁻³ to <10 ⁻²	100-1,000	Serious injury possible; general industrial	Machine
SIL 3	10 ⁻⁴ to <10 ⁻³	1,000-10,000	Death or severe injury; process industry standard	Emergen
SIL 4	10 ⁻⁵ to <10 ⁻⁴	10,000-100,000	Catastrophic; nuclear, aviation	Nuclear

9.10 Industry 4.0 and IIoT

Industry 4.0 represents the fourth industrial revolution, characterized by the integration of digital technologies into manufacturing.

9.10.1 Industry 4.0 Technologies

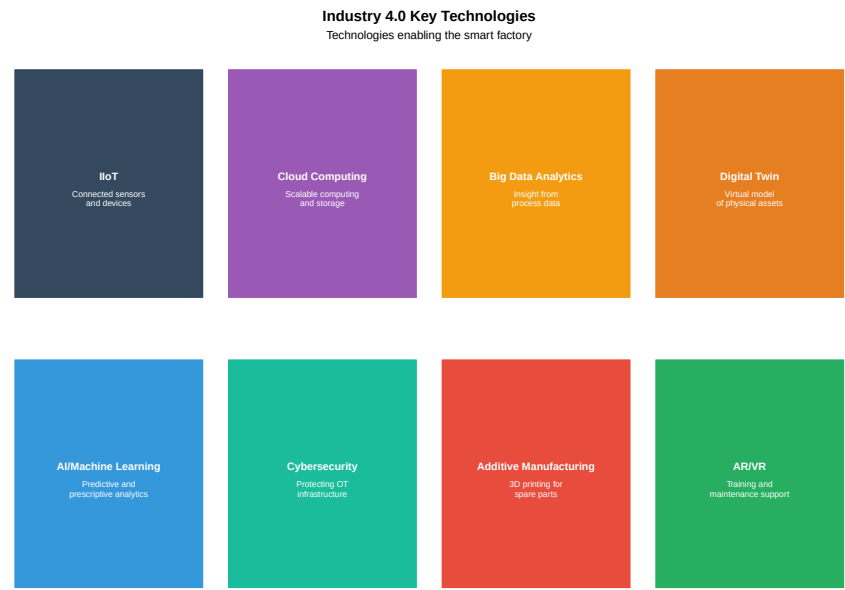

9.10.2 IIoT Architecture

Table 9.13: IIoT Architecture Layers

Layer	Components	Function
Edge/Device Layer	Sensors, actuators, PLCs, gateways, edge devices	Collect data, local processing
Network Layer	Industrial Ethernet, Wi-Fi, 5G, LoRaWAN, MQTT	Secure data transfer
Platform Layer	Cloud/on-premise servers, databases, data lakes	Store, process, analyze data
Application Layer	Analytics dashboards, AI/ML models, business applications	Derive insights, trigger actions

9.10.3 Predictive Maintenance Example

```
# Simulating predictive maintenance with vibration data
set.seed(42)

# Generate 30 days of vibration readings
days <- 1:30
baseline_vibration <- 2.5 # mm/s RMS (normal)

# Simulate gradual bearing degradation
vibration <- baseline_vibration +
  0.05 * days + # Gradual increase
  0.5 * exp((days - 25)/5) * (days > 20) + # Accelerating failure
  rnorm(30, 0, 0.2) # Normal variation

# Alert thresholds
warning_threshold <- 4.0
alarm_threshold <- 6.0

# Find when thresholds crossed
warning_day <- min(which(vibration > warning_threshold))
alarm_day <- min(which(vibration > alarm_threshold))
```

Warning in min(which(vibration > alarm_threshold)): no non-missing arguments to min; returning Inf

```
cat("Predictive Maintenance Analysis:\n")
```

Predictive Maintenance Analysis:

```
cat("          \n")
```

```
cat("Baseline vibration:", baseline_vibration, "mm/s RMS\n")
```

Baseline vibration: 2.5 mm/s RMS

```
cat("Warning threshold:", warning_threshold, "mm/s RMS\n")
```

Warning threshold: 4 mm/s RMS

```
cat("Alarm threshold:", alarm_threshold, "mm/s RMS\n\n")
```

Alarm threshold: 6 mm/s RMS

```
cat("Warning triggered on day:", warning_day, "\n")
```

Warning triggered on day: 24

```
cat("Alarm triggered on day:", alarm_day, "\n")
```


Alarm triggered on day: Inf

```
cat("Days of warning before alarm:", alarm_day - warning_day, "\n")
```

Days of warning before alarm: Inf

```
cat("\nRecommendation: Schedule bearing replacement before day", alarm_day, "\n")
```

Recommendation: Schedule bearing replacement before day Inf

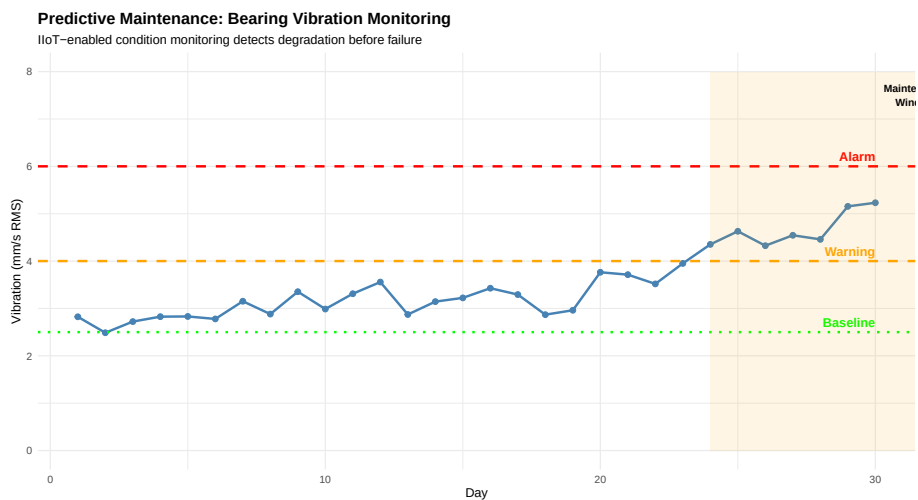

9.11 Video Resources

9.11.1 Introduction to PLCs

9.11.2 Industrial Networks Explained

9.12 Summary

Industrial automation integrates multiple technologies to improve manufacturing efficiency, quality, and safety:

1. **Automation types** range from fixed (high-volume, single product) to flexible (low-volume, high variety)
 2. **PLCs** are the workhorses of industrial control, using scan cycles to process inputs and control outputs
 3. **Sensors** provide feedback on process conditions (discrete, analog, and smart)
 4. **Motor control** through VFDs and servo systems enables precise speed and position control
 5. **Industrial networks** connect devices using protocols like Ethernet/IP, PROFINET, and Modbus
 6. **HMI and SCADA** provide operator interface for monitoring and control
 7. **Safety systems** use dedicated controllers and devices to protect personnel
 8. **Industry 4.0** brings IIoT, cloud computing, and AI to enable smart manufacturing
-

9.13 Review Questions

Question 1: Compare and contrast fixed, programmable, and flexible automation. Give an example application for each.

Answer:

Aspect	Fixed	Programmable	Flexible
Product variety	Single product	Batches of different products	High variety, mixed production
Volume	Very high	Medium-high	Low-medium
Changeover	Difficult, expensive	Hours to days	Minutes
Investment	Very high	High	Very high
Flexibility	None	Limited	High

Examples:

1. **Fixed Automation:** Automotive transfer line producing engine blocks
 - Same machining operations repeated millions of times
 - Dedicated stations optimized for specific operations
 - Changing product would require complete retooling
2. **Programmable Automation:** CNC machining job shop
 - Different parts programmed and run in batches

- Significant setup time between batches
- Equipment reprogrammable but not instantaneous
- 3. **Flexible Automation:** Robotic welding cell in aerospace
 - Different assemblies run with quick changeover
 - Robot program changes automatically based on part ID
 - Same cell handles multiple product variants

Question 2: Explain the PLC scan cycle and why scan time is important.

Answer:

The PLC Scan Cycle consists of four main phases executed continuously:

1. **Input Scan** (~1ms): Read all physical inputs and store values in the input image table
2. **Program Execution** (~5-20ms): Execute the user program (ladder logic, etc.) using input image data
3. **Output Update** (~1ms): Write output image table values to physical outputs
4. **Housekeeping** (~1-3ms): Communications, diagnostics, self-testing

Total scan time = Sum of all phases, typically 10-50ms

Why Scan Time Matters:

1. **Response Time:** An input change isn't acted upon until the next scan completes. If scan time is 50ms, worst-case response time is 50ms.
2. **Safety:** Fast-moving machinery requires short scan times for safety functions. A 100ms scan time with a motor at 1800 RPM means 3 shaft revolutions between scans.
3. **Application Limits:**
 - Motion control may need <1ms scan times (special motion PLCs)
 - High-speed counting needs special modules
 - Safety PLCs have guaranteed maximum scan times
4. **Program Size Impact:** Larger programs take longer to execute, increasing scan time. Optimization may be needed for time-critical applications.
5. **Communication Delays:** Network updates typically happen once per scan, affecting data freshness.

Question 3: What are the key differences between PNP and NPN sensor outputs? When would you use each?

Answer:

PNP (Sourcing): - Sensor output sources current TO the load - When activated, output connects to +V - Load is connected between sensor output and 0V - Current flows: +V → Sensor → Output → Load → 0V - Common in North America and Europe

NPN (Sinking): - Sensor output sinks current FROM the load - When activated, output connects to 0V (ground) - Load is connected between sensor output and +V - Current flows: +V → Load → Output → Sensor → 0V - Common in Asia (Japan)

Selection Criteria:

1. **PLC Input Type:**

- Sinking PLC inputs work with PNP (sourcing) sensors
- Sourcing PLC inputs work with NPN (sinking) sensors

2. **Regional Standards:**

- North America: PNP is standard
- Europe: PNP is standard
- Japan/Asia: NPN is common

3. **Safety Considerations:**

- PNP: A ground fault can cause false ON signal
- NPN: A ground fault typically causes safe-off condition
- For safety applications, consider sensor design carefully

4. **Existing Infrastructure:**

- Match new sensors to existing system type
- Converting between types requires different PLC input cards

Question 4: A VFD is controlling a 10 HP, 4-pole motor rated at 1750 RPM and 460V at 60Hz. Calculate the motor speed at 30Hz and 45Hz. What voltage should the VFD supply at these frequencies?

Answer:

```
# Motor parameters
poles <- 4
rated_voltage <- 460 # V
rated_frequency <- 60 # Hz
rated_rpm <- 1750

# Calculate synchronous speed and slip at rated conditions
sync_speed_60 <- 120 * rated_frequency / poles
slip_rpm <- sync_speed_60 - rated_rpm
slip_percent <- (slip_rpm / sync_speed_60) * 100

cat("Motor Analysis:\n")
```

Motor Analysis:

```
cat("Synchronous speed at 60Hz:", sync_speed_60, "RPM\n")
```

Synchronous speed at 60Hz: 1800 RPM

```
cat("Rated speed:", rated_rpm, "RPM\n")
```

Rated speed: 1750 RPM

```
cat("Slip:", slip_rpm, "RPM (", round(slip_percent, 1), "%)\n\n")
```

Slip: 50 RPM (2.8 %)

```
# V/Hz ratio
vHz_ratio <- rated_voltage / rated_frequency
cat("V/Hz Ratio:", round(vHz_ratio, 2), "V/Hz\n\n")
```

V/Hz Ratio: 7.67 V/Hz

```
# Calculate at 30Hz
freq_30 <- 30
sync_30 <- 120 * freq_30 / poles
speed_30 <- sync_30 - slip_rpm # Assuming constant slip in RPM
voltage_30 <- freq_30 * vHz_ratio

cat("At 30Hz:\n")
```

At 30Hz:

```
cat(" Synchronous speed:", sync_30, "RPM\n")
```

Synchronous speed: 900 RPM

```
cat(" Motor speed (approx):", speed_30, "RPM\n")
```

Motor speed (approx): 850 RPM

```
cat(" VFD output voltage:", voltage_30, "V\n\n")
```

VFD output voltage: 230 V

```
# Calculate at 45Hz
freq_45 <- 45
sync_45 <- 120 * freq_45 / poles
speed_45 <- sync_45 - slip_rpm
voltage_45 <- freq_45 * vHz_ratio

cat("At 45Hz:\n")
```

At 45Hz:

```
cat(" Synchronous speed:", sync_45, "RPM\n")
```

Synchronous speed: 1350 RPM

```
cat(" Motor speed (approx):", speed_45, "RPM\n")
```

Motor speed (approx): 1300 RPM

```
cat(" VFD output voltage:", voltage_45, "V\n")
```

VFD output voltage: 345 V

Note: The calculation assumes constant slip in RPM, which is an approximation. Actual slip varies somewhat with load and frequency. The V/Hz ratio is maintained constant to provide constant torque capability below base speed.

Question 5: Compare Ethernet/IP and PROFINET. When would you choose each?

Answer:

Feature	Ethernet/IP	PROFINET
Developer	ODVA (Rockwell Automation)	PROFIBUS International (Siemens)
Base Protocol	CIP over TCP/UDP	Based on standard Ethernet
Real-time	CIP Motion for motion control	IRT (Isochronous Real-Time)
Determinism	Standard: non-deterministic; CIP Sync: deterministic	RT: soft real-time; IRT: hard real-time
Typical Cycle	2-10ms (standard); <1ms (CIP Motion)	1-10ms (RT); <1ms (IRT)
Ecosystem	Allen-Bradley, DeviceNet-heritage	Siemens, PROFIBUS-heritage

Choose Ethernet/IP when: - Using Allen-Bradley/Rockwell PLCs - Integrating with DeviceNet legacy systems - Standard industrial Ethernet needs - North American installations (common) - Need CIP protocol compatibility

Choose PROFINET when: - Using Siemens PLCs (S7-1200, S7-1500) - Migrating from PROFIBUS installations - Need IRT for high-performance motion - European installations (common) - Require I-Device functionality

General Guidance: - Match the protocol to your PLC vendor's ecosystem - Both are capable industrial Ethernet solutions - Consider existing infrastructure and expertise - For motion, evaluate specific timing requirements

Question 6: What is the difference between HMI and SCADA? Where would each be used?

Answer:

HMI (Human-Machine Interface): - Local operator interface for a single machine or process - Typically a touchscreen panel mounted on or near equipment - Communicates directly with one or few PLCs - Provides real-time control and monitoring - Limited data storage (trends, alarms) - Examples: Allen-Bradley PanelView, Siemens Comfort Panel

SCADA (Supervisory Control and Data Acquisition): - Centralized system monitoring multiple processes/locations - Server-based architecture with multiple client workstations - Communicates with many PLCs/RTUs across large distances - Supervisory control - high-level commands, not direct control - Extensive historical data collection and analysis - Examples: Wonderware, Ignition, FactoryTalk View SE

Where Each is Used:

Application	HMI	SCADA
Single CNC machine		
Packaging line		
Entire factory floor		
Water treatment plant	(local)	(central)
Oil pipeline network		
Building automation	(per zone)	(campus-wide)
Power grid		

Key Distinction: HMI is typically embedded/local for one process; SCADA is a system supervising many processes across the enterprise.

Question 7: Explain what SIL 3 means and give an example of a SIL 3 application.

Answer:

SIL 3 (Safety Integrity Level 3) is defined in IEC 61508 and represents:

- **PFD (Probability of Failure on Demand):** 10^{-4} to 10^{-3} (0.01% to 0.1%)
- **Risk Reduction Factor:** 1,000 to 10,000
- **Availability:** 99.9% to 99.99%

What SIL 3 Means: - The safety function will fail to operate when needed less than 1 in 1,000 demands - Requires redundant architecture (typically 2oo3 or 1oo2D) - Requires certified safety-rated components - Requires rigorous design, testing, and validation processes - Requires regular proof testing and maintenance

SIL 3 Requirements: - Hardware fault tolerance ≥ 1 (single fault won't cause dangerous failure) - Safe Failure Fraction $> 90\%$ (for Type A components) - Systematic capability rating of SC3 - Extensive documentation and lifecycle management

SIL 3 Application Examples:

1. **Emergency Shutdown System (ESD)** in oil refinery
 - Detects dangerous conditions (high pressure, fire)
 - Shuts down process and isolates fuel sources

- Failure could result in explosion and fatalities
- 2. **Burner Management System (BMS)**
 - Controls furnace/boiler ignition sequence
 - Monitors flame presence and fuel/air ratio
 - Prevents furnace explosions
- 3. **High Integrity Pressure Protection System (HIPPS)**
 - Prevents overpressure in pipelines
 - Isolates high-pressure source before relief valve capacity exceeded
 - Protects against catastrophic pipeline rupture

Question 8: Describe three benefits of implementing IIoT in a manufacturing facility and give a specific example of each.

Answer:

1. Predictive Maintenance

Benefit: Detect equipment degradation before failure, enabling planned maintenance during scheduled downtime rather than emergency repairs.

Example: Vibration sensors on a conveyor gearbox transmit data to cloud analytics. Machine learning algorithms detect bearing wear signature 3 weeks before expected failure. Maintenance schedules replacement during next planned shutdown, avoiding \$50,000 in lost production from unplanned downtime.

2. Real-Time Production Visibility

Benefit: Instant access to production metrics, OEE, and quality data from anywhere, enabling faster decision-making.

Example: Dashboard shows real-time OEE for all production lines on plant manager's tablet. Sudden drop in Line 3 performance triggers alert. Investigation reveals material feed issue; corrected within 30 minutes instead of waiting for end-of-shift report.

3. Energy Optimization

Benefit: Monitor energy consumption at machine level, identify waste, and optimize based on production schedule.

Example: Power meters on each machine report to central system. Analysis reveals HVAC in unused areas runs at full capacity during weekends. Automated scheduling reduces weekend HVAC operation, saving 15% on energy bills (\$30,000/year).

Additional Benefits:

4. **Quality Traceability** - Every part traced through production with complete process data
5. **Remote Monitoring** - Engineers can diagnose issues without traveling to site

6. **Supply Chain Integration** - Real-time inventory and production data shared with suppliers
-

9.14 References

1. Bolton, W. (2015). *Programmable Logic Controllers* (6th ed.). Newnes.
2. Petruzella, F.D. (2017). *Programmable Logic Controllers* (5th ed.). McGraw-Hill Education.
3. Rehg, J.A., & Sartori, G.J. (2013). *Industrial Electronics*. Pearson.
4. IEC 61131-3:2013. *Programmable Controllers - Part 3: Programming Languages*.
5. IEC 61508:2010. *Functional Safety of Electrical/Electronic/Programmable Electronic Safety-related Systems*.
6. ODVA. (2020). *The CIP Networks Library*. ODVA, Inc.
7. Siemens AG. (2019). *PROFINET System Description*. Siemens.
8. Gilchrist, A. (2016). *Industry 4.0: The Industrial Internet of Things*. Apress.
9. ISA-95/IEC 62264. *Enterprise-Control System Integration*.
10. Groover, M.P. (2016). *Automation, Production Systems, and Computer-Integrated Manufacturing* (4th ed.). Pearson.

Chapter 10

Statistical Process Control (SPC)

10.1 Learning Objectives

By the end of this chapter, you will be able to:

- Explain the purpose and benefits of Statistical Process Control
- Distinguish between common cause and special cause variation
- Select the appropriate control chart for different data types
- Construct and interpret $\bar{X}$ -R, $\bar{X}$ -S, and Individual-MR charts
- Construct and interpret attribute control charts (p, np, c, u)
- Apply control chart interpretation rules (Western Electric rules)
- Calculate and interpret process capability indices (C_p , C_{pk} , P_p , P_{pk})
- Respond appropriately to out-of-control signals

“In God we trust; all others must bring data.” — W. Edwards Deming

10.2 Introduction to SPC

10.2.1 What is Statistical Process Control?

Statistical Process Control (SPC) is a method of quality control that uses statistical methods to monitor and control a process. It helps ensure that the process operates at its full potential to produce conforming product.

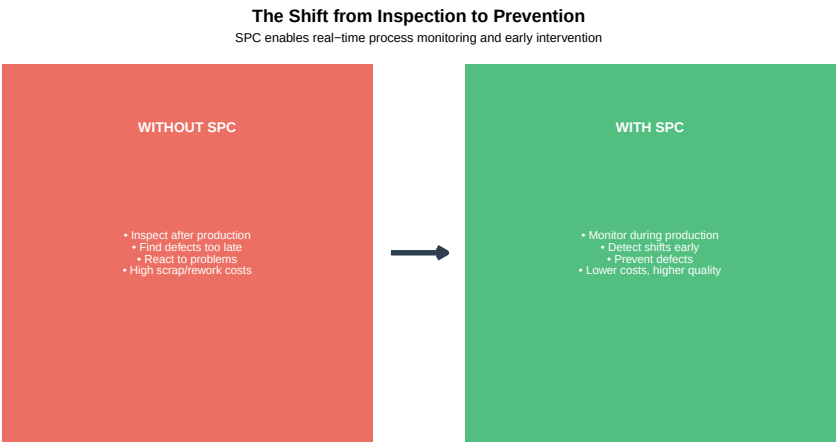


Figure 10.1: The SPC Philosophy: Prevention Through Monitoring

10.2.2 Brief History of SPC

Table 10.1: Evolution of Statistical Process Control

Year	Development	Significance
1920s	Walter Shewhart develops control charts at Bell Labs	Birth of modern quality control
1930s-40s	SPC used in WWII military production	Proved effectiveness in manufacturing
1950s	Deming teaches SPC to Japanese industry	Foundation of Japanese quality management
1980s	US automotive industry adopts SPC	Response to Japanese competition
1990s	SPC becomes requirement in ISO/QS-9000	Industry-wide standardization
2000s+	Real-time SPC, automated data collection	Integration with Industry 4.0

10.2.3 Why SPC Matters

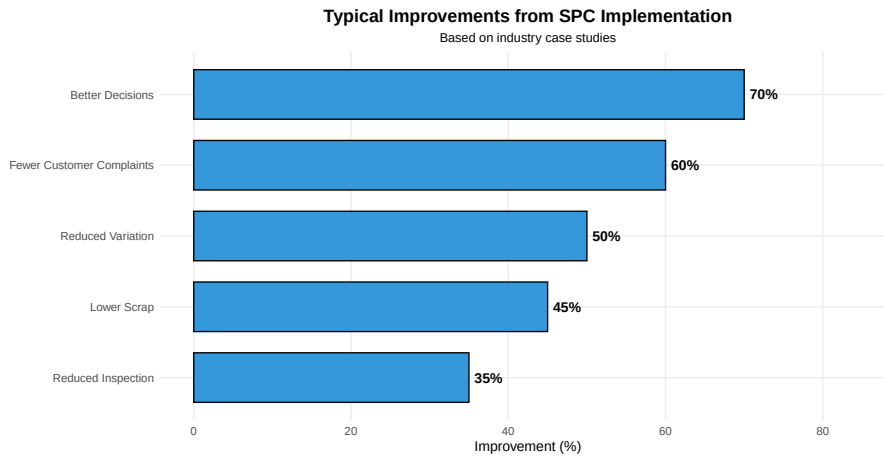


Figure 10.2: Benefits of SPC Implementation

10.3 Understanding Variation

All processes exhibit variation. No two products are ever exactly identical. The key insight of SPC is that variation comes from two fundamentally different sources, and we must respond to them differently.

10.3.1 Common Cause vs. Special Cause Variation

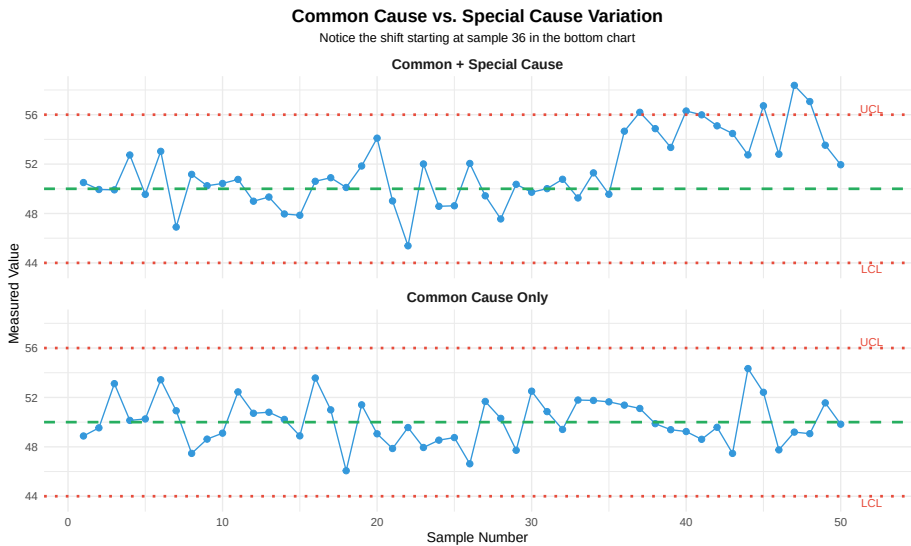


Figure 10.3: Two Types of Variation

Table 10.2: Common Cause vs. Special Cause Variation

Characteristic	Common Cause Variation	Special Cause Variation
Other Names	Random, chance, noise, inherent	Assignable
Source	Built into the process; many small factors	Specific, identifiable
Pattern	Random, stable, predictable pattern	Non-random
Predictability	Statistically predictable within limits	Unpredictable
Examples	Machine vibration, material variation, ambient temperature	Tool breakage, operator error
Action Required	Improve the system (management decision)	Find and eliminate the cause
Who Acts	Management — requires system change	Operators

10.3.2 The Two Mistakes in Process Control

Understanding variation prevents two costly mistakes:



Figure 10.4: The Two Fundamental Mistakes

The Funnel Experiment: Why Tampering Makes Things Worse

Deming's Funnel Experiment demonstrates why adjusting a stable process increases variation:

Setup: Drop a ball through a funnel onto a target. The ball lands near (but not exactly on) the target due to common cause variation.

Rule 1 (Correct): Leave the funnel alone. Variation remains constant.

Rule 2 (Tampering): After each drop, move the funnel to compensate for the last error. - Result: Variation DOUBLES!

Rule 3 (More Tampering): Move funnel to compensate relative to the target. - Result: Variation increases without bound!

Lesson: Adjusting a stable process based on individual deviations (common cause) actually makes the process worse. Only adjust when special causes are identified.

Real-World Example: An operator notices a part is 0.02mm below target and adjusts the machine. The next part is 0.03mm above target (the adjustment plus normal variation). They adjust again... and the process oscillates with increasing variation.

10.3.3 When is a Process “In Control”?

A process is **in statistical control** when:

1. Only common cause variation is present
2. All points fall within control limits
3. No non-random patterns exist

4. The process is stable and predictable

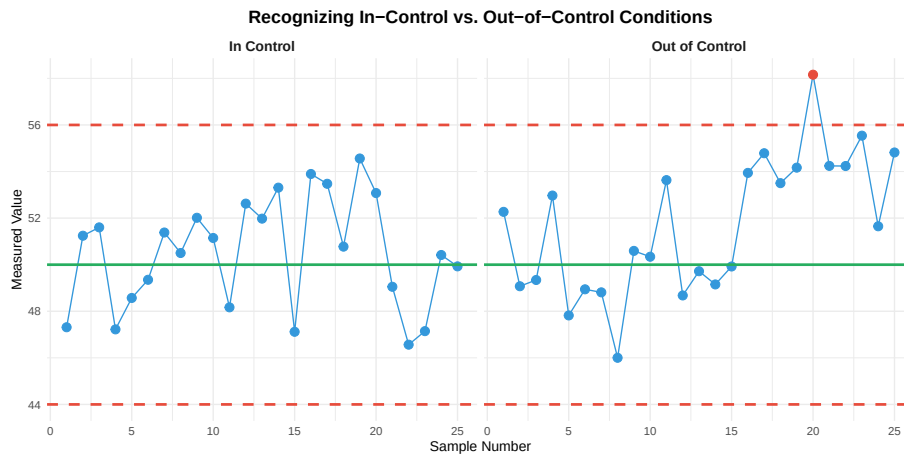


Figure 10.5: In-Control vs. Out-of-Control Process

10.4 Control Charts: The Foundation of SPC

10.4.1 What is a Control Chart?

A **control chart** is a graph that shows process data over time with statistically determined control limits. It provides a visual method for distinguishing between common and special cause variation.

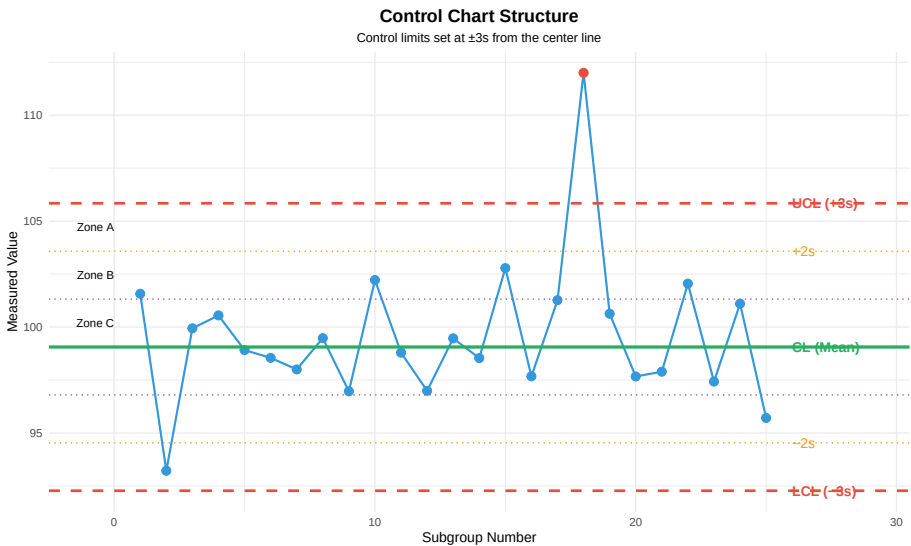


Figure 10.6: Anatomy of a Control Chart

10.4.2 Control Chart Components

Table 10.3: Control Chart Components

Component	Description	Purpose
Center Line (CL)	The process average; target for the process	Shows where process
Upper Control Limit (UCL)	Upper boundary of expected variation (+3)	Signals if process shif
Lower Control Limit (LCL)	Lower boundary of expected variation (-3)	Signals if process shif
Data Points	Individual or subgroup statistics plotted over time	Visual representation
Zones A, B, C	Regions between ± 1 , ± 2 , and ± 3 for pattern analysis	Used for detecting tre

10.4.3 Why ± 3 Sigma?

Control limits are set at ± 3 **standard deviations** from the center line. This is not arbitrary:

- For a normal distribution, 99.73% of data falls within ± 3
- Only 0.27% (about 3 in 1000) will fall outside by chance
- This balances the risk of both mistakes (false alarms vs. missed signals)

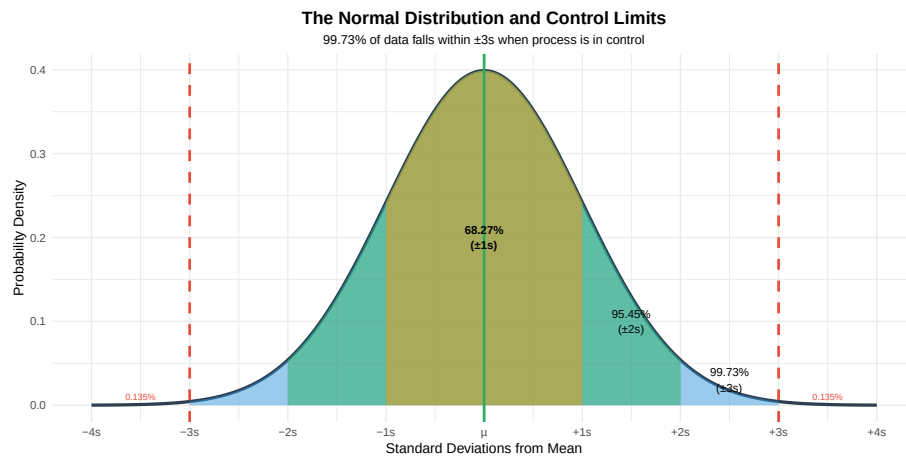


Figure 10.7: Normal Distribution and Control Limits

10.4.4 Choosing the Right Control Chart

The type of control chart depends on the **type of data** being collected:

Selecting the Right Control Chart

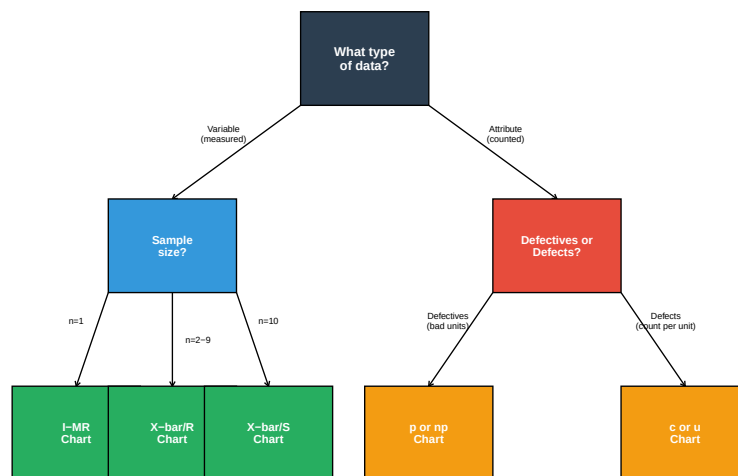


Figure 10.8: Control Chart Selection Flowchart

Table 10.4: Control Chart Summary

Chart Type	Data Type	Sample Size	What It Charts	Typical
X-bar / R	Variable	2-9 per subgroup	Subgroup mean and range	Production
X-bar / S	Variable	10 per subgroup	Subgroup mean and std dev	Large sub
I-MR	Variable	1 (individuals)	Individual values and moving range	Continuo
p chart	Attribute	Variable or constant	Proportion defective	Pass/fail
np chart	Attribute	Constant	Number defective	Pass/fail
c chart	Attribute	Constant	Number of defects	Defects p
u chart	Attribute	Variable	Defects per unit	Defects p

Question: Variable vs. Attribute Data - What's the Difference?

Variable Data (Measured): - Can take any value within a range - Measured on a continuous scale - Examples: length, weight, temperature, voltage, pressure - More information per measurement - Smaller sample sizes needed

Attribute Data (Counted): - Discrete categories (good/bad, pass/fail) - Counted, not measured - Examples: number of defects, number of rejects, yes/no - Less information per observation - Larger sample sizes needed

When to Use Each: - Use variable data when you CAN measure (more powerful) - Use attribute data when you can only classify or count - Sometimes you convert variable to attribute (e.g., pass/fail based on tolerance)

10.5 Variable Control Charts

10.5.1 X-bar and R Chart

The **X-bar and R chart** is the most common control chart for variable data. It tracks both the process average (X-bar) and the process spread (Range).

10.5.1.1 Constructing an X-bar/R Chart

Step 1: Collect data in subgroups (typically 4-5 samples)

```
# Example: Measuring shaft diameter (mm)
# 25 subgroups of 5 measurements each

set.seed(100)
n_subgroups <- 25
n_samples <- 5
```

```
# Generate data
data <- matrix(rnorm(n_subgroups * n_samples, mean = 25.00, sd = 0.05),
              nrow = n_subgroups, ncol = n_samples)

# Add a special cause (shift) at subgroup 18
data[18, ] <- data[18, ] + 0.12

# Calculate statistics for each subgroup
xbar <- apply(data, 1, mean)
R <- apply(data, 1, function(x) max(x) - min(x))

cat("First 5 subgroups:\n")
```

First 5 subgroups:

```
print(round(data[1:5, ], 4))
```

```
      [,1]    [,2]    [,3]    [,4]    [,5]
[1,] 24.9749 24.9781 24.9776 25.0006 24.9834
[2,] 25.0066 24.9640 24.9131 24.9456 25.0682
[3,] 24.9961 25.0115 25.0089 25.0135 24.9765
[4,] 25.0443 24.9421 25.0949 25.0504 25.0421
[5,] 25.0058 25.0124 24.8864 24.8963 24.9271
```

```
cat("\nX-bar values:", round(xbar[1:5], 4))
```

X-bar values: 24.9829 24.9795 25.0013 25.0348 24.9456

```
cat("\nRange values:", round(R[1:5], 4))
```

Range values: 0.0257 0.1551 0.037 0.1528 0.126

Step 2: Calculate control limits

```
# Control chart constants for n=5
A2 <- 0.577
D3 <- 0      # D3 = 0 for n < 7
D4 <- 2.114

# Calculate grand mean and average range
X_double_bar <- mean(xbar)
R_bar <- mean(R)

cat("Grand Mean (X-double-bar):", round(X_double_bar, 4), "mm\n")
```

Grand Mean (X-double-bar): 25.004 mm

```
cat("Average Range (R-bar):", round(R_bar, 4), "mm\n\n")
```

Average Range (R-bar): 0.1023 mm

```
# X-bar chart limits
UCL_xbar <- X_double_bar + A2 * R_bar
LCL_xbar <- X_double_bar - A2 * R_bar

cat("X-bar Chart:\n")
```

X-bar Chart:

```
cat("  UCL =", round(UCL_xbar, 4), "mm\n")
```

UCL = 25.0631 mm

```
cat("  CL  =", round(X_double_bar, 4), "mm\n")
```

CL = 25.004 mm

```
cat("  LCL =", round(LCL_xbar, 4), "mm\n\n")
```

LCL = 24.945 mm

```
# R chart limits
UCL_R <- D4 * R_bar
LCL_R <- D3 * R_bar

cat("R Chart:\n")
```

R Chart:

```
cat("  UCL =", round(UCL_R, 4), "mm\n")
```

UCL = 0.2164 mm

```
cat("  CL  =", round(R_bar, 4), "mm\n")
```

CL = 0.1023 mm

```
cat("  LCL =", round(LCL_R, 4), "mm\n")
```

LCL = 0 mm

Step 3: Plot the charts



Figure 10.9: X-bar and R Control Charts

Interpretation: Subgroup 18 shows a point above the UCL on the X-bar chart, indicating a special cause. Investigation reveals the cause and corrective action is taken.

10.5.2 Control Chart Constants

Table 10.5: Control Chart Constants for X-bar/R Charts

n	A2	D3	D4	d2
2	1.880	0.000	3.267	1.128
3	1.023	0.000	2.574	1.693
4	0.729	0.000	2.282	2.059
5	0.577	0.000	2.114	2.326
6	0.483	0.000	2.004	2.534
7	0.419	0.076	1.924	2.704
8	0.373	0.136	1.864	2.847
9	0.337	0.184	1.816	2.970

10	0.308	0.223	1.777	3.078
----	-------	-------	-------	-------

10.5.3 Individual and Moving Range (I-MR) Chart

When sample size is $n = 1$ (one measurement per time period), use the **I-MR chart**.

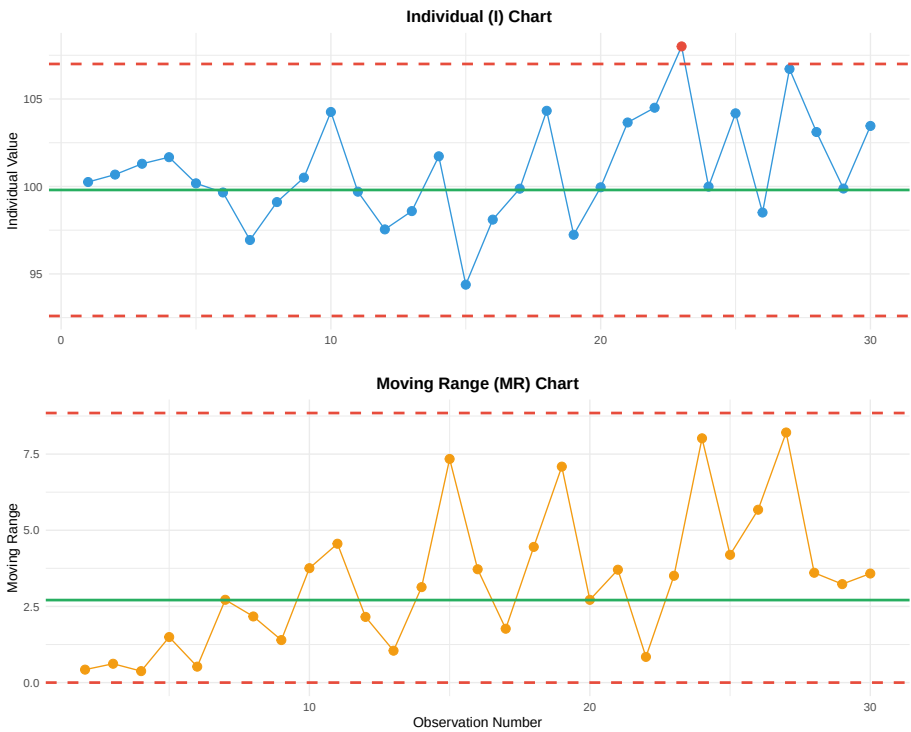


Figure 10.10: Individual and Moving Range Chart

I-MR Chart Formulas:

Chart	Center Line	UCL	LCL
I Chart	$\bar{X}$	$\bar{X} + 2.66\bar{MR}$	$\bar{X} - 2.66\bar{MR}$
MR Chart	$\bar{MR}$	$3.267 \times \bar{MR}$	0

10.6 Attribute Control Charts

10.6.1 p Chart (Proportion Defective)

The **p chart** tracks the proportion of defective units when sample sizes may vary.

```
# Example: Daily inspection data
# Varying sample sizes (different production volumes)

set.seed(300)
days <- 20
sample_sizes <- sample(80:120, days, replace = TRUE)
defectives <- rbinom(days, sample_sizes, prob = 0.05)

# Add a special cause on day 15
defectives[15] <- rbinom(1, sample_sizes[15], prob = 0.12)

# Calculate proportion
p <- defectives / sample_sizes

# Calculate p-bar (weighted average)
p_bar <- sum(defectives) / sum(sample_sizes)

cat("p-bar (average proportion defective):", round(p_bar, 4), "\n\n")
```

p-bar (average proportion defective): 0.0493

```
# Calculate control limits (vary with sample size)
UCL_p <- p_bar + 3 * sqrt(p_bar * (1 - p_bar) / sample_sizes)
LCL_p <- pmax(0, p_bar - 3 * sqrt(p_bar * (1 - p_bar) / sample_sizes))

cat("Sample of control limits (varying with n):\n")
```

Sample of control limits (varying with n):

```
cat("Day 1: UCL =", round(UCL_p[1], 4), ", LCL =", round(LCL_p[1], 4), "(n =", sample_s
```

Day 1: UCL = 0.1167 , LCL = 0 (n = 93)

```
cat("Day 5: UCL =", round(UCL_p[5], 4), ", LCL =", round(LCL_p[5], 4), "(n =", sample_s
```

Day 5: UCL = 0.1143 , LCL = 0 (n = 100)

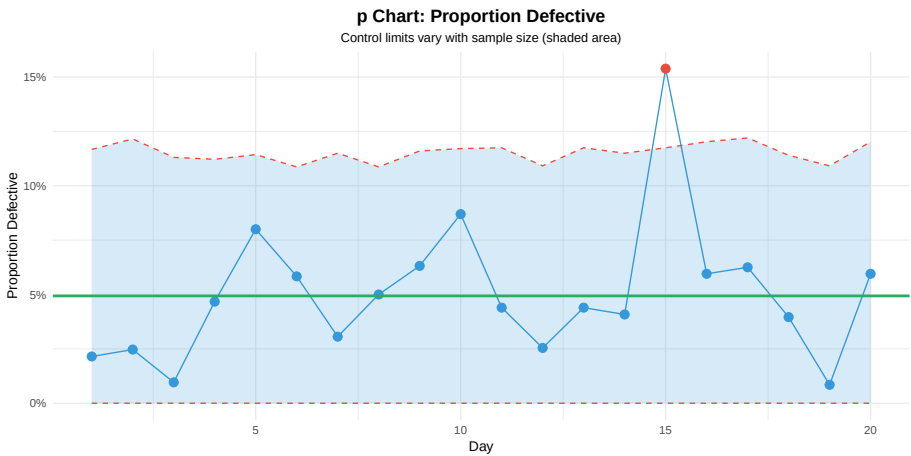


Figure 10.11: p Chart for Proportion Defective

10.6.2 c Chart (Count of Defects)

The **c chart** tracks the number of defects when the sample size (area of opportunity) is constant.

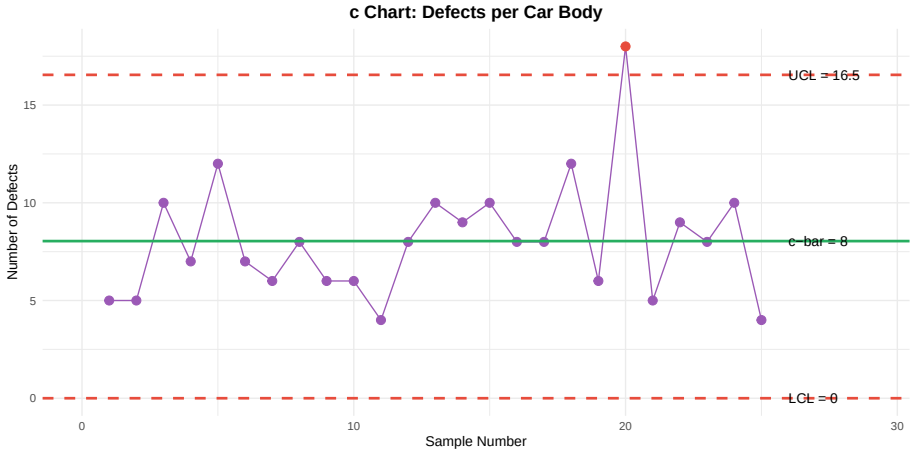


Figure 10.12: c Chart for Defects per Unit

Table 10.6: Attribute Control C

Chart	Center Line	UCL
p chart	$\bar{p} = \frac{\sum d}{\sum n}$	$\bar{p} + 3\sqrt{\frac{\bar{p}(1-\bar{p})}{n}}$

np chart	$\bar{np} = \frac{\sum d}{k}$	$\bar{np} + 3\sqrt{\bar{np}(1-\bar{p})}$
c chart	$\bar{c} = \frac{\sum c}{k}$	$\bar{c} + 3\sqrt{\bar{c}}$
u chart	$\bar{u} = \frac{\sum c}{\sum n}$	$\bar{u} + 3\sqrt{\frac{\bar{u}}{n}}$

10.7 Interpreting Control Charts

10.7.1 Out-of-Control Signals (Western Electric Rules)

A point doesn't have to be outside the control limits to indicate a problem. The **Western Electric Rules** identify non-random patterns:

Table 10.7: Western Electric Rules for Control Chart Interpretation

Rule	Pattern	Description
Rule 1	**Point beyond control limit**	One point above UCL or below LCL
Rule 2	**Zone A: 2 of 3 consecutive points**	2 out of 3 consecutive points in Zone A (>2)
Rule 3	**Zone B: 4 of 5 consecutive points**	4 out of 5 consecutive points in Zone B (>1)
Rule 4	**8 consecutive points on one side**	8 consecutive points above or below the center line

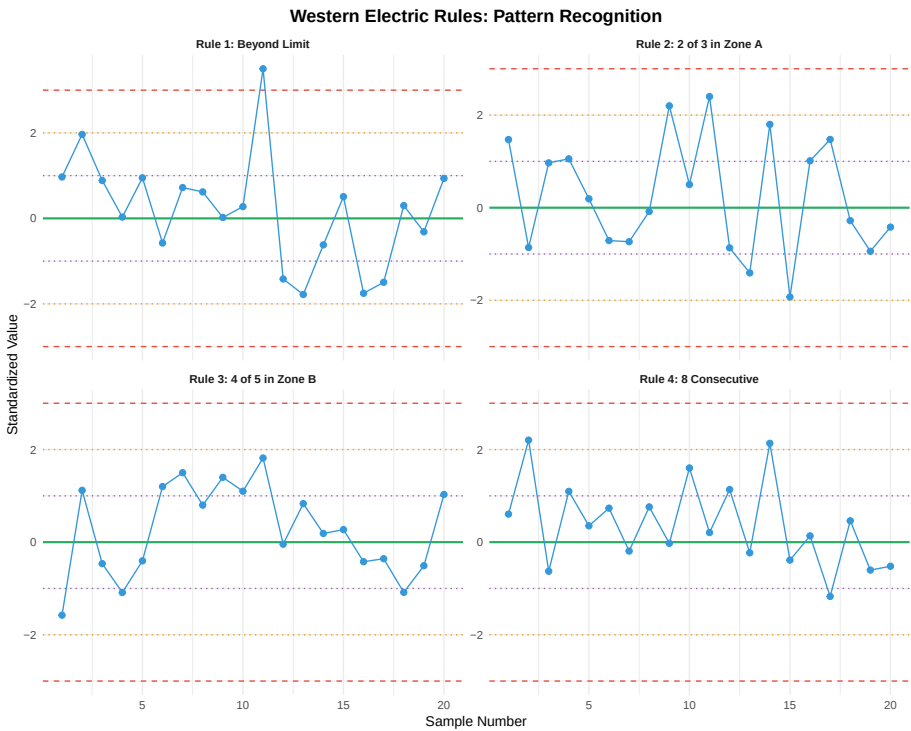


Figure 10.13: Visual Examples of Western Electric Rules

10.7.2 Additional Patterns to Watch For

Table 10.8: Additional Control Chart Patterns

Pattern	Description	Possible Causes
Trend	6 or more consecutive points steadily increasing or decreasing	Tool wear, temperature
Cycle	Repeating high-low pattern	Shift changes, batch effect
Stratification	Points consistently near center line (too little variation)	Incorrect limits, data manipulation
Mixture	Points avoiding center line (bimodal distribution)	Two machines, two operators

Interactive Exercise: Identify the Out-of-Control Condition

Look at this sequence of points (standardized values):

0.5, 0.8, 1.2, 0.9, 1.4, 1.6, 1.3, 1.8, -0.2, 0.3

Questions:

1. Are any points beyond ± 3 ?
2. Is there a Rule 4 violation (8 consecutive on one side)?

3. What pattern do you see?

Answers:

1. No — all points are within ± 3
2. **YES** — Points 1-8 are all positive (above center line)
3. This is a **Rule 4 violation**: 8 consecutive points above the center line indicates a likely process shift upward

Action: Investigate what changed — new material lot? Different operator? Equipment adjustment?

10.8 Process Capability

10.8.1 What is Process Capability?

Process capability compares the process performance to the specification limits. It answers: “Can this process consistently produce parts within tolerance?”

Warning: Using ``size`` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use ``linewidth`` instead.

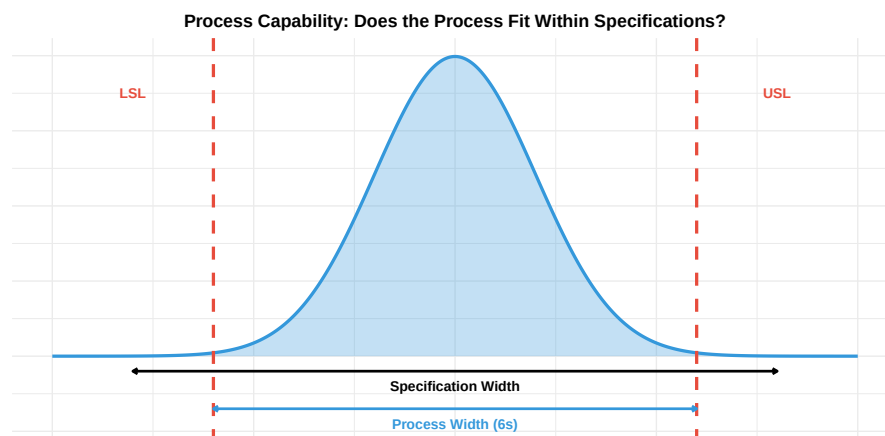


Figure 10.14: Process Capability: Comparing Process to Specifications

10.8.2 Capability Indices

Table 10.9: Process Capability

Index	Formula
-------	---------

Cp	$\frac{USL - LSL}{6\sigma}$	Potential
Cpk	$\min\left(\frac{USL - \bar{X}}{3\sigma}, \frac{\bar{X} - LSL}{3\sigma}\right)$	Actual ca
Pp	$\frac{USL - LSL}{6s}$	Overall p
Ppk	$\min\left(\frac{USL - \bar{X}}{3s}, \frac{\bar{X} - LSL}{3s}\right)$	Overall p

10.8.3 Cp vs. Cpk: Why Both Matter

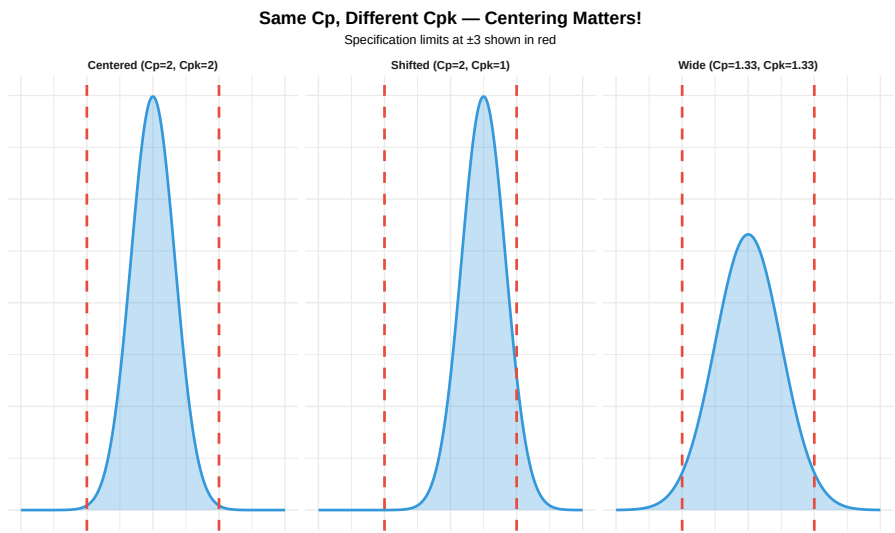


Figure 10.15: Cp vs. Cpk: The Importance of Centering

10.8.4 Capability Example Calculation

```
# Example: Shaft diameter specification 25.00 ± 0.15 mm
# Process data from 25 subgroups of 5

USL <- 25.15
LSL <- 24.85
Target <- 25.00

# Using earlier X-bar/R data
X_bar_cap <- mean(xbar)
R_bar_cap <- mean(R)

# Estimate sigma using R-bar/d2 (d2 = 2.326 for n=5)
d2 <- 2.326
sigma_within <- R_bar_cap / d2
```

```

cat("Process Statistics:\n")

Process Statistics:
cat("  Mean (X-bar):", round(X_bar_cap, 4), "mm\n")

    Mean (X-bar): 25.004 mm
cat("  Sigma (estimated):", round(sigma_within, 4), "mm\n\n")

    Sigma (estimated): 0.044 mm
# Calculate Cp
Cp <- (USL - LSL) / (6 * sigma_within)
cat("Cp =", round(Cp, 2), "\n")

Cp = 1.14
# Calculate Cpk
Cpu <- (USL - X_bar_cap) / (3 * sigma_within)
Cpl <- (X_bar_cap - LSL) / (3 * sigma_within)
Cpk <- min(Cpu, Cpl)

cat("Cpu =", round(Cpu, 2), "\n")

Cpu = 1.11
cat("Cpl =", round(Cpl, 2), "\n")

Cpl = 1.17
cat("Cpk =", round(Cpk, 2), "\n\n")

Cpk = 1.11
# Interpretation
cat("Interpretation:\n")

Interpretation:
if (Cpk >= 1.33) {
  cat("Process is CAPABLE (Cpk >= 1.33)\n")
} else if (Cpk >= 1.00) {
  cat("Process is marginally CAPABLE (1.00 <= Cpk < 1.33)\n")
} else {
  cat("Process is NOT CAPABLE (Cpk < 1.00)\n")
}

Process is marginally CAPABLE (1.00 <= Cpk < 1.33)

```

10.8.5 Capability Index Interpretation

Table 10.10: Capability Index Interpretation Guide

Cpk Value	Sigma Level	PPM Defective	Interpretation	Typical Industry
< 1.00	< 3	> 2,700	Not capable — improvement required	Requires improvement
1.00 - 1.33	3 - 4	2,700 - 64	Marginally capable — monitor closely	Consumer products
1.33 - 1.67	4 - 5	64 - 0.6	Capable — meets typical requirements	General manufacturing
1.67 - 2.00	5 - 6	0.6 - 0.002	Good capability — automotive/aerospace	Automotive, aerospace
> 2.00	> 6	< 0.002	Excellent — Six Sigma level	Aerospace, medical

Question: When to use Cp/Cpk vs. Pp/Ppk?

Cp/Cpk (Process Capability): - Uses within-subgroup variation (estimated from $\bar{R}/d_2$) - Represents the POTENTIAL capability if process is in control - Use for ongoing process monitoring - Requires process to be in statistical control

Pp/Ppk (Process Performance): - Uses overall standard deviation (s) of all data - Represents ACTUAL performance including all variation - Use for initial capability studies or when process stability is unknown - Includes both common and special cause variation

Rule of Thumb: - If $Pp \geq Cp$ and $Ppk \geq Cpk \rightarrow$ Process is stable - If $Pp < Cp$ or $Ppk < Cpk \rightarrow$ Process has special cause variation (not in control)

10.9 Responding to Out-of-Control Signals

10.9.1 The Response Process

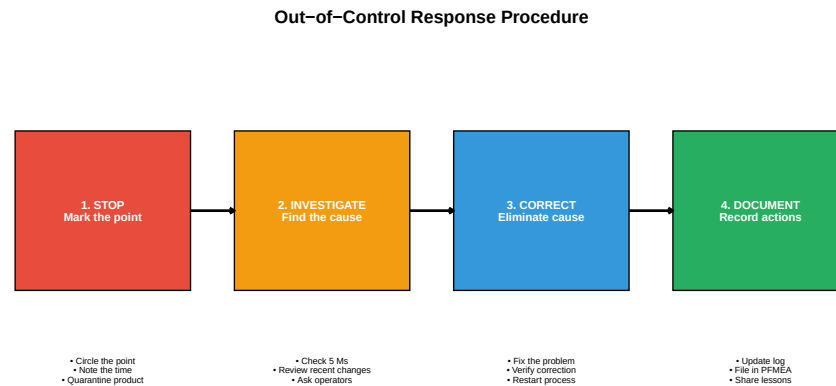


Figure 10.16: Responding to Out-of-Control Conditions

10.9.2 Investigation Checklist (5 Ms + E)

Table 10.11: Investigation Checklist: 5 Ms + E

Category	Questions to Ask
Man	Different operator? New employee? Fatigue? Training issue?
Machine	Equipment malfunction? Tool wear? Maintenance due? Setup change?
Material	New lot? Different supplier? Out-of-spec material?
Method	Procedure changed? Parameter drift? Wrong program?
Measurement	Gauge drift? Calibration due? Different inspector?
Environment	Temperature change? Humidity? Vibration? Contamination?

10.10 SPC Implementation

10.10.1 Steps to Implement SPC

Table 10.12: SPC Implementation Steps

Step	Action	Key Considerations
1	Select the process and characteristic	Start with critical/problem processes
2	Determine measurement system adequacy (MSA)	Gauge R&R must be acceptable (< 30%)
3	Collect initial data (25+ subgroups)	Process must be running normally
4	Calculate trial control limits	Limits based on actual process, not specs
5	Identify and remove special causes	Investigate each out-of-control point
6	Recalculate limits with stable data	These become the standard limits
7	Implement ongoing monitoring	Train operators, establish reaction plans
8	Review and improve continuously	Update limits when process improves

10.10.2 Common SPC Mistakes

Table 10.13: Common SPC Mistakes and Corrections

Mistake	Why It's Wrong	Cor
Using specification limits as control limits	Control limits are based on process performance, not specs	Calc
Changing limits too frequently	Limits should only change when process fundamentally changes	Use
Ignoring the R chart	R chart often signals problems before X-bar chart	Alwa
Over-adjusting (tampering)	Adjusting for common cause variation increases variation	Only
Not acting on signals	Defeats the purpose of SPC	Inve

10.11 Summary

Table 10.14: SPC Key Concepts Summary

Topic	Key Points
Variation	Common cause (inherent) vs. special cause (assignable); respond differently
Control Charts	Graph with UCL/LCL at $\pm 3\sigma$; distinguishes between variation types
Variable Charts	X-bar/R (n=2-9), X-bar/S (n 10), I-MR (n=1)
Attribute Charts	p (proportion), np (count defectives), c (defects), u (defects/unit)
Interpretation	Western Electric rules: beyond limits, 2 of 3 in Zone A, 4 of 5 in Zone B, 8 consecutive
Capability	Cp (potential), Cpk (actual); 1.33 is capable; 1.67 for automotive

10.12 Review Questions

10.12.1 Conceptual Questions

Question 1: What is the difference between common cause and special cause variation?

Common Cause Variation: - Inherent to the process - Always present - Random and predictable - Many small factors - System-level improvement required - Examples: machine vibration, material variation, ambient temperature

Special Cause Variation: - External to normal process - Intermittent or new - Non-random patterns - Specific assignable cause - Local action to eliminate - Examples: tool breakage, new operator, bad material lot

Key Point: Only act on special causes. Attempting to adjust for common cause variation (tampering) makes the process worse.

Question 2: Why are control limits set at ± 3 sigma rather than ± 2 sigma?

At ± 3 : - 99.73% of data falls within limits (when in control) - Only 0.27% false alarm rate (about 3 per 1000 points) - Good balance between detecting real problems and avoiding false alarms

If we used ± 2 : - 95.45% of data within limits - 4.55% false alarm rate (about 45 per 1000 points!) - Too many false alarms $\rightarrow$ operators ignore the chart

If we used ± 4 : - 99.99% within limits - Almost no false alarms - But we'd miss real problems (low sensitivity)

The ± 3 choice balances: - Risk of false alarm (treating common cause as special) - Risk of missed signal (treating special cause as common)

Question 3: When would you use an I-MR chart instead of an X-bar/R chart?

Use I-MR Chart When:

1. **Sample size is $n = 1$** — only one measurement per time period
2. **Destructive testing** — can't afford multiple samples
3. **Expensive measurement** — time or cost prohibitive
4. **Continuous process** — each reading is independent (batch process)
5. **Long intervals** — measurements far apart in time
6. **Homogeneous batches** — within-batch variation is negligible

Examples: - Daily chemical batch analysis - Weekly calibration check - Each lot incoming inspection (one sample per lot) - Continuous process temperature readings

Caution: I-MR charts are less sensitive than X-bar charts because averaging in subgroups reduces noise.

10.12.2 Calculation Questions

Question 4: Calculate control limits for an X-bar/R chart given the following data.

Given: - 20 subgroups of $n = 4$ measurements - Grand mean (X-double-bar) = 50.25 - Average range (R-bar) = 2.40 - Constants for $n = 4$: $A_2 = 0.729$, $D_3 = 0$, $D_4 = 2.282$

Calculate UCL and LCL for both charts.

Solution:

X-bar Chart:

$$UCL = \bar{\bar{X}} + A_2 \times \bar{R}$$

$$UCL = 50.25 + 0.729 \times 2.40 = 50.25 + 1.75 = 52.00$$

$$LCL = \bar{\bar{X}} - A_2 \times \bar{R}$$

$$LCL = 50.25 - 0.729 \times 2.40 = 50.25 - 1.75 = 48.50$$

$$CL = 50.25$$

R Chart:

$$UCL = D_4 \times \bar{R} = 2.282 \times 2.40 = 5.48$$

$$LCL = D_3 \times \bar{R} = 0 \times 2.40 = 0$$

$$CL = 2.40$$

Question 5: Calculate C_p and C_{pk} for a process with the following data.

Given: - Specification: 100 ± 5 ($USL = 105$, $LSL = 95$) - Process mean = 102
- Process standard deviation (σ) = 1.5

Solution:

C_p (Potential Capability):

$$C_p = (USL - LSL) / (6 \sigma)$$

$$C_p = (105 - 95) / (6 \times 1.5)$$

$$C_p = 10 / 9 = 1.11$$

C_{pk} (Actual Capability):

$$C_{pu} = (USL - \bar{X}) / (3 \sigma) = (105 - 102) / (3 \times 1.5) = 3 / 4.5 = 0.67$$

$$C_{pl} = (\bar{X} - LSL) / (3 \sigma) = (102 - 95) / (3 \times 1.5) = 7 / 4.5 = 1.56$$

$$C_{pk} = \min(C_{pu}, C_{pl}) = \min(0.67, 1.56) = 0.67$$

Interpretation: - $C_p = 1.11$ suggests process spread could fit within specs IF centered - $C_{pk} = 0.67$ shows process is NOT capable because it's shifted toward

USL - Action: Center the process closer to 100 (target)

Question 6: A p chart has $\bar{p} = 0.04$ and sample size $n = 200$. Calculate control limits.

Solution:

Center Line:

$$CL = \bar{p} = 0.04 \text{ (4\% defective)}$$

Upper Control Limit:

$$UCL = \bar{p} + 3 \times \sqrt{\bar{p} \times (1 - \bar{p}) / n}$$

$$UCL = 0.04 + 3 \times \sqrt{0.04 \times 0.96 / 200}$$

$$UCL = 0.04 + 3 \times \sqrt{0.000192}$$

$$UCL = 0.04 + 3 \times 0.01386$$

$$UCL = 0.04 + 0.0416 = 0.0816 \text{ (8.16\%)}$$

Lower Control Limit:

$$LCL = \bar{p} - 3 \times \sqrt{\bar{p} \times (1 - \bar{p}) / n}$$

$$LCL = 0.04 - 0.0416 = -0.0016$$

Since LCL cannot be negative: $LCL = 0$

Final Limits: - $UCL = 8.16\%$ - $CL = 4.00\%$ - $LCL = 0\%$

10.12.3 Application Questions

Question 7: You observe 8 consecutive points above the center line but all within control limits. What does this indicate?

This is a Rule 4 violation (Western Electric Rules).

What it indicates: - The process mean has shifted upward - This is a SPECIAL CAUSE signal - Even though no points are beyond limits, the pattern is not random

Probability analysis: - Probability of a point above CL (random) = 0.5 - Probability of 8 consecutive above CL = $0.5^8 = 0.0039$ (0.39%) - This is very unlikely by chance alone

Action required: 1. Stop and mark the chart 2. Investigate what changed around the time of the first high point 3. Check: new material lot? Tool change? Operator change? Temperature? 4. Correct the cause 5. Monitor to verify process returns to normal

Question 8: A process has $C_p = 2.0$ but $C_{pk} = 1.0$. What does this tell you?

Analysis:

$C_p = 2.0$ means: - Process spread (6 σ) is half the specification width - The process COULD produce no defects if centered - Potential capability is excellent

Cpk = 1.0 means: - Process is off-center - Actual capability is only marginal
 - Some defects are being produced

The difference (Cp - Cpk = 1.0) indicates: - The process mean is shifted 3 from the target - One side has much less margin than the other

Visual:

```

LSL           Target           USL
|             |               |
              [====PROCESS====]
              ↑ shifted to one side
  
```

Action: - Center the process on target - After centering, Cpk should approach Cp (both 2.0) - This is an adjustment action, not a variation reduction

Question 9: Why should you always analyze the R chart before the X-bar chart?

The R chart should be analyzed first because:

1. **Control limits depend on variation:**
 - X-bar limits are calculated using R-bar
 - If R is out of control, X-bar limits are unreliable
2. **R chart is more sensitive to variation changes:**
 - Tool wear shows on R chart before X-bar
 - Inconsistent setup appears as increased R
3. **Process must be stable in variation first:**
 - A process can't be "in control" if variation is changing
 - Stable variation is a prerequisite for evaluating the mean
4. **Different actions for each:**
 - R chart problem → variation issue (consistency)
 - X-bar problem → centering issue (average)

Rule: If R chart is out of control, fix that FIRST before interpreting the X-bar chart.

10.13 References

- Montgomery, D.C. (2019). *Introduction to Statistical Quality Control* (8th ed.). Wiley.
- Wheeler, D.J., & Chambers, D.S. (1992). *Understanding Statistical Process Control* (2nd ed.). SPC Press.
- AIAG. (2005). *Statistical Process Control (SPC) Reference Manual* (2nd ed.).
- Western Electric. (1956). *Statistical Quality Control Handbook*. AT&T.
- Deming, W.E. (1986). *Out of the Crisis*. MIT Press.

- Shewhart, W.A. (1931). *Economic Control of Quality of Manufactured Product*. Van Nostrand.
 - ASTM E2587. Standard Practice for Use of Control Charts in Statistical Process Control.
-

Chapter 11

Measurement Systems Analysis

11.1 Learning Objectives

After completing this chapter, you will be able to:

1. Explain the importance of measurement system quality in process control
 2. Identify the components of measurement system variation
 3. Define and calculate accuracy, bias, linearity, stability, repeatability, and reproducibility
 4. Conduct and interpret a Gauge R&R study using both the Range and ANOVA methods
 5. Determine measurement system acceptability using %GRR and ndc criteria
 6. Apply attribute measurement system analysis for pass/fail decisions
 7. Recognize common sources of measurement error and implement improvements
 8. Understand the relationship between MSA and SPC effectiveness
-

11.2 Introduction to Measurement Systems Analysis


Measurement Systems Analysis (MSA) is the science of evaluating the quality of measurement processes. Before we can trust our data for process

control, quality decisions, or capability studies, we must first verify that our measurement system is capable of providing reliable results.

11.2.1 Why MSA Matters

“You can’t improve what you can’t measure - but you also can’t improve what you measure incorrectly.”

Consider this scenario:

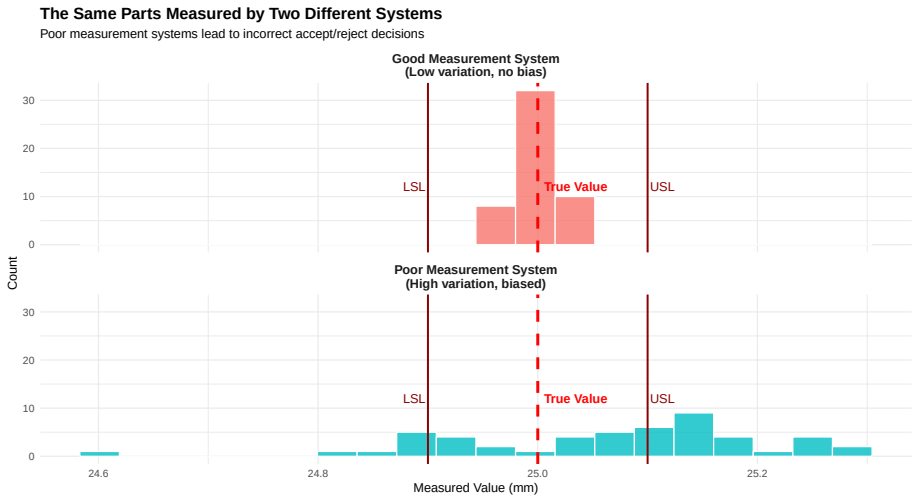

11.2.2 The Cost of Poor Measurement

Table 11.1: Business Impact of Poor Measurement System

Impact	Description
False Accepts (Type II Error)	Bad parts passed as good; reach customer
False Rejects (Type I Error)	Good parts rejected as bad; scrapped or reworked
Process Adjustment Errors	Adjusting process based on measurement noise, not real changes
Capability Misassessment	Cp/Cpk calculations are wrong; true capability unknown
Customer Complaints	Inconsistent quality due to measurement-based decisions

11.2.3 MSA in Industry Standards

MSA is required by multiple quality standards:


- **IATF 16949** (Automotive): Requires MSA for all measurement systems referenced in control plans
- **AS9100** (Aerospace): Requires demonstrated measurement capability
- **ISO 9001**: Requires monitoring and measurement resources to be suitable

- **FDA 21 CFR Part 820** (Medical Devices): Requires validated measurement equipment
-

11.3 Components of Measurement Variation

Total measurement variation comes from multiple sources. Understanding these components is essential for improvement.

11.3.1 The Measurement System Model

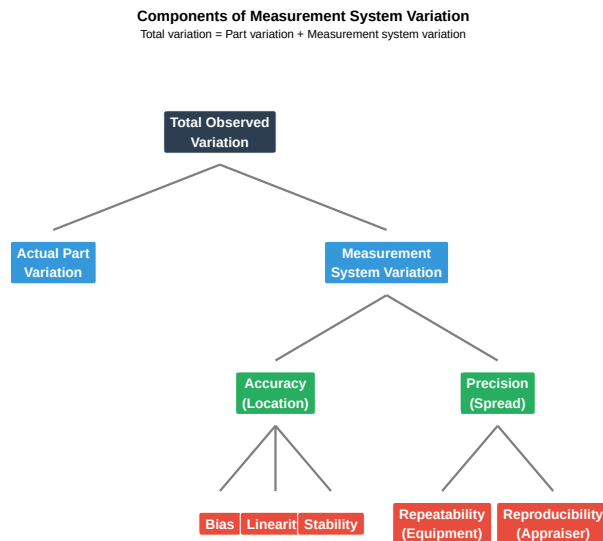

11.3.2 Accuracy vs. Precision

These are often confused but are fundamentally different concepts:

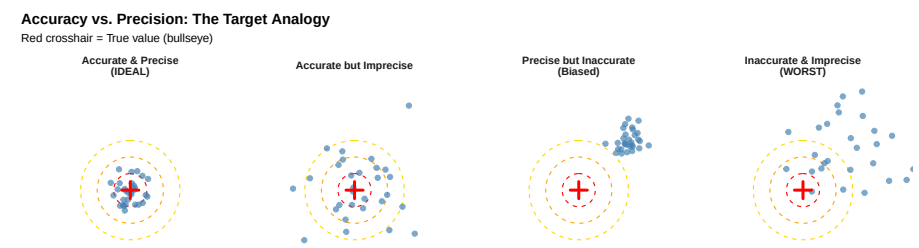


Table 11.2: Accuracy v

	Definition	Affected By
Accuracy	How close measurements are to the true value (average)	Calibration, bias, linearity
Precision	How close measurements are to each other (spread)	Repeatability, reproducibility,


11.4 Accuracy Studies

Accuracy studies evaluate how well the measurement system indicates the true value.

11.4.1 Bias

Bias is the systematic error - the difference between the average of measurements and the true (reference) value.

$$\text{Bias} = \bar{x}_{observed} - x_{reference}$$

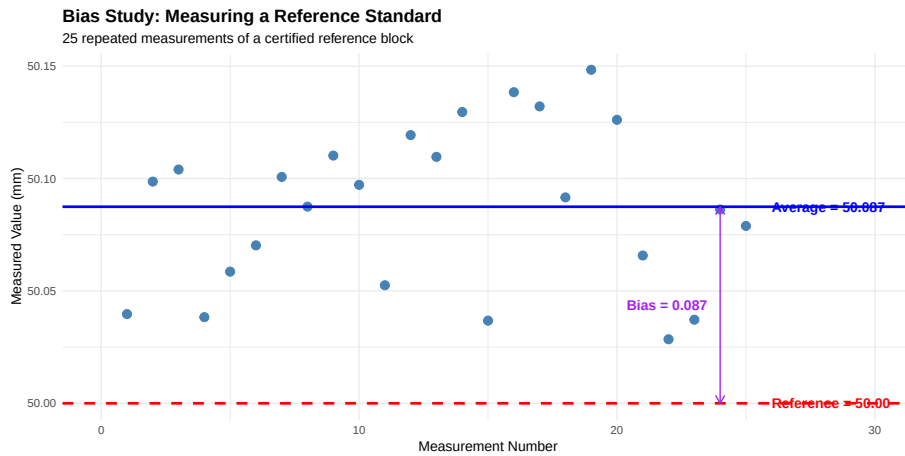

```
# Bias study calculation
reference_value <- 50.000 # Certified reference standard
measurements <- c(50.08, 50.07, 50.09, 50.08, 50.06, 50.10, 50.07, 50.08,
                  50.09, 50.08, 50.07, 50.11, 50.08, 50.09, 50.07)

# Calculate bias
average_measured <- mean(measurements)
bias <- average_measured - reference_value

cat("Reference Value:", reference_value, "mm\n")

Reference Value: 50 mm

cat("Average Measured:", round(average_measured, 4), "mm\n")

Average Measured: 50.0813 mm

cat("Bias:", round(bias, 4), "mm\n")

Bias: 0.0813 mm

cat("Bias as % of Tolerance (±0.10):", round(abs(bias) / 0.10 * 100, 1), "%\n")

Bias as % of Tolerance (±0.10): 81.3 %

# Statistical test for significance
t_test <- t.test(measurements, mu = reference_value)
cat("\nt-test p-value:", round(t_test$p.value, 4))

t-test p-value: 0

if(t_test$p.value < 0.05) {
  cat(" - Bias is statistically significant\n")
}
```

```

} else {
  cat(" - Bias is not statistically significant\n")
}


```

- Bias is statistically significant

11.4.2 Linearity

Linearity measures whether bias changes across the measurement range. A gauge might be accurate at one end of its range but biased at the other.

``geom_smooth()`` using formula = 'y ~ x'

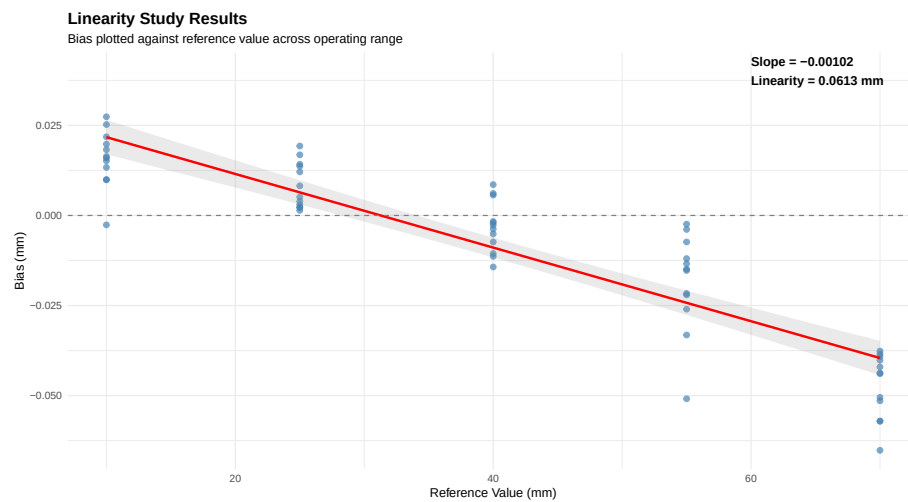

```

# Linearity calculation
reference <- c(10, 25, 40, 55, 70)
avg_bias <- c(0.020, 0.008, -0.002, -0.018, -0.048)

# Fit linear regression
model <- lm(avg_bias ~ reference)

# Calculate linearity
slope <- coef(model)[2]
range_used <- max(reference) - min(reference)
linearity <- abs(slope) * range_used

cat("Regression equation: Bias =", round(coef(model)[1], 4), "+",
    round(slope, 5), "× Reference\n")

```

Regression equation: Bias = 0.0352 + -0.00108 × Reference

```
cat("Linearity (slope × range):", round(linearity, 4), "mm\n")
```

```
Linearity (slope × range): 0.0648 mm
```

```
cat("As % of tolerance (±0.10):", round(linearity / 0.10 * 100, 1), "%\n")
```

```
As % of tolerance (±0.10): 64.8 %
```

```
# R-squared
```


```
cat("R² =", round(summary(model)$r.squared, 3),  
    "- indicates", ifelse(summary(model)$r.squared > 0.7, "significant", "minor"),  
    "linearity issue\n")
```

```
R² = 0.945 - indicates significant linearity issue
```

11.4.3 Stability

Stability (also called drift) measures whether the measurement system's accuracy changes over time.

```
`geom_smooth()` using formula = 'y ~ x'
```

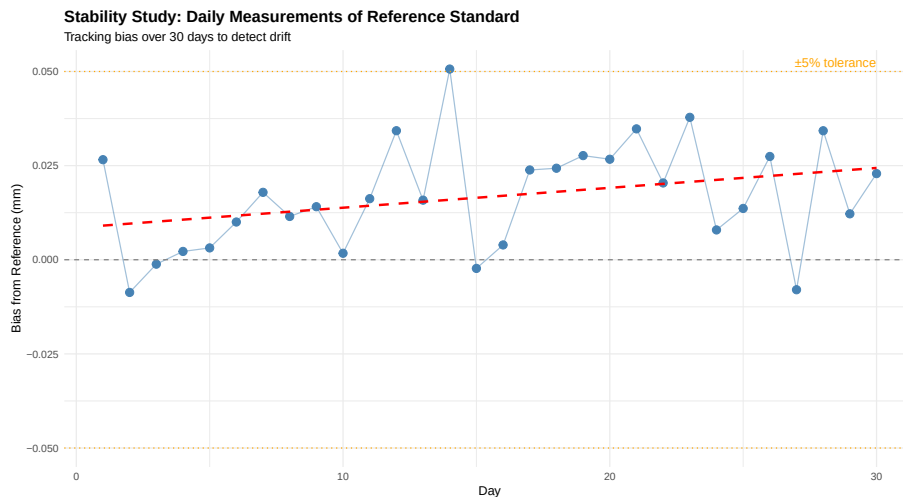

11.4.4 Stability Control Chart

For ongoing stability monitoring, use a control chart:

```
# Stability monitoring with control chart
```

```
reference <- 25.000
```

```
measurements <- c(25.012, 25.008, 25.015, 25.018, 25.022, 25.019, 25.025,  
                  25.028, 25.031, 25.026, 25.033, 25.038, 25.035, 25.041, 25.039)
```

```
days <- 1:15
```

```
# Calculate control limits (based on historical sigma)
historical_sigma <- 0.010
x_bar <- mean(measurements[1:5]) # Baseline from first 5 days
UCL <- x_bar + 3 * historical_sigma
LCL <- x_bar - 3 * historical_sigma

cat("Baseline Average:", round(x_bar, 4), "\n")
```

Baseline Average: 25.015

```
cat("UCL:", round(UCL, 4), "\n")
```

UCL: 25.045

```
cat("LCL:", round(LCL, 4), "\n")
```

LCL: 24.985

```
# Check for out-of-control
out_of_control <- which(measurements > UCL | measurements < LCL)
if(length(out_of_control) > 0) {
  cat("\nOut-of-control points on days:", out_of_control, "\n")
  cat("Drift detected - recalibration recommended\n")
} else {
  cat("\nNo out-of-control points - measurement system stable\n")
}
```

No out-of-control points - measurement system stable

11.5 Precision Studies: Gauge R&R

Gauge R&R (Repeatability and Reproducibility) is the most common MSA study. It quantifies precision variation.

11.5.1 Repeatability vs. Reproducibility

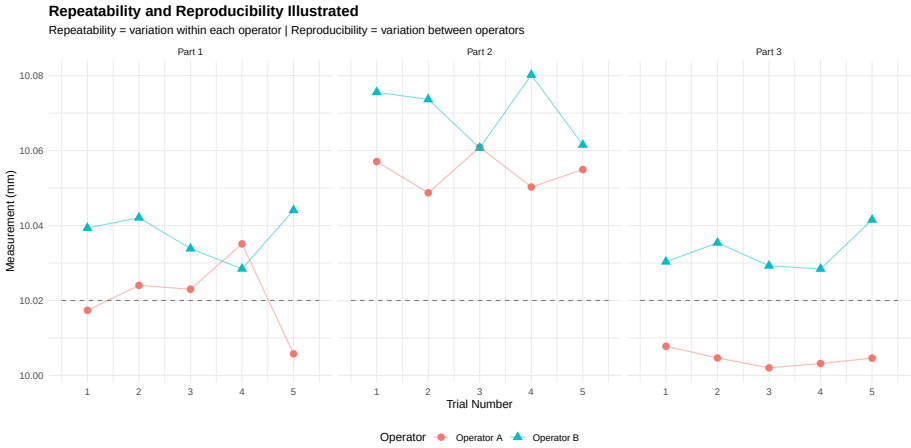


Table 11.3: Gauge

Component	Also Known As	Definition
Repeatability (EV)	Equipment Variation, Within-operator variation	Variation when same operator meas
Reproducibility (AV)	Appraiser Variation, Between-operator variation	Variation when different operators m
Gauge R&R (GRR)	Total measurement system variation	Combined repeatability and reproduc

11.5.2 Gauge R&R Study Design

Table 11.4: Standard Gauge R&R Study Design Parameters

Parameter	Typical_Value	Notes
Number of Parts	10	Minimum 5, 10 recommended for statistical power
Number of Operators	3	Minimum 2, 3 is standard for detecting operator effect
Number of Trials	3	Minimum 2, 3 is standard for repeatability estimation
Total Measurements	$10 \times 3 \times 3 = 90$	More measurements = better precision in estimates
Part Selection	Cover the full process range	Parts should represent typical production variation
Randomization	Randomize measurement order	Blind measurements when possible; prevents bias

11.5.3 Range Method (Short Form)

The Range Method is a quick approximation useful for initial screening.

```
# Range Method Gauge R&R Calculation
# Two operators, five parts, two trials each
```

```
# Data: Measurements by each operator (2 trials per part)
operator_a <- matrix(c(
  0.85, 0.87, # Part 1
  0.92, 0.91, # Part 2
  0.78, 0.80, # Part 3
  0.95, 0.96, # Part 4
  0.88, 0.85 # Part 5
), ncol = 2, byrow = TRUE)

operator_b <- matrix(c(
  0.86, 0.88, # Part 1
  0.93, 0.92, # Part 2
  0.80, 0.79, # Part 3
  0.94, 0.97, # Part 4
  0.87, 0.88 # Part 5
), ncol = 2, byrow = TRUE)

# Step 1: Calculate ranges for each part-operator combination
range_a <- apply(operator_a, 1, function(x) max(x) - min(x))
range_b <- apply(operator_b, 1, function(x) max(x) - min(x))

# Step 2: Average range
R_bar <- mean(c(range_a, range_b))

# Step 3: Calculate Repeatability (EV)
# d2 for 2 trials = 1.128
d2_trials <- 1.128
EV <- R_bar / d2_trials

# Step 4: Calculate part averages by operator
avg_a <- rowMeans(operator_a)
avg_b <- rowMeans(operator_b)

# Step 5: Range of operator averages
X_diff <- abs(mean(avg_a) - mean(avg_b))

# d2 for 2 operators = 1.128
d2_operators <- 1.128
n_parts <- 5
n_trials <- 2

# Step 6: Reproducibility (AV)
AV_squared <- (X_diff / d2_operators)^2 - (EV^2 / (n_parts * n_trials))
AV <- sqrt(max(0, AV_squared))
```

```
# Step 7: Gauge R&R
GRR <- sqrt(EV^2 + AV^2)

# Step 8: Express as % of tolerance
tolerance <- 0.30 # Example tolerance of ±0.15 = 0.30 total

cat("=== Range Method Gauge R&R Results ===\n\n")

=== Range Method Gauge R&R Results ===
cat("Average Range (R-bar):", round(R_bar, 4), "\n")

Average Range (R-bar): 0.017
cat("Repeatability (EV):", round(EV, 4), "\n")

Repeatability (EV): 0.0151
cat("Reproducibility (AV):", round(AV, 4), "\n")

Reproducibility (AV): 0.004
cat("Gauge R&R (GRR):", round(GRR, 4), "\n\n")

Gauge R&R (GRR): 0.0156
cat("%EV (of tolerance):", round(EV / tolerance * 100 * 5.15, 1), "%\n")

%EV (of tolerance): 25.9 %
cat("%AV (of tolerance):", round(AV / tolerance * 100 * 5.15, 1), "%\n")

%AV (of tolerance): 6.8 %
cat("%GRR (of tolerance):", round(GRR / tolerance * 100 * 5.15, 1), "%\n")

%GRR (of tolerance): 26.8 %
```

11.5.4 ANOVA Method (Full Study)

ANOVA (Analysis of Variance) is a statistical technique that partitions the total observed variation in a dataset into distinct components, each attributable to a specific source. In the context of Gauge R&R, ANOVA separates the total measurement variation into contributions from:

- **Parts** (the actual differences between items being measured)
- **Operators** (systematic differences between people taking measurements)
- **Part × Operator interaction** (whether certain operators measure certain parts differently)
- **Repeatability** (random error when the same operator measures the same part multiple times)

11.5.4.1 Why Use ANOVA for Gauge R&R?

The fundamental question in any measurement system analysis is: *“How much of the variation I observe comes from my measurement system versus the actual differences between parts?”* ANOVA answers this question by statistically decomposing variance—it calculates how much each source contributes to what we observe.

Consider the alternative: if we simply looked at the spread of all measurements, we wouldn’t know whether a wide spread indicates highly variable parts (good—our gauge can detect differences) or a poor measurement system (bad—we’re adding noise). ANOVA untangles these effects mathematically.

11.5.4.2 Why ANOVA is the Preferred Method

While the Range Method provides a quick estimate, ANOVA offers several critical advantages for Gauge R&R studies:

Aspect	Range Method	ANOVA Method
Interaction effects	Cannot detect	Identifies Part $\times$ Operator interactions
Statistical rigor	Approximation using range-based estimates	Exact variance component estimation
Hypothesis testing	Not available	Provides F-tests and p-values for each source
Accuracy	Tends to overestimate GRR	More precise variance estimates
Information richness	Basic EV/AV breakdown	Full decomposition with confidence intervals
Industry acceptance	Screening only	Required for formal MSA studies (AIAG)

The ability to detect **interaction effects** is particularly important. If Operator A consistently measures Part 3 higher than Operator B does (but they agree on other parts), this indicates a training issue or technique difference that the Range Method would miss entirely. ANOVA flags this interaction, enabling targeted corrective action.

11.5.4.3 How ANOVA Works in Gauge R&R

ANOVA uses the **F-statistic** to test whether variation between groups (e.g., between operators) is significantly larger than variation within groups (repeatability). The mathematical basis is:

$$F = \frac{\text{Mean Square Between Groups}}{\text{Mean Square Within Groups}} = \frac{MS_{factor}}{MS_{error}}$$

A large F-value indicates that the factor (Part, Operator, or their interaction) contributes meaningfully to the observed variation. The p-value tells us the probability of seeing such an F-value if the factor had no real effect.

From the ANOVA table's Mean Squares, we extract **variance components** (σ^2) for each source, then combine them to calculate the standard metrics: %EV (repeatability), %AV (reproducibility), %GRR, and the number of distinct categories (ndc).

```
# Full Gauge R&R using ANOVA method
# 10 parts, 3 operators, 3 trials

set.seed(42)

# Generate realistic GRR data
n_parts <- 10
n_operators <- 3
n_trials <- 3

# Part true values (most of the variation)
part_effects <- rnorm(n_parts, 0, 0.05)

# Operator effects (some variation)
operator_effects <- c(-0.008, 0.003, 0.005)

# Create dataset
grr_data <- expand.grid(
  Part = 1:n_parts,
  Operator = paste0("Op", 1:n_operators),
  Trial = 1:n_trials
)

# Add measurements
grr_data$Measurement <- 10 +
  part_effects[grr_data$Part] +
  operator_effects[as.numeric(factor(grr_data$Operator))] +
  rnorm(nrow(grr_data), 0, 0.006) # Repeatability error

# Convert to factors
grr_data$Part <- factor(grr_data$Part)
grr_data$Operator <- factor(grr_data$Operator)

# Fit ANOVA model
anova_model <- aov(Measurement ~ Part + Operator + Part:Operator, data = grr_data)

# Extract variance components
```

```
anova_table <- anova(anova_model)
print(anova_table)
```

Analysis of Variance Table

Response: Measurement

	Df	Sum Sq	Mean Sq	F value	Pr(>F)
Part	9	0.136635	0.0151816	343.6163	< 2.2e-16 ***
Operator	2	0.003430	0.0017152	38.8223	1.52e-11 ***
Part:Operator	18	0.000430	0.0000239	0.5401	0.9263
Residuals	60	0.002651	0.0000442		

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```
# Extract Mean Squares from ANOVA
```

```
MS_part <- anova_table["Part", "Mean Sq"]
```

```
MS_operator <- anova_table["Operator", "Mean Sq"]
```

```
MS_interaction <- anova_table["Part:Operator", "Mean Sq"]
```

```
MS_error <- anova_table["Residuals", "Mean Sq"]
```

```
# Calculate variance components
```

```
n_p <- 10 # number of parts
```

```
n_o <- 3 # number of operators
```

```
n_r <- 3 # number of trials
```

```
# Repeatability variance
```

```
var_repeatability <- MS_error
```

```
# Interaction variance
```

```
var_interaction <- max(0, (MS_interaction - MS_error) / n_r)
```

```
# Operator variance
```

```
var_operator <- max(0, (MS_operator - MS_interaction) / (n_p * n_r))
```

```
# Part variance
```

```
var_part <- max(0, (MS_part - MS_interaction) / (n_o * n_r))
```

```
# Reproducibility = Operator + Interaction
```

```
var_reproducibility <- var_operator + var_interaction
```

```
# Total Gauge R&R
```

```
var_GRR <- var_repeatability + var_reproducibility
```

```
# Total variation
```

```
var_total <- var_part + var_GRR
```

```
# Convert to standard deviations
sigma_repeatability <- sqrt(var_repeatability)
sigma_reproducibility <- sqrt(var_reproducibility)
sigma_GRR <- sqrt(var_GRR)
sigma_part <- sqrt(var_part)
sigma_total <- sqrt(var_total)

# Calculate study variation (5.15 sigma for 99% of distribution)
SV_repeatability <- 5.15 * sigma_repeatability
SV_reproducibility <- 5.15 * sigma_reproducibility
SV_GRR <- 5.15 * sigma_GRR
SV_part <- 5.15 * sigma_part
SV_total <- 5.15 * sigma_total

cat("\n=== ANOVA Gauge R&R Results ===\n\n")
```

```
=== ANOVA Gauge R&R Results ===
```

```
cat("Variance Components:\n")
```

```
Variance Components:
```

```
cat("  Repeatability:", round(var_repeatability, 8), "\n")
```

```
  Repeatability: 4.418e-05
```

```
cat("  Reproducibility:", round(var_reproducibility, 8), "\n")
```

```
  Reproducibility: 5.638e-05
```

```
cat("  Part-to-Part:", round(var_part, 8), "\n")
```

```
  Part-to-Part: 0.0016842
```

```
cat("  Total:", round(var_total, 8), "\n")
```

```
  Total: 0.00178476
```

```
cat("\nStudy Variation (5.15):\n")
```

```
Study Variation (5.15):
```

```
cat("  Repeatability:", round(SV_repeatability, 5), "\n")
```

```
  Repeatability: 0.03423
```

```
cat("  Reproducibility:", round(SV_reproducibility, 5), "\n")
```

```
  Reproducibility: 0.03867
```

```
cat(" Gauge R&R:", round(SV_GRR, 5), "\n")
```

```
Gauge R&R: 0.05164
```

```
cat(" Part-to-Part:", round(SV_part, 5), "\n")
```

```
Part-to-Part: 0.21135
```

```
cat(" Total:", round(SV_total, 5), "\n")
```

```
Total: 0.21757
```

11.5.5 Calculating %GRR and Acceptance Criteria

```
# Calculate %GRR using both methods
tolerance <- 0.30 # Total tolerance
```

```
# Method 1: % of Tolerance (%GRR_Tolerance)
pct_GRR_tol <- (SV_GRR / tolerance) * 100
```

```
# Method 2: % of Total Variation (%GRR_TV)
pct_GRR_tv <- (sigma_GRR / sigma_total) * 100
```

```
# Number of Distinct Categories (ndc)
ndc <- 1.41 * (sigma_part / sigma_GRR)
```

```
cat("=== Gauge R&R Acceptance Criteria ===\n\n")
```

```
=== Gauge R&R Acceptance Criteria ===
```

```
cat("%GRR (of Tolerance):", round(pct_GRR_tol, 1), "%\n")
```

```
%GRR (of Tolerance): 17.2 %
```

```
cat("%GRR (of Total Variation):", round(pct_GRR_tv, 1), "%\n")
```

```
%GRR (of Total Variation): 23.7 %
```

```
cat("Number of Distinct Categories (ndc):", round(ndc, 1), "\n\n")
```

```
Number of Distinct Categories (ndc): 5.8
```

```
# Acceptance criteria
```

```
cat("AIAG Acceptance Guidelines:\n")
```

```
AIAG Acceptance Guidelines:
```

```
cat("                                \n")
```



```

if(pct_GRR_tol < 10) {
  cat("%GRR < 10%: ACCEPTABLE - Measurement system is acceptable\n")
} else if(pct_GRR_tol < 30) {
  cat("%GRR 10-30%: MARGINAL - May be acceptable based on application\n")
} else {
  cat("%GRR > 30%: UNACCEPTABLE - Measurement system needs improvement\n")
}

```

%GRR 10-30%: MARGINAL - May be acceptable based on application

```

if(ndc >= 5) {
  cat("ndc 5: ACCEPTABLE - Adequate discrimination\n")
} else if(ndc >= 2) {
  cat("ndc 2-4: MARGINAL - Limited discrimination ability\n")
} else {
  cat("ndc < 2: UNACCEPTABLE - Cannot distinguish between parts\n")
}

```


ndc 5: ACCEPTABLE - Adequate discrimination

11.5.6 Gauge R&R Acceptance Criteria Summary

Table 11.5: AIAG Gauge R&R Acceptance Guidelines

Criterion	Status	Interpretation
%GRR < 10%	Acceptable	Measurement system is acceptable for process control and capability
%GRR 10-30%	Marginal	May be acceptable depending on importance, cost of gauge, repair costs
%GRR > 30%	Unacceptable	Measurement system is not acceptable; action required
ndc 5	Acceptable	Gauge can adequately distinguish between parts
ndc = 2-4	Marginal	Limited ability to distinguish; may be OK for simple pass/fail
ndc < 2	Unacceptable	Gauge cannot distinguish between parts; almost useless for control

11.5.7 Visual Analysis of Gauge R&R

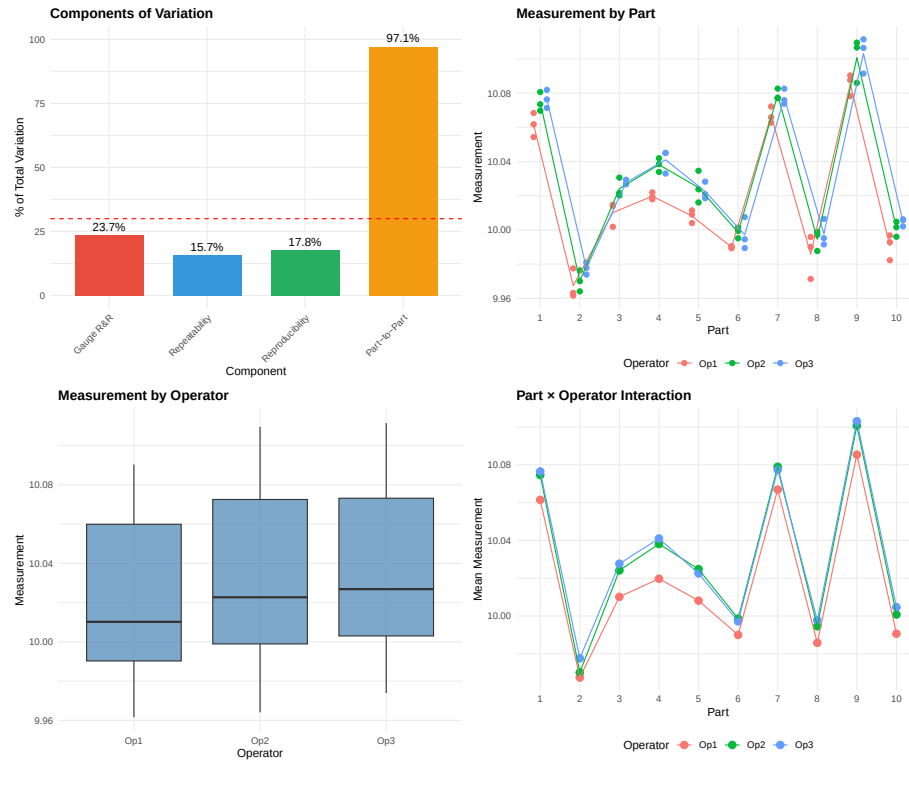

11.6 Attribute Measurement Systems

For pass/fail or categorical measurements (visual inspection, go/no-go gauges), we use **Attribute MSA** or **Attribute Agreement Analysis**.

11.6.1 Kappa Statistic

When evaluating attribute measurement systems (pass/fail, accept/reject, visual inspection), you might think that **percent agreement** would be sufficient—if two inspectors agree 90% of the time, isn't that good enough? The problem is that some agreement happens purely by chance, and percent agreement doesn't account for this.

11.6.1.1 Why Percent Agreement Can Be Misleading

Consider a visual inspection where 95% of parts are good. If an inspector simply guesses “Accept” for every part (without even looking), they would be “correct”

95% of the time. Two such inspectors would agree 90.5% of the time by pure chance:

$$P_e = P(\text{both say Accept}) + P(\text{both say Reject}) = 0.95^2 + 0.05^2 = 0.905$$

This is why we need **Cohen’s Kappa** (κ)—it measures agreement *beyond what we’d expect from chance alone*.

11.6.1.2 The Kappa Formula

$$\kappa = \frac{P_o - P_e}{1 - P_e}$$

Where:

- P_o = Observed proportion of agreement (how often they actually agree)
- P_e = Expected proportion of agreement by chance (how often they’d agree if guessing randomly based on their individual tendencies)
- $1 - P_e$ = Maximum possible agreement beyond chance

Interpreting the formula: The numerator ($P_o - P_e$) represents *actual agreement minus chance agreement*—the “real” agreement attributable to consistent measurement. The denominator ($1 - P_e$) normalizes this to a 0–1 scale by dividing by the maximum possible improvement over chance.

Kappa Value	Meaning
$\kappa = 1$	Perfect agreement (everyone agrees, and not by chance)
$\kappa = 0$	Agreement equals chance—no better than random guessing
$\kappa < 0$	Agreement is <i>worse</i> than chance (systematic disagreement)

11.6.1.3 When to Use Kappa

Use Kappa when evaluating:

- **Inspector vs. Reference:** Does the operator match the known correct answer? (Most important for MSA)
- **Inspector vs. Inspector:** Do two operators classify the same parts the same way?
- **Inspector vs. Self (Repeatability):** Does the same operator give the same answer when re-inspecting the same part?

For a robust attribute MSA, you should calculate Kappa for all three comparisons. High agreement with other operators but low agreement with the reference standard indicates *consistent but incorrect* inspection—a training problem.

Table 11.6: Kappa Statistic Interpretation Guide

Kappa	Interpretation	Action
< 0	Less than chance agreement	Major issues - do not use
0.00 - 0.20	Slight agreement	Major improvement needed
0.21 - 0.40	Fair agreement	Significant improvement needed
0.41 - 0.60	Moderate agreement	Some improvement needed
0.61 - 0.80	Substantial agreement	Acceptable for most applications
0.81 - 1.00	Almost perfect agreement	Excellent - acceptable

11.6.2 Attribute Agreement Study Example

```
# Attribute Agreement Analysis
# 3 operators inspect 30 samples, 2 trials each
# Reference standard (known good/bad) available

set.seed(123)
n_samples <- 30
n_operators <- 3
n_trials <- 2

# Reference classification (10 bad, 20 good)
reference <- c(rep("Reject", 10), rep("Accept", 20))

# Simulate operator decisions (some disagreement)
simulate_decision <- function(ref, accuracy) {
  sapply(ref, function(r) {
    if(runif(1) < accuracy) r else ifelse(r == "Accept", "Reject", "Accept")
  })
}

# Operators with different accuracy levels
op1_t1 <- simulate_decision(reference, 0.92)
op1_t2 <- simulate_decision(reference, 0.92)
op2_t1 <- simulate_decision(reference, 0.88)
op2_t2 <- simulate_decision(reference, 0.88)
op3_t1 <- simulate_decision(reference, 0.95)
op3_t2 <- simulate_decision(reference, 0.95)

# Calculate agreement metrics
```

```

# 1. Within-operator agreement (repeatability)
within_op1 <- mean(op1_t1 == op1_t2)
within_op2 <- mean(op2_t1 == op2_t2)
within_op3 <- mean(op3_t1 == op3_t2)

# 2. Each operator vs. reference
op1_vs_ref <- mean(op1_t1 == reference & op1_t2 == reference)
op2_vs_ref <- mean(op2_t1 == reference & op2_t2 == reference)
op3_vs_ref <- mean(op3_t1 == reference & op3_t2 == reference)

# 3. All operators agree (both trials)
all_agree_t1 <- mean(op1_t1 == op2_t1 & op2_t1 == op3_t1)
all_agree_both <- mean(op1_t1 == op1_t2 & op1_t1 == op2_t1 & op2_t1 == op2_t2 &
                        op2_t1 == op3_t1 & op3_t1 == op3_t2)

cat("=== Attribute Agreement Analysis ===\n\n")

=== Attribute Agreement Analysis ===
cat("Within-Operator Agreement (Repeatability):\n")

Within-Operator Agreement (Repeatability):
cat("  Operator 1:", round(within_op1 * 100, 1), "%\n")

  Operator 1: 83.3 %
cat("  Operator 2:", round(within_op2 * 100, 1), "%\n")

  Operator 2: 76.7 %
cat("  Operator 3:", round(within_op3 * 100, 1), "%\n\n")

  Operator 3: 93.3 %
cat("Each Operator vs. Reference (both trials correct):\n")

Each Operator vs. Reference (both trials correct):
cat("  Operator 1:", round(op1_vs_ref * 100, 1), "%\n")

  Operator 1: 83.3 %
cat("  Operator 2:", round(op2_vs_ref * 100, 1), "%\n")

  Operator 2: 73.3 %
cat("  Operator 3:", round(op3_vs_ref * 100, 1), "%\n\n")

  Operator 3: 93.3 %

```

```
cat("All Operators Agreement:\n")
```

All Operators Agreement:

```
cat("  All agree (one trial):", round(all_agree_t1 * 100, 1), "%\n")
```

All agree (one trial): 70 %

```
cat("  All agree (both trials):", round(all_agree_both * 100, 1), "%\n")
```

All agree (both trials): 53.3 %

11.6.3 Calculating Kappa

```
# Calculate Kappa for Operator 1 vs Reference
# Create confusion matrix for trial 1
actual <- factor(reference, levels = c("Accept", "Reject"))
predicted <- factor(op1_t1, levels = c("Accept", "Reject"))

confusion <- table(Predicted = predicted, Actual = actual)
print(confusion)
```

	Actual	
Predicted	Accept	Reject
Accept	17	1
Reject	3	9

```
# Calculate proportions
n <- sum(confusion)
p_o <- sum(diag(confusion)) / n # Observed agreement

# Expected agreement by chance
p_accept <- sum(confusion[1,]) / n * sum(confusion[,1]) / n
p_reject <- sum(confusion[2,]) / n * sum(confusion[,2]) / n
p_e <- p_accept + p_reject

# Kappa
kappa <- (p_o - p_e) / (1 - p_e)

cat("\nKappa Calculation (Operator 1 vs Reference):\n")
```

Kappa Calculation (Operator 1 vs Reference):

```
cat("Observed agreement (Po):", round(p_o, 3), "%\n")
```

Observed agreement (Po): 0.867

```
cat("Expected agreement (Pe):", round(p_e, 3), "\n")
```

Expected agreement (Pe): 0.533

```
cat("Kappa:", round(kappa, 3), "\n")
```

Kappa: 0.714

```
# Interpretation
if(kappa >= 0.81) {
  cat("Interpretation: Almost perfect agreement\n")
} else if(kappa >= 0.61) {
  cat("Interpretation: Substantial agreement\n")
} else if(kappa >= 0.41) {
  cat("Interpretation: Moderate agreement\n")
} else {
  cat("Interpretation: Fair or less agreement - needs improvement\n")
}
```

Interpretation: Substantial agreement

11.6.4 Attribute MSA Best Practices

Table 11.7: Best Practices for Attribute MSA Studies

Practice	Description
Use boundary samples	Include samples at the accept/reject boundary where decisions are hardest
Include clear accept/reject	Include obvious accept and obvious reject samples as controls
Blind testing	Operators should not know which samples are repeated or reference
Multiple trials	Minimum 2-3 trials per operator to assess within-operator repeatability
Reference standard	Must have known correct answers to assess accuracy, not just agreement
Adequate sample size	Minimum 30-50 samples recommended for statistical validity

11.7 Measurement System Resolution

Resolution (also called discrimination) is the smallest increment a measurement system can detect.

11.7.1 Rule of Ten

The **Rule of Ten** states that measurement resolution should be at least 1/10 of: - The tolerance, OR - The process variation (6)

Whichever is smaller.

```
# Resolution adequacy check
tolerance <- 0.100 # mm total tolerance
process_6sigma <- 0.080 # 6 sigma of process
gauge_resolution <- 0.010 # mm (smallest increment)

# Check against tolerance
ratio_tolerance <- tolerance / gauge_resolution
# Check against process
ratio_process <- process_6sigma / gauge_resolution

cat("=== Resolution Adequacy Check ===\n\n")
```

```
=== Resolution Adequacy Check ===
```

```
cat("Tolerance:", tolerance, "mm\n")
```

```
Tolerance: 0.1 mm
```

```
cat("Process 6 :", process_6sigma, "mm\n")
```

```
Process 6 : 0.08 mm
```

```
cat("Gauge Resolution:", gauge_resolution, "mm\n\n")
```

```
Gauge Resolution: 0.01 mm
```

```
cat("Tolerance / Resolution:", ratio_tolerance, ":1")
```

```
Tolerance / Resolution: 10 :1
```

```
if(ratio_tolerance >= 10) cat(" - ADEQUATE\n") else cat(" - INADEQUATE\n")
```

```
- ADEQUATE
```


```
cat("Process 6 / Resolution:", ratio_process, ":1")
```

```
Process 6 / Resolution: 8 :1
```

```
if(ratio_process >= 10) cat(" - ADEQUATE\n") else cat(" - INADEQUATE\n")
```

```
- INADEQUATE
```


11.7.2 Resolution Impact on Gauge R&R

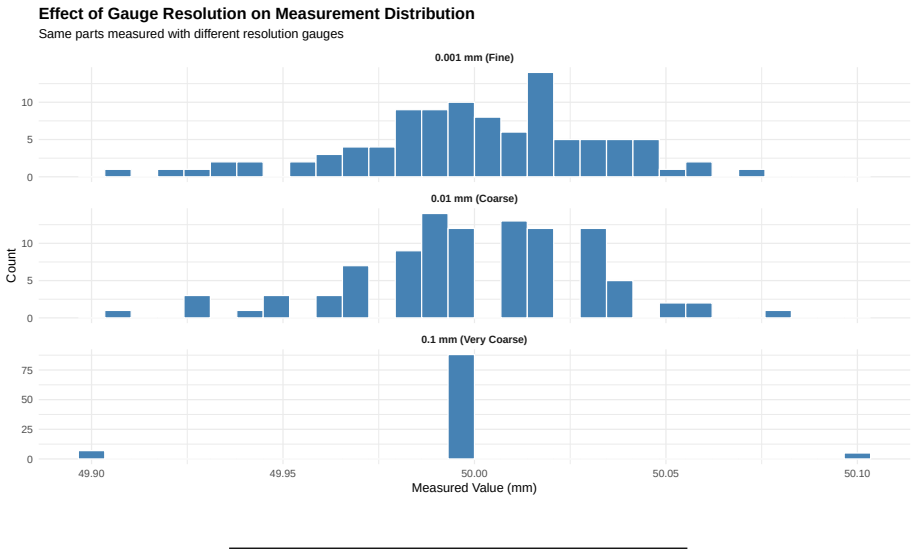

11.8 Common Sources of Measurement Error

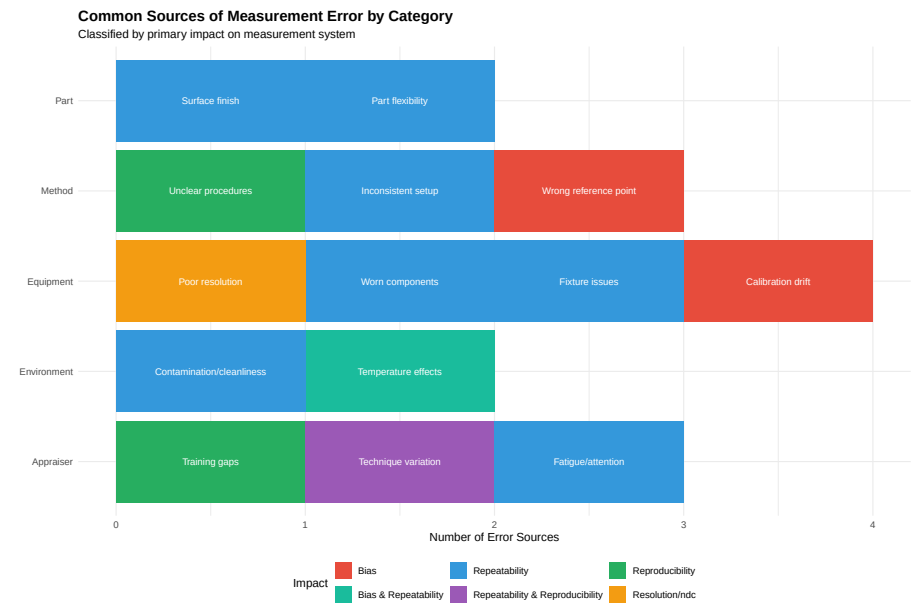



Table 11.8: MSA Issues and Improvement Action

Issue Identified	Likely Causes
High Repeatability (EV)	Gauge condition, fixture, resolution, part variation during measurement
High Reproducibility (AV)	Training, technique, procedure clarity
Significant Bias	Calibration, master accuracy, technique
Poor Linearity	Gauge mechanism, calibration across range
Drift/Stability Issues	Environmental effects, gauge wear, master deterioration
Low ndc	Resolution, excessive gauge variation relative to part variation

11.9 MSA and SPC Relationship

Poor measurement systems directly impact SPC effectiveness.

11.9.1 Effect on Control Charts

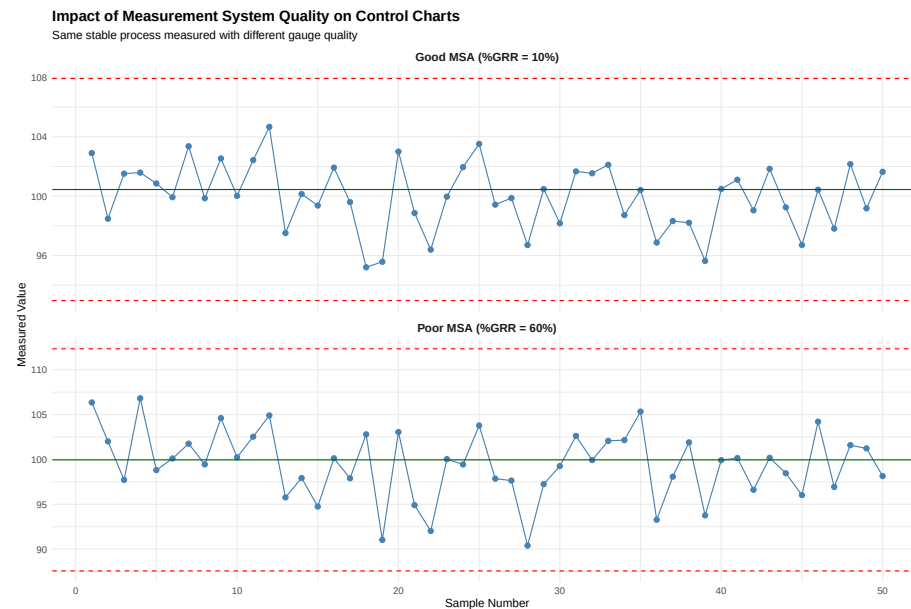

11.9.2 Effect on Capability Studies

```
# True process parameters
true_mean <- 100
true_sigma <- 2.0
USL <- 106
LSL <- 94
```

```

tolerance <- USL - LSL

# True capability
true_Cp <- tolerance / (6 * true_sigma)
true_Cpk <- min((USL - true_mean), (true_mean - LSL)) / (3 * true_sigma)

cat("=== True Process Capability ===\n")

=== True Process Capability ===
cat("True  :", true_sigma, "\n")

True  : 2
cat("True Cp:", round(true_Cp, 2), "\n")

True Cp: 1
cat("True Cpk:", round(true_Cpk, 2), "\n\n")

True Cpk: 1

# With good measurement system (10% GRR)
grr_good <- 0.10 * tolerance / 5.15
observed_sigma_good <- sqrt(true_sigma^2 + grr_good^2)
observed_Cp_good <- tolerance / (6 * observed_sigma_good)
observed_Cpk_good <- min((USL - true_mean), (true_mean - LSL)) / (3 * observed_sigma_good)

cat("=== With Good MSA (10% GRR) ===\n")

=== With Good MSA (10% GRR) ===
cat("Observed  :", round(observed_sigma_good, 3), "\n")

Observed  : 2.014
cat("Observed Cp:", round(observed_Cp_good, 2), "\n")

Observed Cp: 0.99
cat("Observed Cpk:", round(observed_Cpk_good, 2), "\n\n")

Observed Cpk: 0.99

# With poor measurement system (50% GRR)
grr_poor <- 0.50 * tolerance / 5.15
observed_sigma_poor <- sqrt(true_sigma^2 + grr_poor^2)
observed_Cp_poor <- tolerance / (6 * observed_sigma_poor)
observed_Cpk_poor <- min((USL - true_mean), (true_mean - LSL)) / (3 * observed_sigma_poor)

cat("=== With Poor MSA (50% GRR) ===\n")

```

```
=== With Poor MSA (50% GRR) ===
```

```
cat("Observed :", round(observed_sigma_poor, 3), "\n")
```

```
Observed : 2.315
```

```
cat("Observed Cp:", round(observed_Cp_poor, 2), "\n")
```

```
Observed Cp: 0.86
```

```
cat("Observed Cpk:", round(observed_Cpk_poor, 2), "\n\n")
```

```
Observed Cpk: 0.86
```

```
cat("Poor MSA makes a capable process (Cpk=1.0) appear incapable (Cpk=",  
    round(observed_Cpk_poor, 2), ")\n")
```

```
Poor MSA makes a capable process (Cpk=1.0) appear incapable (Cpk= 0.86 )
```

11.10 Conducting an MSA Study: Step-by-Step

Gauge R&R Study Process Flow
Steps for conducting a complete MSA study



11.10.1 Data Collection Sheet Template

Table 11.9: Gauge R&R Data Collection Sheet (Partial Example)

Part	Operator	Trial	Measurement
1	A	1	_____
1	A	2	_____
1	B	1	_____
1	B	2	_____
1	C	1	_____
1	C	2	_____
2	A	1	_____
2	A	2	_____
2	B	1	_____
2	B	2	_____
2	C	1	_____
2	C	2	_____

11.11 Video Resources

11.11.1 Understanding Gauge R&R

11.11.2 MSA in Practice

11.12 Summary

Measurement Systems Analysis ensures that your data can be trusted for process control and decision-making:

1. **Before SPC, do MSA** - Garbage in, garbage out; verify measurement quality first
2. **Accuracy components** - Bias, linearity, and stability affect location (average)
3. **Precision components** - Repeatability (within operator) and reproducibility (between operators)
4. **Key metrics** - %GRR < 30% and ndc = 5 for acceptable systems
5. **Resolution matters** - 10:1 ratio vs. tolerance or process variation
6. **Attribute MSA** - Use Kappa for pass/fail decisions
7. **Continuous improvement** - Regular verification and recertification

“The measurement system is part of the process. Fix the measurement system before trying to fix the process.”

11.13 Review Questions

Question 1: A gauge R&R study yields $\%GRR = 45\%$ and $ndc = 2$. What does this mean and what should be done?

Answer:

This measurement system is **unacceptable**:

- **$\%GRR = 45\%$** exceeds the 30% maximum threshold, meaning 45% of the observed variation is due to the measurement system, not the parts
- **$ndc = 2$** indicates the gauge can only distinguish between 2 categories of parts, which is insufficient for process control (minimum 5 required)

Actions required: 1. Investigate root causes of high variation: - Check gauge calibration and condition - Evaluate operator technique and training - Review measurement procedure for ambiguity - Assess fixture and part positioning - Check gauge resolution adequacy

2. Prioritize improvement efforts:

- If repeatability (EV) is high: Focus on gauge condition, fixture, technique consistency
- If reproducibility (AV) is high: Focus on training, procedure clarity, technique standardization

3. Re-run study after improvements

4. If improvements insufficient, consider upgrading to a higher-capability gauge

5. Until resolved, this gauge should not be used for process control or capability studies

Question 2: What is the difference between repeatability and reproducibility? Give an example of each source of error.

Answer:

Repeatability (Equipment Variation - EV): - Variation when the **same operator** measures the **same part** multiple times with the **same gauge** - Also called “within-operator” variation - Represents the inherent precision of the gauge and measurement technique

Examples of repeatability errors: - Gauge resolution limitations - Gauge mechanism play/backlash - Inconsistent part positioning in fixture - Variations in

technique even by same operator - Environmental micro-changes during measurement

Reproducibility (Appraiser Variation - AV): - Variation when **different operators** measure the **same parts** - Also called “between-operator” variation
- Represents differences in how operators apply the measurement method

Examples of reproducibility errors: - Different technique between operators (pressure applied, angle, etc.) - Different interpretation of measurement procedure
- Different reading of analog scales - Training differences - Physical differences (eyesight, hand steadiness)

Question 3: Calculate the bias and determine if it is acceptable. Reference value = 25.000 mm, Tolerance = ± 0.050 mm, Measured values: 25.012, 25.015, 25.008, 25.011, 25.014, 25.009, 25.013, 25.010, 25.012, 25.011

Answer:

```
reference <- 25.000
tolerance_total <- 0.100 #  $\pm 0.050 = 0.100$  total
measurements <- c(25.012, 25.015, 25.008, 25.011, 25.014,
                  25.009, 25.013, 25.010, 25.012, 25.011)

# Calculate bias
mean_measured <- mean(measurements)
bias <- mean_measured - reference

cat("Reference value:", reference, "mm\n")
```

Reference value: 25 mm

```
cat("Mean measured:", round(mean_measured, 4), "mm\n")
```

Mean measured: 25.0115 mm

```
cat("Bias:", round(bias, 4), "mm\n\n")
```

Bias: 0.0115 mm

```
# Express as % of tolerance
bias_pct <- abs(bias) / tolerance_total * 100
cat("Bias as % of tolerance:", round(bias_pct, 1), "%\n")
```

Bias as % of tolerance: 11.5 %

```
# T-test for significance
t_result <- t.test(measurements, mu = reference)
cat("T-test p-value:", round(t_result$p.value, 6), "\n\n")
```

T-test p-value: 0

```
# Acceptability
cat("Acceptability Assessment:\n")

Acceptability Assessment:
if(bias_pct < 10) {
  cat("- Bias < 10% of tolerance: ACCEPTABLE\n")
} else if(bias_pct < 25) {
  cat("- Bias 10-25% of tolerance: MARGINAL\n")
} else {
  cat("- Bias > 25% of tolerance: UNACCEPTABLE\n")
}

- Bias 10-25% of tolerance: MARGINAL

if(t_result$p.value < 0.05) {
  cat("- Bias is statistically significant (p < 0.05)\n")
  cat("- Consider recalibration or technique adjustment\n")
}

- Bias is statistically significant (p < 0.05)
- Consider recalibration or technique adjustment
```

The bias of 0.0115 mm (11.5% of tolerance) is **marginally acceptable** and statistically significant. Recalibration should be considered.

Question 4: Why is it important to conduct MSA before capability studies (Cp, Cpk)?

Answer:

MSA must precede capability studies because measurement error directly inflates observed variation:

Mathematical Relationship:

$$\sigma_{observed}^2 = \sigma_{process}^2 + \sigma_{measurement}^2$$

Impacts on Capability:

1. **Understated Cp/Cpk:** Observed sigma is always larger than true process sigma, so calculated capability will be lower than actual capability
2. **False Alarms:** A capable process may appear incapable due to measurement noise, leading to unnecessary process adjustments or investment
3. **Missed Issues:** High measurement variation masks actual process variation; you can't see problems through the "fog" of gauge error
4. **Bad Decisions:** Incorrect capability data leads to:
 - Wrong process acceptance decisions

- Inappropriate control limits
- Misguided improvement investments
- Customer quality issues

Example: - True process: $C_{pk} = 1.5$ (very capable) - With 50% GRR: Observed $C_{pk} = 0.9$ (appears incapable) - Result: Unnecessary process “improvement” efforts

Rule of Thumb: If $\%GRR > 30\%$, any capability study is essentially meaningless because too much of the observed variation is measurement noise, not real process variation.

Question 5: A visual inspection has the following results: Kappa vs. reference = 0.72, within-operator agreement = 88%, between-operator agreement = 75%. Evaluate this attribute measurement system.

Answer:

Results Interpretation:

1. **Kappa vs. Reference = 0.72**
 - Falls in “Substantial agreement” range (0.61-0.80)
 - Operators are correctly classifying parts most of the time
 - Acceptable for many applications, but improvement possible
2. **Within-Operator Agreement = 88%**
 - Operators are fairly consistent with themselves
 - 12% of the time, same operator gives different result on same part
 - Should target $>90\%$ for critical inspections
3. **Between-Operator Agreement = 75%**
 - Operators disagree on 25% of parts
 - This is a significant reproducibility issue
 - Major source of inconsistency in product quality

Assessment: MARGINAL - Improvement Needed

Recommended Actions:

1. **Standardize criteria:** Create clear visual standards with boundary samples
 - Photos of accept/reject borderline cases
 - Written descriptions of defect criteria
2. **Training:**
 - Calibration session with all operators and reference samples
 - Identify operators with lower agreement for targeted training
3. **Improve conditions:**
 - Check lighting adequacy and consistency
 - Ensure proper viewing distance and angle
 - Reduce fatigue with appropriate break schedules

4. **Consider automation:** For critical inspections, automated vision systems may provide better consistency
5. **Re-study after improvements** to verify effectiveness

Question 6: What is the “Rule of Ten” for gauge resolution, and how would you apply it?

Answer:

The Rule of Ten: The gauge resolution should be at least **1/10 of the tolerance** or **1/10 of the process variation (6 σ)**, whichever is smaller.

$$\text{Resolution} \leq \frac{\min(\text{Tolerance}, 6\sigma)}{10}$$

Application Example:

Given: - Part tolerance: ± 0.05 mm (total = 0.10 mm) - Process 6 σ : 0.08 mm - Available gauges: 0.01 mm resolution, 0.001 mm resolution

Calculation:

Required resolution $\min(0.10, 0.08) / 10$
 Required resolution $0.08 / 10$
 Required resolution 0.008 mm

Assessment: - 0.01 mm gauge: $0.01 > 0.008 \rightarrow$ **INADEQUATE** - 0.001 mm gauge: $0.001 < 0.008 \rightarrow$ **ADEQUATE**

Why It Matters: 1. If resolution is too coarse, gauge cannot detect small part differences 2. Results in low ndc (number of distinct categories) 3. Control charts will show “stair-step” patterns 4. Capability studies will be inaccurate

Practical Tips: - For SPC applications, 10:1 is minimum; 20:1 is preferred - For capability studies, 10:1 is acceptable - For simple pass/fail gauging, 5:1 may be acceptable

Question 7: Given the following ANOVA table from a Gauge R&R study, calculate the variance components and %GRR.

Source	DF	SS	MS
Part	9	0.2850	0.03167
Operator	2	0.0025	0.00125
Part $\times$ Operator	18	0.0090	0.00050
Repeatability	60	0.0180	0.00030
Total	89	0.3145	

Study design: 10 parts, 3 operators, 3 trials

Answer:

```

# Given values from ANOVA table
MS_part <- 0.03167
MS_operator <- 0.00125
MS_interaction <- 0.00050
MS_error <- 0.00030

n_parts <- 10
n_operators <- 3
n_trials <- 3

# Variance components
var_repeatability <- MS_error
cat("Var(Repeatability) =", var_repeatability, "\n")

Var(Repeatability) = 3e-04

var_interaction <- max(0, (MS_interaction - MS_error) / n_trials)
cat("Var(Interaction) =", round(var_interaction, 6), "\n")

Var(Interaction) = 6.7e-05

var_operator <- max(0, (MS_operator - MS_interaction) / (n_parts * n_trials))
cat("Var(Operator) =", round(var_operator, 6), "\n")

Var(Operator) = 2.5e-05

var_part <- max(0, (MS_part - MS_interaction) / (n_operators * n_trials))
cat("Var(Part) =", round(var_part, 6), "\n\n")

Var(Part) = 0.003463

# Reproducibility = Operator + Interaction
var_reproducibility <- var_operator + var_interaction
cat("Var(Reproducibility) =", round(var_reproducibility, 6), "\n")

Var(Reproducibility) = 9.2e-05

# Total Gauge R&R
var_GRR <- var_repeatability + var_reproducibility
cat("Var(GRR) =", round(var_GRR, 6), "\n")

Var(GRR) = 0.000392

# Total variation
var_total <- var_part + var_GRR
cat("Var(Total) =", round(var_total, 6), "\n\n")

Var(Total) = 0.003855

```

```
# Calculate %GRR (of total variation)
sigma_GRR <- sqrt(var_GRR)
sigma_total <- sqrt(var_total)
pct_GRR <- (sigma_GRR / sigma_total) * 100

cat("%GRR (of Total Variation) =", round(pct_GRR, 1), "%\n\n")
```

```
%GRR (of Total Variation) = 31.9 %
```

```
# ndc
sigma_part <- sqrt(var_part)
ndc <- 1.41 * (sigma_part / sigma_GRR)
cat("ndc =", round(ndc, 1), "\n\n")
```

```
ndc = 4.2
```

```
if(pct_GRR < 10) {
  cat("Assessment: ACCEPTABLE (< 10%)\n")
} else if(pct_GRR < 30) {
  cat("Assessment: MARGINAL (10-30%)\n")
} else {
  cat("Assessment: UNACCEPTABLE (> 30%)\n")
}
```

```
Assessment: UNACCEPTABLE (> 30%)
```

Question 8: What actions would you take if a Gauge R&R study showed high repeatability (EV) but low reproducibility (AV)?

Answer:

When **repeatability is high** (main contributor to GRR) but **reproducibility is low**, the measurement variation is coming from the gauge/equipment/technique rather than differences between operators.

Root Cause Investigation - Focus Areas:

1. **Gauge Condition**
 - Worn measuring surfaces or contacts
 - Loose components or mechanism play
 - Damaged or dirty probe/sensor
2. **Gauge Resolution**
 - Resolution may be inadequate for the tolerance
 - Check 10:1 rule compliance
3. **Fixture/Fixturing**
 - Part not held consistently
 - Fixture wear or damage
 - Part not seating properly
4. **Measurement Technique**

- Inconsistent contact force
- Varying measurement location on part
- Speed of measurement varies

5. Part Characteristics

- Part surface finish affecting readings
- Part flexibility/deflection during measurement
- Part temperature variation

6. Environment

- Vibration affecting readings
- Temperature instability
- Contamination

Improvement Actions:

Priority	Action
1	Verify gauge calibration and condition; repair/replace if needed
2	Check and improve fixture; ensure consistent part positioning
3	Evaluate and potentially upgrade gauge resolution
4	Standardize technique (force, speed, location)
5	Control environmental factors
6	Re-run study to verify improvement

Note: Low AV in this case is actually good - it means operators are consistent with each other. The problem is the measurement equipment itself.

11.14 References

1. AIAG. (2010). *Measurement Systems Analysis Reference Manual* (4th ed.). Automotive Industry Action Group.
2. Wheeler, D.J. (2006). *EMP III: Evaluating the Measurement Process* (3rd ed.). SPC Press.
3. Montgomery, D.C. (2019). *Introduction to Statistical Quality Control* (8th ed.). Wiley.
4. Burdick, R.K., Borror, C.M., & Montgomery, D.C. (2005). *Design and Analysis of Gauge R&R Studies*. SIAM.
5. ASTM E2782-17. *Standard Guide for Measurement Systems Analysis*.
6. ISO 22514-7:2021. *Statistical Methods in Process Management - Capability and Performance - Part 7: Capability of Measurement Processes*.
7. Wheeler, D.J., & Lyday, R.W. (1989). *Evaluating the Measurement Process* (2nd ed.). SPC Press.

8. Minitab. (2021). *Gage R&R Study (Crossed)*. Minitab Support Documentation.
9. JCGM 100:2008. *Evaluation of Measurement Data - Guide to the Expression of Uncertainty in Measurement* (GUM).
10. Dietrich, E., & Schulze, A. (2011). *Statistical Procedures for Machine and Process Qualification* (6th ed.). Hanser.

Chapter 12

Total Productive Maintenance (TPM)

12.1 Learning Objectives

By the end of this chapter, you will be able to:

- Define Total Productive Maintenance and explain its objectives
- Describe the 8 pillars of TPM and their interconnections
- Calculate Overall Equipment Effectiveness (OEE) and its components
- Identify and categorize the Six Big Losses
- Implement autonomous maintenance activities
- Develop preventive and predictive maintenance strategies
- Apply TPM principles to improve equipment reliability and productivity

“Take care of your equipment, and it will take care of your production.” — Seiichi Nakajima, Father of TPM

12.2 Introduction to TPM

12.2.1 What is Total Productive Maintenance?

Total Productive Maintenance (TPM) is a holistic approach to equipment maintenance that strives to achieve perfect production with no breakdowns, no defects, and no accidents. It involves everyone in the organization, from operators to top management.

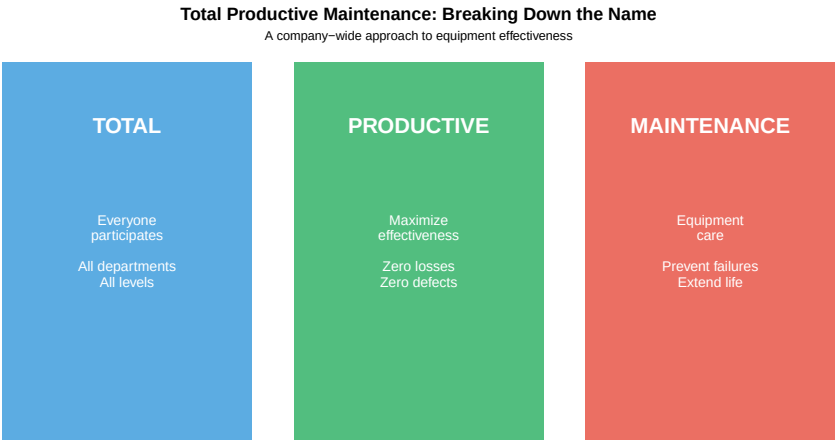


Figure 12.1: The TPM Philosophy

12.2.2 History of TPM

Table 12.1: Evolution of Maintenance Philosophy

Era	Maintenance Approach	Description
Pre-1950s	Breakdown Maintenance	Fix it when it breaks; reactive only
1950s	Preventive Maintenance	Scheduled maintenance to prevent failures
1960s	Productive Maintenance	Maintenance focused on reliability and maintainability
1970s	TPM Developed	Nakajima develops TPM at Nippondenso (Toyota supplier)
1980s	TPM Spreads Globally	Adopted by automotive, electronics, process industries
1990s-Present	TPM + Industry 4.0	Integration with predictive analytics, IoT sensors, AI

12.2.3 The Goals of TPM

TPM aims to achieve **zero** targets:

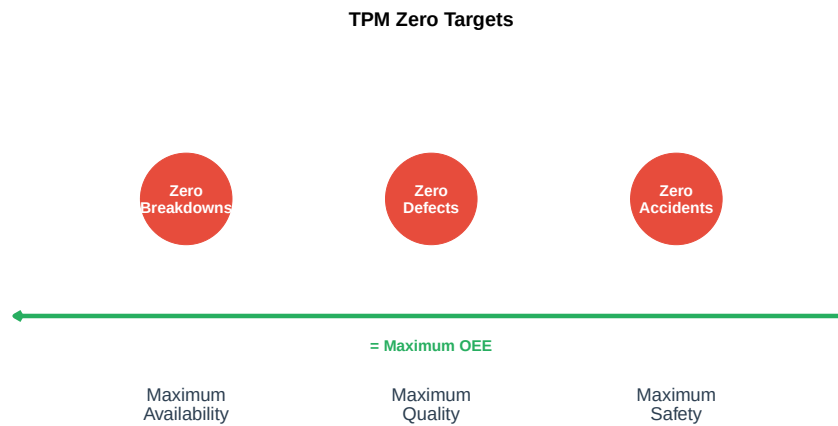


Figure 12.2: TPM Zero Targets

12.2.4 Traditional vs. TPM Approach

Table 12.2: Traditional Maintenance vs. TPM

Aspect	Traditional Maintenance	TPM Approach
Equipment ownership	'Maintenance owns the machines'	'We all own the machines'
Maintenance responsibility	Maintenance department only	Everyone (operators + maintenance)
Operator role	Operate; call maintenance when broken	Operate, clean, inspect, maintain
Maintenance focus	Fix breakdowns quickly	Prevent breakdowns; extend life
Problem solving	Reactive; fire-fighting	Proactive; root cause elimination
Goal	Minimize maintenance cost	Maximize equipment effectiveness

Question: Why involve operators in maintenance?

Operators are the first line of defense because:

1. **They know the equipment:** Operators work with machines every day and notice subtle changes
2. **Early detection:** Small problems are detected before becoming major failures
3. **Ownership mindset:** People take better care of things they “own”
4. **Reduced response time:** Operators can address minor issues immediately
5. **Freed maintenance resources:** Technicians can focus on complex tasks

Example: An operator notices a slight vibration change in a motor. Under traditional maintenance, they might ignore it. Under TPM, they report it, potentially preventing a \$50,000 breakdown.

“No one knows a machine better than the person who operates it every day.”

12.3 The Eight Pillars of TPM

TPM is built on **eight pillars**, each addressing a specific aspect of equipment management and organizational culture.

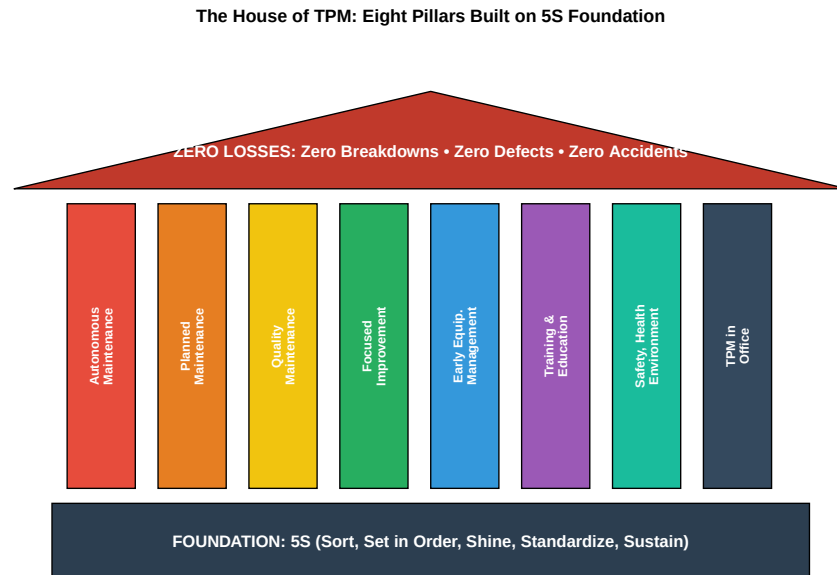


Figure 12.3: The Eight Pillars of TPM

Table 12.3: The Eight Pillars of TPM

#	Pillar	Purpose
1	**Autonomous Maintenance**	Operators maintain their own equipment
2	**Planned Maintenance**	Scheduled maintenance by specialists
3	**Quality Maintenance**	Zero defects through equipment care

4	**Focused Improvement**	Eliminate losses through kaizen activities
5	**Early Equipment Management**	Design equipment for maintainability
6	**Training & Education**	Develop skilled operators and technicians
7	**Safety, Health, Environment**	Zero accidents, safe workplace
8	**TPM in Office**	Apply TPM principles to administrative pr

12.4 Overall Equipment Effectiveness (OEE)

12.4.1 What is OEE?

Overall Equipment Effectiveness (OEE) is the primary metric of TPM. It measures how effectively equipment is being used by combining three factors: Availability, Performance, and Quality.



Figure 12.4: OEE Formula and Components

12.4.2 OEE Component Formulas

Table 12.4: OEE Component Formulas

Component	Formula
Availability	$\frac{\text{Run Time}}{\text{Planned Production Time}} \times 100\%$

Performance	$\frac{\text{Ideal Cycle Time}}{\text{Run Time}} \times \text{Total Count}$
Quality	$\frac{\text{Good Count}}{\text{Total Count}} \times 100\%$
OEE	$\text{Availability} \times \text{Performance} \times \text{Quality}$

12.4.3 OEE Calculation Example

```
# OEE Calculation Example: Injection Molding Machine
```

```
cat("=== SHIFT DATA ===\n")
```

```
=== SHIFT DATA ===
```

```
# Time data
shift_length <- 480 # minutes (8 hours)
planned_downtime <- 30 # breaks, planned maintenance
planned_production_time <- shift_length - planned_downtime
cat("Planned Production Time:", planned_production_time, "minutes\n")
```

```
Planned Production Time: 450 minutes
```

```
# Downtime losses
breakdown_time <- 25 # equipment failure
changeover_time <- 35 # mold changes
adjustment_time <- 10 # setup adjustments
total_downtime <- breakdown_time + changeover_time + adjustment_time
cat("Unplanned Downtime:", total_downtime, "minutes\n")
```

```
Unplanned Downtime: 70 minutes
```

```
run_time <- planned_production_time - total_downtime
cat("Run Time:", run_time, "minutes\n\n")
```

```
Run Time: 380 minutes
```

```
# Production data
ideal_cycle_time <- 0.5 # minutes per part (design spec)
total_parts <- 700 # parts produced
good_parts <- 665 # parts passing inspection
defects <- total_parts - good_parts

cat("=== PRODUCTION DATA ===\n")
```

```
=== PRODUCTION DATA ===
```

```
cat("Total Parts Produced:", total_parts, "\n")
```

```
Total Parts Produced: 700
```

```
cat("Good Parts:", good_parts, "\n")
```

Good Parts: 665

```
cat("Defects:", defects, "\n\n")
```

Defects: 35

```
# Calculate OEE Components
```

```
cat("=== OEE CALCULATION ===\n\n")
```

```
=== OEE CALCULATION ===
```

```
# Availability
```

```
availability <- (run_time / planned_production_time) * 100
```

```
cat("AVAILABILITY:\n")
```

AVAILABILITY:

```
cat(" = Run Time / Planned Production Time\n")
```

```
 = Run Time / Planned Production Time
```

```
cat(" =", run_time, "/", planned_production_time, "\n")
```

```
 = 380 / 450
```

```
cat(" =", round(availability, 1), "%\n\n")
```

```
 = 84.4 %
```

```
# Performance
```

```
# Actual output vs. theoretical output during run time
```

```
theoretical_output <- run_time / ideal_cycle_time
```

```
performance <- (total_parts / theoretical_output) * 100
```

```
cat("PERFORMANCE:\n")
```

PERFORMANCE:

```
cat(" Theoretical Output =", theoretical_output, "parts\n")
```

```
 Theoretical Output = 760 parts
```

```
cat(" Actual Output =", total_parts, "parts\n")
```

```
 Actual Output = 700 parts
```

```
cat(" = Actual / Theoretical\n")
```

```
 = Actual / Theoretical
```

```
cat(" =", round(performance, 1), "%\n\n")
```

```
 = 92.1 %
```

```
# Quality
quality <- (good_parts / total_parts) * 100
cat("QUALITY:\n")
```

QUALITY:

```
cat(" = Good Parts / Total Parts\n")
```

= Good Parts / Total Parts

```
cat(" =", good_parts, "/", total_parts, "\n")
```

= 665 / 700

```
cat(" =", round(quality, 1), "%\n\n")
```

= 95 %

```
# Overall OEE
oee <- (availability/100) * (performance/100) * (quality/100) * 100
cat("=== OVERALL OEE ===\n")
```

=== OVERALL OEE ===

```
cat("OEE =", round(availability, 1), "% ×", round(performance, 1), "% ×", round(quality,
```

OEE = 84.4 % × 92.1 % × 95 %

```
cat("OEE =", round(oee, 1), "%\n")
```

OEE = 73.9 %

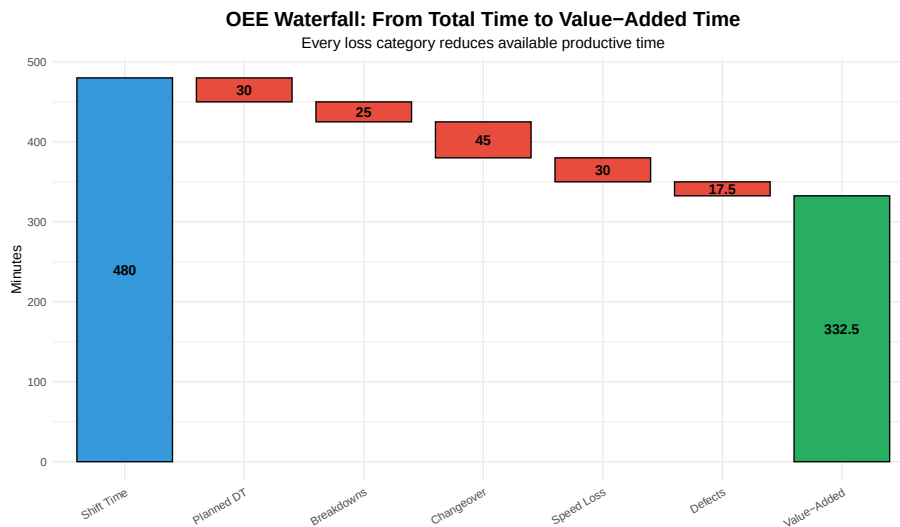


Figure 12.5: OEE Waterfall Chart: Where Time Goes

12.4.4 OEE Benchmarks

Table 12.5: OEE Benchmarks

OEE Level	Classification	Interpretation	Component Targets
< 65%	Unacceptable	Significant improvement opportunities exist	—
65% - 75%	Typical	Average for discrete manufacturing	A: 90%, P: 85%, Q: 95%
75% - 85%	Good	Well-managed operations	A: 92%, P: 90%, Q: 97%
> 85%	World Class	Best-in-class performance	A: 95%, P: 95%, Q: 99%

Interactive Exercise: Calculate OEE

Given the following shift data, calculate OEE:

- Shift length: 480 minutes
- Planned breaks: 40 minutes
- Equipment breakdown: 30 minutes
- Setup/changeover: 20 minutes
- Ideal cycle time: 1 minute/part
- Total parts produced: 350
- Rejected parts: 14

Work through the calculation:

Solution:

Planned Production Time = $480 - 40 = 440$ minutes

Run Time = $440 - 30 - 20 = 390$ minutes

Availability = $390 / 440 = 88.6\%$

Theoretical Output = $390 / 1 = 390$ parts

Performance = $350 / 390 = 89.7\%$

Quality = $(350 - 14) / 350 = 336 / 350 = 96.0\%$

OEE = $88.6\% \times 89.7\% \times 96.0\% = 76.3\%$

Interpretation: This is “Good” performance, above the typical range. The biggest opportunity is in Performance (speed losses).

12.5 The Six Big Losses

TPM categorizes all equipment losses into **six categories**, which map directly to the OEE components.

The Six Big Losses: Targets for TPM Improvement



Figure 12.6: The Six Big Losses

Table 12.6: The Six Big Losses

#	Loss Category	OEE Component	Description
1	**Equipment Failure**	Availability	Unplanned equipment breakdown
2	**Setup & Adjustment**	Availability	Time for changeover, tool change
3	**Idling & Minor Stops**	Performance	Brief stoppages (jams, blockage)
4	**Reduced Speed**	Performance	Running slower than design speed
5	**Process Defects**	Quality	Defects produced during normal
6	**Startup Rejects**	Quality	Defects during warmup, startup

12.5.1 Typical Loss Distribution

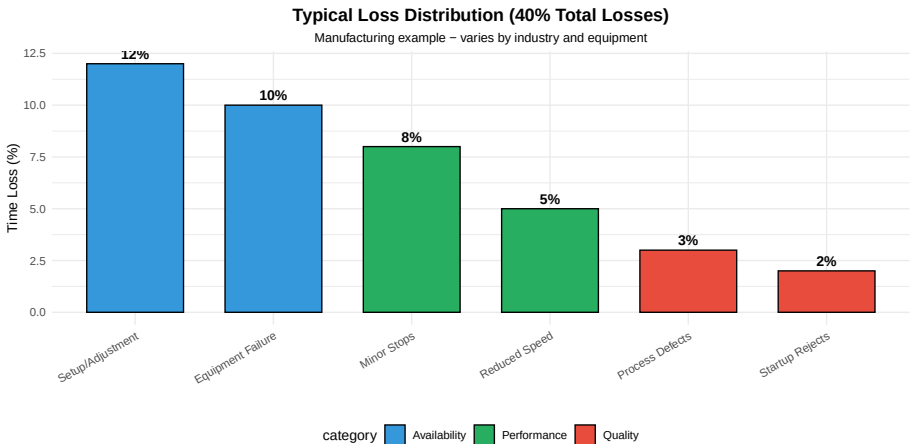


Figure 12.7: Typical Distribution of the Six Big Losses

12.6 Autonomous Maintenance

Autonomous Maintenance (AM) is the first and most visible pillar of TPM. It transfers basic maintenance tasks from maintenance specialists to operators.

12.6.1 The Seven Steps of Autonomous Maintenance



Figure 12.8: Seven Steps of Autonomous Maintenance

Table 12.7: Autonomous Maintenance Steps

Step	Name	Activities
1	**Initial Cleaning**	Deep clean equipment; identify abnormalities
2	**Eliminate Contamination Sources**	Find and fix sources of dirt, leaks, contamination
3	**Cleaning & Lubrication Standards**	Create standards for cleaning, lubricating, inspection
4	**General Inspection**	Train operators on equipment function; expand scope
5	**Autonomous Inspection**	Operators perform scheduled inspections independently
6	**Organization & Tidiness**	Standardize workplace; visual management
7	**Full Autonomous Maintenance**	Continuous improvement; operators propose improvements

12.6.2 The AM Tag System

During autonomous maintenance activities, operators identify abnormalities using **tags**:

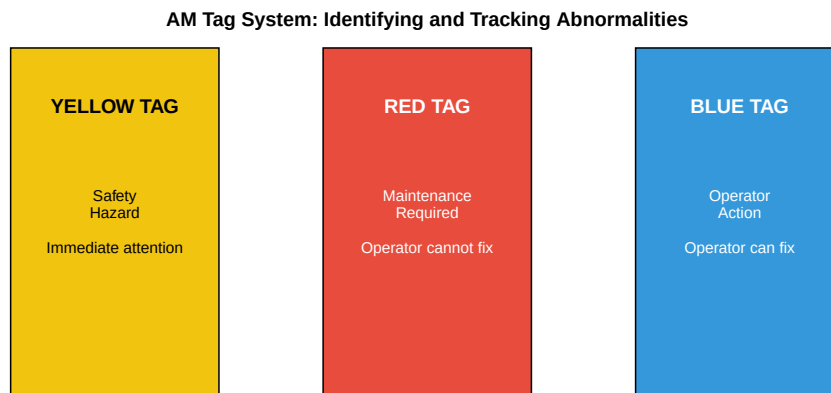


Figure 12.9: AM Tag System

12.6.3 Example: AM Cleaning and Inspection Checklist

Table 12.8: Sample AM Inspection Checklist

#	Check Item	Method	Standard	Frequency
1	General cleanliness	Visual	No dust, debris, contamination	Daily
2	Oil/lubricant levels	Visual/gauge	Between min-max marks	Daily
3	Loose bolts/fasteners	Touch/wrench	Hand tight + 1/4 turn	Weekly
4	Unusual sounds	Listen	Normal operating sound	Each startup
5	Vibration	Touch	Minimal, no unusual patterns	Each startup
6	Temperature	Touch/thermometer	< 60°C (or per spec)	Hourly
7	Leaks (oil, air, coolant)	Visual	No visible leaks	Daily
8	Safety guards in place	Visual	All guards secure	Each shift

12.7 Planned Maintenance

Planned Maintenance is the second pillar, focusing on scheduled maintenance activities performed by maintenance specialists.

12.7.1 Types of Maintenance

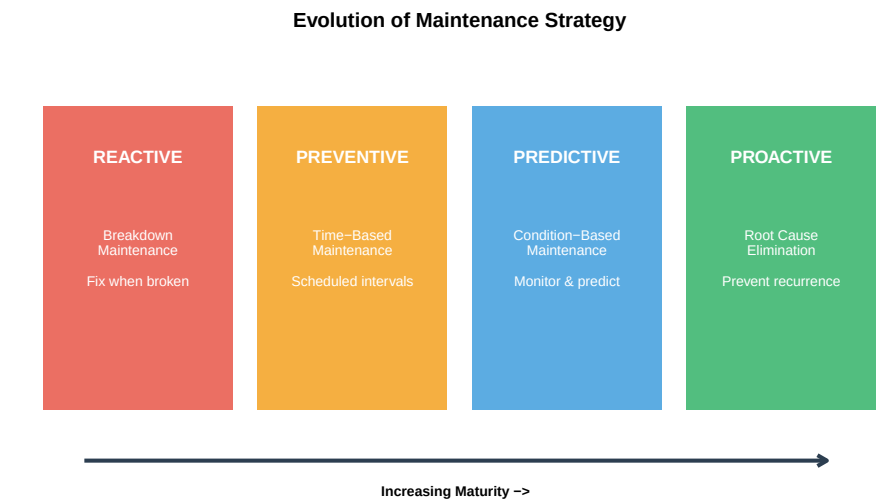


Figure 12.10: Types of Maintenance Activities

Table 12.9: Maintenance Strategy

Type	Approach	Advantages
Breakdown	Run to failure	No upfront cost
Preventive	Time/cycle-based replacement	Planned downtime, parts availability
Predictive	Condition monitoring	Optimal component life, targeted actions
Proactive	Root cause elimination	Prevents future failures

12.7.2 Predictive Maintenance Technologies

Table 12.10: Predictive Maintenance Tech

Technology	What It Detects	Equipment
Vibration Analysis	Imbalance, misalignment, bearing wear, looseness	Rotating equ
Thermography	Hot spots, electrical issues, friction, insulation problems	Electrical pa
Oil Analysis	Contamination, wear particles, lubricant degradation	Gearboxes, h
Ultrasound	Leaks, bearing defects, electrical discharge	Steam traps,
Motor Current Analysis	Motor winding issues, rotor bar problems, power quality	Electric moto

12.7.3 The P-F Curve

The **P-F Curve** illustrates the concept of detecting potential failure (P) before functional failure (F).

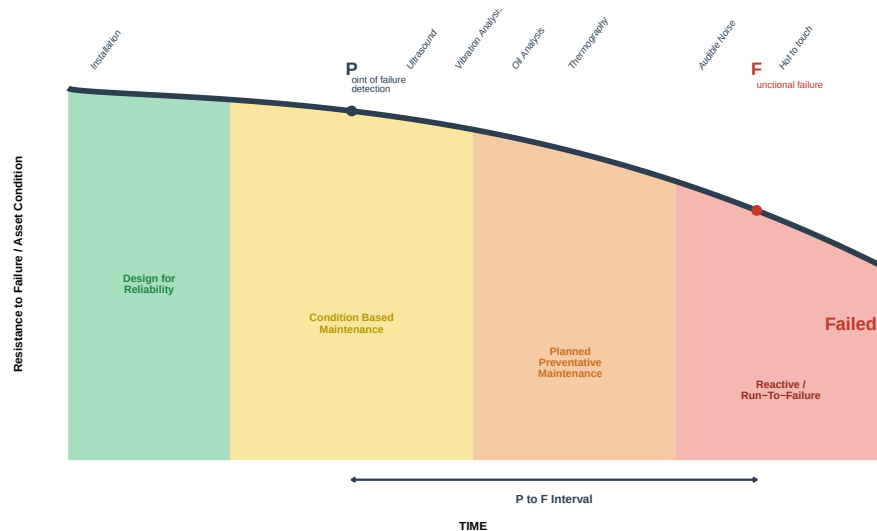


Figure 12.11: The P-F Curve: Detecting Failure Early

Question: Why is predictive maintenance better than preventive maintenance?

Preventive Maintenance (Time-Based): - Replaces parts at fixed intervals regardless of condition - May replace parts still in good condition (waste) - May miss failures that occur before scheduled replacement - Based on average life, not individual component condition

Predictive Maintenance (Condition-Based): - Monitors actual equipment condition - Replaces parts when condition indicates need - Maximizes component life - Provides warning time to plan repairs

Example: - Preventive: Replace bearing every 6 months (may last 9 months or fail at 4 months) - Predictive: Monitor vibration; replace when trending indicates 2-3 weeks to failure - Result: Optimal component life, planned downtime, no unexpected failures

Cost Comparison: - Reactive repair: \$10,000 (including secondary damage, lost production) - Preventive replacement: \$3,000 (may waste \$1,000 in parts life) - Predictive replacement: \$2,500 (optimal timing, minimal waste)

12.8 Focused Improvement (Kobetsu Kaizen)

Focused Improvement uses cross-functional teams to eliminate specific losses identified through OEE analysis.

12.8.1 The Kaizen Process

Focused Improvement (Kobetsu Kaizen) Process

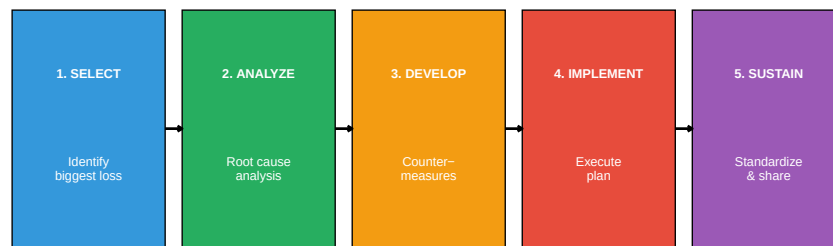


Figure 12.12: Focused Improvement Process

12.8.1.1 Understanding Kaizen

Kaizen () is a Japanese term meaning “change for better” or **continuous improvement**. Unlike large-scale transformation projects, Kaizen focuses on small, incremental improvements made consistently over time. The philosophy is built on the belief that every process can be improved, and everyone—from operators to managers—should participate in identifying and implementing improvements.

Core Principles of Kaizen:

- **Good processes bring good results** — Focus on improving the process, not blaming people
- **Go see for yourself (Gemba)** — Understand the actual situation at the workplace
- **Speak with data** — Base decisions on facts and measurements
- **Take action to contain and correct root causes** — Don’t just treat symptoms
- **Work as a team** — Cross-functional collaboration produces better solutions
- **Kaizen is everybody’s business** — Every employee can contribute improvements

12.8.1.2 The Five Steps in Detail

Step 1: SELECT — Identify the Biggest Loss

The first step uses data to identify which loss has the greatest impact on OEE. This typically involves:

- Reviewing OEE data and breakdown logs
- Creating Pareto charts to visualize loss magnitude
- Selecting a loss that is significant, measurable, and within the team's ability to address
- Forming a cross-functional team with members who understand the equipment and process

Key question: "Which single problem, if solved, would give us the biggest improvement?"

Step 2: ANALYZE — Root Cause Analysis

Once a loss is selected, the team investigates its root cause using structured problem-solving tools:

- **Why-Why Analysis (5 Whys):** Repeatedly asking "why" to drill down from symptoms to root causes
- **Fishbone Diagram (Ishikawa):** Categorizing potential causes by Machine, Method, Material, Man, Measurement, Environment
- **PM Analysis:** A systematic method for chronic losses that examines physical mechanisms
- **Data collection:** Gathering facts at the Gemba (actual workplace)

Key principle: Never assume you know the cause—verify with evidence.

Step 3: DEVELOP — Create Countermeasures

Based on root cause analysis, the team develops countermeasures—actions designed to eliminate or reduce the root cause:

- Brainstorm multiple potential solutions
- Evaluate options based on effectiveness, cost, and implementation time
- Create an action plan with clear responsibilities and deadlines
- Consider both immediate fixes and permanent solutions
- Apply error-proofing (Poka-Yoke) where possible

Important: Countermeasures address root causes, not just symptoms.

Step 4: IMPLEMENT — Execute the Plan

The team puts countermeasures into action:

- Follow the action plan systematically
- Make changes during planned downtime when possible
- Document all modifications made
- Train affected personnel on new procedures

- Monitor results immediately after implementation
- Be prepared to adjust if initial results are not as expected

Tip: Start with small-scale trials before full implementation when possible.

Step 5: SUSTAIN — Standardize and Share

The final step ensures improvements are maintained and shared across the organization:

- **Standardize:** Update procedures, checklists, and work instructions to reflect the new method
- **Visualize:** Create visual controls that make the standard easy to follow
- **Train:** Ensure all shifts and new employees learn the improved method
- **Verify:** Include checks in AM routines or audits to confirm the standard is being followed
- **Share:** Communicate successful improvements to other areas that might benefit (Yokoten—horizontal deployment)

Kaizen is never finished—today’s standard is tomorrow’s baseline for further improvement.

12.8.1.3 Kaizen Event vs. Daily Kaizen

Aspect	Kaizen Event (Blitz)	Daily Kaizen
Duration	3-5 days intensive	Ongoing, small improvements
Scope	Focused on one specific problem	Any improvement opportunity
Team	Dedicated cross-functional team	Individual or small group
Impact	Significant, measurable improvement	Cumulative effect over time
Example	Reduce changeover time by 50%	Reorganize tool storage for easier access

Both approaches are valuable—Kaizen events tackle significant losses while daily Kaizen builds a culture of continuous improvement.

12.8.2 Loss Elimination Tools

Effective loss elimination requires systematic tools that help teams identify problems, find root causes, and implement lasting solutions. The following tools are essential for Focused Improvement activities.

12.8.2.1 Pareto Analysis

Pareto Analysis applies the 80/20 rule: roughly 80% of losses come from 20% of causes. By creating a Pareto chart, teams can visualize which losses have the greatest impact and prioritize their improvement efforts accordingly.

How to use:

1. Collect data on all losses (downtime events, defects, speed reductions)
2. Categorize losses by type or cause
3. Calculate the frequency or duration of each category
4. Rank categories from highest to lowest
5. Create a bar chart with a cumulative percentage line
6. Focus improvement efforts on the “vital few” categories that account for most losses

12.8.2.2 Why-Why Analysis (5 Whys)

Why-Why Analysis is a simple but powerful technique for drilling down from a symptom to its root cause by repeatedly asking “Why?” The goal is to go beyond surface-level explanations to find the fundamental cause that, if addressed, will prevent recurrence.

Example:

Level	Question	Answer
Problem	Machine stopped	Overload tripped
Why 1?	Why did the overload trip?	Motor drew excessive current
Why 2?	Why excessive current?	Bearing was seized
Why 3?	Why was bearing seized?	Insufficient lubrication
Why 4?	Why insufficient lubrication?	Lubrication schedule not followed
Why 5?	Why not followed?	No visual indicator when lubrication is due
Root Cause		Missing visual management for lubrication schedule

Tips for effective Why-Why Analysis:

- Stay focused on one causal chain at a time
- Base answers on facts, not assumptions—verify at the Gemba
- Don’t stop at “human error”—ask why the error was possible
- The number 5 is a guideline, not a rule—continue until you reach a controllable root cause

12.8.2.3 PM Analysis

PM Analysis (Physical Mechanism Analysis or Phenomenon-Mechanism Analysis) is a systematic method for analyzing **chronic losses**—problems that occur repeatedly despite multiple repair attempts. It examines the physical principles behind equipment failures.

The PM Analysis Process:

1. **Clarify the phenomenon:** Describe exactly what happens, when, and under what conditions
2. **Conduct physical analysis:** Understand the physical principles involved (friction, heat, vibration, etc.)
3. **Identify conditions that produce the phenomenon:** List all conditions required for the problem to occur
4. **Investigate equipment, materials, and methods:** Examine each condition against the 4Ms (Machine, Material, Method, Man)
5. **Plan and implement countermeasures:** Address the conditions that allow the problem to occur
6. **Verify results:** Confirm the chronic loss has been eliminated

PM Analysis is particularly valuable when Why-Why Analysis doesn't resolve a recurring problem.

12.8.2.4 SMED (Single-Minute Exchange of Die)

SMED is a systematic approach to reducing changeover or setup time—the time between the last good part of one product and the first good part of the next. The goal is to complete changeovers in under 10 minutes (single-digit minutes).

The SMED Process:

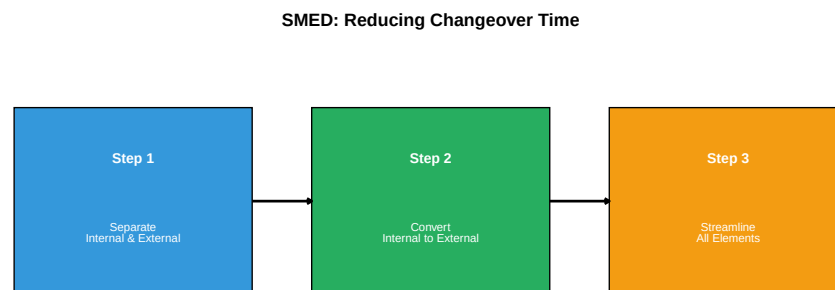


Figure 12.13: SMED Methodology

Key Concepts:

- **Internal setup:** Tasks that can only be done when the machine is stopped (changing the die itself)
- **External setup:** Tasks that can be done while the machine is running (preparing tools, preheating)

Typical SMED Improvements:

Technique	Example
Prepare in advance	Stage tools and materials before stopping the machine
Use quick-release clamps	Replace bolts with cam locks or hydraulic clamps
Eliminate adjustments	Use fixtures, stops, and standardized settings
Parallel operations	Two people working simultaneously on different tasks
Standardize components	Use common bolt sizes, connection types

12.8.2.5 Poka-Yoke (Error-Proofing)

Poka-Yoke () means “mistake-proofing” or “error-proofing.” These are devices or methods that either prevent errors from occurring or detect them immediately when they do occur.

Types of Poka-Yoke:

Type	Function	Example
Prevention	Makes errors impossible	Asymmetric connector that only fits one way
Detection	Identifies errors immediately	Sensor that stops the line if a part is missing
Warning	Alerts operator to potential error	Light or buzzer when a step is skipped

Poka-Yoke Design Principles:

1. **Design out the possibility of error** — The best Poka-Yoke makes the error impossible
2. **Detect at the source** — Catch errors where they occur, not downstream
3. **Stop and fix immediately** — Don’t pass defects to the next process
4. **Keep it simple** — Low-cost, reliable solutions are better than complex ones

Examples in Manufacturing:

- **Guide pins** that prevent a part from being loaded incorrectly
- **Counters** that verify the correct number of components were installed
- **Checklists with physical verification** (e.g., removing a flag for each completed step)
- **Limit switches** that confirm proper positioning before the cycle starts
- **Color coding** to match parts with their correct locations

Question: How do you decide which tool to use?

Tool Selection Guide:

- **Pareto Analysis:** Use first to identify which loss to focus on
- **Why-Why Analysis:** Use for sporadic failures with clear cause-effect relationships
- **PM Analysis:** Use for chronic losses that keep recurring despite repairs
- **SMED:** Use specifically for setup/changeover losses (Loss #2)
- **Poka-Yoke:** Use to prevent defects and human errors (Losses #5, #6)

Often, multiple tools are used together—Pareto to select the problem, Why-Why or PM Analysis to find the root cause, and Poka-Yoke to prevent recurrence.

12.8.2.6 Summary of Loss Elimination Tools

Table 12.11: Tools for Loss Elimination

Tool	Purpose	Application
Pareto Analysis	Identify biggest losses to target	Prioritize improvement efforts
Why-Why Analysis	Find root cause of failures	Breakdown analysis, defect investigation
PM Analysis	Analyze chronic losses systematically	Complex, recurring problems
SMED	Reduce setup/changeover time	Availability improvement (Loss #1)
Poka-Yoke	Error-proof the process	Quality improvement (Losses #5, #6)

12.9 TPM Implementation

12.9.1 The 12 Steps of TPM Implementation

Table 12.12: 12 Steps of TPM Implementation

Phase	Step	Activity	Duration
Preparation	1	Announce TPM introduction by top management	1 month
Preparation	2	Education and campaign to introduce TPM	3-6 months
Preparation	3	Create TPM promotion organization	1-2 months

Preparation	4	Establish basic TPM policies and goals	1-2 months
Preparation	5	Formulate master plan for TPM development	1-2 months
Implementation	6	Hold TPM kick-off	1 day
Implementation	7	Improve effectiveness of each piece of equipment	6-12 months
Implementation	8	Develop autonomous maintenance program	12-24 months
Implementation	9	Develop planned maintenance program	12-24 months
Implementation	10	Conduct training to improve skills	Ongoing
Stabilization	11	Develop early equipment management program	12-24 months
Stabilization	12	Perfect TPM implementation and raise levels	Ongoing

12.9.2 Success Factors

Table 12.13: TPM Success Factors

Factor	Why Critical
Top Management Commitment	Resources, culture change, sustained focus
Training and Education	Skills to identify problems, perform maintenance
Small Group Activities	Operator involvement, team problem-solving
Visual Management	Make abnormalities obvious, track progress
Patience and Persistence	TPM takes 3-5 years to fully implement

12.10 Case Study: TPM Implementation

12.10.1 Background

Company: Automotive component manufacturer

Equipment: CNC machining center

Initial OEE: 52%

12.10.2 Problem Analysis

```
# Initial State
cat("=== INITIAL OEE BREAKDOWN ===\n\n")
```

```
=== INITIAL OEE BREAKDOWN ===
```

```
availability_initial <- 78 # %
performance_initial <- 82 # %
quality_initial <- 81 # %
```

```

oeo_initial <- (availability_initial/100) * (performance_initial/100) * (quality_initial/100)
cat("Availability:", availability_initial, "%\n")

```

Availability: 78 %

```

cat("Performance:", performance_initial, "%\n")

```

Performance: 82 %

```

cat("Quality:", quality_initial, "%\n")

```

Quality: 81 %

```

cat("OEE:", round(oeo_initial, 1), "%\n\n")

```

OEE: 51.8 %

```

# Loss breakdown

```

```

cat("=== TOP LOSSES IDENTIFIED ===\n")

```

```

=== TOP LOSSES IDENTIFIED ===

```

```

cat("1. Equipment breakdowns: 8% of time\n")

```

1. Equipment breakdowns: 8% of time

```

cat("2. Setup/changeover: 7% of time\n")

```

2. Setup/changeover: 7% of time

```

cat("3. Minor stops: 12% of time\n")

```

3. Minor stops: 12% of time

```

cat("4. Defects: 4% of production\n")

```

4. Defects: 4% of production

12.10.3 Improvements Implemented

Loss	Root Cause	Countermeasure	Result
Breakdowns	Lack of basic maintenance	Autonomous maintenance program	8% → 3%
Setup time	No standard procedure	SMED implementation	35 min → 12 min
Minor stops	Chip buildup in sensors	Improved chip management	12% → 4%
Defects	Tool wear not detected	In-process gauging	4% → 1.5%

12.10.4 Results After 18 Months

```
# After TPM Implementation
```

```
cat("=== FINAL OEE BREAKDOWN ===\n\n")
```

```
=== FINAL OEE BREAKDOWN ===
```

```
availability_final <- 91      # %
```

```
performance_final <- 94      # %
```

```
quality_final <- 98.5        # %
```

```
oee_final <- (availability_final/100) * (performance_final/100) * (quality_final/100) * 100
```

```
cat("Availability:", availability_final, "% (was", availability_initial, "%)\n")
```

```
Availability: 91 % (was 78 %)
```

```
cat("Performance:", performance_final, "% (was", performance_initial, "%)\n")
```

```
Performance: 94 % (was 82 %)
```

```
cat("Quality:", quality_final, "% (was", quality_initial, "%)\n")
```

```
Quality: 98.5 % (was 81 %)
```

```
cat("OEE:", round(oee_final, 1), "% (was", round(oee_initial, 1), "%)\n\n")
```

```
OEE: 84.3 % (was 51.8 %)
```

```
improvement <- oee_final - oee_initial
```

```
cat("=== IMPROVEMENT ===\n")
```

```
=== IMPROVEMENT ===
```

```
cat("OEE Improvement:", round(improvement, 1), "percentage points\n")
```

```
OEE Improvement: 32.4 percentage points
```

```
cat("Relative Improvement:", round((improvement/oee_initial)*100, 0), "%\n")
```

```
Relative Improvement: 63 %
```



Figure 12.14: OEE Improvement: Before and After TPM

12.11 Summary

Table 12.14: TPM Key Concepts Summary

Topic	Key Points
TPM Definition	Total involvement, productive focus, maintenance excellence; zero break
Eight Pillars	AM, PM, Quality, Focused Improvement, Early Equipment, Training, S
OEE	$OEE = Availability \times Performance \times Quality$; World class > 85%
Six Big Losses	Equipment failure, setup, minor stops, speed loss, defects, startup reject
Autonomous Maintenance	Operators maintain own equipment; 7 steps from cleaning to full owners
Planned Maintenance	Preventive → Predictive → Proactive; use P-F curve for optimal timing

12.12 Review Questions

12.12.1 Conceptual Questions

Question 1: What does “Total” mean in Total Productive Maintenance?

“Total” has three dimensions:

1. **Total participation:** Everyone participates, from operators to top management
2. **Total equipment effectiveness:** Aim for maximum OEE (zero losses)
3. **Total system:** Covers the entire equipment lifecycle, from design to disposal

Key insight: TPM is not just a maintenance program — it's a company-wide philosophy where everyone takes responsibility for equipment care.

Question 2: Why is OEE calculated as a product rather than a sum?

OEE uses multiplication because losses are sequential and compound:

1. **Availability** determines how much time is available
2. **Performance** determines how much of that time is productive
3. **Quality** determines how much of that production is good

Example: - If each factor is 90%: $OEE = 0.9 \times 0.9 \times 0.9 = 72.9\%$ (not 270% or 90%) - This reflects reality: you can only achieve quality on parts that were produced (performance) during time the machine ran (availability)

Why this matters: - Small improvements in all three factors compound - 5% improvement in each: $0.85 \times 0.85 \times 0.85 = 61\% \rightarrow 0.90 \times 0.90 \times 0.90 = 73\%$ - Focus on the weakest factor first for biggest impact

Question 3: What is the difference between autonomous maintenance and planned maintenance?

Aspect	Autonomous Maintenance	Planned Maintenance
Who	Operators	Maintenance technicians
What	Basic care (clean, inspect, lubricate)	Complex repairs, overhauls
When	Daily, during operation	Scheduled intervals
Skills	Basic equipment knowledge	Technical expertise
Goal	Prevent deterioration	Restore/improve equipment

They complement each other: - AM catches problems early (first line of defense) - PM provides specialized skills when needed - Together they achieve zero breakdowns

12.12.2 Calculation Questions

Question 4: Calculate OEE given the following data.

Given: - Shift length: 480 minutes - Breaks: 30 minutes - Changeover: 45 minutes - Breakdown: 20 minutes - Ideal cycle time: 30 seconds (0.5 min) - Total parts produced: 580 - Rejected parts: 23

Solution:

Planned Production Time = 480 - 30 = 450 minutes

Run Time = 450 - 45 - 20 = 385 minutes

Availability = 385 / 450 = 85.6%

Theoretical Output = 385 / 0.5 = 770 parts

Performance = 580 / 770 = 75.3%

Quality = (580 - 23) / 580 = 557 / 580 = 96.0%

OEE = 85.6% × 75.3% × 96.0% = 61.9%

Analysis: Performance is the biggest opportunity for improvement (75.3% vs. targets of 95%). Investigate minor stops and speed losses.

Question 5: A machine has OEE of 65% with Availability 90%, Performance 80%, Quality 90%. Which factor should be prioritized?

Analysis:

Current state: - Availability: 90% (Gap to world class: 5%) - Performance: 80% (Gap to world class: 15%) - Quality: 90% (Gap to world class: 9%)

Performance should be prioritized because:

1. **Biggest gap:** 15 percentage points below world class (95%)
2. **Biggest OEE impact:** Improving performance 10% → OEE = 90% × 90% × 90% = 72.9%
3. **Often overlooked:** Speed losses and minor stops are frequently accepted as normal

Investigation areas for performance: - Minor stops (jams, blockages, sensor trips) - Reduced speed operation - Idling and waiting - Operator pace

Question 6: If current OEE is 60% and target is 85%, what improvement is needed in each component assuming equal improvement?

Solution:

Current: 60% = A × P × Q

If we improve each equally, we need: - Target: 85% = A' × P' × Q' - If A' = P' = Q' = x, then $x^3 = 0.85$ - $x = \sqrt[3]{0.85} = 0.947 = 94.7\%$

Each component needs to reach approximately 95%

Check: $0.947 \times 0.947 \times 0.947 = 0.849$ 85%

If current factors are A=80%, P=85%, Q=88%: - Availability needs: +15 points (80% → 95%) - Performance needs: +10 points (85% → 95%) - Quality needs: +7 points (88% → 95%)

Prioritize by gap size: Availability first, then Performance, then Quality.

12.12.3 Application Questions

Question 7: An operator notices a small oil leak on a machine. Under traditional maintenance vs. TPM, what happens?

Traditional Maintenance Approach: 1. Operator continues running machine 2. May or may not report to maintenance 3. If reported, added to backlog 4. Maintenance addresses when convenient (days/weeks) 5. Leak worsens, potential bearing damage 6. Eventually leads to breakdown

TPM Approach: 1. Operator notices during routine inspection 2. Tags the abnormality immediately 3. Determines if operator can fix (blue tag) or needs maintenance (red tag) 4. If simple: operator tightens fitting or adds sealant 5. If complex: maintenance prioritizes based on severity 6. Root cause investigated to prevent recurrence 7. Finding shared in team meeting

Key Differences: - **Ownership:** Operator takes responsibility vs. “not my job” - **Speed:** Immediate action vs. delayed response - **Prevention:** Fixed before failure vs. reactive repair - **Cost:** \$10 seal vs. \$5,000 bearing replacement + downtime

Question 8: List five items an operator should check during daily autonomous maintenance.

Five Essential Daily AM Checks:

1. **Cleanliness:** Remove chips, debris, dust; clean safety windows and sensors
 - *Why:* Contamination causes wear, sensor malfunctions, quality issues
2. **Lubrication:** Check oil levels, grease points, coolant level
 - *Why:* Inadequate lubrication causes friction, heat, accelerated wear
3. **Fasteners:** Check for loose bolts, guards, covers
 - *Why:* Loose fasteners cause vibration, safety hazards, misalignment
4. **Leaks:** Look for oil, coolant, air, hydraulic leaks
 - *Why:* Leaks indicate seal failure, waste resources, create hazards
5. **Abnormal sounds/vibration:** Listen and feel during startup
 - *Why:* Changes indicate developing problems (bearings, alignment)

Bonus items: - Safety guards in place - Emergency stops functional - Pressure/temperature gauges in normal range - No unusual smells (burning, chemical)

Question 9: Explain how SMED relates to OEE improvement.

SMED (Single Minute Exchange of Die) directly improves Availability:

Loss #2: Setup and Adjustment is an availability loss captured in OEE.

How SMED helps:

1. **Reduces changeover time:**

- Before SMED: 45-minute changeover
- After SMED: 10-minute changeover
- Gain: 35 minutes per changeover

2. Impact on OEE:

- If 2 changeovers per shift: 70 minutes saved
- On 450-minute shift: Availability improves 15%+

3. Secondary benefits:

- More changeovers become practical
- Smaller batch sizes possible
- Flexibility increased
- Less WIP inventory

SMED Process: 1. Separate internal (machine stopped) from external (while running) setup 2. Convert internal to external where possible 3. Streamline remaining internal operations 4. Practice and standardize

Example: Die change on press - External: Stage next die, prepare tools, pre-heat - Internal: Remove old die, install new die, adjust - Target: All possible work done while machine runs

12.13 References

- Nakajima, S. (1988). *Introduction to TPM: Total Productive Maintenance*. Productivity Press.
 - Nakajima, S. (1989). *TPM Development Program: Implementing Total Productive Maintenance*. Productivity Press.
 - Shirose, K. (1992). *TPM for Operators*. Productivity Press.
 - Willmott, P., & McCarthy, D. (2001). *TPM: A Route to World-Class Performance*. Butterworth-Heinemann.
 - JIPM (Japan Institute of Plant Maintenance). *TPM Awards Criteria*.
 - Hansen, R.C. (2001). *Overall Equipment Effectiveness*. Industrial Press.
 - Borris, S. (2006). *Total Productive Maintenance*. McGraw-Hill.
-

Chapter 13

Quality Management Systems

13.1 Learning Objectives

After completing this chapter, you will be able to:


1. Define quality management systems and explain their purpose in manufacturing
 2. Describe the structure and requirements of ISO 9001:2015
 3. Identify industry-specific quality standards (IATF 16949, AS9100, ISO 22000)
 4. Explain the documentation hierarchy and control requirements
 5. Conduct internal audits using systematic methodologies
 6. Implement effective corrective and preventive action (CAPA) processes
 7. Understand management review and continuous improvement requirements
 8. Integrate quality tools (SPC, PFMEA, MSA) within a QMS framework
-

13.2 Introduction to Quality Management Systems

A **Quality Management System (QMS)** is a formalized system that documents processes, procedures, and responsibilities for achieving quality policies and objectives. It coordinates and directs an organization's activities to meet

customer and regulatory requirements while continuously improving effectiveness.

13.2.1 Why Implement a QMS?

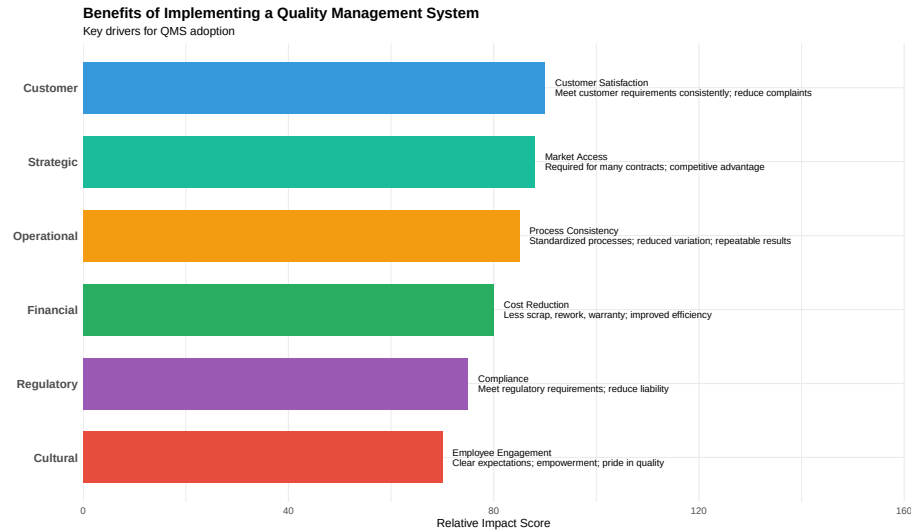


13.2.2 The Evolution of Quality Management

Table 13.1: Evolution of Quality Management

Era	Approach	Focus
Pre-1900s	Craftsmanship	Individual skill; master craftsmen
1900-1940s	Inspection	Sort good from bad; end-of-line inspection
1940-1960s	Statistical Quality Control	Control charts; sampling; Shewhart, Deming
1960-1980s	Quality Assurance	Prevention; systems approach; documented procedure
1980-2000s	Total Quality Management	Company-wide quality; customer focus; continuous improvement
2000s-Present	Integrated Management	Risk-based thinking; integration with business strategy

13.2.3 Quality Management Principles

ISO 9000 defines seven quality management principles that form the foundation of all QMS standards:

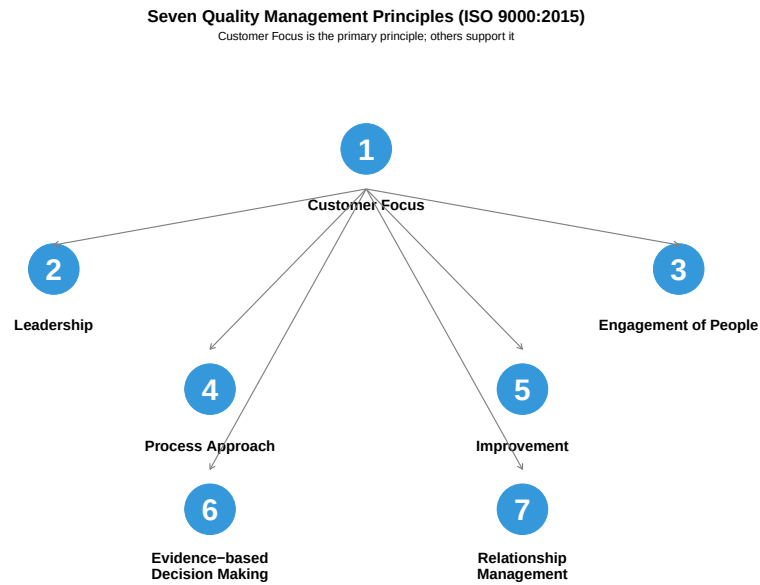

13.3 ISO 9001:2015 Structure

ISO 9001:2015 is the international standard for quality management systems. It uses the High-Level Structure (HLS) common to all ISO management system standards.

13.3.1 The Ten Clauses

ISO 9001:2015 Structure – The Ten Clauses


Clauses 4–10 contain the auditable requirements

1	Scope	Defines applicability of the standard
2	Normative References	References to ISO 9000:2015
3	Terms and Definitions	Definitions used in the standard
4	Context of the Organization	Understanding the organization and its context
5	Leadership	Top management commitment and policy
6	Planning	Actions to address risks and opportunities
7	Support	Resources, competence, awareness, communication
8	Operation	Operational planning and control
9	Performance Evaluation	Monitoring, measurement, analysis, evaluation
10	Improvement	Nonconformity, corrective action, continual improvement

13.3.2 The Process Approach and PDCA

ISO 9001:2015 emphasizes the **process approach** combined with the **Plan-Do-Check-Act (PDCA)** cycle:

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use `linewidth` instead.

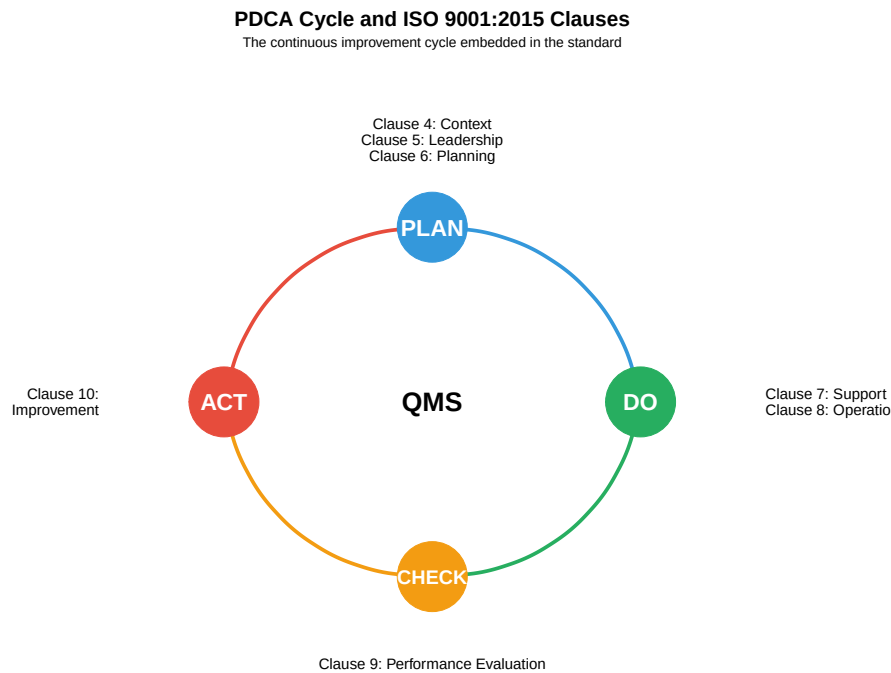

13.3.3 Risk-Based Thinking

ISO 9001:2015 introduced **risk-based thinking** throughout the QMS:

Table 13.2: Risk-Based Thinking in ISO 9001:2015

Clause	Requirement	Risk_Application
4.1	Context of the Organization	Identify internal/external issues that could affect QMS ou
4.2	Interested Parties	Understand needs/expectations that could impact quality
6.1	Actions to Address Risks and Opportunities	Plan actions to address risks and opportunities; integrate
8.1	Operational Planning and Control	Control processes considering risks identified in planning
9.1	Monitoring and Measurement	Monitor effectiveness of actions taken to address risks
10.2	Nonconformity and Corrective Action	Analyze nonconformities; update risks/opportunities as ne

Understanding Risk-Based Thinking

Risk-based thinking doesn't require formal risk management (like FMEA for every process), but rather:

1. **Consider risks** when designing and implementing the QMS
2. **Preventive action** is built into the system, not a separate activity

3. **Proportional response** - more rigorous controls for higher-risk processes
4. **Opportunities** are also considered (not just negative risks)


Example: A food manufacturer identifies “allergen cross-contamination” as a significant risk. Risk-based thinking leads them to: - Dedicated production lines for allergen-containing products - Enhanced cleaning verification procedures - Staff training on allergen awareness - Increased inspection frequency after changeovers

The extent of controls is proportional to the risk level.

13.4 Industry-Specific Quality Standards

Different industries have developed standards that build upon ISO 9001 with additional sector-specific requirements.

13.4.1 Comparison of Major Standards

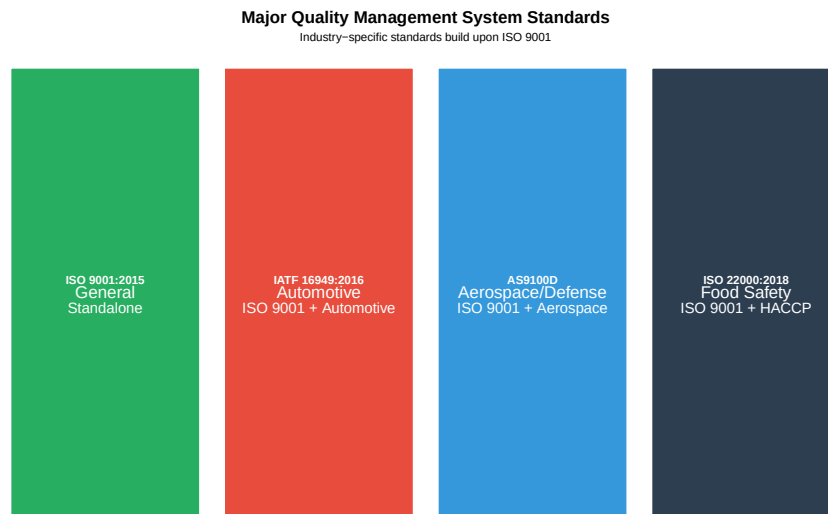

13.4.2 IATF 16949:2016 (Automotive)

IATF 16949 is the automotive quality standard, required by most major OEMs (Ford, GM, Toyota, VW, etc.).


Table 13.3: IATF 16949 Additional Requirements Beyond ISO 9001

Requirement Area	ISO 9001	IATF 16949 Addition
------------------	----------	---------------------

Product Safety	Implied	Explicit requirements for product safety processes
APQP/PPAP	Not specified	APQP phases required; PPAP submission mandatory
Control Plans	Not specified	Control plans required for all parts; specific format
MSA	General requirement	MSA studies required per AIAG MSA manual
SPC	General requirement	SPC for all special characteristics
Supplier Quality	Basic purchasing	Supplier development; second-party audits; IATF certification
Warranty Management	Complaint handling	NTF analysis; warranty data analysis; field return analysis
Manufacturing Feasibility	Review of requirements	Documented manufacturing feasibility review

13.4.3 Automotive Core Tools


IATF 16949 requires the use of **five core tools**:

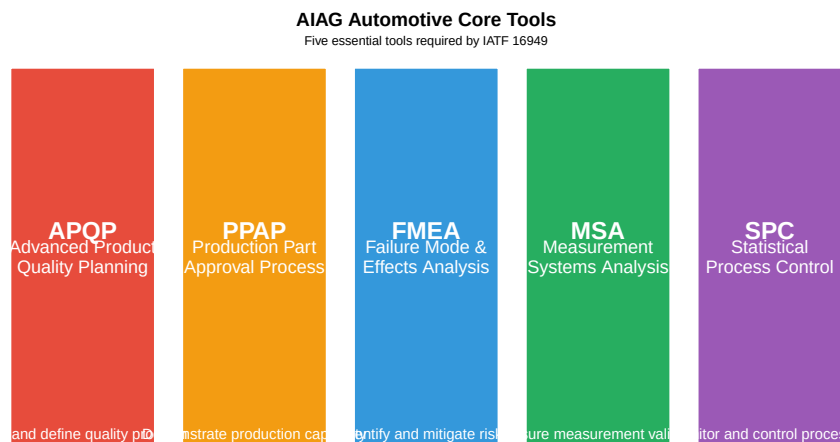

13.4.3.1 APQP: Advanced Product Quality Planning

APQP is a structured framework for developing products that ensures customer requirements are met through careful planning and defined milestones.

```
Warning in geom_segment(aes(x = 0.6, xend = 5.4, y = 1, yend = 1), arrow = arrow(length = unit(0.5))) :
i Please consider using `annotate()` or provide this layer with data containing
  a single row.
```

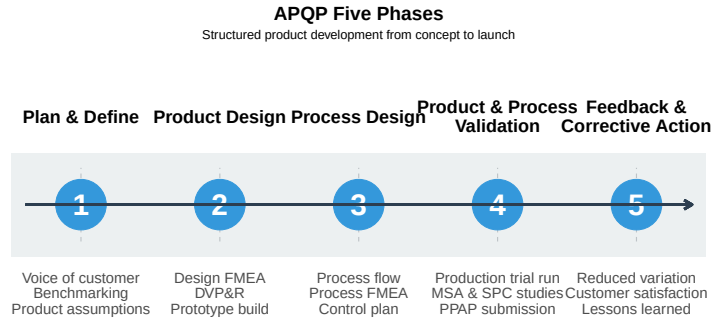

Example: New Brake Caliper Development

A Tier 1 supplier developing a new brake caliper for an OEM would follow APQP:

- **Phase 1:** Gather customer requirements (stopping distance, weight limits, environmental conditions), benchmark competitor products
- **Phase 2:** Design the caliper, create Design FMEA (what if piston seal fails?), build prototypes for testing
- **Phase 3:** Design manufacturing process, create Process FMEA, develop control plan for machining and assembly
- **Phase 4:** Run production trial, validate $Cpk > 1.67$ for critical dimensions, submit PPAP package
- **Phase 5:** Monitor warranty returns, implement kaizen improvements, document lessons for next program

13.4.3.2 PPAP: Production Part Approval Process

PPAP provides evidence that the supplier understands customer requirements and can consistently produce conforming parts during actual production runs.

Table 13.4: PPAP 18 Elements Required for Submission

Element	Description
1. Design Records	Part drawings, CAD files, specifications
2. Engineering Change Documents	Documentation of any design changes since original ap
3. Customer Engineering Approval	Evidence of customer sign-off on design
4. Design FMEA	Risk analysis of product design failure modes
5. Process Flow Diagram	Visual representation of manufacturing steps
6. Process FMEA	Risk analysis of process failure modes
7. Control Plan	Document describing controls for each process step
8. MSA Studies	Gage R&R studies proving measurement system adequ
9. Dimensional Results	Actual measurements vs. specifications for all dimensi

10. Material/Performance Test Results	Test results for material properties and performance requirements
11. Initial Process Studies (SPC)	Cpk/Ppk studies demonstrating process capability
12. Qualified Lab Documentation	Scope and accreditation of testing laboratories
13. Appearance Approval Report	Required for parts with color, grain, or surface requirements
14. Sample Production Parts	Parts from production run for customer evaluation
15. Master Sample	Retained reference sample for future comparison
16. Checking Aids	Fixtures, gages, or templates used to inspect parts
17. Customer-Specific Requirements	OEM-specific requirements (Ford, GM, Toyota, etc.)
18. Part Submission Warrant (PSW)	Summary document with supplier certification

PPAP Submission Levels:

Level	Requirements	When Used
1	PSW only	Low-risk parts, trusted suppliers
2	PSW + samples + limited data	Standard submission
3	PSW + samples + complete data	Default level; new parts/suppliers
4	PSW + other per customer direction	Customer-specified requirements
5	PSW + samples + complete data at supplier site	Full documentation review on-site

Example: Fuel Injector PPAP Submission

A supplier submitting PPAP for a new fuel injector would include:

- **Dimensional results:** 100% inspection of 300 parts showing all 47 dimensions in spec
- **MSA study:** Gage R&R < 10% for critical spray angle measurement
- **Process capability:** Cpk = 1.89 for nozzle hole diameter (spec requires Cpk 1.67)
- **Material certs:** Steel chemistry and hardness test results
- **Performance tests:** Flow rate, spray pattern, durability (1 million cycles)
- **PSW:** Signed warrant certifying all requirements met

13.4.3.3 FMEA: Failure Mode and Effects Analysis

FMEA is a systematic method for identifying potential failures, their causes, and effects, then prioritizing actions to reduce risk. Two types are used in automotive:

- **Design FMEA (DFMEA):** Analyzes potential failures in product design

- **Process FMEA (PFMEA):** Analyzes potential failures in manufacturing processes

Table 13.5: Process FMEA Structure and Example

Column	Description	Example
Process Step	The operation being analyzed	Torque fastener
Potential Failure Mode	How the process could fail to meet requirements	Under-torque
Potential Effect(s)	Impact on customer if failure occurs	Joint loosens
Severity (S)	1-10 rating of effect seriousness (10 = safety/regulatory)	10 (safety critical)
Potential Cause(s)	Root cause of the failure mode	Worn tool, worn
Occurrence (O)	1-10 rating of cause likelihood (10 = very frequent)	4 (occasional)
Current Controls	Existing prevention or detection controls	Torque monitoring
Detection (D)	1-10 rating of detection ability (10 = cannot detect)	3 (high detection)
RPN	$S \times O \times D$ = Risk Priority Number	$10 \times 4 \times 3 = 120$
Recommended Actions	Actions to reduce S, O, or D	Add DC torque


Action Priority Based on RPN:**RPN-Based Action Priority****Example: Engine Block Machining PFMEA**

Step	Failure Mode	Effect	S	Cause	O	Control	D	RPN	Action
Bore cylinder	Oversize bore	Piston slap, oil consumption	7	Tool wear	5	SPC chart, tool life monitoring	4	140	Add in-process bore gage

Step	Failure Mode	Effect	S	Cause	O	Control	D	RPN	Action
Hone surface	Insufficient crosshatch	Poor ring seal, oil burning	8	Wrong hone stones	3	Visual inspection	6	144	Add surface roughness measurement
Wash block	Residual chips	Engine seizure	9	Blocked nozzle	4	Cleanliness spec check	5	180	Add particle counter, automated flush verification

13.4.3.4 MSA: Measurement Systems Analysis

MSA ensures that measurement systems provide reliable data for decision-making. Poor measurement systems can cause good parts to be rejected (false rejects) or bad parts to be accepted (false accepts).

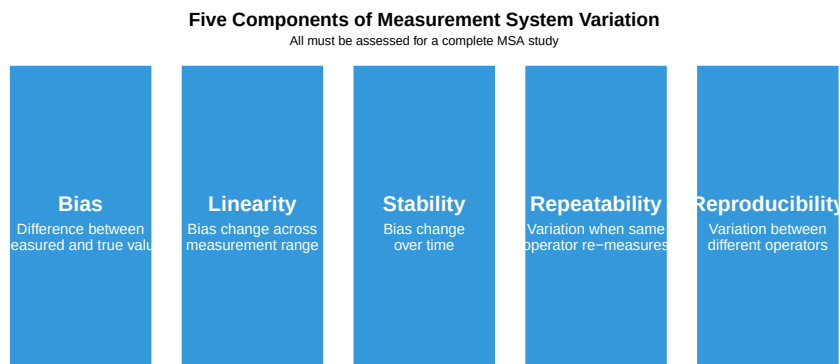

Gage R&R Study Acceptance Criteria:

%GRR	Interpretation	Action
< 10%	Excellent	Acceptable for all applications

%GRR	Interpretation	Action
10-30%	Acceptable	May be acceptable depending on application, cost of gage, cost of repairs
> 30%	Unacceptable	Measurement system must be improved; cannot make reliable decisions

Number of Distinct Categories (ndc): Should be 5 to adequately discriminate between parts.

Example: Gage R&R Study for Shaft Diameter

A supplier conducts a Gage R&R study for a micrometer used to measure shaft diameter (spec: 25.00 ± 0.05 mm):


Study Setup: - 3 operators measure 10 parts, 3 times each = 90 measurements
- Parts selected to represent the range of production variation

Results: | Source | Variance | % Contribution | | :——-|:——-|:——-| |
Part-to-Part | 0.000156 | 87.2% | | Repeatability | 0.000018 | 10.1% | | Reproducibility | 0.000005 | 2.7% | | **Total Gage R&R** | **0.000023** | **12.8%** |

Conclusion: %GRR = 12.8% is acceptable (between 10-30%). ndc = 7 (5 required). The measurement system is adequate for this application.

13.4.3.5 SPC: Statistical Process Control

SPC uses control charts to monitor process stability and capability, distinguishing between common cause variation (inherent to the process) and special cause variation (assignable causes requiring investigation).

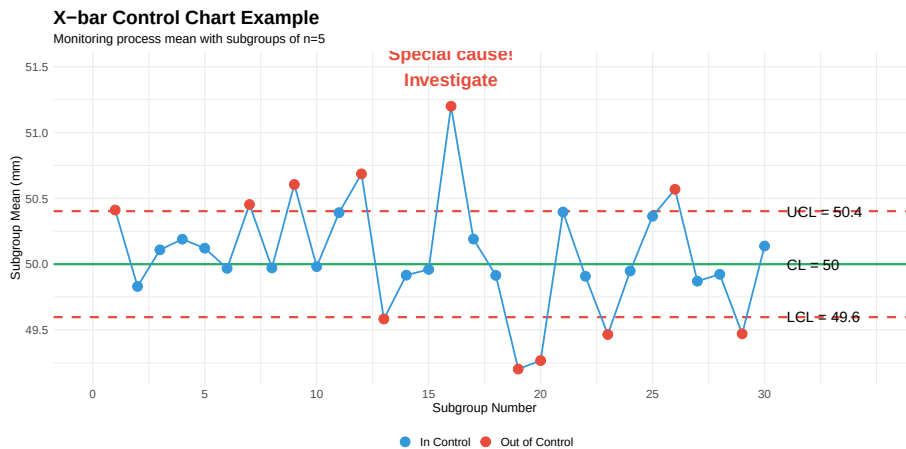

Common Control Chart Types:

Chart	Data Type	Monitors	When to Use
X-bar & R	Variable, subgroups	Mean and range	Most common; subgroups of 2-10
X-bar & S	Variable, subgroups	Mean and std dev	Subgroups > 10
I-MR	Variable, individuals	Individual values and moving range	Slow processes, destructive testing
p-chart	Attribute	Proportion defective	Variable sample sizes
np-chart	Attribute	Number defective	Fixed sample sizes
c-chart	Attribute	Count of defects	Fixed opportunity area
u-chart	Attribute	Defects per unit	Variable opportunity area

Process Capability Indices:

$$C_p = \frac{USL - LSL}{6\sigma}$$

$$C_{pk} = \min \left(\frac{USL - \bar{x}}{3\sigma}, \frac{\bar{x} - LSL}{3\sigma} \right)$$

Cpk Value	Interpretation	PPM Defective
< 1.00	Not capable	> 2,700
1.00 - 1.33	Marginally capable	64 - 2,700
1.33 - 1.67	Capable	0.6 - 64
1.67	Highly capable (IATF requirement)	< 0.6

Example: SPC for Injection Molded Connector

A supplier monitors critical dimensions on an injection molded electrical connector:

Process Setup: - Critical dimension: Pin spacing = 2.54 ± 0.08 mm - Sample 5 parts every 30 minutes - X-bar and R charts maintained at the press

Results over one shift: - Process mean (X-double-bar) = 2.539 mm - Average range (R-bar) = 0.024 mm - Estimated $\sigma = R\text{-bar} / d_2 = 0.024 / 2.326 = 0.0103$ mm

Capability: - $C_p = (2.62 - 2.46) / (6 \times 0.0103) = 2.59$ - $C_{pk} = \min[(2.62 - 2.539)/(3 \times 0.0103), (2.539 - 2.46)/(3 \times 0.0103)] = \min[2.62, 2.56] = \mathbf{2.56}$

Conclusion: $C_{pk} = 2.56$ exceeds IATF requirement of 1.67. Process is highly capable.

13.4.4 AS9100D (Aerospace/Defense)

AS9100D adds aerospace-specific requirements to ISO 9001:

Table 13.6: AS9100D Key Additional Requirements

Area	Requirement
Configuration Management	Control product configuration throughout lifecycle; change management
First Article Inspection	FAI per AS9102; documented verification of first production parts
Counterfeit Parts Prevention	Controls to prevent counterfeit parts entering supply chain
Special Processes	NADCAP accreditation for special processes (welding, heat treat, etc.)
Product Safety	Product safety requirements; reporting of unsafe conditions
Risk Management	Explicit risk management process (often using AS/NZS 4360 or similar)
Human Factors	Consideration of human factors in process design

13.4.5 ISO 22000:2018 (Food Safety)

ISO 22000 integrates quality management with **HACCP** (Hazard Analysis Critical Control Points):


Table 13.7: ISO 22000 Food Safety Management

Element	Description
Prerequisite Programs (PRPs)	Basic hygiene conditions: cleaning, pest control, personnel hygiene, facility c
Operational PRPs (OPRPs)	PRPs essential to control specific identified hazards
HACCP Plan	Critical Control Points (CCPs) for significant hazards; critical limits; monito
Traceability	One-step-back, one-step-forward traceability; recall procedures
Emergency Preparedness	Procedures for food safety emergencies; recall/withdrawal
Validation and Verification	Validate control measures; verify HACCP plan effectiveness

13.5 Documentation Requirements

A QMS requires documented information to ensure consistency, provide evi-
dence, and enable improvement.

13.5.1 Documentation Hierarchy

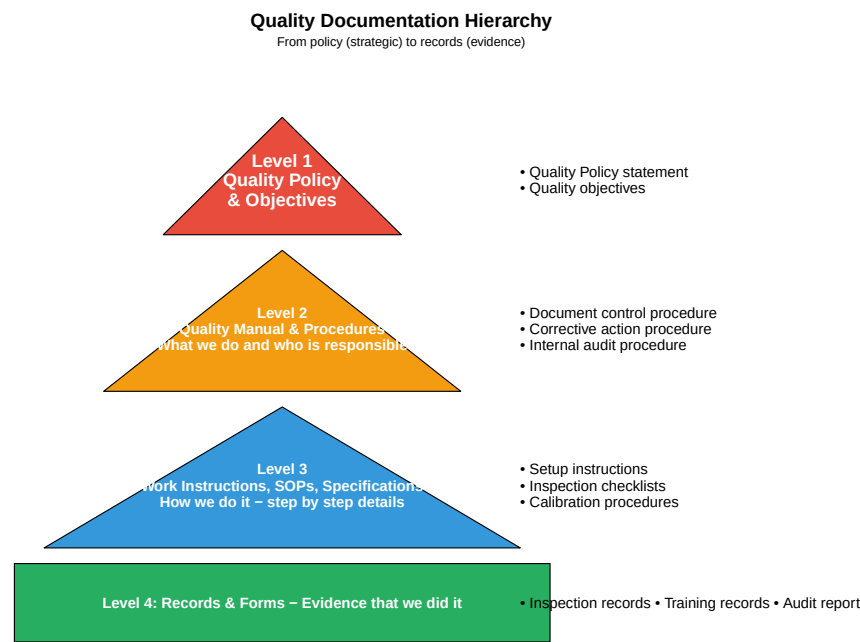

13.5.2 Document Control Requirements

Table 13.8: Document Control Requirements (ISO 9001 Clause

Requirement	Description	Implement
Approval	Documents reviewed and approved for adequacy before issue	Approval
Review & Update	Reviewed, updated as necessary, and re-approved	Periodic
Identification	Identified with title, date, revision, author	Document
Availability	Relevant versions available at points of use	Control
Protection	Protected from loss, damage, unauthorized changes	Backup
Obsolete Control	Obsolete documents identified and prevented from unintended use	Stamp
External Documents	External documents identified and distribution controlled	List of
Record Retention	Records retained for specified periods; protected; retrievable	Retention

13.5.3 Documented Information Required by ISO 9001:2015


Table 13.9: Documented Information Required by ISO 9001:2015

Type	Clause	Requirement
Documents (shall be maintained)		
Documents (shall be maintained)	4.3	Scope of the QMS
Documents (shall be maintained)	5.2	Quality policy
Documents (shall be maintained)	6.2	Quality objectives
Documents (shall be maintained)	7.1.5	Monitoring and measuring resources (calibration)
Documents (shall be maintained)	7.2	Evidence of competence
Documents (shall be maintained)	8.1	Evidence of conformity to processes
Documents (shall be maintained)	8.5.1	Controlled conditions for production
Records (shall be retained)		
Records (shall be retained)	7.1.5.1	Calibration/verification results
Records (shall be retained)	7.2	Training records
Records (shall be retained)	8.2.3.2	Results of review of requirements
Records (shall be retained)	8.3.3	Design and development inputs
Records (shall be retained)	8.3.4	Design and development controls
Records (shall be retained)	8.3.5	Design and development outputs
Records (shall be retained)	8.3.6	Design and development changes
Records (shall be retained)	8.5.2	Traceability requirements
Records (shall be retained)	8.6	Release of products/services
Records (shall be retained)	9.1.1	Results of monitoring and measurement

13.6 Internal Auditing

Internal audits are systematic, independent evaluations of the QMS to determine if it conforms to requirements and is effectively implemented.

13.6.1 The Audit Process

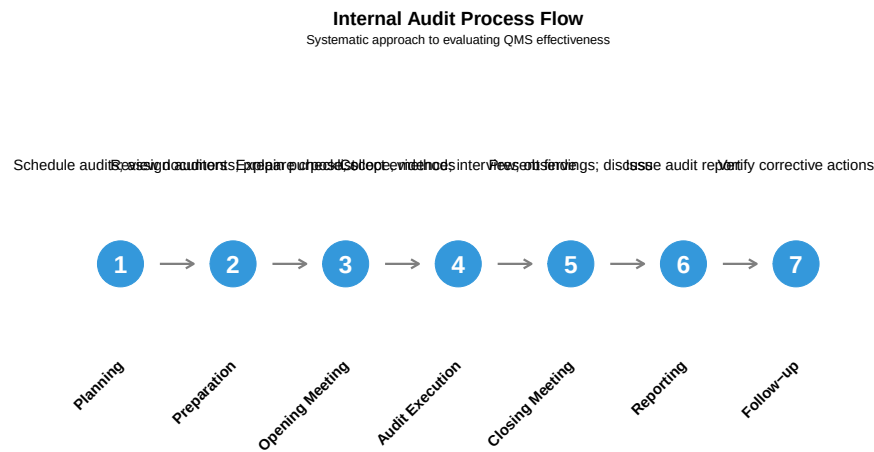

13.6.2 Audit Checklist Example

Table 13.10: Sample Audit Checklist: Clause 7.1.5 Monitoring and Resources

Clause	Requirement	Question
7.1.5	Monitoring and measuring resources suitable for the type of activities	How do you determine what me
7.1.5	Resources maintained to ensure continued fitness for purpose	What maintenance is performed
7.1.5	Documented information on fitness for purpose retained	Can you show me calibration re
7.1.5	Measuring equipment identified to determine status	How can I tell if this gauge is c
7.1.5.2	Measurement traceability when required	What standards are these gauge

13.6.3 Types of Audit Findings

Table

Finding Type	Definition
Major Nonconformity	Absence or total breakdown of a system; significant risk to product/customer
Minor Nonconformity	Single lapse or isolated incident; system exists but not fully effective
Observation	Weakness that could lead to nonconformity if not addressed
Opportunity for Improvement	Suggestion for enhancement; not a nonconformity

13.6.4 Auditor Competence


Table 13.12: Internal Auditor Competency Requirements

Competency	Description	How to Develop
Knowledge of Standards	Understanding of ISO 9001 and applicable industry standards	Training
Audit Techniques	Planning, interviewing, evidence collection, reporting	Audit experience
Industry Knowledge	Understanding of processes, products, and industry practices	Work experience
Communication Skills	Active listening, clear questioning, professional writing	Practice
Objectivity	Independence from area being audited; impartial	Audit experience
Professional Judgment	Ability to evaluate significance of findings	Experience

13.7 Corrective and Preventive Action (CAPA)

Corrective action eliminates the cause of a detected nonconformity to prevent recurrence. **Preventive action** eliminates the cause of a potential nonconformity to prevent occurrence.

13.7.1 The CAPA Process

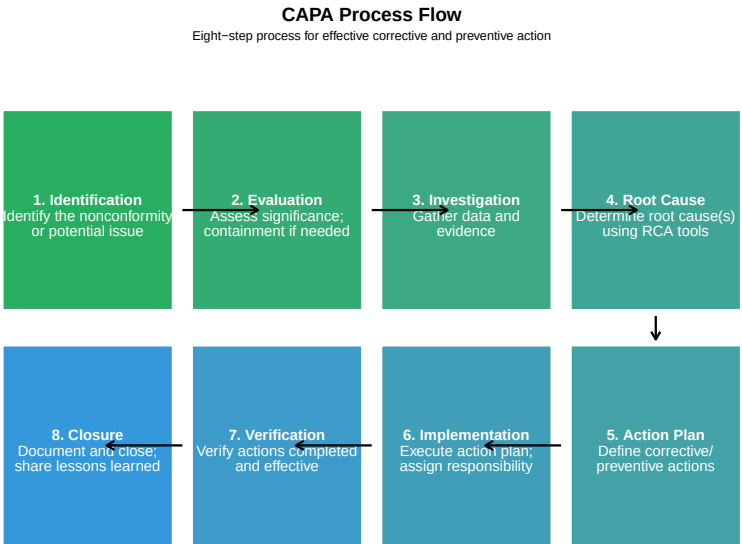

13.7.1.1 Step 1: Identification

The CAPA process begins when a nonconformity or potential problem is identified. Sources include:

Table 13.13: Common CAPA Initiation Sources

Source	Description	Priority
Customer Complaints	Product returns, warranty claims, customer feedback	High
Internal Audits	Nonconformities found during scheduled internal audits	Medium
Process Monitoring	SPC out-of-control conditions, trend analysis	Medium
Inspection/Testing	Failed inspections, test failures, rejected lots	High
Supplier Issues	Incoming inspection failures, supplier audit findings	Medium
Employee Reports	Near-misses, safety concerns, improvement suggestions	Low-Medium
Management Review	Issues identified during management review meetings	Medium
External Audits	Findings from certification body or customer audits	High

13.7.1.2 Step 2: Evaluation

Evaluate the significance of the issue to determine the appropriate response level:

Evaluation Criteria:

Factor	Questions to Consider
Safety	Could this harm people or the environment?
Customer Impact	How many customers affected? Severity of impact?
Regulatory	Does this violate regulations or standards?
Financial	What is the cost of the problem? Potential liability?
Frequency	Is this a one-time event or recurring pattern?
Detection	How was it found? Could others exist undetected?

Containment Actions - Immediate actions to limit the impact while the investigation proceeds:

- Quarantine suspect product
- Sort and inspect inventory
- Notify affected customers
- Implement temporary controls
- Stop shipments if necessary

Example: Evaluation of Dimensional Nonconformity

A batch of machined shafts is found with diameter 0.02 mm oversize:

- **Safety:** Low - not a safety-critical dimension
- **Customer Impact:** Medium - may cause assembly issues
- **Regulatory:** None
- **Financial:** 500 parts $\times$ \$15/part = \$7,500 potential scrap
- **Containment:** Quarantine batch, 100% inspection of last 3 lots, notify customer

Decision: Proceed with formal CAPA (cost exceeds \$5,000 threshold)

13.7.1.3 Step 3: Investigation

Gather all relevant data and evidence to understand what happened:

Investigation Activities:

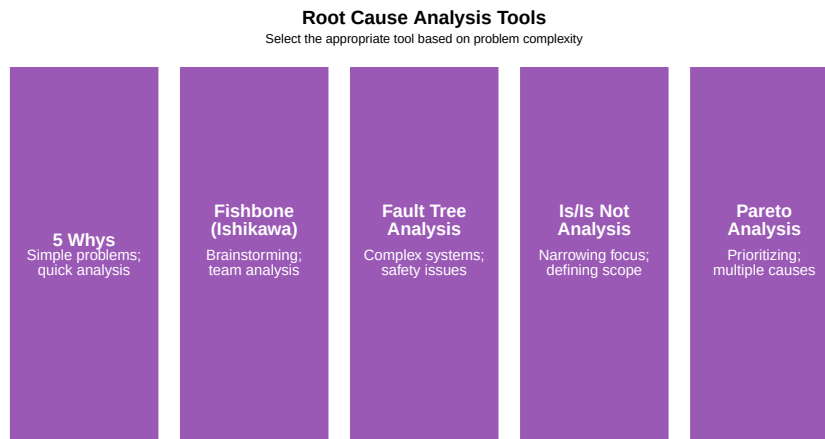
- **Review documentation:** Work instructions, control plans, inspection records
- **Examine physical evidence:** Failed parts, raw materials, tooling
- **Interview personnel:** Operators, inspectors, supervisors
- **Analyze data:** SPC charts, measurement data, process parameters
- **Timeline reconstruction:** When did the problem start? What changed?

Table 13.14: Data Collection for CAPA Investigation

Data Type	Examples	Collection Method
Process Data	Temperatures, pressures, speeds, feeds, cycle times	Data historians, SPC
Material Data	Lot numbers, certificates, incoming inspection results	Traceability system,
Equipment Data	Maintenance records, calibration status, tool wear	CMMS, calibration
Personnel Data	Training records, shift assignments, experience level	HR system, training
Environmental Data	Temperature, humidity, contamination levels	Environmental moni

13.7.1.4 Step 4: Root Cause Analysis

Determine the fundamental cause(s) of the problem using structured analysis tools:

**The 5 Whys Example:**

Level	Question	Answer
Problem	Shaft diameter is oversize	-
Why 1?	Why is the diameter oversize?	Tool is worn
Why 2?	Why is the tool worn?	Tool wasn't changed at scheduled interval
Why 3?	Why wasn't it changed?	Operator didn't know it was due
Why 4?	Why didn't operator know?	Tool life counter was reset incorrectly
Why 5?	Why was it reset incorrectly?	No verification step in setup procedure
Root Cause	Setup procedure lacks tool counter verification step	

The 6M Categories (Fishbone Diagram):

- **Man** (People): Training, skills, fatigue, attention
- **Machine**: Equipment condition, capability, maintenance
- **Material**: Raw material quality, specifications, storage
- **Method**: Procedures, work instructions, standards
- **Measurement**: Gages, calibration, measurement technique
- **Mother Nature** (Environment): Temperature, humidity, contamination

13.7.1.5 Step 5: Action Plan

Define specific corrective and/or preventive actions to address the root cause:

Table 13.15: Types of CAPA Actions

Action_Type	Definition	Example
Correction	Fix the immediate problem (symptom treatment)	Rework or scrap the nonconforming product
Corrective Action	Eliminate the root cause to prevent recurrence	Revise setup procedure to prevent recurrence
Preventive Action	Eliminate potential causes before problems occur	Add tool counter verification step

SMART Action Planning:

- **Specific:** Clearly defined action (not vague)
- **Measurable:** Can verify completion and effectiveness
- **Assignable:** Single owner responsible
- **Realistic:** Achievable with available resources
- **Time-bound:** Due date specified

Example: SMART Corrective Action

Poor: “Improve the setup procedure”

SMART: “Quality Engineer (J. Smith) will revise Work Instruction WI-2345 to add Step 4.7: ‘Verify tool life counter matches Tool Setup Sheet before starting production. Record counter reading on Setup Checklist Form F-102.’ Revision to be completed by April 15, training completed by April 22.”

13.7.1.6 Step 6: Implementation

Execute the action plan with clear ownership and tracking:

Implementation Requirements:

- Assign responsible person for each action
- Provide necessary resources (time, budget, authority)
- Communicate changes to affected personnel
- Update documentation (procedures, work instructions, forms)
- Train personnel on new requirements
- Implement changes in a controlled manner

Change Control Considerations:

Change Type	Approval Required	Documentation
Document revision	Document owner, Quality	Revision history, training records
Process change	Process owner, Engineering, Quality	Change request, validation if needed
Equipment change	Maintenance, Engineering, Quality	Equipment qualification, capability study

Change Type	Approval Required	Documentation
Product change	Engineering, Quality, Customer (if required)	ECN, customer approval, PPAP if applicable

13.7.1.7 Step 7: Verification

Verify that actions were completed AND effective:

Completion Verification: - Was the action actually implemented? - Is documentation updated and approved? - Are personnel trained? - Is the change being followed?

Effectiveness Verification: - Has the problem stopped recurring? - Do metrics show improvement? - Are there any unintended consequences?

Table 13.16: CAPA Effectiveness Verification Methods

Method	Description	When_to_U
Monitoring Period	Track for recurrence over defined period (e.g., 90 days, 3 production runs)	All CAPAs -
Statistical Analysis	Compare defect rates before/after; statistical significance testing	When baseli
Audit Verification	Include in next internal audit; verify implementation	Process/doc
Customer Feedback	Monitor complaints related to this issue	Customer-re
Process Capability	Cpk study to confirm process improvement	Manufacturi

13.7.1.8 Step 8: Closure

Complete documentation and share lessons learned:

Closure Requirements:

- All actions verified complete
- Effectiveness confirmed (no recurrence)
- Documentation updated and approved
- CAPA record completed with all evidence
- Management approval for closure

Lessons Learned:

- What was the root cause?
- Could this happen elsewhere? (Horizontal deployment)
- Should procedures/training be updated system-wide?
- Are there similar products/processes at risk?
- What can we do to prevent similar issues?

Example: Horizontal Deployment

The shaft diameter CAPA revealed that setup procedures lacked tool counter verification.

Horizontal deployment: Quality reviewed ALL 47 CNC machine setup procedures and found 12 others with the same gap. All procedures were revised, and the finding was shared at the monthly quality meeting as a lesson learned.

13.7.2 CAPA Effectiveness Criteria

```
# CAPA Effectiveness Tracking
set.seed(42)

# Simulate CAPA data for a year
months <- c("Jan", "Feb", "Mar", "Apr", "May", "Jun",
            "Jul", "Aug", "Sep", "Oct", "Nov", "Dec")

capa_data <- data.frame(
  Month = factor(months, levels = months),
  Total_CAPAs = c(12, 15, 18, 14, 11, 13, 10, 9, 8, 7, 9, 6),
  Closed_On_Time = c(8, 10, 12, 11, 9, 11, 9, 8, 7, 6, 8, 5),
  Effective = c(7, 9, 10, 10, 8, 10, 8, 8, 7, 6, 8, 5),
  Recurrence = c(2, 1, 3, 1, 0, 1, 0, 0, 1, 0, 0, 0)
)

# Calculate metrics
capa_data$On_Time_Rate <- round(capa_data$Closed_On_Time / capa_data$Total_CAPAs * 100)
capa_data$Effectiveness_Rate <- round(capa_data$Effective / capa_data$Closed_On_Time *
cat("CAPA Performance Metrics Summary:\n")

CAPA Performance Metrics Summary:

cat("
    \n")

cat("Total CAPAs initiated:", sum(capa_data$Total_CAPAs), "\n")


Total CAPAs initiated: 132
cat("Closed on time:", sum(capa_data$Closed_On_Time), "(",
    round(sum(capa_data$Closed_On_Time)/sum(capa_data$Total_CAPAs)*100, 1), "%)\n")

Closed on time: 104 ( 78.8 %)
cat("Verified effective:", sum(capa_data$Effective), "(",
    round(sum(capa_data$Effective)/sum(capa_data$Closed_On_Time)*100, 1), "%)\n")

Verified effective: 96 ( 92.3 %)
```

```
cat("Recurrences:", sum(capa_data$Recurrence), "\n")
```

Recurrences: 9

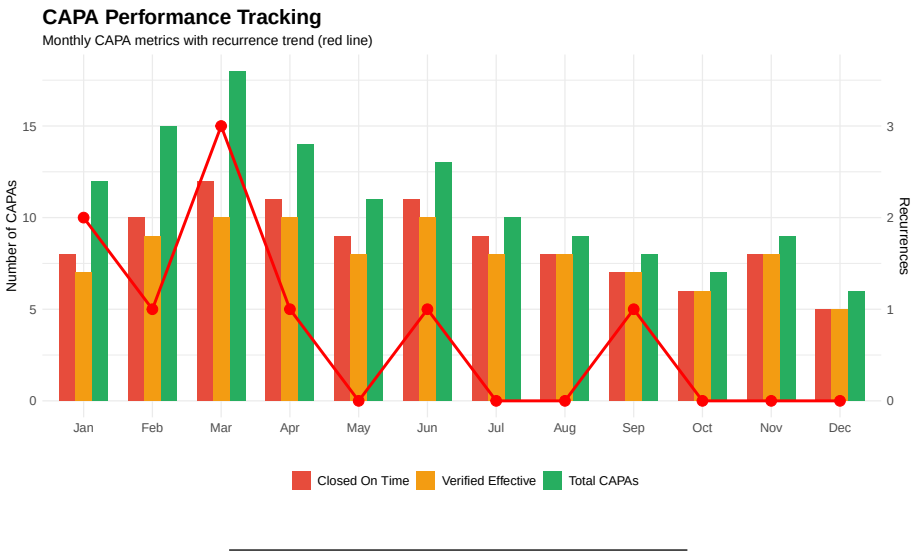

13.8 Management Review

Management review is a formal evaluation of the QMS by top management to ensure its continuing suitability, adequacy, and effectiveness.

13.8.1 Management Review Inputs

Table 13.17: Management Review

Required Input	Details to Review
Previous Review Actions	Status of actions from previous management reviews
Changes in Issues/Context	Changes in external/internal issues; interested party requirements
Quality Performance	Customer satisfaction; quality objectives achievement; process performance; nonconformities
Resource Adequacy	Adequacy of resources for QMS maintenance and improvement
Risk/Opportunity Actions	Effectiveness of actions taken to address risks and opportunities
Improvement Opportunities	Opportunities for improvement identified from various sources

13.8.2 Management Review Outputs

Table 13.18: Management Review Outputs

Required Output	ISO Requirement	Examples
Improvement Decisions	Decisions and actions related to improvement opportunities	Launch ka
QMS Changes	Any need for changes to the QMS	Revise con
Resource Needs	Any resource needs	Hire addit

13.8.3 Sample Management Review Dashboard



13.9 Continuous Improvement

Continuous improvement is a fundamental principle of quality management - the ongoing effort to improve products, services, and processes.

13.9.1 Improvement Methodologies

Table 13.19: Continuous Improvement Methodolog

Methodology	Origin	Best_For	Steps
PDCA	Deming/Shewhart	General improvement cycle; process changes	Plan-Do-Check-A
DMAIC	Six Sigma	Data-driven problem solving; reducing variation	Define-Measure-A
Kaizen	Toyota/Lean	Small, incremental improvements; team-based	Identify waste →
A3 Problem Solving	Toyota	Visual problem solving; root cause analysis	Background → C
8D	Ford	Customer complaints; complex problems	D0-D8 (Team, P

13.9.2 Key Performance Indicators (KPIs)

Table 13.20: Common Quality Management KPIs

Category	KPI	Formula	Ta
Quality Metrics			
Quality	First Pass Yield (FPY)	$(\text{Good units first time} / \text{Total units}) \times 100\%$	98
Quality	Customer Complaints (PPM)	$(\text{Complaints} / \text{Units shipped}) \times 1,000,000$	<1
Quality	Internal Reject Rate	$(\text{Rejected units} / \text{Total inspected}) \times 100\%$	<1
Quality	Cost of Quality	Prevention + Appraisal + Internal Failure + External Failure	<3
Delivery Metrics			
Delivery	On-Time Delivery (OTD)	$(\text{Orders delivered on time} / \text{Total orders}) \times 100\%$	98
Delivery	Lead Time	Order date to delivery date	Inc
Delivery	Order Fulfillment Rate	$(\text{Complete orders shipped} / \text{Total orders}) \times 100\%$	99
Cost Metrics			
Cost	Scrap Rate	$(\text{Scrap value} / \text{Total production value}) \times 100\%$	<2
Cost	Rework Cost	Labor + Material for rework	Mi
Cost	Warranty Cost	Warranty claims cost / Revenue	<0
Safety Metrics			
Safety	Recordable Incident Rate	$(\text{Recordable incidents} \times 200,000) / \text{Hours worked}$	<1
Safety	Near Miss Reports	Count of near miss reports	En

13.9.3 Cost of Quality (COQ)

```
# Cost of Quality Analysis
coq_data <- data.frame(
  Category = c("Prevention", "Appraisal", "Internal Failure", "External Failure"),
  Description = c("Quality planning, training, process control",
    "Inspection, testing, audits, calibration",
    "Scrap, rework, reinspection, downtime",
    "Warranty, returns, complaints, recalls"),
  Cost = c(50000, 75000, 120000, 180000)
)
```

```
total_coq <- sum(coq_data$Cost)
revenue <- 10000000 # $10M revenue

coq_data$Percent_of_COQ <- round(coq_data$Cost / total_coq * 100, 1)
coq_data$Percent_of_Revenue <- round(coq_data$Cost / revenue * 100, 2)

cat("Cost of Quality Analysis:\n")
```

Cost of Quality Analysis:

```
cat("          \n")
```

```
print(coq_data[, c("Category", "Cost", "Percent_of_COQ")])
```

	Category	Cost	Percent_of_COQ
1	Prevention	50000	11.8
2	Appraisal	75000	17.6
3	Internal Failure	120000	28.2
4	External Failure	180000	42.4

```
cat("          \n")
```

```
cat("Total Cost of Quality: $", format(total_coq, big.mark = ","), "\n")
```

Total Cost of Quality: \$ 425,000

```
cat("COQ as % of Revenue:", round(total_coq/revenue*100, 1), "%\n\n")
```

COQ as % of Revenue: 4.2 %

```
# Analysis
```

```
conformance <- coq_data$Cost[1] + coq_data$Cost[2]
```

```
nonconformance <- coq_data$Cost[3] + coq_data$Cost[4]
```

```
cat("Conformance Costs (Prevention + Appraisal): $", format(conformance, big.mark = ","),
    "(", round(conformance/total_coq*100, 1), "%)\n")
```

Conformance Costs (Prevention + Appraisal): \$ 125,000 (29.4 %)


```
cat("Nonconformance Costs (Failures): $", format(nonconformance, big.mark = ","),
    "(", round(nonconformance/total_coq*100, 1), "%)\n")
```

Nonconformance Costs (Failures): \$ 3e+05 (70.6 %)

```
cat("\nRecommendation: Increase prevention spending to reduce failure costs\n")
```


Recommendation: Increase prevention spending to reduce failure costs


Warning: Removed 1 row containing missing values or values outside the scale range (``geom_text()``).
Removed 1 row containing missing values or values outside the scale range (``geom_text()``).

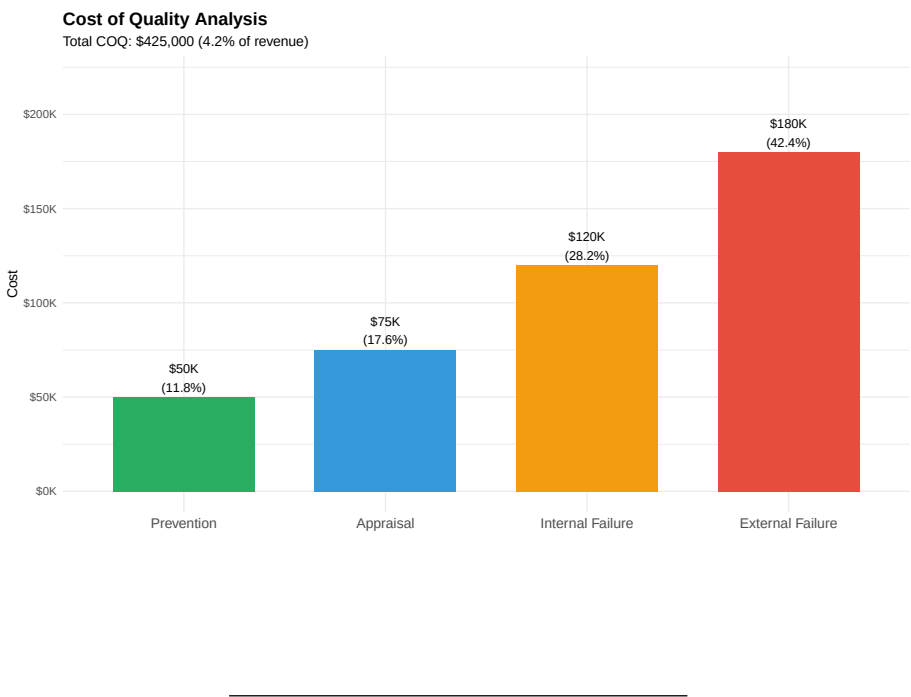

13.10 Integration with Quality Tools

A mature QMS integrates various quality tools throughout the organization.

13.10.1 Quality Tools Integration Map

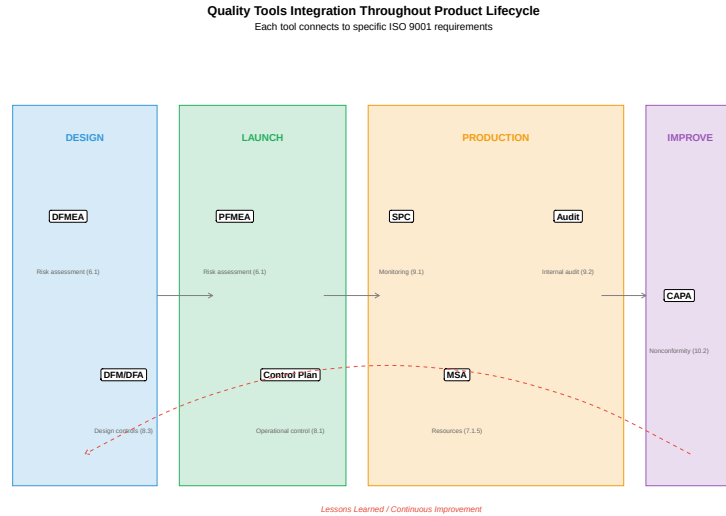

13.10.2 Linking Tools to QMS Requirements

Table 13.21: Quality Tools and QMS Integration

Quality Tool	ISO 9001 Clause	Purpose
PFMEA	6.1, 8.1	Identify and mitigate process risks before production
Control Plan	8.1, 8.5.1	Define controls for special characteristics
SPC	9.1.1	Monitor process performance; detect special causes
MSA	7.1.5	Ensure measurement system is adequate
Internal Audit	9.2	Verify QMS conformance and effectiveness
CAPA	10.2	Eliminate causes of nonconformities
Management Review	9.3	Evaluate QMS suitability and effectiveness


13.11 Certification Process

Organizations can seek **third-party certification** to demonstrate QMS conformance to customers and stakeholders.

13.11.1 The Certification Journey

Warning in geom_segment(aes(x = 1, xend = 8, y = 1, yend = 1), color = "gray70", : All

i Please consider using ``annotate()`` or provide this layer with data containing a single row.

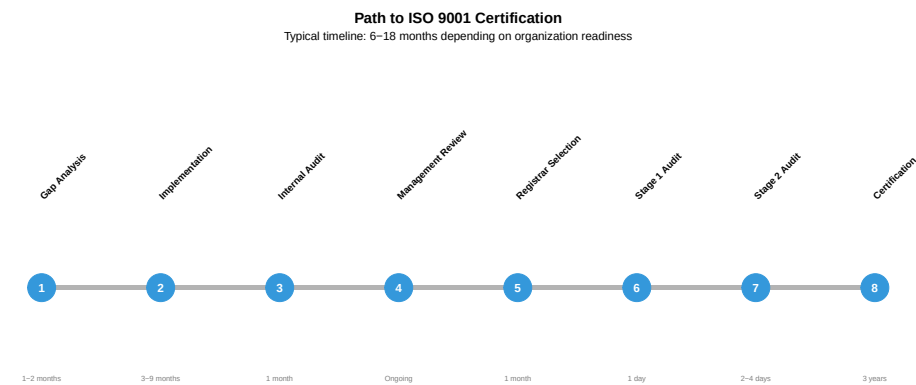

13.11.2 Certification Audit Types

Table 13.22: Third-Party Certification Audits

Audit Type	Purpose	Focus Areas
Stage 1 (Documentation)	Review QMS documentation; verify readiness for Stage 2	Quality manual, procedures
Stage 2 (Certification)	Evaluate implementation and effectiveness of QMS	All clauses; process effectiveness
Surveillance	Verify continued conformance (annual)	Selected processes; preparedness
Recertification	Full re-audit at end of 3-year cycle	Complete review similar to Stage 2

13.12 Video Resources

13.12.1 ISO 9001:2015 Overview

13.12.2 Internal Auditing Best Practices

13.13 Summary

A Quality Management System provides the framework for consistently meeting customer requirements and improving organizational performance:

- 1. **ISO 9001:2015** provides the foundational requirements using risk-based thinking and PDCA

2. **Industry standards** (IATF 16949, AS9100, ISO 22000) add sector-specific requirements
3. **Documentation** establishes the hierarchy from policy to procedures to records
4. **Internal audits** verify conformance and identify improvement opportunities
5. **CAPA** eliminates root causes of nonconformities and prevents recurrence
6. **Management review** ensures QMS suitability and drives strategic improvement
7. **Continuous improvement** is embedded through KPIs, COQ analysis, and improvement methodologies
8. **Quality tools** (PFMEA, SPC, MSA) integrate throughout the product lifecycle

“Quality is not an act, it is a habit.” — Aristotle

13.14 Review Questions

Question 1: Explain the seven quality management principles and how they relate to each other.

Answer:

The seven quality management principles form an interconnected foundation:

1. **Customer Focus** (Central principle)
 - Understanding and meeting customer needs is the primary purpose
 - All other principles support this goal
2. **Leadership**
 - Leaders establish unity of purpose and direction
 - Create conditions for people to achieve quality objectives
 - Enables all other principles
3. **Engagement of People**
 - Competent, empowered people at all levels
 - Essential for effective processes and customer focus
4. **Process Approach**
 - Activities managed as interrelated processes
 - Enables consistent, predictable results
5. **Improvement**
 - Ongoing focus on enhancing performance
 - Essential for maintaining customer satisfaction
6. **Evidence-based Decision Making**
 - Decisions based on analysis of data
 - Reduces uncertainty; improves decision quality
7. **Relationship Management**

- Managing relationships with interested parties (suppliers, partners)
- Optimizes their impact on performance

Relationships: - Customer Focus drives the need for all others - Leadership enables and supports all principles - Engagement of People is essential for Process Approach and Improvement - Evidence-based Decision Making supports Improvement - Relationship Management extends quality beyond the organization

Question 2: Compare ISO 9001, IATF 16949, and AS9100. When would each be required?

Answer:

Standard	Base	Industry	Additional Focus
ISO 9001:2015	Standalone	General	Quality fundamentals
IATF 16949:2016	ISO 9001 + auto-motive	Automotive	PPAP, APQP, Core Tools
AS9100D	ISO 9001 + aerospace	Aerospace/Defense	Configuration mgmt, FAI, counterfeit prevention

When Required:

ISO 9001: - Any organization wanting to demonstrate quality capability - Customer or contract requirement for QMS certification - Basis for all other standards - Suitable for service, manufacturing, any industry

IATF 16949: - Suppliers to automotive OEMs (Ford, GM, Toyota, VW, etc.) - Required for production parts/materials - Required throughout automotive supply chain - Includes Customer-Specific Requirements (CSRs)

AS9100: - Suppliers to aerospace/defense contractors - Boeing, Airbus, Lockheed Martin, military programs - Required for flight-critical components - OASIS database registration required

Key Differences: - IATF 16949: Emphasizes PPAP, APQP, manufacturing process control - AS9100: Emphasizes traceability, configuration control, first article inspection - Both build on ISO 9001 with sector-specific additions

Question 3: Describe the documentation hierarchy in a QMS. Give an example of each level.

Answer:

Level 1: Quality Policy and Objectives - Strategic direction for quality - Signed by top management - Communicated to all employees - *Example:* "ABC

Company is committed to delivering defect-free products that meet customer requirements through continuous improvement of our processes and people.”

Level 2: Quality Manual and Procedures - Describes WHAT is done and WHO is responsible - System-level documents - *Example:* Document Control Procedure (QP-001) - Purpose: Control creation, approval, distribution of documents - Scope: All QMS documents - Responsibilities: Document Control Coordinator, Department Managers - Process flow for document changes

Level 3: Work Instructions and Specifications - Describes HOW tasks are performed - Detailed step-by-step instructions - *Example:* Work Instruction for CNC Lathe Setup (WI-MAC-015) - Step 1: Verify program number matches work order - Step 2: Install correct tooling per setup sheet - Step 3: Set tool offsets using touch-off procedure - Step 4: Run first piece and verify dimensions

Level 4: Records and Forms - Evidence that activities were performed - Completed forms, inspection results, logs - *Example:* First Article Inspection Report (FM-QC-008) - Part number, revision, date - Dimensional measurements vs. specifications - Inspector signature - Disposition (Accept/Reject)

Question 4: What are the key elements of an effective internal audit program?

Answer:

1. Audit Program Planning - Annual audit schedule covering all QMS processes - Risk-based frequency (higher risk = more frequent) - Documented audit program procedure - Resource allocation (trained auditors, time)

2. Auditor Competence - Trained in audit techniques - Knowledge of standards (ISO 9001, industry-specific) - Understanding of processes being audited - Independence from area being audited

3. Audit Preparation - Review of relevant documents (procedures, previous audits) - Prepared checklist linked to requirements - Notification to auditee - Defined scope and objectives

4. Audit Execution - Opening meeting (purpose, scope, schedule) - Evidence collection (documents, records, interviews, observation) - Objective evaluation against criteria - Note taking and evidence documentation

5. Reporting - Clear finding statements (nonconformities, observations) - Reference to requirement violated - Objective evidence cited - Closing meeting to present findings

6. Follow-up - Corrective action requests issued - Root cause analysis required - Verification of corrective action implementation - Verification of effectiveness

7. Continuous Improvement of Audit Program - Evaluate audit program effectiveness - Update based on organizational changes - Calibrate auditors periodically - Incorporate lessons learned

Question 5: Explain the difference between corrective action and preventive action. Provide an example of each.

Answer:

Corrective Action: - Eliminates the cause of a *detected* nonconformity - Reactive - responds to something that has already happened - Goal: Prevent recurrence of the specific problem

Example: - **Nonconformity:** Customer received shipment with wrong part numbers (3 incidents in past month) - **Root Cause:** Shipping labels printed from outdated part number list - **Corrective Action:** 1. Update master part number list 2. Link shipping system directly to ERP for current data 3. Add verification step comparing label to packing list - **Verification:** No recurrence after 3 months

Preventive Action: - Eliminates the cause of a *potential* nonconformity - Proactive - addresses something that hasn't happened yet - Goal: Prevent occurrence before it happens

Example: - **Potential Nonconformity:** New CNC machine may produce out-of-spec parts due to operator unfamiliarity - **Risk Identified Through:** PFMEA analysis during new equipment installation - **Preventive Action:** 1. Develop comprehensive training program before machine goes live 2. Create detailed setup procedures with photos 3. Implement first-article inspection for first 30 days 4. Assign experienced mentor to new operators - **Verification:** Track first-pass yield during initial production period

Key Difference: - Corrective = Fix what went wrong - Preventive = Stop what might go wrong

Note: ISO 9001:2015 doesn't explicitly require "preventive action" as a separate process. Instead, risk-based thinking throughout the QMS serves the preventive function.

Question 6: Calculate and analyze the Cost of Quality for the following data. What recommendations would you make?

Category	Cost
Quality planning	\$35,000
Training	\$25,000
Incoming inspection	\$40,000
In-process inspection	\$55,000
Final inspection	\$30,000
Scrap	\$85,000
Rework	\$65,000
Warranty claims	\$120,000
Customer returns	\$45,000

Annual revenue: \$8,000,000

Answer:

```
# Cost of Quality Analysis
prevention <- 35000 + 25000 # Planning + Training
appraisal <- 40000 + 55000 + 30000 # Inspections
internal_failure <- 85000 + 65000 # Scrap + Rework
external_failure <- 120000 + 45000 # Warranty + Returns

total_coq <- prevention + appraisal + internal_failure + external_failure
revenue <- 8000000

cat("Cost of Quality Breakdown:\n")
```

Cost of Quality Breakdown:

```
cat("          \n")
```

```
cat("Prevention:      $", format(prevention, big.mark = ","),
    "(", round(prevention/total_coq*100, 1), "%)\n")
```

Prevention: \$ 60,000 (12 %)

```
cat("Appraisal:      $", format(appraisal, big.mark = ","),
    "(", round(appraisal/total_coq*100, 1), "%)\n")
```

Appraisal: \$ 125,000 (25 %)

```
cat("Internal Failure: $", format(internal_failure, big.mark = ","),
    "(", round(internal_failure/total_coq*100, 1), "%)\n")
```

Internal Failure: \$ 150,000 (30 %)

```
cat("External Failure: $", format(external_failure, big.mark = ","),
    "(", round(external_failure/total_coq*100, 1), "%)\n")
```

External Failure: \$ 165,000 (33 %)

```
cat("          \n")
```

```
cat("Total COQ:      $", format(total_coq, big.mark = ","), "\n")
```

Total COQ: \$ 5e+05

```
cat("COQ % of Revenue:", round(total_coq/revenue*100, 1), "%\n\n")
```

COQ % of Revenue: 6.2 %


```
conformance <- prevention + appraisal
nonconformance <- internal_failure + external_failure

cat("Conformance Costs:    $", format(conformance, big.mark = ","),
    "(", round(conformance/total_coq*100, 1), "%)\n")
```

Conformance Costs: \$ 185,000 (37 %)

```
cat("Nonconformance Costs: $", format(nonconformance, big.mark = ","),
    "(", round(nonconformance/total_coq*100, 1), "%)\n")
```

Nonconformance Costs: \$ 315,000 (63 %)

Analysis: - COQ at 7.5% of revenue is HIGH (target <3%) - External failure costs are the largest category (27.5%) - Nonconformance costs (60.8%) greatly exceed conformance (39.2%) - Prevention is only 10% of COQ - very low

Recommendations: 1. **Increase Prevention Investment:** - Implement SPC on critical processes to reduce defects - Enhance operator training on quality standards - Apply PFMEA to identify and control failure modes

2. **Reduce External Failures:**

- Analyze warranty data for root causes
- Improve final inspection effectiveness
- Implement containment for known issues

3. **Optimize Appraisal:**

- Use SPC to reduce inspection where processes are capable
- Implement risk-based inspection (more for critical, less for proven)

4. **Target COQ Reduction:**

- Short-term: Reduce external failures by 50% (\$82,500 savings)
- Medium-term: Reduce internal failures by 30% (\$45,000 savings)
- Long-term: Achieve COQ <3% of revenue (\$240,000)

Question 7: What is risk-based thinking in ISO 9001:2015? How is it different from formal risk management?

Answer:

Risk-Based Thinking in ISO 9001:2015:

Risk-based thinking is a way of considering risks and opportunities when designing, implementing, and operating the QMS. It:

- Applies throughout the standard (not a separate clause)
- Is proportional to potential impact on conformity
- Makes preventive action part of routine planning
- Considers both risks (negative) and opportunities (positive)

Where Risk-Based Thinking Applies:

Clause	Application
4.1 Context	Identify external/internal issues affecting QMS
4.2 Interested Parties	Understand requirements that could impact quality
6.1 Planning	Plan actions to address risks and opportunities
8.1 Operations	Consider risks in operational planning
9.1 Performance	Monitor effectiveness of risk actions
10.2 Corrective Action	Update risks/opportunities based on nonconformities

How It Differs from Formal Risk Management:

Aspect	Risk-Based Thinking	Formal Risk Management
Requirement	Implicit throughout ISO 9001	Explicit (ISO 31000)
Documentation	No formal risk register required	Documented risk register
Methodology	No specific method required	Defined methodology (FMEA, etc.)
Quantification	Not required	Often quantitative
Scope	QMS processes	Enterprise-wide

Practical Implementation:

Organizations should: 1. Consider risks when designing processes 2. Build controls proportional to risk level 3. Monitor and review effectiveness 4. Update as context changes

ISO 9001 does NOT require: - Formal risk management process - Risk register - Specific risk assessment methodology - Documented risk assessments (unless organization decides to)

However, many organizations do use tools like PFMEA to fulfill risk-based thinking requirements, especially in automotive (IATF 16949 requires it).

Question 8: Describe what management review is and what should be included in the inputs and outputs.

Answer:

What is Management Review?

Management review is a formal, periodic evaluation of the QMS by top management to: - Ensure continuing suitability (appropriate for the organization) - Ensure adequacy (sufficient to meet requirements) - Ensure effectiveness (achieving

intended results) - Ensure alignment with strategic direction - Identify improvement opportunities

Frequency: At least annually; many organizations conduct quarterly reviews

Required Inputs (ISO 9001 Clause 9.3.2):

Input	What to Review
Status of previous actions	Actions from prior reviews - completed? effective?
Changes in external/internal issues	Market changes, regulations, technology, organizational changes
QMS performance and effectiveness	Customer satisfaction, quality objectives, process performance, nonconformities, audit results, supplier performance
Resource adequacy	People, infrastructure, environment, knowledge
Effectiveness of risk actions	Did actions address risks/opportunities?
Improvement opportunities	Suggestions, benchmarking, new technologies

Required Outputs (ISO 9001 Clause 9.3.3):

Output	Examples
Improvement decisions	Launch specific improvement projects, address recurring issues
QMS changes	Revise quality objectives, update processes, modify documentation
Resource needs	Budget approvals, hiring, equipment purchases, training

Best Practices: - Use a standard agenda aligned with required inputs - Prepare data in advance (dashboards, trend charts) - Document decisions and action items with owners and due dates - Follow up on action completion - Keep minutes as quality records

Evidence Required: - Meeting minutes or management review report - Attendance record (top management participation) - Action items with status tracking - Data/reports presented

13.15 References

1. ISO 9001:2015. *Quality Management Systems - Requirements*. International Organization for Standardization.
2. ISO 9000:2015. *Quality Management Systems - Fundamentals and Vocabulary*. International Organization for Standardization.
3. IATF 16949:2016. *Quality Management System Requirements for Automotive Production and Relevant Service Parts Organizations*. International Automotive Task Force.
4. AS9100D:2016. *Quality Management Systems - Requirements for Aviation, Space and Defense Organizations*. SAE International.
5. ISO 22000:2018. *Food Safety Management Systems - Requirements for Any Organization in the Food Chain*. International Organization for Standardization.
6. ISO 19011:2018. *Guidelines for Auditing Management Systems*. International Organization for Standardization.
7. Hoyle, D. (2017). *ISO 9000 Quality Systems Handbook* (7th ed.). Routledge.
8. AIAG. (2010). *Advanced Product Quality Planning and Control Plan (APQP)* (2nd ed.). Automotive Industry Action Group.
9. ASQ. (2019). *The Certified Quality Auditor Handbook* (4th ed.). ASQ Quality Press.
10. Juran, J.M., & De Feo, J.A. (2010). *Juran's Quality Handbook* (6th ed.). McGraw-Hill.

Chapter 14

Process Failure Mode and Effects Analysis (PFMEA)

14.1 Learning Objectives

By the end of this chapter, you will be able to:

- Explain the purpose and benefits of PFMEA in manufacturing
- Distinguish between DFMEA (Design) and PFMEA (Process)
- Apply the 10-step PFMEA methodology to a manufacturing process
- Correctly rate Severity, Occurrence, and Detection using standardized scales
- Calculate Risk Priority Numbers (RPN) and prioritize actions
- Develop recommended actions to reduce process risks
- Create and maintain PFMEA documentation as a living document

“An ounce of prevention is worth a pound of cure.” — Benjamin Franklin

14.2 Introduction to PFMEA

14.2.1 What is PFMEA?

Process Failure Mode and Effects Analysis (PFMEA) is a systematic, proactive method for evaluating a manufacturing or business process to identify where and how it might fail, and to assess the relative impact of different failures.

The goal is to identify and prioritize actions that will prevent defects before they occur.

Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use `linewidth` instead.

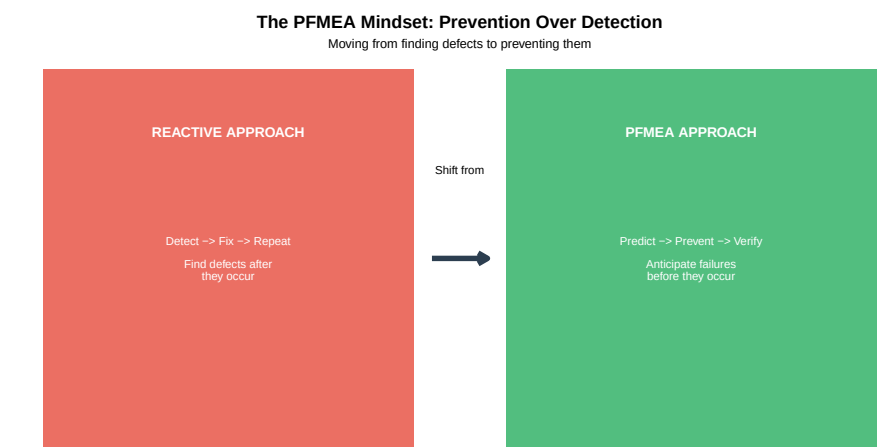


Figure 14.1: PFMEA: A Proactive Quality Tool

14.2.2 Brief History of FMEA

Table 14.1: Evolution of FMEA

Year	Development	Significance
1949	US Military develops FMEA (MIL-P-1629)	First formal FMEA methodology
1960s	NASA adopts FMEA for Apollo program	Proven reliability in life-critical systems
1970s	Automotive industry begins using FMEA	Ford, GM, Chrysler adopt FMEA
1980s	AIAG publishes first FMEA manual	Industry-wide consistency
1990s	QS-9000 requires FMEA for automotive suppliers	FMEA becomes mandatory
2000s	FMEA expands to healthcare, service industries	Methodology proves universal
2019	AIAG-VDA FMEA Handbook published (current standard)	Harmonized global standard

14.2.3 DFMEA vs. PFMEA

Two main types of FMEA are used in product development:

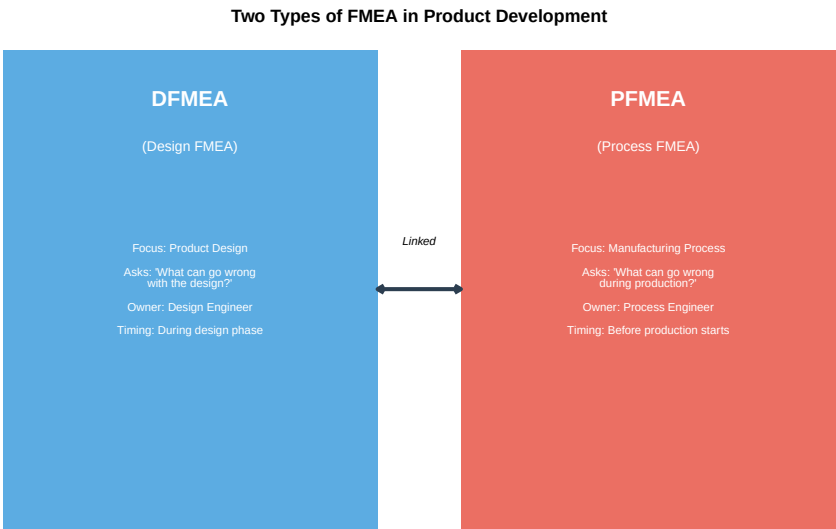


Figure 14.2: DFMEA vs PFMEA: Different Focus, Same Methodology

Table 14.2: DFMEA vs PFMEA Comparison

Aspect	DFMEA (Design)	PFMEA (Process)
Primary Question	Will the design meet requirements?	Will the process produce conforming parts?
Failure Mode Example	Shaft diameter too small	Shaft turned undersize
Effect Example	Premature bearing failure	Part fails incoming inspection
Cause Example	Inadequate stress analysis	Tool wear not monitored
Control Example	FEA simulation, prototype testing	In-process gauging, SPC
Responsible Team	Design engineering, R&D	Manufacturing, quality, production

Question: When should PFMEA be conducted?

Ideal Timing for PFMEA:

- New Process Development:** Before production begins, during process design
- New Product Introduction:** When a new product will use existing processes
- Process Changes:** Whenever significant changes are made to equipment, methods, or materials
- Quality Issues:** When field failures or customer complaints indicate process problems
- Regular Review:** Periodically (annually) to ensure continued relevance

Key Principle: The earlier PFMEA is conducted, the lower the cost of implementing improvements. Changes during design cost 10x less than changes during production, and 100x less than changes after customer delivery.

14.2.4 Why PFMEA Matters

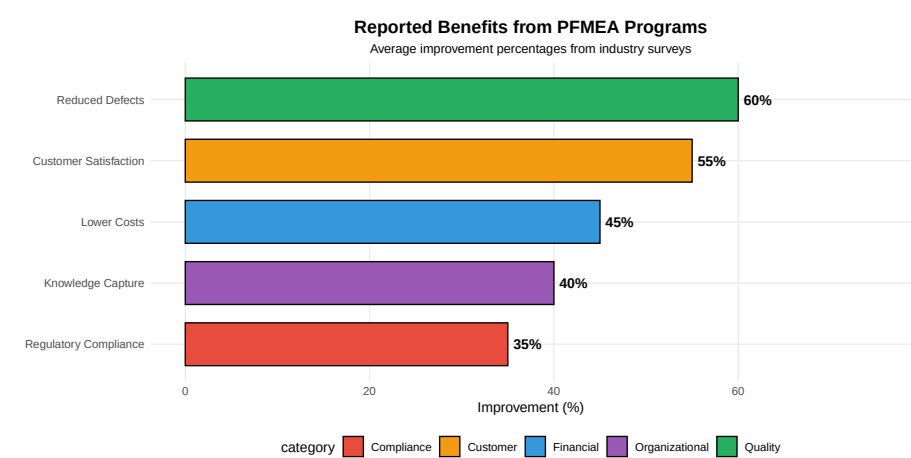


Figure 14.3: Benefits of PFMEA Implementation

14.3 PFMEA Fundamentals

14.3.1 Core Objectives

The fundamental objective of PFMEA is **prevention over detection** — identifying and eliminating potential failures before they occur, rather than finding defects after production.

Table 14.3: Core Objectives of PFMEA

Objective	Description	Outcom
Identify Failure Modes	Systematically identify all ways the process can fail	Comprel
Assess Risk	Evaluate severity, likelihood, and detectability of each failure	Quantifi
Prioritize Actions	Focus resources on highest-risk failure modes	Action p
Document Knowledge	Capture institutional knowledge in a structured format	Living d

Drive Improvement	Implement and verify effectiveness of countermeasures	Measurable reduction
------------------------------	---	----------------------

14.3.2 The PFMEA Team

PFMEA is most effective when conducted by a **cross-functional team**. No single person has all the knowledge needed to identify every potential failure.

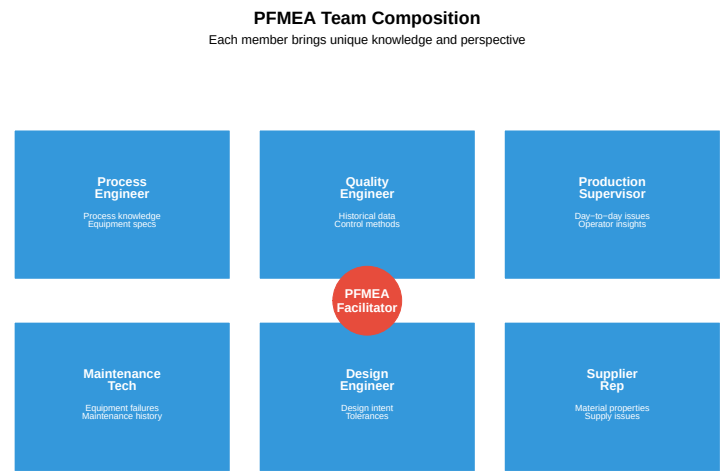


Figure 14.4: PFMEA Cross-Functional Team

Question: Why is a cross-functional team essential?

A cross-functional team is essential because:

1. **Diverse Knowledge:** No single person understands all aspects of the process
2. **Different Perspectives:** Quality sees defects, production sees constraints, maintenance sees failures
3. **Buy-in:** People support what they help create
4. **Historical Knowledge:** Operators often know about problems never formally documented
5. **System Thinking:** Process interactions are visible when multiple functions participate

Common Mistake: Having one engineer complete PFMEA alone as a “paperwork exercise.” This misses critical failure modes and produces an ineffective document.

Best Practice: Minimum 4-6 team members, including at least one person with hands-on process experience.

14.3.3 Key Terminology

Understanding PFMEA terminology is essential for effective analysis:

Table 14.4: PFMEA Key Terminology

Term	Definition
Process Function	What the process step is supposed to do
Failure Mode	How the process can fail to perform its function
Failure Effect	The consequence of the failure on the customer or next operation
Severity (S)	Rating (1-10) of how serious the failure effect is
Failure Cause	Why the failure mode might occur
Occurrence (O)	Rating (1-10) of how likely the cause is to happen
Current Controls	What currently prevents the cause or detects the failure
Detection (D)	Rating (1-10) of how likely current controls will detect the failure
RPN	Risk Priority Number = $S \times O \times D$
Action Priority (AP)	Alternative prioritization method (AIAG-VDA)

14.3.4 The PFMEA Form

The PFMEA is documented in a structured form. Here is a simplified template:

Table 14.5: PFMEA Form Template (Simplified)

Process Step	Function	Failure Mode	Effect	S	Cause	O	Current Controls
Example:	Drill hole	Hole undersize	Assembly interference	7	Drill wear	5	Visual inspection

14.4 The PFMEA Methodology: 10 Steps

PFMEA follows a systematic 10-step methodology. Each step builds on the previous one.

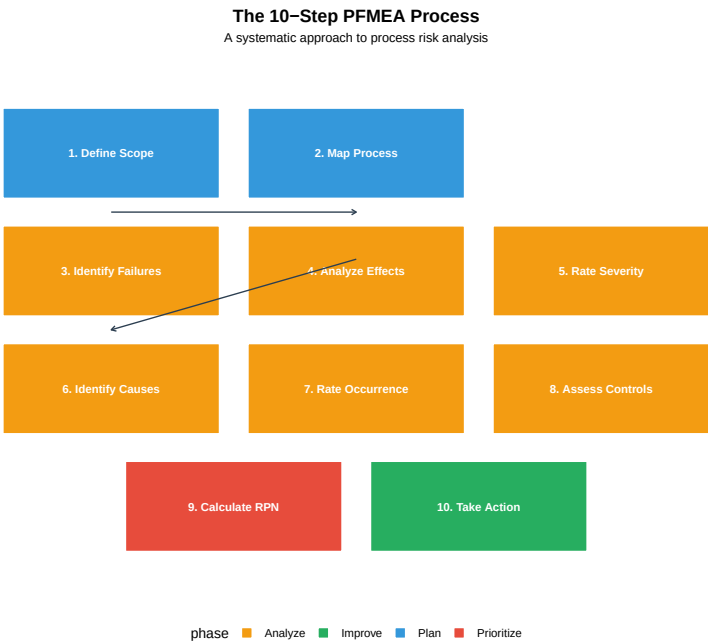


Figure 14.5: The 10-Step PFMEA Methodology

14.4.1 Step 1: Define Scope and Process Boundaries

Before starting the analysis, clearly define what is included and excluded.

Table 14.6: Step 1: Defining PFMEA Scope

Element	Description	Example: Injection Molding
Process Name	Clear name identifying the process	Plastic Part Injection Molding
Start Boundary	Where does our analysis begin?	Raw material loading into hopper
End Boundary	Where does our analysis end?	Part removed from mold, ready for packaging
Included Operations	All operations within scope	Material prep, injection, cooling, ejection
Excluded Operations	Operations analyzed separately or by others	Mold design (covered by DFMEA), part inspection
Key Assumptions	Conditions assumed to be true	Material meets incoming spec, mold is maintained

14.4.2 Step 2: Process Mapping and Identifying Functions

Create a detailed process flow diagram and identify the function of each step.

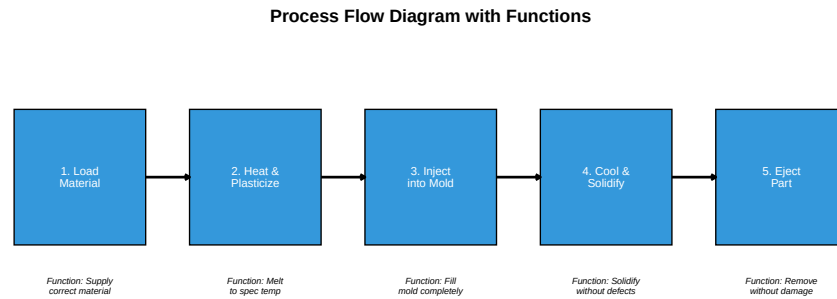


Figure 14.6: Example: Injection Molding Process Flow

14.4.3 Step 3: Identifying Potential Failure Modes

For each process function, ask: **“How can this step fail to perform its intended function?”**

Table 14.7: Step 3: Identifying Failure Modes

Process Function	Potential Failure Mode	Category
Load correct material	Wrong material loaded	Wrong item
Load correct material	Material contaminated	Degraded item
Load correct material	Insufficient material	Missing item
Melt to specification temperature	Temperature too low	Below specification
Melt to specification temperature	Temperature too high	Above specification
Fill mold completely	Short shot (incomplete fill)	Incomplete operation
Fill mold completely	Flash (overfill)	Excessive operation
Fill mold completely	Air entrapment	Unintended result

Common failure mode categories: - **No operation** (step doesn’t happen)
 - **Partial operation** (incomplete) - **Degraded operation** (below standard)
 - **Excessive operation** (too much) - **Wrong operation** (incorrect action) -
Intermittent operation (inconsistent)

Interactive Exercise: Identify Failure Modes

Process Step: Heat treat steel parts at 850°C for 2 hours

Function: Achieve required hardness (58-62 HRC)

Identify at least 5 potential failure modes:

Answers: 1. Temperature too low → Parts soft (below hardness spec) 2. Temperature too high → Parts brittle/cracked 3. Time too short → Incomplete

hardening 4. Time too long → Over-hardening, distortion 5. Uneven heating → Inconsistent hardness across part 6. Wrong atmosphere → Surface decarburization 7. Quench delay too long → Soft spots

14.4.4 Step 4: Analyzing Failure Effects

For each failure mode, determine: “**What is the consequence if this failure occurs?**”

Consider effects at multiple levels: 1. **Local effect:** Impact on immediate operation 2. **Next operation effect:** Impact on downstream process 3. **End customer effect:** Impact on final user

Table 14.8: Step 4: Analyzing Effects at Multiple Levels

Failure Mode	Effect Level	Effect Description
Short shot	Local	Part is incomplete/missing features
Short shot	Next Operation	Part rejected at inspection, line stoppage
Short shot	End Customer	If shipped: product malfunction, safety hazard
Flash	Local	Excess material on part edges
Flash	Next Operation	Secondary trimming required, increased cycle time
Flash	End Customer	If shipped: poor fit, appearance defect

14.4.5 Step 5: Determining Severity Ratings

Severity (S) rates the seriousness of the effect on a scale of 1-10.

Table 14.9: Severity Rating Scale (S)

Rating	Effect	Criteria
10	Hazardous - without warning	Safety hazard; noncompliance with regulations; n
9	Hazardous - with warning	Safety hazard; noncompliance with regulations; v
8	Very High	Product inoperable; loss of primary function
7	High	Product operable but at reduced performance
6	Moderate	Product operable; comfort/convenience affected; noticea
5	Low	Product operable; reduced comfort; noticed by average c
4	Very Low	Product operable; slightly reduced comfort; noticed by c
3	Minor	Fit/finish nonconforming; noticed by discriminating cus
2	Very Minor	Fit/finish nonconforming; noticed only by trained obser
1	None	No discernible effect

Important: Severity is determined by the **effect**, not the failure mode. Severity can only be reduced by changing the design — process changes typically cannot reduce severity.

14.4.6 Step 6: Identifying Potential Causes

For each failure mode, identify all possible causes: “**Why might this failure occur?**”

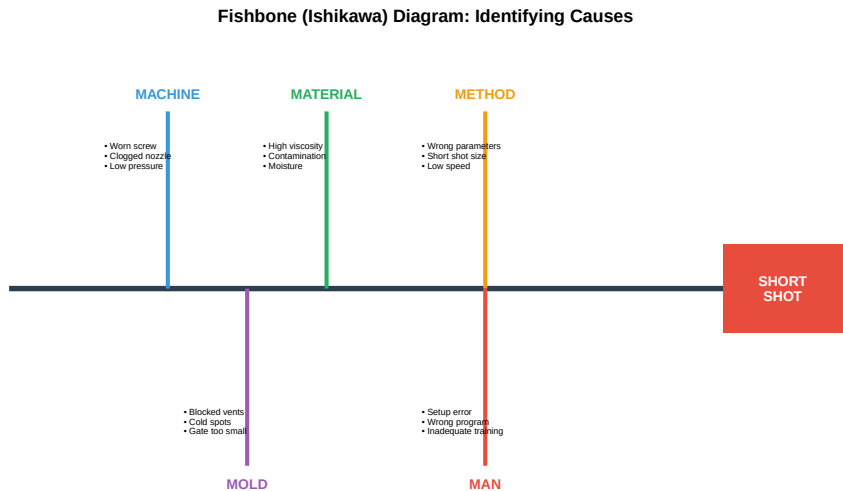


Figure 14.7: Fishbone Diagram: Causes of Short Shot

14.4.7 Step 7: Rating Occurrence

Occurrence (O) rates the likelihood that the cause will occur on a scale of 1-10.

Table 14.10: Occurrence Rating Scale (O)

Rating	Likelihood	Criteria	Approximate Rate	Cpk
10	Very High	Failure is almost inevitable	100 per 1000 (10%)	< 0.33
9	Very High	Failures occur very frequently	50 per 1000 (5%)	0.33
8	High	Failures occur frequently	20 per 1000 (2%)	0.51
7	High	Failures occur on regular basis	10 per 1000 (1%)	0.67
6	Moderate	Occasional failures	5 per 1000 (0.5%)	0.83
5	Moderate	Occasional failures expected	2 per 1000 (0.2%)	1.00
4	Low	Relatively few failures	1 per 1000 (0.1%)	1.17
3	Low	Few failures	0.5 per 1000 (500 ppm)	1.33
2	Remote	Failure unlikely	0.1 per 1000 (100 ppm)	1.50
1	Remote	Failure nearly impossible	0.01 per 1000 (10 ppm)	1.67

14.4.8 Step 8: Current Controls and Detection Ratings

Identify current controls and rate their ability to detect the failure or cause.

Types of Process Controls:

Table 14.11: Types of Process Controls

Control Type	Purpose	Examples
Prevention Controls	Prevent the cause from occurring	Error-proofing (poka-yoke), interlocks
Detection Controls	Detect the failure mode or cause after it occurs	Inspection, testing, gauging, SPC

Detection Rating Scale:

Table 14.12: Detection Rating Scale (D)

Rating	Detection	Criteria	Example Controls
10	Absolute Uncertainty	No current control; cannot detect or is not analyzed	No inspection
9	Very Remote	Control will probably not detect	Indirect measurement
8	Remote	Control has poor chance of detection	Visual inspection
7	Very Low	Control has low chance of detection	Manual 100% inspection
6	Low	Control may detect	Variable gauging
5	Moderate	Control has moderate chance of detection	SPC charting
4	Moderately High	Control has moderately high chance of detection	In-station gauging
3	High	Control has high chance of detection	Automated 100% inspection
2	Very High	Control almost certain to detect	Multiple independent inspections
1	Almost Certain	Control will detect; error-proofed	Error-proofing

Important: Detection ratings are often **harder to reduce** than occurrence ratings. Adding inspection doesn't prevent defects — it only catches them. Prevention is always better than detection.

Question: Why are detection ratings often harder to improve?

Detection ratings are harder to reduce because:

1. **Detection doesn't prevent:** The defect has already been made; you're just trying to find it
2. **Human inspection is unreliable:** Typical effectiveness is only 80-85% for visual inspection
3. **100% inspection is expensive:** Automated inspection requires significant investment
4. **Some defects are hard to detect:** Internal defects, intermittent problems, latent failures

5. **Sampling has limitations:** Even good sampling plans miss some defects

Better approach: Focus on reducing occurrence through: - Error-proofing (poka-yoke) - Process capability improvement - Preventive maintenance - Better training

14.4.9 Step 9: Calculating RPN and Prioritization

The **Risk Priority Number (RPN)** combines all three ratings:

$$\text{RPN} = \text{Severity (S)} \times \text{Occurrence (O)} \times \text{Detection (D)}$$

```
# Example RPN Calculations

# Failure Mode 1: Short shot
S1 <- 7    # Severity: Product inoperable (assembly)
O1 <- 5    # Occurrence: Occasional
D1 <- 6    # Detection: Moderate (visual inspection)

RPN1 <- S1 * O1 * D1
cat("Short shot RPN:", RPN1, "\n")
```

Short shot RPN: 210

```
# Failure Mode 2: Flash
S2 <- 4    # Severity: Appearance issue
O2 <- 6    # Occurrence: Regular
D2 <- 3    # Detection: High (easy to see)

RPN2 <- S2 * O2 * D2
cat("Flash RPN:", RPN2, "\n")
```

Flash RPN: 72

```
# Failure Mode 3: Contamination
S3 <- 9    # Severity: Safety concern (medical device)
O3 <- 3    # Occurrence: Low
D3 <- 7    # Detection: Low (internal contamination)

RPN3 <- S3 * O3 * D3
cat("Contamination RPN:", RPN3, "\n")
```

Contamination RPN: 189

```
# Comparison
cat("\n--- Priority Order by RPN ---\n")
```

--- Priority Order by RPN ---


```
cat("1. Short shot (RPN =", RPN1, ")\n")
```

1. Short shot (RPN = 210)

```
cat("2. Contamination (RPN =", RPN3, ")\n")
```

2. Contamination (RPN = 189)

```
cat("3. Flash (RPN =", RPN2, ")\n")
```

3. Flash (RPN = 72)

RPN Action Thresholds (Traditional):

Table 14.13: RPN Action Thresholds

RPN Range	Risk Level	Action Required
1-50	Low	Monitor; no immediate action
51-100	Moderate	Consider action if resources available
101-200	Significant	Action required within planning cycle
201-500	High	Immediate action required
501-1000	Critical	Stop production; immediate corrective action

Interactive Exercise: Calculate RPN

Calculate the RPN for each failure mode and rank them:

Failure Mode	Severity	Occurrence	Detection	RPN
A: Dimension out of spec	6	4	5	?
B: Surface scratch	3	7	2	?
C: Missing component	8	2	8	?
D: Wrong material	9	3	6	?

Answers: - A: $6 \times 4 \times 5 = 120$ - B: $3 \times 7 \times 2 = 42$ - C: $8 \times 2 \times 8 = 128$ - D: $9 \times 3 \times 6 = 162$

Priority Order: D (162) > C (128) > A (120) > B (42)

Question: Should we always address the highest RPN first? See limitations discussion below.

14.4.10 Limitations of RPN

RPN has known limitations that must be understood:

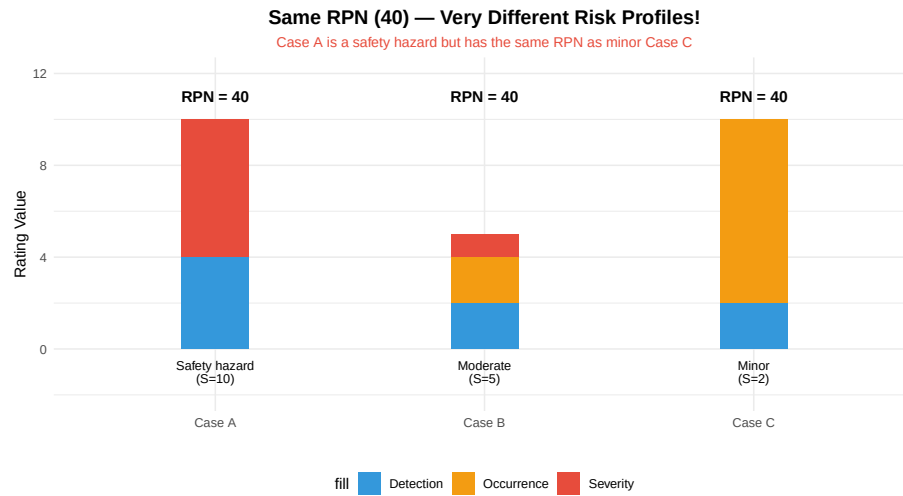


Figure 14.8: RPN Limitation Example

Key RPN Limitations:

1. **Same RPN, different risk:** $10 \times 1 \times 4 = 40$, but $2 \times 10 \times 2 = 40$
2. **Severity often overlooked:** High severity should always trigger action
3. **Arbitrary thresholds:** Why is 100 the magic number?
4. **Non-linear scale:** Difference between 2 and 3 is not same as 8 and 9

14.4.11 Action Priority (AP) Method — AIAG-VDA Alternative

The 2019 AIAG-VDA FMEA Handbook introduced the **Action Priority (AP)** method as an alternative to RPN.

Table 14.14: Action Priority (AP) Method

Priority	Criteria	Action Required
HIGH	Severity = 9 or 10 (any O, any D)	Must take action to improve
HIGH	Severity = 8 AND Occurrence 4	Must take action
MEDIUM	Severity = 7 AND Occurrence 5	Should take action
MEDIUM	Severity = 5-6 AND Occurrence 6 AND Detection 5	Should take action
LOW	All other combinations	May take action; document

14.4.12 Step 10: Recommended Actions and Follow-Up

For high-priority items, develop specific recommended actions.

Table 14.15: Step 10: Recommended Actions with T

Failure Mode	Current RPN	Recommended Action	Responsible	T
Short shot	210	Install shot size monitoring with automatic reject	Process Engineer	2
Short shot	210	Implement preventive maintenance for nozzle cleaning	Maintenance	2
Short shot	210	Add mold temperature monitoring with alarm	Quality Engineer	2

14.5 Complete PFMEA Example: Injection Molding

Let's work through a complete PFMEA for an injection molding process step by step.

Table 14.16: Complete PFMEA Example: Injection Molding Process

Step	Function	Failure Mode	Effect	S	Cause
3. Inject	Fill mold completely	Short shot	Part scrapped, line stoppage	7	Insufficient shot size
3. Inject	Fill mold completely	Flash	Secondary trim required	4	Excessive pressure
3. Inject	Fill mold completely	Air entrapment	Weak area, visual defect	6	Blocked vent
4. Cool	Solidify uniformly	Warping	Dimensional rejection	7	Uneven cooling
4. Cool	Solidify uniformly	Sink marks	Visual defect	5	Thick section, short p
5. Eject	Remove without damage	Stuck in mold	Part damage, mold damage	8	Insufficient draft angle

```
# Improvement Analysis for Short Shot (Highest RPN = 210)
```

```
cat("=== CURRENT STATE ===\n")
```

```
=== CURRENT STATE ===
```

```
S_current <- 7 # Severity (cannot change - inherent to failure)
```

```
O_current <- 5 # Occurrence
```

```
D_current <- 6 # Detection
```

```
RPN_current <- S_current * O_current * D_current
```

```
cat("Current RPN:", RPN_current, "(S=7, O=5, D=6)\n\n")
```

```
Current RPN: 210 (S=7, O=5, D=6)
```

```
cat("=== IMPROVEMENT OPTIONS ===\n\n")
```

```
=== IMPROVEMENT OPTIONS ===
```

```
# Option 1: Improve Detection
cat("Option 1: Add automatic shot weight monitoring\n")
```

Option 1: Add automatic shot weight monitoring

```
D_option1 <- 2 # Automated detection
RPN_option1 <- S_current * O_current * D_option1
cat("New RPN:", RPN_option1, "(S=7, O=5, D=2)\n")
```

New RPN: 70 (S=7, O=5, D=2)

```
cat("Reduction:", round((1 - RPN_option1/RPN_current)*100), "%\n\n")
```

Reduction: 67 %

```
# Option 2: Improve Occurrence (Prevention)
cat("Option 2: Add screw position monitoring with feedback control\n")
```

Option 2: Add screw position monitoring with feedback control

```
O_option2 <- 2 # Much lower occurrence
RPN_option2 <- S_current * O_option2 * D_current
cat("New RPN:", RPN_option2, "(S=7, O=2, D=6)\n")
```

New RPN: 84 (S=7, O=2, D=6)

```
cat("Reduction:", round((1 - RPN_option2/RPN_current)*100), "%\n\n")
```

Reduction: 60 %

```
# Option 3: Both improvements
cat("Option 3: Both improvements combined\n")
```

Option 3: Both improvements combined

```
RPN_option3 <- S_current * O_option2 * D_option1
cat("New RPN:", RPN_option3, "(S=7, O=2, D=2)\n")
```

New RPN: 28 (S=7, O=2, D=2)

```
cat("Reduction:", round((1 - RPN_option3/RPN_current)*100), "%\n\n")
```

Reduction: 87 %

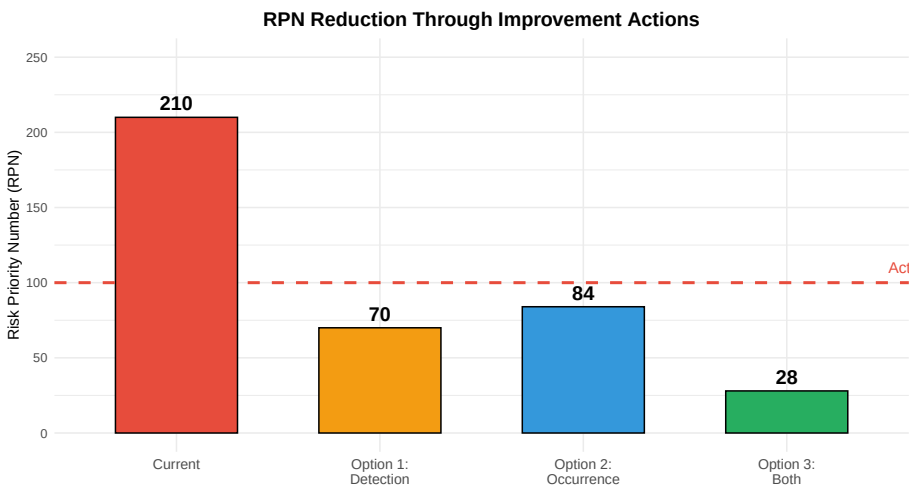


Figure 14.9: RPN Improvement Comparison

14.6 Industry-Specific PFMEA Examples

14.6.1 Example: Welding Process

Table 14.17: PFMEA Example: Welding Process

Failure Mode	Effect	S	Cause	O
Incomplete fusion	Weak joint, potential crack	9	Low heat input, contamination	4
Porosity	Leak path, strength reduction	8	Shielding gas issue, moisture	5
Undercut	Stress concentration, fatigue failure	7	Excessive current, wrong angle	4
Spatter	Appearance, cleanup required	3	Wrong parameters, contaminated wire	6
Distortion	Dimensional non-conformance	6	Excessive heat, improper sequence	4

14.6.2 Example: Heat Treatment Process

Table 14.18: PFMEA Example: Heat Treatment Process

Failure Mode	Effect	S	Cause	O	Current
Under-hardened	Premature wear, field failure	8	Low temp, short time	4	Hardne
Over-hardened/Brittle	Part cracks under load	9	High temp, long time	3	Hardne
Surface decarburization	Soft surface, wear	7	Wrong atmosphere	4	Surface

Distortion/Warpage	Dimensional rejection	6	Uneven heating, rapid quench
Quench cracking	Scrap, safety hazard	10	Thermal shock, design

14.6.3 Example: Food Processing (Pasteurization)

Table 14.19: PFMEA Example: Pasteurization

Failure Mode	Effect	S	Cause
Under-processing	Pathogen survival, food safety	10	Equipment malfunction, calibration
Over-processing	Nutrient loss, off-flavor	5	Control system error
Temperature deviation	Inconsistent kill, shelf life	8	Sensor drift, flow variation
Time deviation	Process variation	6	Timer malfunction
Cross-contamination	Product recall, illness	10	Gasket leak, CIP failure

Interactive Exercise: Create a PFMEA

Create a simple PFMEA for a coffee brewing process in a commercial setting.

Process Steps: 1. Fill water reservoir 2. Load coffee grounds 3. Brew coffee 4. Dispense into cup

Identify at least 4 failure modes with S, O, D ratings and RPN.

Example Answer:

Step	Failure Mode	Effect	S	Cause	O	Control	D	RPN
1. Fill water	Wrong water level	Weak/stro4g coffee	4	No level indicator	5	Visual check	5	100
2. Load grounds	Wrong amount	Weak/stro4g coffee	4	No measuring	6	Visual check	6	144
3. Brew	Temperature too low	Under-extracted	6	Heating element worn	3	Temp display	4	72
4. Dis-pense	Overflow	Burn hazard, mess	8	Cup sensor failure	2	Cup sensor	4	64

Priority: Wrong amount (144) > Water level (100) > Temperature (72) > Overflow (64)

14.7 Integration with Other Quality Tools

PFMEA doesn't exist in isolation — it connects to other quality tools and systems.

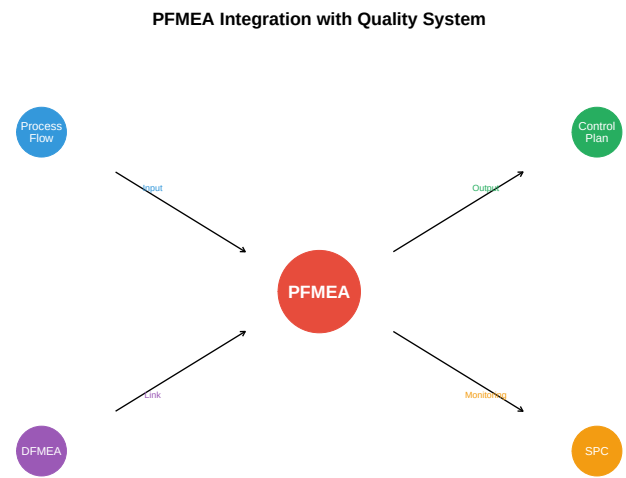


Figure 14.10: PFMEA Integration with Quality Tools

14.7.1 From PFMEA to Control Plan

The PFMEA directly feeds the **Control Plan** — a document that specifies what controls are needed at each process step.

Table 14.20: PFMEA to Control Plan Linkage

From PFMEA	To Control Plan
Process Step	Operation/Step
Failure Mode	Characteristic to Control
Severity	Classification (Critical/Significant)
Cause	Process Parameter
Current Control	Control Method
Detection	Reaction Plan

14.8 Common Pitfalls and Best Practices

14.8.1 Common Pitfalls to Avoid

Table 14.21: Common PFMEA Pitfalls and Solutions

Pitfall	Problem	Solution
Paperwork Exercise	PFMEA done only to satisfy customer requirement	Conduct
One-Person Show	Engineer completes alone without team input	Require c
Optimistic Detection	Overestimating effectiveness of current controls	Validate
Static Document	Never updated after process changes	Review a
RPN Obsession	Focusing only on RPN numbers, missing high-severity items	Also cons
Vague Failure Modes	Failure modes too general to be actionable	Be specif

14.8.2 Best Practices

Table 14.22: PFMEA Best Practices

Practice	Description
Start Early	Begin PFMEA during process design, not after problems occur
Include Operators	Operators know failures that never get documented
Use Historical Data	Use warranty data, scrap reports, customer complaints
Be Specific	Specific failure modes lead to specific actions
Follow Up	Verify that actions were implemented and effective
Living Document	Review and update regularly (minimum annually)

14.9 Case Study: Preventing a Major Quality Issue

14.9.1 Background

Company: Automotive brake component manufacturer

Product: Brake caliper mounting bracket

Situation: New manufacturing process being implemented for a high-volume contract

14.9.2 PFMEA Analysis

During the PFMEA session, the team identified a critical failure mode:

Table 14.23: Case Study: Critical Failure Mode Identified

Element	Analysis
Process Step	Drill mounting holes
Function	Create holes at 45.0 ± 0.1 mm spacing
Failure Mode	Hole spacing out of tolerance
Effect	Caliper misalignment, brake performance affected
Severity	9 (safety-related)
Cause	Fixture wear, thermal expansion
Occurrence	4 (occasional)
Current Control	CMM check 5 per shift
Detection	5 (moderate sampling)
RPN	180

14.9.3 Actions Taken

Based on the PFMEA, the team implemented:

1. **In-process gauging:** Automated measurement after every part (D: 5 $\rightarrow$ 2)
2. **Fixture monitoring:** Temperature compensation and wear tracking (O: 4 $\rightarrow$ 2)
3. **Enhanced fixture design:** Carbide wear surfaces (O: 4 $\rightarrow$ 2)

```
# Before improvements
S_before <- 9
O_before <- 4
D_before <- 5
RPN_before <- S_before * O_before * D_before
cat("Before RPN:", RPN_before, "\n")
```

Before RPN: 180

```
# After improvements
S_after <- 9 # Severity unchanged (inherent)
O_after <- 2 # Reduced through fixture improvements
D_after <- 2 # Reduced through 100% gauging
RPN_after <- S_after * O_after * D_after
cat("After RPN:", RPN_after, "\n")
```

After RPN: 36

```
cat("Reduction:", round((1 - RPN_after/RPN_before)*100), "%\n")
```

Reduction: 80 %

14.9.4 Results

- **Zero field failures** related to hole spacing after 18 months of production
- **Estimated avoided cost:** \$2.4 million in potential recall and warranty
- **Investment:** \$85,000 for gauging and fixture upgrades
- **ROI:** 28:1

Key Lesson: The PFMEA investment of \$85,000 prevented a potential \$2.4 million problem. This is the power of proactive risk management.

14.10 Summary

Table 14.24: PFMEA Key Concepts Summary

Topic	Key Points
PFMEA Purpose	Prevent defects before they occur; proactive vs. reactive quality
Key Ratings	Severity (effect), Occurrence (likelihood), Detection (control effectiveness)
RPN Calculation	$RPN = S \times O \times D$; Range 1-1000; Higher = More risk
Prioritization	Address high RPN first, but always act on high severity (9-10)
Action Priority	AIAG-VDA method: High/Medium/Low based on S-O-D combination
Best Practice	Cross-functional team, living document, follow-up on actions

14.11 Review Questions

14.11.1 Conceptual Questions

Question 1: What is the difference between a failure mode and a failure effect?

Failure Mode: How the process fails to perform its intended function - Example: “Hole drilled undersize” - Example: “Temperature too low” - Example: “Missing component”

Failure Effect: The consequence of the failure mode - Example: “Part rejected at assembly” (effect of undersize hole) - Example: “Product not properly cured” (effect of low temperature) - Example: “Product doesn’t function” (effect of missing component)

Key Relationship: One failure mode can have multiple effects at different levels (local, downstream, customer).

Question 2: Why should PFMEA be conducted by a cross-functional team?

Reasons for Cross-Functional Team:

1. **Diverse expertise:** No single person understands all aspects
2. **Multiple perspectives:** Quality sees defects differently than production
3. **Historical knowledge:** Operators know undocumented problems
4. **Buy-in:** People support what they help create
5. **System thinking:** Process interactions become visible
6. **Better solutions:** Different functions propose different improvements

Typical team composition: - Process Engineer (owner) - Quality Engineer - Production Supervisor/Operator - Maintenance Technician - Design Engineer - Supplier Representative (when applicable)

Question 3: Explain why detection ratings are often harder to reduce than occurrence ratings.

Detection is harder to reduce because:

1. **Detection doesn't prevent:** Defect already exists; just trying to find it
2. **Human inspection is unreliable:** 80-85% effectiveness typical
3. **100% inspection is expensive:** Requires automation investment
4. **Some defects are hidden:** Internal defects, intermittent failures
5. **Sampling limitations:** Cannot catch all defects with sampling

Better approach: Focus on occurrence reduction: - Error-proofing (poka-yoke) - Process capability improvement - Preventive maintenance - Better training

Example: Reducing drill wear (occurrence) is more effective than adding more inspection (detection).

Question 4: At what point in process development should PFMEA ideally be conducted?

Ideal Timing: During process design, before production begins

Why early is better: - Changes cost 1x during design - Changes cost 10x during production - Changes cost 100x after customer delivery

PFMEA Timing Points: 1. **New process development:** Before equipment is ordered 2. **New product introduction:** During process planning 3. **Process changes:** Before implementing changes 4. **Quality issues:** When problems indicate process risk 5. **Regular review:** Annually at minimum

Key Principle: The earlier PFMEA is conducted, the more opportunity exists to design out failures rather than inspect them out.

14.11.2 Calculation Questions

Question 5: Given $S=8$, $O=6$, $D=4$, calculate RPN. If improved controls reduce detection to 2, what is the new RPN?

Initial Calculation:

$$\begin{aligned} \text{RPN} &= S \times O \times D \\ \text{RPN} &= 8 \times 6 \times 4 = 192 \end{aligned}$$

After Detection Improvement:

$$\text{New RPN} = 8 \times 6 \times 2 = 96$$

Analysis: - Original RPN: 192 (Significant risk, action required) - New RPN: 96 (Moderate risk) - Reduction: 50%

Note: Severity (8) remains unchanged because it's determined by the effect, not by process controls. Only occurrence and detection can be reduced through process improvements.

Question 6: Two failure modes have RPNs of 120 and 150. Should the higher RPN always be addressed first?

Answer: Not necessarily!

Consider the following scenarios:

Scenario A: - Failure Mode 1: $\text{RPN} = 150$ ($S=3$, $O=10$, $D=5$) — Minor cosmetic issue - Failure Mode 2: $\text{RPN} = 120$ ($S=10$, $O=3$, $D=4$) — Safety hazard

Priority: Address Failure Mode 2 first despite lower RPN because: - Severity 10 indicates safety hazard - High-severity items should always be addressed regardless of RPN - The AP (Action Priority) method would classify this as HIGH priority

When to prioritize lower RPN: - Higher severity (especially 9-10) - Regulatory or safety implications - Customer-critical characteristic - Easier/faster to implement

Key Lesson: RPN is a prioritization tool, not the only decision criterion. Use engineering judgment.

14.11.3 Application Questions

Question 7: For a metal stamping operation, identify at least five potential failure modes and their likely effects.

Metal Stamping PFMEA:

#	Failure Mode	Effect
1	Part not fully formed	Dimensional rejection, functional failure
2	Burrs on edges	Injury hazard, assembly interference
3	Cracks/splits	Structural failure, scrap
4	Wrong material thickness	Dimensional/strength issues
5	Mislocated features	Assembly issues, rejection
6	Surface scratches	Appearance rejection, corrosion initiation
7	Springback out of tolerance	Dimensional rejection
8	Die mark/impression	Appearance defect

Potential Causes for “Part not fully formed”: - Insufficient press tonnage
- Die wear - Material too hard - Lubrication insufficient - Press speed too fast

Question 8: A process has RPN of 240 (S=8, O=6, D=5). Propose three improvement strategies and calculate resulting RPN.

Current State: S=8, O=6, D=5, RPN=240

Strategy 1: Improve Detection - Add automated inspection (100% gauging)
- New D = 2 - New RPN = $8 \times 6 \times 2 = 96$ (60% reduction)

Strategy 2: Improve Occurrence - Add error-proofing (poka-yoke) to prevent cause - New O = 2 - New RPN = $8 \times 2 \times 5 = 80$ (67% reduction)

Strategy 3: Combined Approach - Error-proofing (O → 3) + Better detection (D → 3) - New RPN = $8 \times 3 \times 3 = 72$ (70% reduction)

Recommendation: Strategy 2 (error-proofing) is typically preferred because:
- Prevents defects from occurring - More sustainable long-term - Reduces inspection costs - Better for customer confidence

14.11.4 Critical Thinking Questions

Question 9: Discuss the limitations of using RPN as the sole prioritization method.

RPN Limitations:

1. Equal weighting problem:

- $10 \times 1 \times 4 = 40$ (safety hazard, rare)
- $2 \times 10 \times 2 = 40$ (minor, frequent)
- Same RPN, very different risk!

2. Severity often overlooked:

- High-severity items (9-10) should always be addressed
- RPN can hide safety-critical issues

3. Non-linear scales:

- Difference between S=2 and S=3 is not same as S=8 and S=9
- Multiplication assumes linear relationship

4. Arbitrary thresholds:

- Why is RPN=100 the “action” threshold?
- No scientific basis for specific cutoffs

5. Gaming the system:

- Teams may manipulate ratings to avoid action
- Subjectivity in ratings

Better Approaches: - Action Priority (AP) method - Always act on S = 9 regardless of RPN - Consider multiple criteria (cost, feasibility, timing) - Use risk matrix visualization

Question 10: How would you handle a situation where team members disagree on severity ratings?

Approach to Rating Disagreements:

1. Clarify the failure effect: - Ensure everyone understands the same effect
- Be specific about which customer sees which impact

2. Reference the rating criteria: - Use the standardized scale consistently
- Point to specific criteria, not opinions

3. Consider worst-case scenario: - PFMEA should consider worst reasonable case - “Could this effect happen?” vs “Will it happen?”

4. Gather data: - Review historical data if available - What have similar failures caused in the past?

5. When in doubt, go higher: - Conservative approach is appropriate for safety - Can always reduce later with evidence

6. Document the discussion: - Record the rationale for the rating - Note if there was disagreement and why decision was made

7. Get external input: - Bring in customer perspective if needed - Consult subject matter experts

Final Rule: If a safety or regulatory issue is possible, severity should be 9 or 10 regardless of probability.

14.12 References

- AIAG & VDA. (2019). *FMEA Handbook*. Automotive Industry Action Group.
 - Stamatis, D.H. (2003). *Failure Mode and Effect Analysis: FMEA from Theory to Execution*. ASQ Quality Press.
 - McDermott, R.E., Mikulak, R.J., & Beauregard, M.R. (2009). *The Basics of FMEA*. Productivity Press.
 - Carlson, C.S. (2012). *Effective FMEAs: Achieving Safe, Reliable, and Economical Products and Processes*. Wiley.
 - SAE J1739. (2009). *Potential Failure Mode and Effects Analysis in Design and Manufacturing*.
 - ISO 31000:2018. *Risk management — Guidelines*.
 - IATF 16949:2016. *Quality management system requirements for automotive production*.
-

Chapter 15

Troubleshooting and Root Cause Analysis

15.1 Learning Objectives

After completing this chapter, you will be able to:


1. Apply systematic troubleshooting methodologies to diagnose equipment and process failures
 2. Distinguish between symptoms, immediate causes, and root causes
 3. Use the 5 Whys technique to drill down to fundamental causes
 4. Construct and analyze Ishikawa (fishbone) diagrams
 5. Apply Fault Tree Analysis (FTA) to complex failure scenarios
 6. Use Pareto analysis to prioritize problem-solving efforts
 7. Implement the 8D problem-solving methodology
 8. Document findings and implement effective corrective actions
 9. Prevent problem recurrence through systemic improvements
-

15.2 Introduction to Troubleshooting

Troubleshooting is the systematic process of identifying, diagnosing, and resolving problems in equipment, processes, or systems. For electromechanical technicians, effective troubleshooting is perhaps the most valuable skill you can develop.

15.2.1 The Cost of Downtime

Equipment failures and process problems have significant financial impacts:

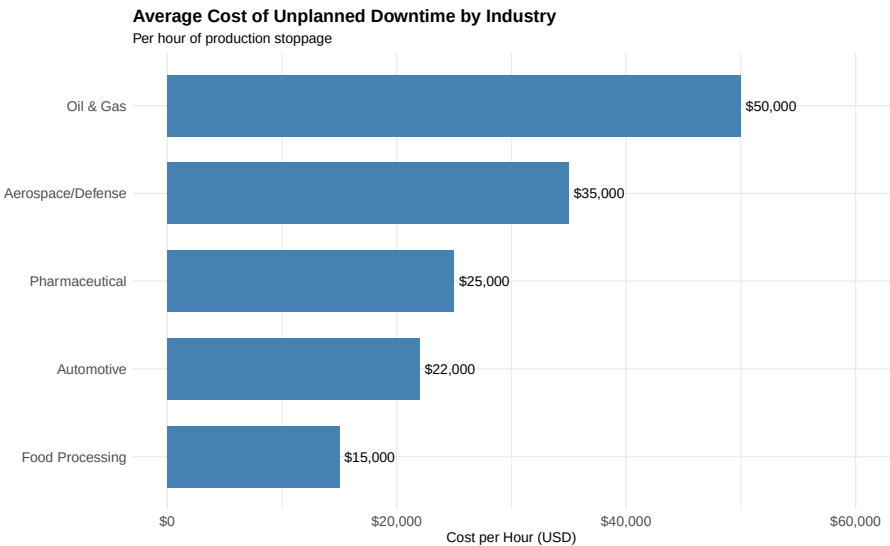

15.2.2 Reactive vs. Proactive Problem Solving

Table 15.1: Comparison of Problem-Solving Approaches

Aspect	Reactive Approach	Proactive Approach
Timing	After failure occurs	Before or early in failure
Focus	Quick fix to restore operation	Root cause elimination
Stress Level	High - production pressure	Lower - planned approach
Cost	High - emergency repairs	Lower - scheduled work
Learning	Limited - rush to fix	High - thorough analysis
Documentation	Often skipped	Systematic and complete

Think About It: Why do organizations often default to reactive troubleshooting?


Common reasons include: - **Time pressure:** Production demands make it tempting to apply quick fixes - **Lack of training:** Technicians may not know RCA methodologies - **Reward systems:** Organizations may reward “firefighters” who quickly restore production - **Missing data:** Without good records, patterns are hard to identify - **Culture:** “We’ve always done it this way” mentality

The irony is that reactive troubleshooting actually costs more time in the long run due to recurring problems.

15.3 Systematic Troubleshooting Methodology

Effective troubleshooting follows a structured approach rather than random trial-and-error.

15.3.1 The DMAIC Troubleshooting Framework

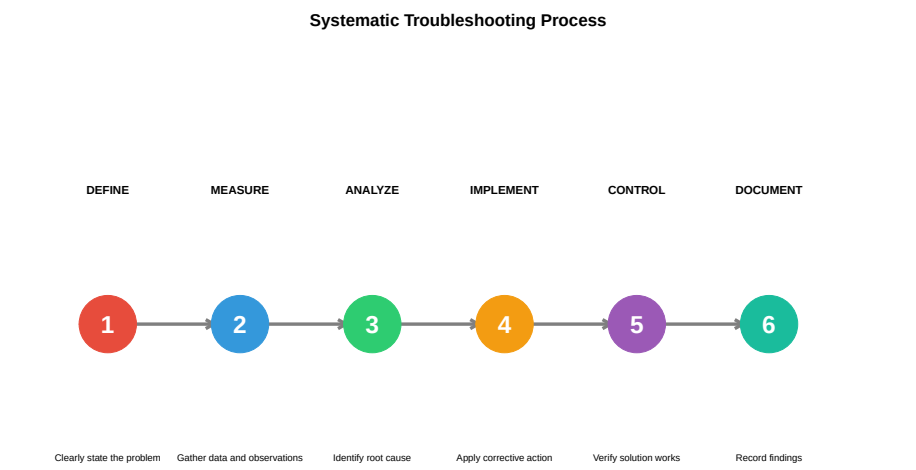

15.3.2 Step 1: Define the Problem

A well-defined problem is half-solved. Use the **5W2H** method:

Table 15.2: 5W2H Problem Definition Framework

Question	What to Ask	Example Response
WHAT WHERE WHEN WHO WHY	What is the problem? What is happening vs. what should happen? Where does the problem occur? Location, machine, station? When did it start? When does it occur? Continuous or intermittent? Who discovered it? Who is affected? Who was operating? Why is this a problem? What is the impact?	Motor overheating on conveyor Discharge end of conveyor Started Monday, occurs daily Operator noticed, maintenance called Risk of motor failure, line stop
HOW HOW MUCH	How was the problem detected? How is it manifesting? How often? How many units affected? What is the magnitude?	Detected by high-temp sensor Occurs every day, 100% of units

15.3.3 Problem Statement Template

Good Problem Statement Format: “[WHAT] is occurring at [WHERE] since [WHEN], affecting [WHO/WHAT], with a magnitude of [HOW MUCH].”

Example: > “Motor overheating (85°C vs. normal 70°C) is occurring at Conveyor Line 3 discharge motor since Monday morning, affecting packaging department production, with the condition occurring every shift after approximately 2 hours of operation.”

Practice: Write a problem statement for this scenario

Scenario: An injection molding machine is producing parts with short shots (incomplete fill). The problem was noticed by the quality inspector during the night shift. About 15% of parts are affected. The issue seems worse when running the larger 500g parts compared to the smaller 200g parts.

Sample Problem Statement: “Short shots (incomplete cavity fill) are occurring on Injection Molding Machine #4 since night shift on Tuesday, affecting 15% of parts produced, with the defect rate increasing significantly when running 500g parts compared to 200g parts.”

15.3.4 Step 2: Gather Data and Observations

Before making any changes, collect information systematically:

Table 15.3: Systematic Data Gathering Checklist

Data Source	What to Check	Tools/Methods
Visual Inspection	Physical condition, wear, contamination, alignment, damage	Flashlight, mirror
Operator Interview	What changed? When did it start? Any unusual events?	Open-ended questions
Machine Parameters	Temperatures, pressures, speeds, currents, positions	HMI screens, gauges
Historical Records	Maintenance logs, previous repairs, similar issues	CMMS, logbooks
Product/Output	Defect patterns, measurements, reject rates	Calipers, gauges
Environmental	Temperature, humidity, vibration, power quality	Thermometer, hygrometer

15.3.5 The “Change Analysis” Approach


Many problems are caused by changes. Ask:

- What changed recently?
- New materials, suppliers, or batches?
- New operators or different shifts?
- Maintenance performed?
- Environmental changes (weather, season)?
- Software updates or parameter changes?

- New products or recipes running?

Change Timeline Analysis

Map changes against problem occurrence to identify correlations

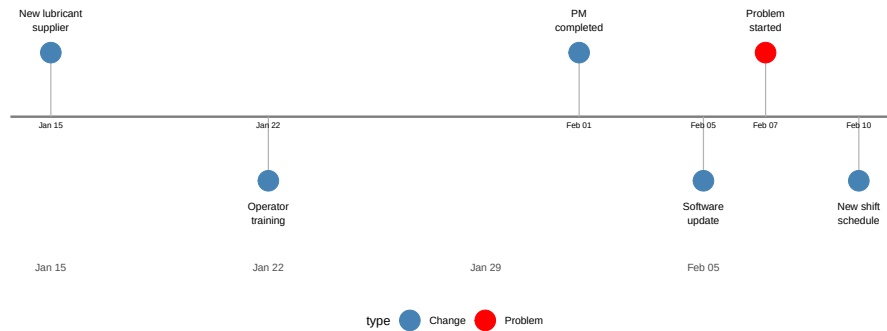


15.4 Understanding Root Cause vs. Symptoms

A critical concept in troubleshooting is distinguishing between different levels of causation.

15.4.1 The Causation Hierarchy

Causation Hierarchy

Dig deeper to find the root cause – don't stop at symptoms

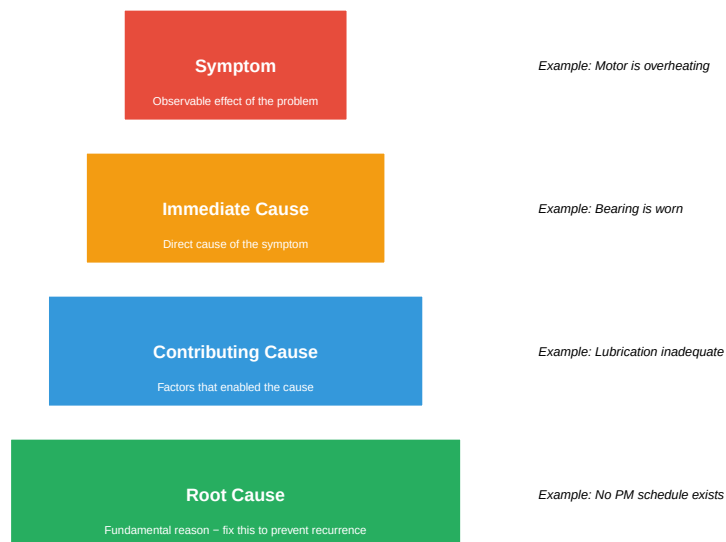

15.4.2 Why Finding Root Cause Matters

Table 15.4: Comparison of Fix

Fix Level	Action Taken	Immediate Result
Symptom	Add cooling fan to motor	Motor runs cooler tem
Immediate Cause	Replace worn bearing	Motor works for a whi
Root Cause	Implement PM schedule with lubrication tasks	Problem eliminated


15.5 The 5 Whys Technique

The **5 Whys** is a simple but powerful technique developed by Sakichi Toyoda and used within Toyota’s manufacturing methods.

15.5.1 How It Works

1. State the problem
2. Ask “Why?” to identify the cause
3. Ask “Why?” again about that cause
4. Continue asking “Why?” until you reach the root cause
5. Typically requires 5 iterations (sometimes more, sometimes less)

15.5.2 5 Whys Example: Production Line Stoppage

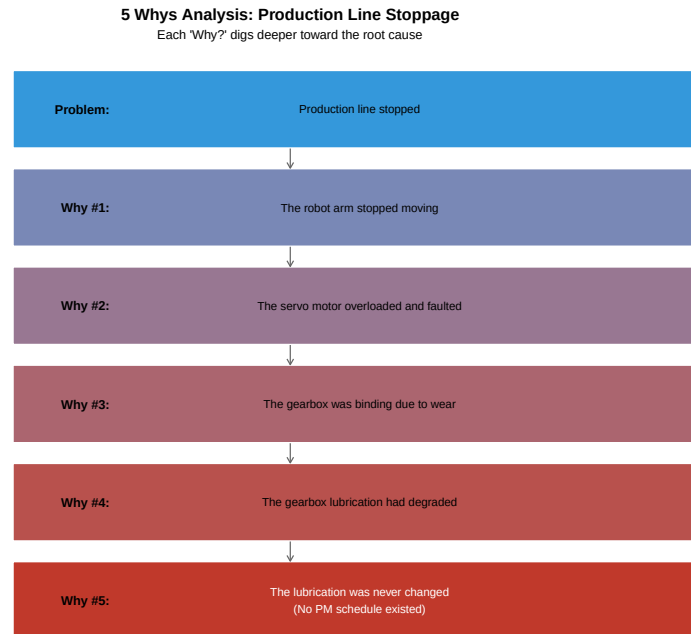


15.5.3 5 Whys Template

Table 15.5: 5 Whys Analysis Template

Step	Description	Typical Cause Type
Problem Statement	Clear, specific description of what happened	Symptom
Why #1	First-level cause (usually technical/physical)	Physical
Why #2	Why did that first cause occur?	Physical/Human
Why #3	Why did the second cause occur?	Human/Process
Why #4	Why did the third cause occur?	Process/System
Why #5	Why did the fourth cause occur?	System/Culture
Root Cause	The fundamental cause that, if fixed, prevents recurrence	Root

15.5.4 Multiple Branches in 5 Whys

Sometimes a problem has multiple causes. When you encounter this, branch your analysis:

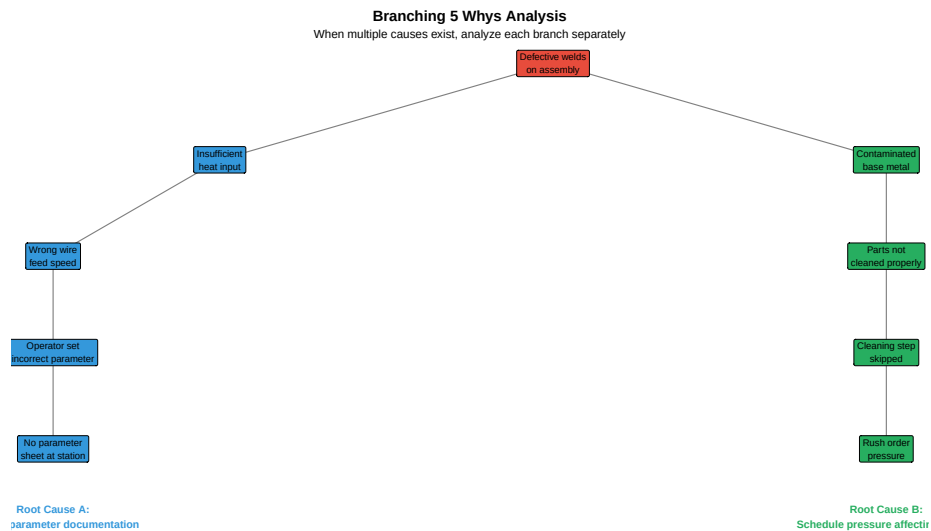

Practice Exercise: Perform a 5 Whys Analysis

Scenario: A CNC machine produced 50 parts that were all 0.5mm undersize on a critical diameter.

Try to complete the 5 Whys analysis before looking at the sample answer below.

Sample Analysis:

1. **Problem:** CNC produced 50 undersize parts
2. **Why #1:** The tool offset was set incorrectly
3. **Why #2:** The operator entered the wrong offset value
4. **Why #3:** The operator misread the setup sheet
5. **Why #4:** The setup sheet had poor formatting and small print
6. **Why #5:** No standard format exists for setup documentation

Root Cause: Lack of standardized, clear setup documentation


Corrective Actions: - Create standardized setup sheet template with large, clear fonts - Add visual verification step (photo of correct setup) - Implement first-piece inspection requirement before production run

15.6 Ishikawa (Fishbone) Diagram

The **Ishikawa diagram**, also called a **fishbone diagram** or **cause-and-effect diagram**, was developed by Kaoru Ishikawa in the 1960s. It provides a structured way to brainstorm and categorize potential causes.


15.6.1 The 6M Categories

Manufacturing problems are typically organized using the **6M** categories:

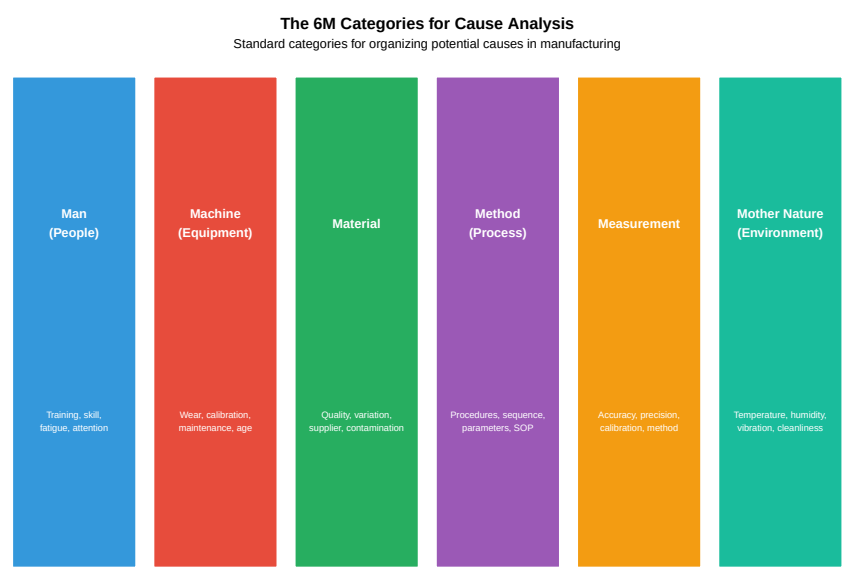

15.6.2 Constructing a Fishbone Diagram

Warning in geom_segment(data = spine, aes(x = x[1], y = y[1], xend = x[2], : All aesthetics have
i Please consider using `annotate()` or provide this layer with data containing
a single row.

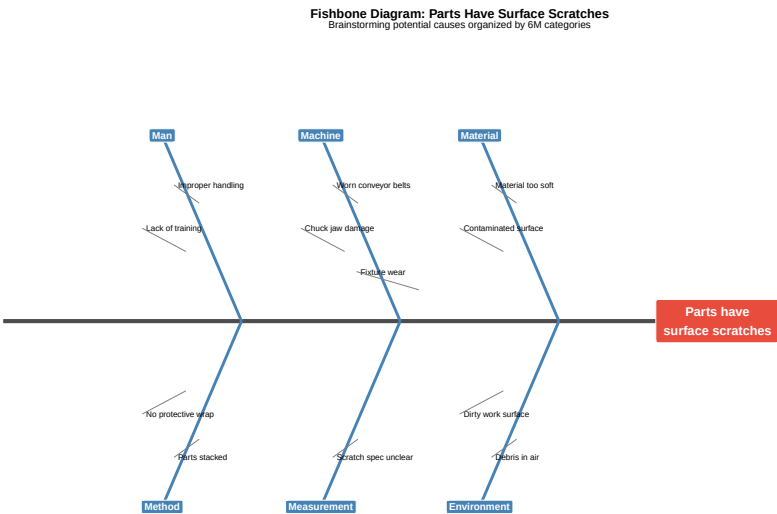

15.6.3 Fishbone Diagram Best Practices

Table 15.6: Best Practices for Fishbone Diagram Development

Guideline	Description
Team Approach	Include operators, engineers, maintenance, quality - diverse perspectives
No Evaluation During Brainstorming	Capture all ideas first; evaluate feasibility later
Use Specific Language	Not 'machine problem' but 'bearing wear on spindle motor'.
Aim for 3-5 Causes per Category	Some categories may have more; don't force causes into categories.
Circle the Most Likely	After brainstorming, identify 2-3 most probable causes to investigate.
Verify with Data	Don't assume - test hypotheses with data before implementing solutions.

15.6.4 Video: How to Create a Fishbone Diagram

15.7 Fault Tree Analysis (FTA)

Fault Tree Analysis is a top-down, deductive analysis method that uses Boolean logic to analyze undesired events. Originally developed for the aerospace industry, FTA is particularly useful for complex systems with multiple potential failure paths.


15.7.1 FTA Symbols

Table 15.7: Fault Tree Analysis Symbols

Symbol	Name	Meaning	Example
Rectangle	Intermediate Event	A fault event that results from combination of other events	Pump fails to deliver flow
Circle	Basic Event	A basic failure that cannot be broken down further	Motor winding failure
Diamond	Undeveloped Event	Event not analyzed further (outside scope or insufficient data)	Power grid failure
House	Normal Event	An event expected to occur during normal operation	Normal wear and tear
AND Gate	AND Gate	Output occurs only if ALL inputs occur	Both sensor 1 and sensor 2 fail
OR Gate	OR Gate	Output occurs if ANY input occurs	Either fuse 1 or fuse 2 fails

15.7.2 FTA Example: Pump Fails to Deliver Flow

Fault Tree Analysis: Pump Fails to Deliver Flow
 OR gates mean any single path can cause the top event

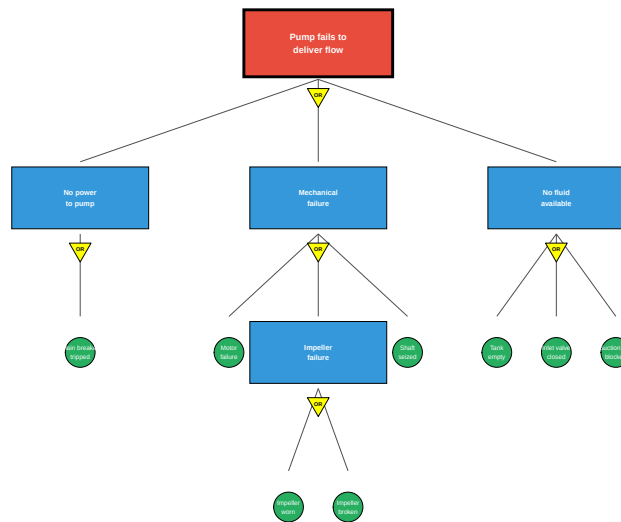

15.7.3 Calculating Probability with FTA

FTA allows quantitative risk analysis by calculating the probability of the top event:

OR Gate: $P(\text{output}) = 1 - [(1 - P_A) \times (1 - P_B) \times \dots]$ *Simplified:* $P(\text{output}) = P_A + P_B$ (when probabilities are small)

AND Gate: $P(\text{output}) = P_A \times P_B \times \dots$

```
# Example: Calculate top event probability
# Basic event probabilities (annual failure rates)
P_breaker_trip <- 0.02
P_motor_fail <- 0.01
P_impeller_worn <- 0.03
P_impeller_break <- 0.005
P_shaft_seize <- 0.008
P_tank_empty <- 0.05
P_valve_closed <- 0.01
P_line_blocked <- 0.02

# Impeller failure (OR gate)
P_impeller_fail <- 1 - (1 - P_impeller_worn) * (1 - P_impeller_break)
cat("P(Impeller failure):", round(P_impeller_fail, 4), "\n")
```

P(Impeller failure): 0.0349

```
# Mechanical failure (OR gate)
P_mechanical <- 1 - (1 - P_motor_fail) * (1 - P_impeller_fail) * (1 - P_shaft_seize)
cat("P(Mechanical failure):", round(P_mechanical, 4), "\n")
```

P(Mechanical failure): 0.0521

```
# No fluid available (OR gate)
P_no_fluid <- 1 - (1 - P_tank_empty) * (1 - P_valve_closed) * (1 - P_line_blocked)
cat("P(No fluid available):", round(P_no_fluid, 4), "\n")
```

P(No fluid available): 0.0783

```
# Top event: Pump fails (OR gate)
P_top <- 1 - (1 - P_breaker_trip) * (1 - P_mechanical) * (1 - P_no_fluid)
cat("P(Pump fails to deliver flow):", round(P_top, 4), "\n")
```

P(Pump fails to deliver flow): 0.1438


```
cat("This represents a", round(P_top * 100, 1), "% annual probability of failure")
```

This represents a 14.4 % annual probability of failure

15.8 Pareto Analysis

Pareto Analysis is based on the Pareto Principle (80/20 rule): roughly 80% of effects come from 20% of causes. This helps prioritize problem-solving efforts.

15.8.1 Creating a Pareto Chart

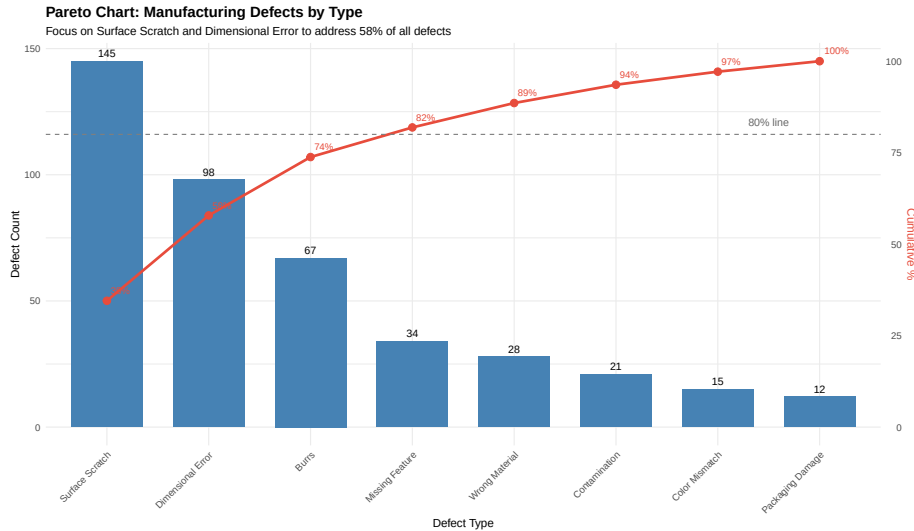

15.8.2 Interpreting Pareto Analysis

```
# Pareto analysis interpretation
defects <- data.frame(
  Defect = c("Surface Scratch", "Dimensional Error", "Burrs",
             "Missing Feature", "Wrong Material", "Contamination",
             "Color Mismatch", "Packaging Damage"),
  Count = c(145, 98, 67, 34, 28, 21, 15, 12)
)

defects <- defects[order(-defects$Count),]
defects$Cumulative_Pct <- cumsum(defects$Count) / sum(defects$Count) * 100

# Identify the "vital few" (those that contribute to 80%)
vital_few <- defects[defects$Cumulative_Pct <= 80 |
  c(TRUE, defects$Cumulative_Pct[-nrow(defects)] < 80),]

cat("Total defects:", sum(defects$Count), "\n")
```

Total defects: 420

```
cat("\nVital Few (contributing to ~80% of defects):\n")
```

Vital Few (contributing to ~80% of defects):

```
print(vital_few[, c("Defect", "Count", "Cumulative_Pct")])
```

```


      Defect Count Cumulative_Pct
1 Surface Scratch  145      34.52381
2 Dimensional Error  98      57.85714
3           Burrs   67      73.80952
4 Missing Feature   34      81.90476
cat("\nFocusing on these", nrow(vital_few), "defect types addresses",
    round(max(vital_few$Cumulative_Pct), 1), "% of all defects")

```

Focusing on these 4 defect types addresses 81.9 % of all defects

15.8.3 Stratified Pareto Analysis

Sometimes you need to break down categories further:

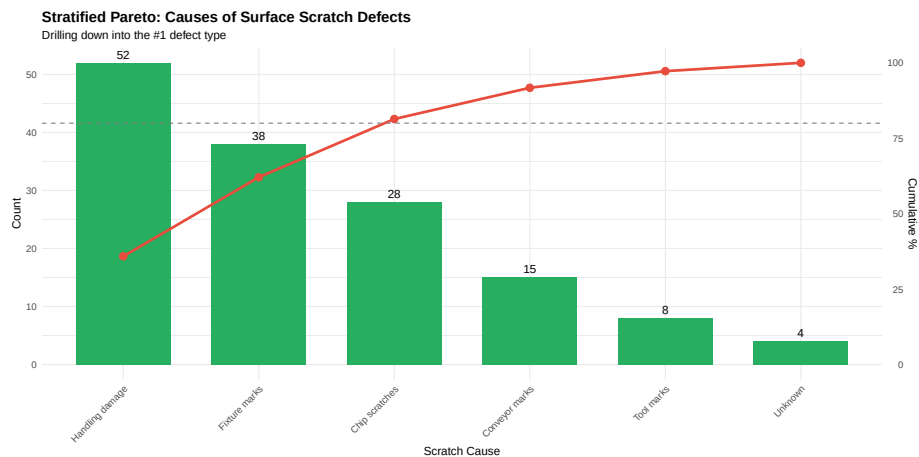

15.9 Is/Is Not Analysis

Is/Is Not Analysis is a structured comparison technique that helps narrow down the scope and identify distinguishing factors of a problem.

15.9.1 Is/Is Not Matrix

Table 15.8: Is/Is Not Analysis: Motor Overheating Problem

Dimension	Question	IS	IS NOT
-----------	----------	----	--------

WHAT	What object has the problem?	Motor on Line 3	Motors on Lines 1, 2, 4	L
WHAT	What is the defect/symptom?	Overheating (85°C)	Noise, vibration, or failure	T
WHERE	Where is the problem observed?	Packaging area, Station 4	Any other station	S
WHERE	Where on the object is the defect?	Motor housing, bearing end	Drive end, junction box	B
WHEN	When was it first observed?	Monday morning shift	Before weekend (Friday OK)	S
WHEN	When in the process/cycle?	After 2 hours of operation	Cold start or end of shift	H
EXTENT	How many units affected?	100% - every shift	Intermittent	C
EXTENT	Is it trending up/down/stable?	Stable - same every day	Getting worse over time	S

15.9.2 Key Insights from Is/Is Not Analysis

From the example above, we can identify:

1. **Line 3 specific** - Not a general problem across all lines
2. **Thermal, not mechanical** - Overheating but no noise/vibration yet
3. **After warm-up** - Heat accumulation issue
4. **Started after weekend** - Something changed

Investigation focus: What changed over the weekend? Check maintenance logs, any work done on Line 3, any environmental changes.

15.10 The 8D Problem-Solving Methodology

The **8D (Eight Disciplines)** methodology is a comprehensive problem-solving approach developed by Ford Motor Company. It's widely used in automotive and other industries.

The 8D Problem-Solving Methodology		
A structured approach for complex problems requiring cross-functional teams		
D0	Plan	Plan the 8D approach; determine if 8D is appropriate
D1	Team	Establish a cross-functional team with required skills
D2	Problem	Define and describe the problem in measurable terms
D3	Containment	Implement temporary actions to protect customer
D4	Root Cause	Identify and verify root cause(s) using RCA tools
D5	Corrective Actions	Develop and verify permanent corrective actions
D6	Implementation	Implement and validate permanent corrective actions
D7	Prevention	Prevent recurrence; update systems and procedures
D8	Closure	Recognize team; document learnings; close out

15.10.1 Detailed 8D Steps

Table 15.9: 8D Methodology Detailed Breakdown

Discipline	Key Activities
D0: Plan	Emergency response actions, initial assessment, determine if 8D needed
D1: Team	Select team leader, identify required expertise, define roles
D2: Problem	5W2H, Is/Is Not, quantify impact, identify affected parts/lots
D3: Containment	Sort suspect material, increase inspection, alert downstream
D4: Root Cause	5 Whys, Fishbone, FTA, verify cause by testing
D5: Corrective Actions	Brainstorm solutions, verify effectiveness before full rollout
D6: Implementation	Execute action plan, validate results, monitor KPIs
D7: Prevention	Update FMEAs, procedures, training, share across organization
D8: Closure	Final documentation, lessons learned, team recognition

15.10.2 D3: Containment Actions

Containment is crucial to protect the customer while you investigate:

Table 15.10: Types of Containment Actions


Type	Description	Example
Sort & Inspect	100% inspection of suspect inventory to separate good from bad	Inspect a

Rework/Repair	Repair nonconforming units if possible and economical	Re-machine undersized
Scrap	Dispose of units that cannot be repaired	Dispose of parts with
Hold/Quarantine	Prevent movement of suspect material until disposition	Tag and segregate al
Increase Monitoring	Add inspections, increase sampling, tighten control limits	Add 100% visual ins
Supplier Notification	Notify suppliers if incoming material is suspected	Request material cer
Customer Alert	Alert customers to check their inventory if product shipped	Contact distributor a

15.11 Corrective Action Implementation

Effective corrective actions address the root cause and prevent recurrence.

15.11.1 Types of Corrective Actions

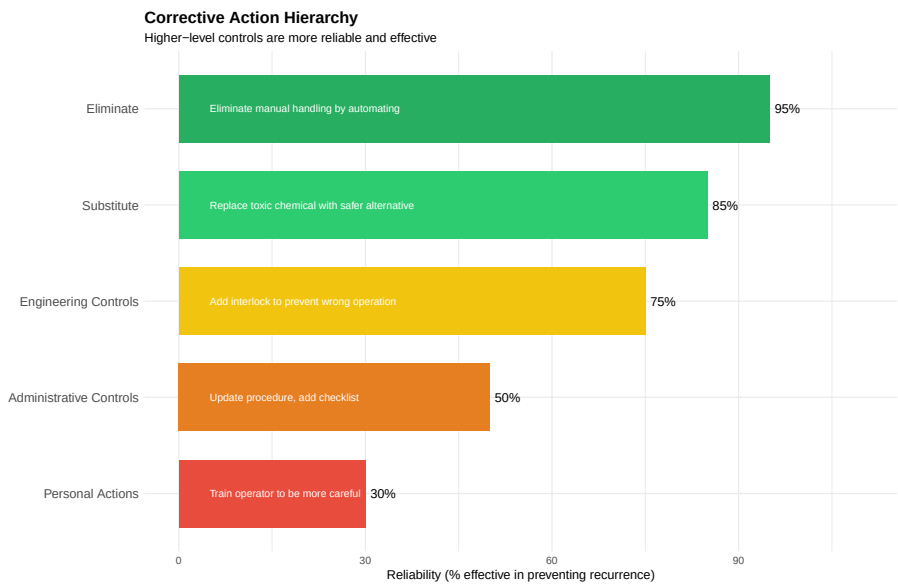

15.11.2 SMART Corrective Actions

Corrective actions should be **SMART**:

Table 15.11: SMART Corrective Action Criteria

	Meaning	Description	Poor Example	Good Example
S	Specific	Clearly defined action, not vague	Improve quality	Install poka-yoke sen
M	Measurable	Can verify completion and effectiveness	Train operators	Train all operators on
A	Achievable	Realistic with available resources	Redesign entire product line	Add inspection step (

R	Relevant	Directly addresses the root cause	Repaint the floor	Add check
T	Time-bound	Has a target completion date	Do this sometime soon	Complete

15.12 Verification and Validation

Before closing out a problem, verify that your actions worked.


15.12.1 Verification vs. Validation

Table 15.12: Verification vs. Validation of Corrective Actions

Aspect	Verification	Validation
Definition	Did we implement the action correctly?	Did the action solve the problem?
Focus	Process compliance	Results and effectiveness
Question	Did we build the fix right?	Did we build the right fix?
Timing	During/after implementation	After implementation, during monitoring
Methods	Audits, inspections, checklists	Data analysis, trend charts, capability studies

15.12.2 Effectiveness Monitoring

Warning in `scale_x_date()`: A `<numeric>` value was passed to a Date scale.
i The value was converted to a `<Date>` object.

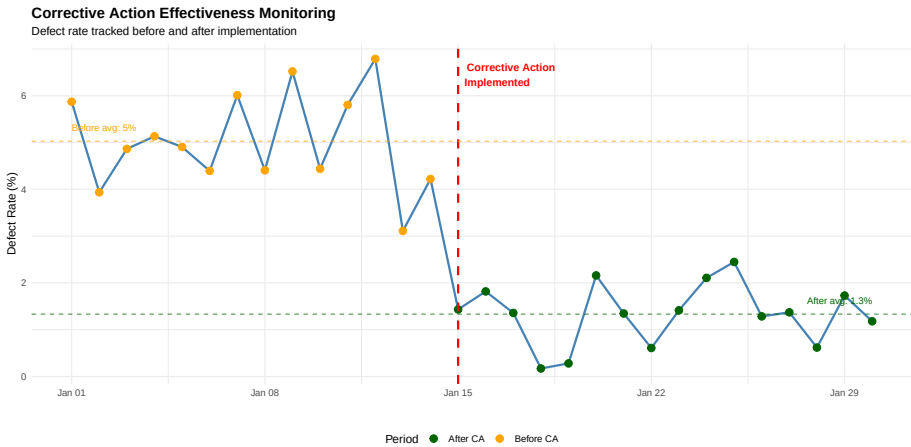

```
# Calculate improvement
before_avg <- mean(defect_rate[1:14])
after_avg <- mean(defect_rate[15:30])
improvement <- (before_avg - after_avg) / before_avg * 100
```

```
cat("Before corrective action: ", round(before_avg, 2), "% defect rate\n")
```

```
Before corrective action: 5.03 % defect rate
```

```
cat("After corrective action: ", round(after_avg, 2), "% defect rate\n")
```

```
After corrective action: 1.33 % defect rate
```

```
cat("Improvement: ", round(improvement, 1), "% reduction\n")
```

```
Improvement: 73.5 % reduction
```

15.13 Case Study: Automotive Welding Defects

Let's work through a comprehensive troubleshooting case using multiple RCA tools.

15.13.1 The Problem

A Tier-1 automotive supplier is experiencing weld porosity defects on a critical structural component. Customer complaints have increased, and the plant has received a quality alert.

15.13.2 Initial Problem Definition (5W2H)

Table 15.13: Case Study Problem Definition

Question	Details
WHAT	Porosity (gas pockets) in MIG welds on crossmember subassembly
WHERE	Robot welding Cell 4, occurring at weld joint W-23 (corner weld)
WHEN	Started approximately 2 weeks ago, occurs on all shifts
WHO	Detected by customer during their incoming inspection
WHY	Customer rejecting parts; risk of production line stop
HOW	Visible voids on X-ray inspection; some visible to naked eye
HOW MUCH	Estimated 8% of parts affected (up from baseline of 0.5%)

15.13.3 5 Whys Analysis

Table 15.14: 5 Whys Analysis: Weld Porosity

Level	Finding
Problem	Porosity in welds at joint W-23

Why #1	Gas entrapment during solidification
Why #2	Inadequate shielding gas coverage
Why #3	Gas flow rate dropped below specification
Why #4	Flow meter was not calibrated; showing higher than actual
Why #5	No calibration schedule existed for welding gas flow meters

15.13.4 Fishbone Diagram Findings

After brainstorming with the cross-functional team:

Table 15.15: Fishbone Analysis Results with Verification

Category	Potential Cause	Likelihood	Verification Result
Machine	Gas flow meter out of calibration	HIGH	YES - Root cause
Machine	Worn contact tip affecting arc stability	Medium	No - tips OK
Material	Different wire lot from new supplier	Medium	No - tested OK
Material	Base metal surface contamination	Low	No - clean parts
Method	Robot path too fast for corner weld	Medium	Partial contributor
Method	Gas pre-flow time insufficient	HIGH	YES - Contributing
Man	Recent operator turnover, less experience	Low	No - all shifts affected
Environment	Seasonal humidity changes	Low	No - controlled

15.13.5 8D Report Summary

Table 15.16: 8D Report: Weld Porosity Case S

D#	Discipline	Summary
D1	Team	Team: Weld Engineer (lead), Quality, Maintenance, Production Superv
D2	Problem	8% porosity rate at W-23 joint since Jan 15; customer quality alert rece
D3	Containment	100% X-ray inspection of all crossmembers; sort and quarantine 3 days
D4	Root Cause	Primary: Flow meter out of calibration (reading 25 CFH, actual 18 CF
D5	Corrective Actions	1. Recalibrate flow meter immediately; 2. Increase pre-flow time to 0.5s
D6	Implementation	Actions completed Feb 5; validation testing shows 0.1% porosity rate (l
D7	Prevention	Updated PM schedule to include all gas flow meters quarterly; added t
D8	Closure	Customer satisfied with response; 8D closed Feb 15; cost avoidance: \$4

15.14 Documentation and Knowledge Manage-
ment

Proper documentation ensures learnings are captured and problems don’t recur.

15.14.1 Key Documentation Elements

Table 15.17: RCA Documentation Checklist

Element	Contents	Benefit
Problem Description	5W2H, problem statement, impact/cost	Clear reference for s
Timeline	When discovered, key investigation dates, implementation dates	Understanding of re
Data Collected	Measurements, photos, test results, operator interviews	Evidence-based anal
Root Cause Analysis	5 Whys, fishbone diagrams, FTA as applicable	Documented logical
Corrective Actions	Actions taken, responsible parties, target/actual dates	Accountability, closu
Verification Results	Before/after data, statistical comparison, effectiveness %	Proof of effectiveness
Lessons Learned	What we'd do differently, recommendations for similar situations	Continuous improve
System Updates	PFMEA updates, procedure changes, training records	Prevention of recurr

15.14.2 Creating a Troubleshooting Knowledge Base

Build organizational memory by:

1. **Standardized templates** - Use consistent formats for all RCA documents
2. **Searchable database** - Store in CMMS, SharePoint, or dedicated quality system
3. **Categories and tags** - Equipment type, failure mode, root cause category
4. **Cross-references** - Link related issues and solutions
5. **Regular reviews** - Periodic analysis of trends and patterns

15.15 Troubleshooting Tools Quick Reference

Table 15.18: RCA Tool Selection Guide

Tool	Best For	When to Use
5 Whys	Simple problems with linear cause chains	Quick investigations, starting point
Fishbone Diagram	Brainstorming multiple potential causes	Team problem-solving sessions
Fault Tree Analysis	Complex systems with multiple failure paths	Safety-critical systems, reliability an
Pareto Chart	Prioritizing which problems to tackle first	When facing multiple problems or d
Is/Is Not	Narrowing down scope and identifying distinctions	When problem is hard to define clea
8D	Customer complaints requiring formal response	Formal quality requirements, major
Change Analysis	Problems that started suddenly	When timing of problem onset is kn

15.16 Video Resources

15.16.1 Understanding 5 Whys

15.16.2 8D Problem Solving

15.17 Summary

Effective troubleshooting and root cause analysis require:

1. **Systematic approach** - Don't guess; follow a structured methodology
2. **Clear problem definition** - Use 5W2H to clearly define what you're solving
3. **Data-driven analysis** - Collect facts before jumping to conclusions
4. **Root cause focus** - Don't stop at symptoms; dig to fundamental causes
5. **Multiple tools** - Use 5 Whys, Fishbone, FTA, Pareto as appropriate
6. **Effective corrective actions** - Aim for elimination, not just mitigation
7. **Verification** - Confirm your fix actually works with data
8. **Documentation** - Capture learnings to prevent recurrence

Remember: The goal isn't just to fix today's problem - it's to prevent tomorrow's.

15.18 Review Questions

Question 1: What is the difference between a symptom, immediate cause, and root cause? Provide an example of each for a machine that is producing parts with excessive surface roughness.

Answer:

- **Symptom:** The observable effect of the problem
 - *Example: Parts have Ra surface roughness of 3.2 μ m when specification is 1.6 μ m*
- **Immediate cause:** The direct, technical cause of the symptom
 - *Example: Cutting tool is worn beyond its effective life*
- **Root cause:** The fundamental reason that, if eliminated, prevents recurrence
 - *Example: No tool life monitoring system exists; operators judge tool changes by intuition rather than data*

Fixing the root cause (implementing tool life tracking) prevents the problem from recurring, whereas just replacing the tool (addressing immediate cause) means it will happen again.

Question 2: A food processing plant is experiencing frequent jams on their packaging line. Perform a 5 Whys analysis given the following information: The jam occurs at the carton loading station, started last week, happens 4-5 times per shift, and the maintenance team found the timing of the pusher mechanism is off.

Answer:

1. **Problem:** Carton loading station jams 4-5 times per shift
2. **Why #1:** Cartons are not in position when pusher activates → Timing mismatch
3. **Why #2:** Pusher timing is off by approximately 0.3 seconds
4. **Why #3:** Timing adjustment was changed during last week's maintenance
5. **Why #4:** Technician didn't have correct specification for timing setting
6. **Why #5:** Maintenance procedure doesn't include timing specifications

Root Cause: Maintenance procedures lack critical parameter specifications

Corrective Actions: - Update maintenance procedure with correct timing specification ($180\text{ms} \pm 10\text{ms}$) - Restore timing to correct setting immediately - Review other procedures for missing specifications - Add parameter verification checklist to PM activities

Question 3: Create a fishbone diagram outline (list the potential causes under each 6M category) for the problem "CNC machine producing parts 0.05mm oversize."

Answer:

MAN (People) - Operator entered wrong offset - Incorrect setup procedure followed - Inadequate training on new program - Fatigue/distraction during setup

MACHINE (Equipment) - Spindle thermal growth - Ballscrew wear/backlash - Tool holder runout - Axis positioning error

MATERIAL - Material hardness variation - Different lot from supplier - Material springback - Incorrect material grade

METHOD (Process) - Wrong tool offset entered - Program error in G-code - Incorrect cutting parameters - Missing roughing pass

MEASUREMENT - Gauge out of calibration - Wrong measurement technique - Temperature affecting measurement - Incorrect datum reference

MOTHER NATURE (Environment) - Shop temperature variation - Coolant temperature change - Vibration from nearby equipment - Humidity affecting gauges

Question 4: Given the following defect data from a sheet metal stamping operation, create a Pareto analysis and identify the vital few defects to focus

on.

Defect Type	Count
Scratches	89
Burrs	156
Wrinkles	45
Splits/Cracks	28
Dimensional	112
Surface Dents	67
Missing Features	18

Answer:

```
# Create and analyze the data
defects <- data.frame(
  Type = c("Burrs", "Dimensional", "Scratches", "Surface Dents",
           "Wrinkles", "Splits/Cracks", "Missing Features"),
  Count = c(156, 112, 89, 67, 45, 28, 18)
)

# Sort by count descending
defects <- defects[order(-defects$Count),]

# Calculate percentages
defects$Percent <- defects$Count / sum(defects$Count) * 100
defects$Cumulative <- cumsum(defects$Percent)

# Display results
print(defects)
```

	Type	Count	Percent	Cumulative
1	Burrs	156	30.291262	30.29126
2	Dimensional	112	21.747573	52.03883
3	Scratches	89	17.281553	69.32039
4	Surface Dents	67	13.009709	82.33010
5	Wrinkles	45	8.737864	91.06796
6	Splits/Cracks	28	5.436893	96.50485
7	Missing Features	18	3.495146	100.00000

```
# Identify vital few
vital_few <- defects$Type[defects$Cumulative <= 80 |
                          c(TRUE, defects$Cumulative[-nrow(defects)] < 80)]
cat("\nVital Few (contributing to ~80%):", paste(vital_few, collapse = ", "))
```

Vital Few (contributing to ~80%): Burrs, Dimensional, Scratches, Surface Dents

The **vital few** are Burrs, Dimensional errors, and Scratches - addressing these three defect types would address approximately 69% of all defects. Adding Surface Dents would bring the total to 82%.

Question 5: What are the key differences between verification and validation in the context of corrective actions?

Answer:

Aspect	Verification	Validation
Question asked	Did we implement the action correctly?	Did the action solve the problem?
Focus	Process compliance	Results/outcomes
Timing	During/immediately after implementation	Ongoing monitoring after implementation
Methods	Audits, checklists, inspections	Data analysis, trend charts, SPC
Example	Confirm new sensor was installed per specification	Measure defect rate over 30 days to confirm reduction

Verification confirms the action was done right. **Validation** confirms we did the right action.

Both are required - an action can be implemented perfectly (verified) but still not solve the problem (not validated).

Question 6: An aerospace manufacturer has a requirement to use the 8D methodology for customer complaints. What happens in D3 (Containment) and why is it critical?

Answer:

D3 Containment Actions protect the customer while the root cause investigation continues. Key activities include:

1. **Immediate actions:**

- Quarantine suspect inventory (tagged, segregated)
- 100% inspection of suspect lots
- Increase monitoring at subsequent operations
- Sort parts at customer location if already shipped

2. **Documentation:**

- Identify affected lot numbers, date codes, serial numbers
- Quantify the scope of potential exposure
- Document all containment actions taken

3. **Communication:**

- Notify customer of actions being taken
- Alert downstream operations

- Inform suppliers if incoming material involved

Why critical: - Prevents additional defective product from reaching the customer - Limits the scope of the problem (cost, liability) - Demonstrates responsiveness to customer - Buys time for proper root cause investigation - In aerospace, safety-of-flight concerns make containment essential

Without effective containment, the problem continues while you investigate, increasing customer impact and costs exponentially.

Question 7: Why might a team's 5 Whys analysis stop too early? What are signs that you haven't reached the true root cause?

Answer:

Reasons teams stop too early: 1. **Blame arrives** - Analysis ends at "operator error" without asking why the error occurred 2. **Comfort zone** - Team stops when they reach a cause they can easily fix 3. **Time pressure** - Rush to implement a fix, skipping deeper analysis 4. **Technical limit** - Team lacks expertise to go deeper into certain areas 5. **Defensiveness** - Reaching causes that implicate management or systems creates resistance

Signs you haven't reached root cause: 1. **Recurrence** - If the fix is "more training" or "be more careful," problem will return 2. **Human-based answer** - Root causes should typically be systems/processes, not individuals 3. **No prevention mechanism** - If fixing this cause doesn't prevent future occurrences, keep asking why 4. **Can still ask "why?"** - If there's a logical next level to investigate 5. **Administrative fix only** - If the solution is just a procedure or checklist with no engineering controls

Example of stopping too early: - Stopping at: "Operator set wrong parameter" - Should continue: Why? → No parameter sheet at workstation → Why? → No standard work documentation exists → Root cause: Missing standardized work process

The true root cause typically relates to systems, processes, or management decisions rather than individual actions.

Question 8: Describe how you would use Pareto analysis in a stratified manner to drill down into a quality problem.

Answer:

Stratified Pareto Analysis involves creating multiple levels of Pareto charts, progressively drilling down into the vital few categories.

Example: High scrap rate at a machining shop

Level 1: Scrap by defect type 1. Create Pareto of all defect types 2. Result: "Dimensional errors" is 45% of all scrap - investigate this first

Level 2: Dimensional errors by machine 1. Create Pareto of dimensional errors broken down by machine 2. Result: Machine #4 accounts for 60% of

dimensional errors

Level 3: Machine #4 dimensional errors by feature 1. Create Pareto of which dimensions are failing on Machine #4 2. Result: Bore diameter is 70% of Machine #4 dimensional issues

Level 4: Bore diameter issues by shift/operator 1. Create Pareto by shift 2. Result: Evenly distributed - not operator-dependent (machine issue confirmed)

Final Analysis: Investigate boring operation on Machine #4 specifically - likely tool wear, spindle issue, or program error.

The stratified approach efficiently narrows focus from “we have a scrap problem” to “boring operation on Machine #4 has a systematic error.”

Question 9: A defense contractor needs to analyze a safety-critical failure. Why might Fault Tree Analysis (FTA) be preferred over simpler methods like 5 Whys?

Answer:

FTA advantages for safety-critical analysis:

1. **Handles complexity:**
 - Safety-critical systems often have multiple redundancies and complex failure paths
 - FTA can model combinations of events that must occur together (AND gates) or alternatively (OR gates)
 - 5 Whys follows single linear path; FTA captures parallel paths
2. **Quantitative capability:**
 - FTA allows probability calculations for top event
 - Can identify minimum cut sets (smallest combinations that cause failure)
 - Supports reliability and safety integrity level (SIL) calculations
 - Defense/aerospace require quantitative risk assessment
3. **Documentation requirements:**
 - Regulatory bodies (FAA, DoD) often require FTA for critical systems
 - Provides auditable, traceable analysis
 - Standard symbols and methodology
4. **Identifies hidden failures:**
 - Can reveal single points of failure
 - Shows where redundancy is (or isn't) effective
 - Identifies common cause failures that defeat redundancy
5. **Design improvement:**
 - Visual representation helps identify where to add safeguards
 - Sensitivity analysis shows which basic events most affect risk
 - Supports design reviews and safety cases

Example: A missile guidance system failure - 5 Whys might identify one cause

path - FTA would show all possible failure paths, calculate overall failure probability, and identify that two specific sensor failures AND a software error all occurring together could cause the top event, even though each alone is unlikely.

15.19 References

1. Latino, R.J., Latino, K.C., & Latino, M.A. (2019). *Root Cause Analysis: Improving Performance for Bottom-Line Results* (5th ed.). CRC Press.
2. Okes, D. (2019). *Root Cause Analysis: The Core of Problem Solving and Corrective Action* (2nd ed.). ASQ Quality Press.
3. Andersen, B., & Fagerhaug, T. (2006). *Root Cause Analysis: Simplified Tools and Techniques* (2nd ed.). ASQ Quality Press.
4. AIAG. (2018). *CQI-20: Effective Problem Solving Guide*. Automotive Industry Action Group.
5. IEC 61025:2006. *Fault Tree Analysis (FTA)*. International Electrotechnical Commission.
6. Ishikawa, K. (1990). *Introduction to Quality Control*. 3A Corporation.
7. Juran, J.M. (1988). *Juran on Planning for Quality*. Free Press.
8. Ford Motor Company. (2019). *Global 8D Problem Solving Manual*. Ford Motor Company.
9. NASA. (2002). *Fault Tree Handbook with Aerospace Applications*. NASA Office of Safety and Mission Assurance.
10. Wilson, P.F., Dell, L.D., & Anderson, G.F. (1993). *Root Cause Analysis: A Tool for Total Quality Management*. ASQ Quality Press.

Chapter 16

Simulation Modeling with AnyLogic

16.1 Learning Objectives

After completing this chapter, you will be able to:

1. Explain what simulation modeling is and why it is essential for manufacturing system design
 2. Describe the three simulation paradigms available in AnyLogic (discrete-event, agent-based, and system dynamics)
 3. Identify the key components and libraries in AnyLogic for manufacturing simulation
 4. Build a basic production line simulation using the Process Modeling Library
 5. Model warehouse picking and order fulfillment operations
 6. Analyze simulation results to optimize throughput, reduce bottlenecks, and improve efficiency
 7. Apply simulation to validate design decisions before physical implementation
 8. Use built-in AnyLogic examples to accelerate model development
-

16.2 Introduction to Simulation Modeling

Before You Read: Imagine you are designing a new automotive assembly line that will cost \$50 million to build. How would you test whether your design

will meet production targets *before* spending any money on construction?

In manufacturing, making the wrong design decision can be incredibly expensive. A misplaced workstation, an undersized conveyor, or an incorrect staffing level can result in millions of dollars in lost productivity. **Simulation modeling** allows engineers to build virtual representations of manufacturing systems and test them under various conditions—all without spending a single dollar on physical equipment.

16.2.1 What is Simulation?

Simulation is the process of creating a computer model that mimics the behavior of a real-world system over time. Unlike static calculations or spreadsheet analysis, simulation captures the *dynamic* nature of manufacturing systems:

- Products arrive at random intervals
- Machines break down unexpectedly
- Workers take breaks
- Quality defects occur randomly
- Rush orders disrupt schedules

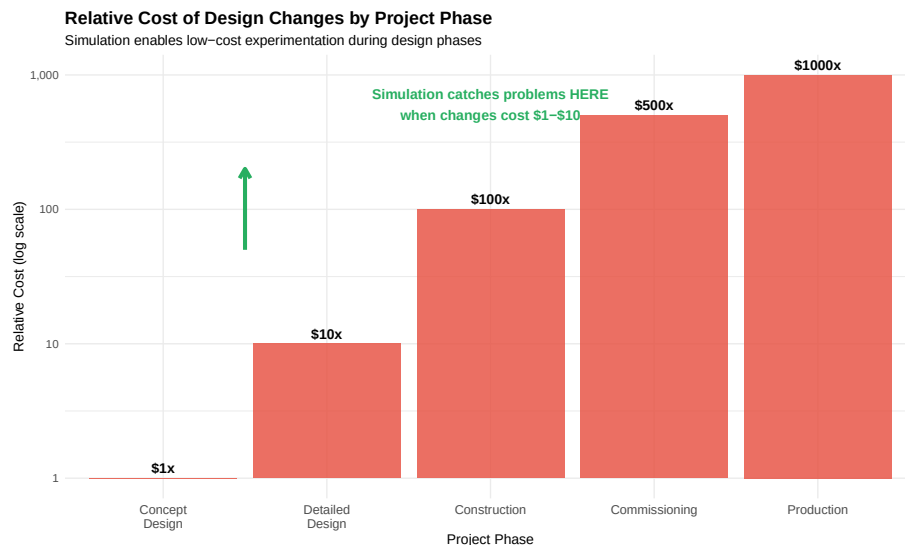


Figure 16.1: The value of simulation in reducing project risk

Industry Application: Mercedes-Benz engineers used AnyLogic simulation to optimize their Sprinter van production line, achieving a **5% efficiency gain** by identifying and eliminating bottlenecks before any physical changes were made. This saved millions in potential rework costs.

16.2.2 Why AnyLogic?

AnyLogic is one of the world’s leading simulation platforms, used by companies including Tesla, BMW, Amazon, Ford, and General Electric. It stands out from other simulation software for several key reasons:

Table 16.1: AnyLogic compared to typical simulation software

Feature	AnyLogic	Other Software
Multi-method modeling	Yes - all three paradigms	Usually single method
Manufacturing libraries	Material Handling Library	Varies
3D visualization	Built-in 3D	Often requires plugins
Cloud-based simulation	AnyLogic Cloud	Limited
Academic version	Free for students	Varies
Agent-based modeling	Industry-leading	Limited support

16.3 The Three Simulation Paradigms

AnyLogic is unique because it supports **three different simulation approaches** within a single platform. Understanding when to use each paradigm is essential for effective modeling.

16.3.1 Discrete-Event Simulation (DES)

Discrete-event simulation models systems as a sequence of events that occur at specific points in time. Between events, nothing changes. This is the most common approach for manufacturing simulation.

Key Concept: Discrete-Event Simulation In DES, entities (products, orders, customers) flow through a series of processes (workstations, queues, resources). The simulation “jumps” from event to event, making it computationally efficient.

Best for: - Assembly lines and production systems - Warehouse operations and logistics - Service processes and queuing systems - Call centers and order processing

16.3.2 Agent-Based Modeling (ABM)

Agent-based modeling simulates systems by defining individual agents (workers, robots, vehicles) that have their own behaviors, goals, and decision rules. Agents interact with each other and their environment, and complex system behavior *emerges* from these interactions.

Discrete-Event Simulation: Entities Flow Through Processes

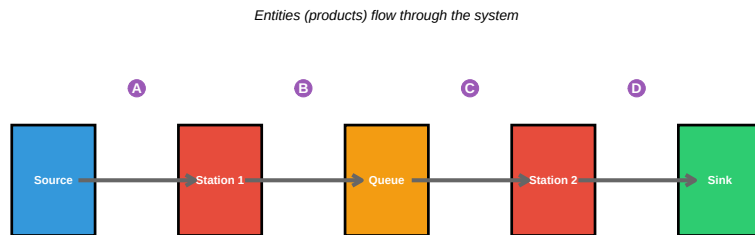


Figure 16.2: Discrete-event simulation flow diagram

Best for: - Autonomous mobile robots (AMRs) and AGVs - Pedestrian and crowd simulation - Market and consumer behavior - Complex adaptive systems

Industry Application: Tesla uses agent-based simulation in AnyLogic to optimize the deployment of autonomous mobile robots in their manufacturing facilities. Each robot is modeled as an agent with its own task allocation logic, collision avoidance, and charging behavior.

16.3.3 System Dynamics (SD)

System dynamics models systems using stocks, flows, and feedback loops. It focuses on aggregate behavior over time rather than individual entities.

Best for: - Strategic planning and capacity modeling - Supply chain dynamics - Policy analysis - Long-term trends and forecasting

16.3.4 Choosing the Right Paradigm

Warning: The ``label.size`` argument of ``geom_label()`` is deprecated as of ggplot2 3.5.0. Please use the ``linewidth`` argument instead.

Quick Check: A company wants to simulate their new automated warehouse with 50 mobile robots that must navigate, avoid collisions, and coordinate pick-ups. Which paradigm would you recommend and why?

16.4 The AnyLogic Interface and Libraries

16.4.1 The AnyLogic Workspace

When you open AnyLogic, you'll see several key areas:

Selecting the Appropriate Simulation Paradigm

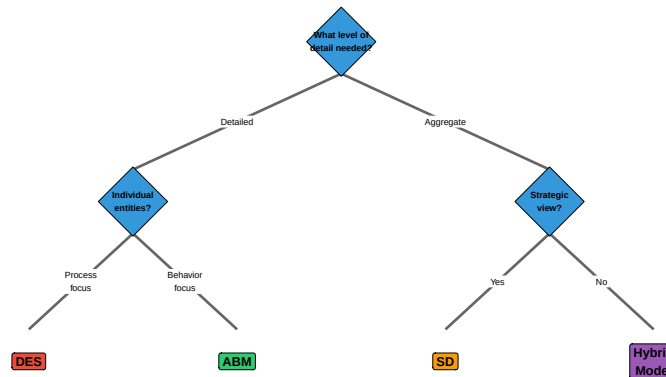


Figure 16.3: Decision framework for selecting simulation paradigm

1. **Model Browser** (left panel) - Shows all elements in your model
2. **Graphical Editor** (center) - Where you build your model visually
3. **Palette** (right panel) - Contains libraries and elements you can drag into your model
4. **Properties** (bottom) - Configure selected elements

16.4.2 Essential Libraries for Manufacturing

AnyLogic includes specialized libraries that dramatically accelerate model development:

Table 16.2: Key AnyLogic libraries for manufacturing simulation

Library	Primary Use	Key Elements
Process Modeling Library	Discrete-event simulation of any process	Source, Queue, Delay, Service, Sink
Material Handling Library	Conveyors, cranes, AGVs, forklifts	Conveyor, Station, Transporter, Crane
Pedestrian Library	Worker movement and ergonomics	PedSource, PedService, PedSink
Road Traffic Library	Truck logistics and yard management	CarSource, Road, Intersection
Rail Library	Rail-based transport systems	RailNetwork, Train, RailYard
Fluid Library	Bulk material and liquid processing	Tank, Pipe, Valve, FlowRate

16.4.3 The Process Modeling Library

The **Process Modeling Library** is the foundation for most manufacturing simulations. It provides building blocks for creating flowchart-based models:

Process Modeling Library Elements
Drag and connect these elements to build your simulation

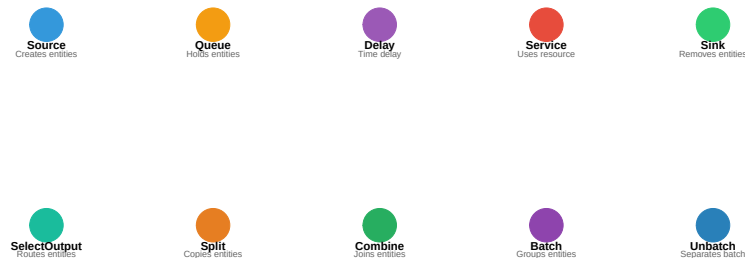


Figure 16.4: Key Process Modeling Library elements

Hands-On Activity: Open AnyLogic and create a new model. Drag a Source, Queue, Delay, and Sink from the Process Modeling Library. Connect them in sequence. Run the simulation and observe entities flowing through.

16.5 Production Line Simulation

Now let's apply these concepts to design and analyze an automotive production line. We'll walk through a complete example using AnyLogic's built-in examples as a starting point.

16.5.1 Case Study: Automotive Door Panel Assembly Line

The Scenario: You are designing a door panel assembly line for an automotive supplier. The line must:

- Process **480 door panels per 8-hour shift** (1 panel per minute)
- Include 5 workstations: stamping, welding, painting, assembly, and inspection

- Meet quality target of **< 2% defect rate**
- Maintain **85% overall equipment effectiveness (OEE)**

Your task is to simulate this line to verify it meets these requirements before construction begins.

16.5.2 Step 1: Calculate Required Takt Time

Before building the simulation, we need to calculate the **takt time**—the maximum time allowed per unit to meet demand.

$$Takt\ Time = \frac{Available\ Production\ Time}{Customer\ Demand} \quad (16.1)$$

For our example:

$$Takt\ Time = \frac{8\ hours \times 60\ min/hour}{480\ panels} = 1\ minute/panel$$

This means each workstation must complete its operation in **less than 1 minute** to avoid becoming a bottleneck.

16.5.3 Step 2: Define Process Parameters

Table 16.3: Process parameters for door panel assembly line

Station	Mean Time (sec)	Std Dev (sec)	Defect Rate (%)	Availability (%)
Stamping	45	5	0.5	95
Welding	52	8	0.8	92
Painting	48	6	0.6	90
Assembly	55	7	0.7	94
Inspection	30	4	0.0	98

16.5.4 Step 3: Build the Simulation Model

In AnyLogic, we would create this model by:

1. Dragging a **Source** block to generate door panels at the required rate
2. Adding **Service** blocks for each workstation (with appropriate process times)
3. Connecting **Queue** blocks between stations to handle waiting
4. Adding **SelectOutput** blocks after each station to route defective parts
5. Placing a **Sink** at the end to collect finished panels

Production Line Model Structure in AnyLogic

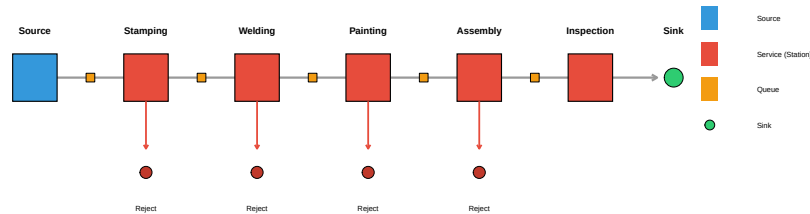


Figure 16.5: AnyLogic production line model structure

16.5.5 Step 4: Simulate and Analyze Results

Let's simulate what the output might look like when we run this model:

```
# Simulate production line results
set.seed(123)

# Generate hourly production data
hours <- 1:8
good_parts <- c(56, 58, 55, 57, 59, 54, 58, 57)
defects <- c(1, 2, 2, 1, 1, 3, 1, 2)
target <- rep(60, 8)

production_df <- data.frame(
  Hour = hours,
  Good = good_parts,
  Defects = defects,
  Target = target
)

# Generate queue length data over time
time_points <- seq(0, 480, by = 5)
queue_data <- data.frame(
  Time = rep(time_points, 5),
  Queue = rep(c("Q1", "Q2", "Q3", "Q4", "Q5"), each = length(time_points)),
  Length = c(
    pmax(0, rnorm(length(time_points), 2, 1)), # Q1
    pmax(0, rnorm(length(time_points), 5, 2)), # Q2 - bottleneck
    pmax(0, rnorm(length(time_points), 3, 1.5)), # Q3
    pmax(0, rnorm(length(time_points), 4, 1.8)), # Q4
    pmax(0, rnorm(length(time_points), 1, 0.5)) # Q5
  )
)
```

```

# Create multi-panel plot
p1 <- ggplot(production_df, aes(x = Hour)) +
  geom_col(aes(y = Good), fill = "#2ECC71", alpha = 0.8) +
  geom_col(aes(y = -Defects), fill = "#E74C3C", alpha = 0.8) +
  geom_line(aes(y = Target), color = "#3498DB", linewidth = 1.2, linetype = "dashed") +
  geom_hline(yintercept = 0, color = "black") +
  annotate("text", x = 8.5, y = 60, label = "Target", color = "#3498DB", fontface = "bold") +
  labs(
    title = "Hourly Production Output",
    subtitle = "Green = Good parts, Red = Defects, Dashed = Target",
    x = "Hour",
    y = "Units"
  ) +
  theme_minimal()

p2 <- ggplot(queue_data, aes(x = Time, y = Length, color = Queue)) +
  geom_line(alpha = 0.7) +
  geom_hline(yintercept = 5, linetype = "dashed", color = "red") +
  annotate("text", x = 450, y = 6, label = "Warning\nThreshold",
    color = "red", size = 3) +
  scale_color_brewer(palette = "Set1") +
  labs(
    title = "Queue Lengths Over Shift",
    subtitle = "Q2 (after Stamping) shows potential bottleneck",
    x = "Time (minutes)",
    y = "Queue Length"
  ) +
  theme_minimal() +
  theme(legend.position = "bottom")

gridExtra::grid.arrange(p1, p2, nrow = 2)

```



Figure 16.6: Simulated production line performance over 8-hour shift

16.5.6 Interpreting the Results

From our simulation, we can observe:

1. **Production Target:** The line produces approximately 454 good parts per shift ($454/480 = 94.6\%$ of target)
2. **Defect Rate:** 13 defects / 467 total = 2.8% (exceeds our 2% target)
3. **Bottleneck Identified:** Queue Q2 (after Stamping) consistently has the longest queue, indicating the **Welding station** is the bottleneck

Warning

Critical Finding: The Welding station with a mean process time of 52 seconds and 8% variability is creating a bottleneck. Even though 52 seconds is under the 60-second takt time, the variability combined with 92% availability causes cumulative delays.

16.5.7 Step 5: Test Improvement Scenarios

The power of simulation is testing “what-if” scenarios. Let’s compare different improvement options:

```
# Create scenario comparison data
scenarios <- data.frame(
  Scenario = factor(c("Current State", "Add Buffer", "Reduce Variability",
    "Add Parallel Station", "Combined Approach"),
    levels = c("Current State", "Add Buffer", "Reduce Variability",
      "Add Parallel Station", "Combined Approach")),
  Throughput = c(454, 462, 471, 485, 498),
  Investment = c(0, 15, 50, 200, 180),
  ROI = c(0, 53, 34, 15.5, 24.4)
)

# Throughput comparison
ggplot(scenarios, aes(x = Scenario, y = Throughput, fill = Scenario)) +
  geom_col() +
  geom_hline(yintercept = 480, linetype = "dashed", color = "red", linewidth = 1) +
  geom_text(aes(label = Throughput), vjust = -0.5, fontface = "bold") +
  annotate("text", x = 5, y = 485, label = "Target: 480", color = "red") +
  scale_fill_brewer(palette = "Set2") +
  labs(
    title = "Throughput by Improvement Scenario",
    subtitle = "Simulation results for 8-hour shift",
    x = "",
    y = "Parts per Shift"
  ) +
  theme_minimal() +
  theme(
    legend.position = "none",
    axis.text.x = element_text(angle = 30, hjust = 1)
  )
```

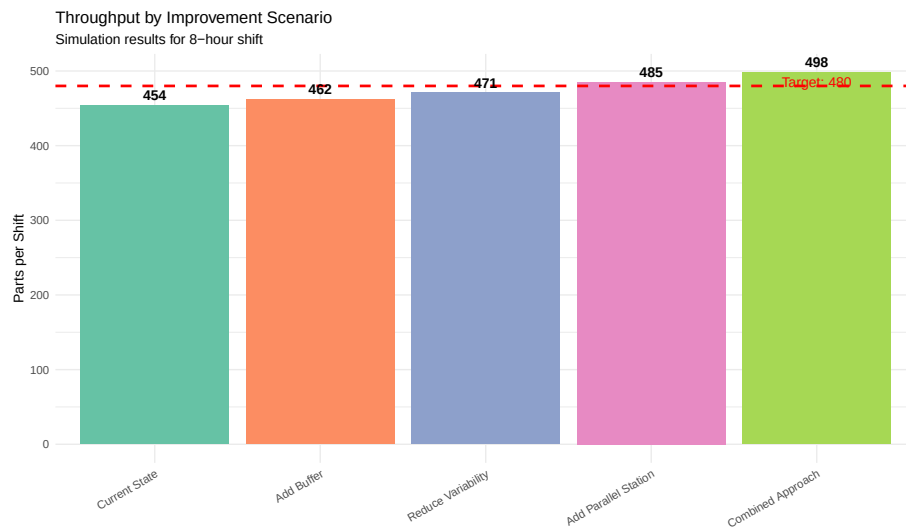


Figure 16.7: Comparison of improvement scenarios

Group Discussion: Based on these results, which improvement option would you recommend? Consider not just throughput but also implementation cost, timeline, and risk. Discuss the trade-offs with your team.

16.6 Warehouse Simulation: Picking and Order Fulfillment

Modern warehouses face immense pressure to fulfill orders quickly and accurately. Simulation helps optimize picking strategies, staffing levels, and automation investments.

16.6.1 The Warehouse Challenge

Before You Read: If you had to fill 1,000 customer orders per day from a warehouse with 50,000 different products (SKUs), how would you organize the picking process? What factors would affect efficiency?

Warehouse operations involve complex interactions between:

- **Order arrivals** (often unpredictable)
- **Picker movement** (walking is typically 50% of picker time)
- **Storage locations** (where products are stored affects travel time)
- **Picking strategies** (single-order vs. batch picking)

- **Material handling equipment** (carts, forklifts, conveyor systems)
- **Packing and shipping** (labor-intensive final steps)

16.6.2 Case Study: E-Commerce Distribution Center

The Scenario: An e-commerce company is designing a new distribution center to handle:

- **13,000 order lines per day** (an order line = one product in one order)
- **750 picking cartons** processed daily
- Peak periods with **3x normal order volume**
- Delivery promise of **same-day shipping** for orders before 2 PM

They need to decide: What picking algorithm will minimize fulfillment time while meeting labor cost targets?

16.6.3 Picking Strategies Compared

AnyLogic allows us to simulate and compare different picking strategies:

Table 16.4: Warehouse picking strategies

Strategy	Description	Best For
Single-Order Picking	One picker completes one order at a time	Small operations, high accuracy
Batch Picking	Picker collects items for multiple orders simultaneously	High-volume with clustered items
Zone Picking	Warehouse divided into zones; each picker handles one zone	Very large warehouses
Wave Picking	Orders grouped into waves released at intervals	Managing workload throughout the day
Cluster Picking	Multiple orders picked into compartmentalized cart	Medium volume, diverse product range

16.6.4 Simulating Picker Movement

One of the key factors in warehouse efficiency is picker travel distance. AnyLogic can model this using the **Pedestrian Library** combined with the **Process Modeling Library**.

```
# Simulate picker travel data for different storage strategies
set.seed(456)

# Random storage vs. velocity-based storage
n_picks <- 500
random_storage <- rnorm(n_picks, mean = 180, sd = 40) # feet per pick
velocity_storage <- rnorm(n_picks, mean = 95, sd = 25) # feet per pick
abc_storage <- rnorm(n_picks, mean = 120, sd = 30) # feet per pick

travel_data <- data.frame(
  Strategy = rep(c("Random Storage", "ABC Analysis", "Velocity-Based"), each = n_picks),
  Distance = c(random_storage, abc_storage, velocity_storage)
```

```

)

ggplot(travel_data, aes(x = Strategy, y = Distance, fill = Strategy)) +
  geom_boxplot(alpha = 0.7) +
  geom_hline(yintercept = mean(velocity_storage), linetype = "dashed", color = "#2ECC71") +
  stat_summary(fun = mean, geom = "point", shape = 18, size = 4, color = "red") +
  annotate("text", x = 3.35, y = mean(velocity_storage),
          label = paste0("Best: ", round(mean(velocity_storage)), " ft"),
          color = "#2ECC71", size = 4, fontface = "bold") +
  scale_fill_manual(values = c("#E74C3C", "#F39C12", "#2ECC71")) +
  labs(
    title = "Picker Travel Distance by Storage Strategy",
    subtitle = "Red diamond = mean; Velocity-based storage reduces travel by 47%",
    x = "Storage Assignment Strategy",
    y = "Travel Distance per Pick (feet)"
  ) +
  theme_minimal() +
  theme(legend.position = "none")

```

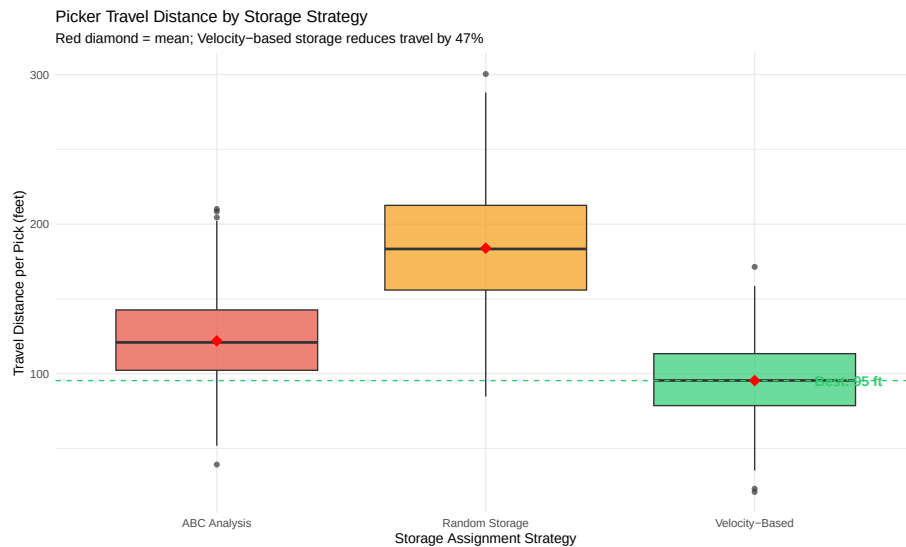


Figure 16.8: Impact of storage assignment on picker travel distance

Industry Application: Kuehne+Nagel used AnyLogic simulation to design a new warehouse processing 13,000 order lines per day. By testing different picking algorithms in simulation, they identified the optimal approach before building the physical facility, avoiding costly redesigns.

16.6.5 Autonomous Mobile Robots (AMRs) in Warehouses

Modern warehouses increasingly use **autonomous mobile robots** to reduce picker travel time. Instead of workers walking to products, robots bring shelving units to stationary pick stations.

```
# Simulate AMR performance
amr_counts <- c(5, 10, 15, 20, 25, 30, 35, 40, 45, 50)
fulfillment_times <- c(45, 28, 18, 13, 10.5, 9, 8.2, 7.8, 7.6, 7.5)
utilization <- c(98, 95, 88, 78, 68, 58, 52, 48, 45, 43)

amr_data <- data.frame(
  AMRs = amr_counts,
  Time = fulfillment_times,
  Utilization = utilization
)

# Dual y-axis plot
coeff <- 0.5

ggplot(amr_data, aes(x = AMRs)) +
  geom_line(aes(y = Time), color = "#3498DB", linewidth = 1.5) +
  geom_point(aes(y = Time), color = "#3498DB", size = 3) +
  geom_line(aes(y = Utilization * coeff), color = "#E74C3C", linewidth = 1.5, linetype = "dashed") +
  geom_point(aes(y = Utilization * coeff), color = "#E74C3C", size = 3) +
  geom_vline(xintercept = 25, linetype = "dotted", color = "#2ECC71", linewidth = 1.2) +
  annotate("text", x = 27, y = 40, label = "Optimal\nPoint", color = "#2ECC71", fontface = "bold")
  scale_y_continuous(
    name = "Fulfillment Time (minutes)",
    sec.axis = sec_axis(~ . / coeff, name = "Robot Utilization (%)")
  ) +
  labs(
    title = "Finding the Optimal Number of Autonomous Mobile Robots",
    subtitle = "Blue = Fulfillment time (lower is better); Red = Robot utilization (higher is bet",
    x = "Number of AMRs"
  ) +
  theme_minimal() +
  theme(
    axis.title.y.left = element_text(color = "#3498DB"),
    axis.title.y.right = element_text(color = "#E74C3C")
  )
)
```

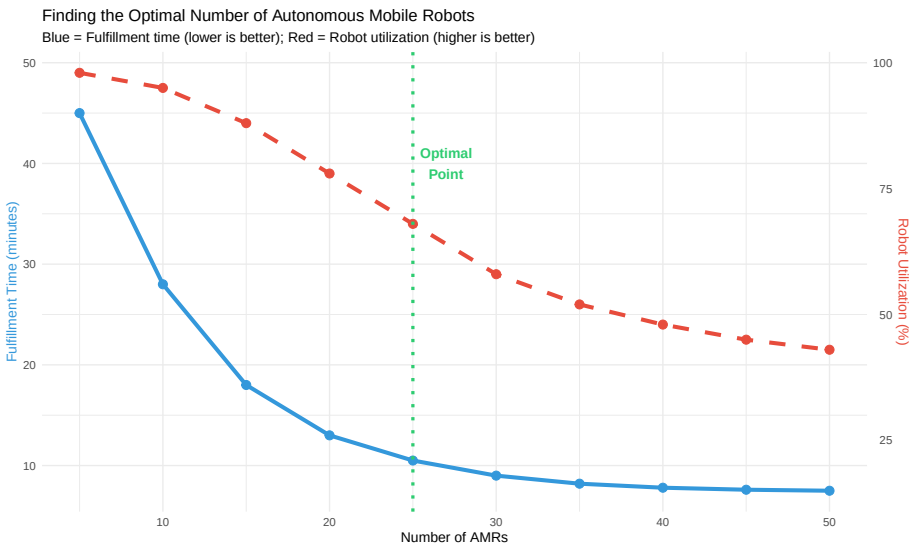


Figure 16.9: Simulation results: order fulfillment time vs. number of AMRs

This simulation reveals a classic trade-off: adding more robots reduces order fulfillment time but also decreases utilization (robots spend more time idle). The **optimal point** balances these factors based on business requirements.

Quick Check: 1. Why does adding more robots eventually show diminishing returns? 2. If robots cost \$50,000 each and labor costs \$25/hour, how would you calculate the breakeven point? 3. What other factors should be considered beyond raw cost?

16.7 Built-in AnyLogic Examples

AnyLogic includes numerous pre-built example models that serve as excellent learning resources and starting points for your own projects. Here are the key examples relevant to manufacturing and warehouse operations:

16.7.1 Manufacturing Examples

Table 16.5: Key manufacturing example models in AnyLogic

Example Name	Location	What You'll Learn
Job Shop	Help > Example Models > Manufacturing	Routing jobs through a shop
Assembly Line	Help > Example Models > Manufacturing	Line balancing

Flexible Manufacturing System	Help > Example Models > Manufacturing	Flexible routing, machine s
Conveyor System	Help > Example Models > Material Handling	Conveyor design, merging,
AGV System	Help > Example Models > Material Handling	Vehicle dispatching, path p

16.7.2 Warehouse and Logistics Examples

Table 16.6: Key warehouse example models in AnyLogic

Example Name	Location	What You’ll Learn
Warehouse	Help > Example Models > Logistics	Storage assignment, inventory managem
Distribution Center	Help > Example Models > Logistics	Receiving, put-away, picking, shipping in
Order Picking	Help > Example Models > Logistics	Picking route optimization, batch vs. sin
AS/RS System	Help > Example Models > Material Handling	Automated storage retrieval, crane sequ
Cross-Docking	Help > Example Models > Logistics	Minimal storage, direct transfer operati

Hands-On Activity: Open AnyLogic and navigate to Help > Example Models. Open the “Assembly Line” example and run it. Then: 1. Identify the bottleneck station (highest queue length) 2. Modify the process time for that station 3. Observe how throughput changes 4. Document your findings

16.8 Building Your First Model: Step-by-Step Tutorial

Let’s walk through building a simple but complete production line model from scratch.

16.8.1 Tutorial: Three-Station Production Line

Objective: Model a production line with three workstations and analyze throughput.

16.8.1.1 Step 1: Create a New Model

- 1. Open AnyLogic
- 2. File > New > Model
- 3. Name it “ProductionLine_Tutorial”
- 4. Select “Discrete Event” as the model type

16.8.1.2 Step 2: Add the Process Flow

From the **Process Modeling Library**, drag these elements onto the canvas in order:

1. **Source** - Generates parts entering the system
2. **Queue** - Holds parts waiting for Station 1
3. **Delay** - Represents Station 1 processing time
4. **Queue** - Holds parts waiting for Station 2
5. **Service** - Represents Station 2 (requires a worker resource)
6. **Queue** - Holds parts waiting for Station 3
7. **Delay** - Represents Station 3 processing time
8. **Sink** - Removes completed parts from the system

16.8.1.3 Step 3: Connect the Elements

Click on the output port of each element and drag to the input port of the next element. The flow should look like:

Source → Queue → Delay → Queue → Service → Queue → Delay → Sink

16.8.1.4 Step 4: Configure Parameters

Click each element and set these properties:

Source: - Arrivals defined by: Inter-arrival time - Inter-arrival time: `exponential(1)` (1 part per minute on average)

Delays (Stations 1 and 3): - Delay time: `triangular(0.5, 0.8, 1.2)` (minutes)

Service (Station 2): - Delay time: `triangular(0.6, 0.9, 1.5)` (minutes) - Requires a Resource Pool (add one and set capacity to 1)

Queues: - Maximum capacity: 10

16.8.1.5 Step 5: Add Statistics Collection

Add these statistics to track performance:

1. **TimeMeasureStart** - After Source
2. **TimeMeasureEnd** - Before Sink
3. **Dataset** - To log throughput over time

16.8.1.6 Step 6: Run and Analyze

```
# Simulate expected results
set.seed(789)
time <- seq(0, 480, by = 1)

# Generate cumulative throughput
throughput <- cumsum(rpois(length(time), lambda = 0.85))

# Generate queue lengths
```

```

q1 <- pmax(0, rnorm(length(time), 1.5, 0.8))
q2 <- pmax(0, rnorm(length(time), 3.2, 1.2)) # Bottleneck
q3 <- pmax(0, rnorm(length(time), 0.8, 0.5))

tutorial_data <- data.frame(
  Time = time,
  Throughput = throughput,
  Q1 = q1,
  Q2 = q2,
  Q3 = q3
)

p1 <- ggplot(tutorial_data, aes(x = Time, y = Throughput)) +
  geom_line(color = "#2ECC71", linewidth = 1) +
  geom_hline(yintercept = 400, linetype = "dashed", color = "red") +
  annotate("text", x = 50, y = 420, label = "Target: 400", color = "red") +
  labs(title = "Cumulative Throughput", x = "Time (min)", y = "Parts Completed") +
  theme_minimal()

tutorial_long <- tutorial_data %>%
  tidyr::pivot_longer(cols = c(Q1, Q2, Q3), names_to = "Queue", values_to = "Length")

p2 <- ggplot(tutorial_long, aes(x = Time, y = Length, color = Queue)) +
  geom_line(alpha = 0.6) +
  scale_color_manual(values = c("#3498DB", "#E74C3C", "#F39C12"),
    labels = c("Before Station 1", "Before Station 2", "Before Station 3")) +
  labs(title = "Queue Lengths", x = "Time (min)", y = "Parts Waiting") +
  theme_minimal() +
  theme(legend.position = "bottom")

gridExtra::grid.arrange(p1, p2, ncol = 2)

```

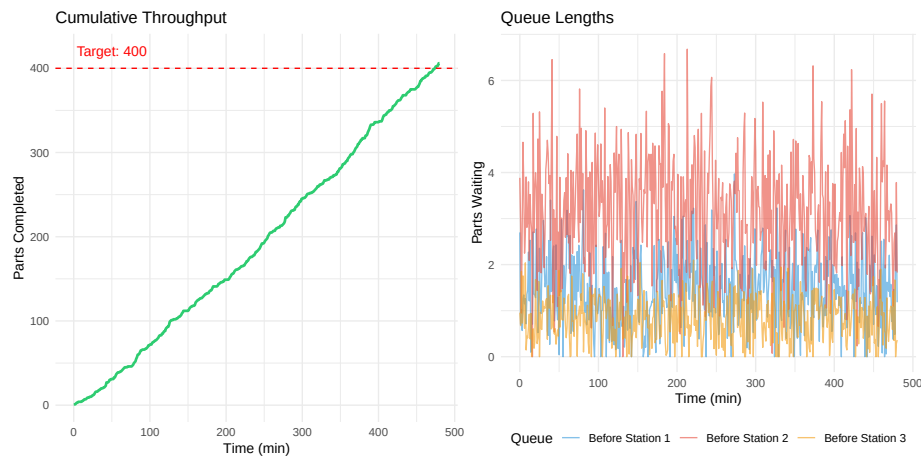


Figure 16.10: Expected results from tutorial model

Verify Your Model: After running, you should observe: - Approximately 400-420 parts completed in 480 minutes - Queue 2 (before Station 2) has the longest average length - The system is stable (queues don't grow without bound)

16.9 Advanced Topics

16.9.1 3D Visualization

AnyLogic includes powerful 3D visualization capabilities that help communicate simulation results to stakeholders who may not understand abstract flowcharts.

Benefits of 3D visualization: - Easier validation with plant managers (“Does this look like our facility?”) - Executive presentations and funding requests - Training material for new employees - Virtual commissioning before physical construction

16.9.2 Integration with Real Data

Production simulations become more valuable when connected to real data:

- **Historical data import:** Load actual order data, machine logs, or production records
- **Real-time dashboards:** Connect to databases for live monitoring
- **Digital twin operation:** Mirror physical operations in real-time

16.9.3 Optimization Experiments

AnyLogic includes an **Optimization** experiment type that automatically searches for the best parameter values:

```
# Simulate optimization process
iterations <- 1:50
staff_levels <- c(
  rep(5, 5), rep(7, 5), rep(6, 5), rep(8, 5), rep(7, 5),
  rep(6, 10), rep(7, 5), rep(7, 5), rep(7, 5)
)
throughput <- c(
  rnorm(5, 380, 10), rnorm(5, 445, 8), rnorm(5, 420, 9), rnorm(5, 450, 7), rnorm(5, 448, 7),
  rnorm(10, 425, 8), rnorm(5, 450, 6), rnorm(5, 452, 5), rnorm(5, 455, 4)
)

opt_data <- data.frame(
  Iteration = iterations,
  Staff = staff_levels,
  Throughput = throughput
)

opt_data$Best <- cummax(opt_data$Throughput)

ggplot(opt_data, aes(x = Iteration)) +
  geom_point(aes(y = Throughput), alpha = 0.5, color = "#3498DB") +
  geom_line(aes(y = Best), color = "#E74C3C", linewidth = 1.2) +
  geom_hline(yintercept = 455, linetype = "dashed", color = "#2ECC71") +
  annotate("text", x = 45, y = 460, label = "Optimal: 7 staff, 455 parts",
    color = "#2ECC71", fontface = "bold") +
  labs(
    title = "Optimization Experiment: Finding Optimal Staffing",
    subtitle = "Blue points = individual runs; Red line = best found so far",
    x = "Iteration",
    y = "Throughput (parts/shift)"
  ) +
  theme_minimal()
```

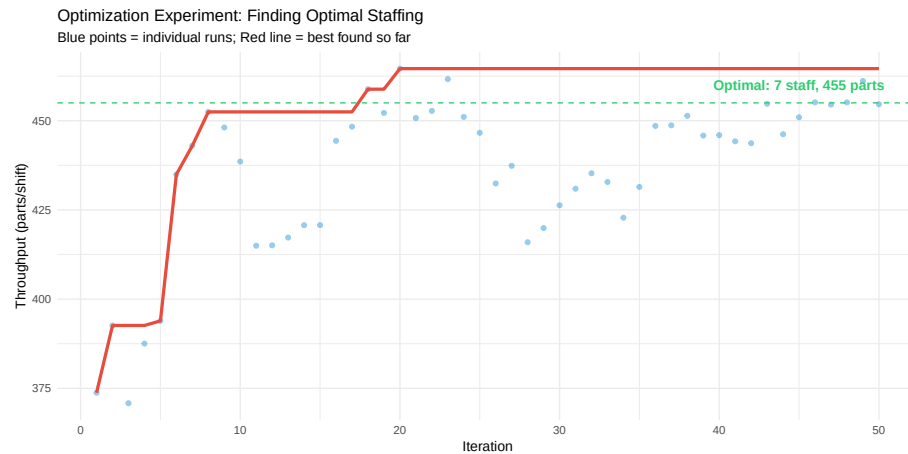


Figure 16.11: Optimization search finding the best staffing level

16.10 Key Takeaways

What We Learned:

1. **Simulation enables risk-free experimentation** - Test design changes in virtual environments before spending money on physical implementation
2. **AnyLogic supports three paradigms** - Discrete-event (for process flows), agent-based (for autonomous entities), and system dynamics (for strategic planning)
3. **Manufacturing simulation identifies bottlenecks** - Queue analysis reveals which stations limit throughput
4. **Warehouse simulation optimizes picking** - Compare strategies like batch picking, zone picking, and AMR deployment before implementation
5. **Built-in examples accelerate learning** - Start from AnyLogic's example models to understand best practices
6. **The value is in the “what-if”** - Simulation's true power is comparing scenarios to find optimal solutions

Key Equations: - Takt Time: Equation Equation 16.1

Before Moving On: - Can you explain when to use discrete-event vs. agent-based simulation? - Can you build a basic three-station production line in AnyLogic? - Can you identify how simulation could help in your workplace or industry?

16.11 Practice Problems

16.11.1 Problem 1: Takt Time Calculation

A refrigerator assembly plant operates two 8-hour shifts per day with a 30-minute lunch break per shift. Customer demand is 720 units per day.

- a) Calculate the takt time in seconds
- b) If the bottleneck station has a cycle time of 62 seconds, will they meet demand? Why or why not?
- c) Suggest two approaches to resolve the issue

16.11.2 Problem 2: Simulation Model Design

You are asked to simulate a paint shop with: - 3 spray booths operating in parallel - Conveyor system bringing parts from preparation area - Curing oven with 30-minute cycle time - Quality inspection with 5% rejection rate

- a) Sketch the simulation model structure
- b) List which AnyLogic libraries you would use
- c) Identify potential bottlenecks to investigate

16.11.3 Problem 3: Warehouse Picking Analysis

A warehouse uses single-order picking with 5 pickers. Each picker walks an average of 3 miles per 8-hour shift. The company is considering batch picking with specialized carts.

- a) If batch picking reduces travel by 35%, how many miles would be saved per picker per shift?
- b) If workers walk at 3 mph and pick items at a rate of 2 per minute while at a location, what percentage of time is currently spent walking?
- c) What information would you need to simulate this scenario in AnyLogic?

16.11.4 Problem 4: AMR Fleet Sizing

Using the graph in Figure 16.9 as a reference:

- a) If the company requires fulfillment time under 12 minutes, what is the minimum number of AMRs needed?
- b) What trade-off occurs when moving from 25 to 50 AMRs?
- c) If each AMR costs \$50,000 and operates for 5 years, what is the daily cost per AMR?

Challenge Problem: Design a simulation experiment to determine the optimal number of pickers and AMRs for a warehouse with variable order volumes.

The solution should: - Handle daily order volumes ranging from 5,000 to 20,000 lines - Meet a 2-hour fulfillment target - Minimize total labor and equipment costs

16.12 Further Resources

16.12.1 AnyLogic Official Resources

- **AnyLogic University:** Free online courses covering all simulation paradigms
- **Example Models:** Help > Example Models in AnyLogic software
- **Cloud Platform:** cloud.anylogic.com for running simulations online

16.12.2 Academic Resources

- Borshchev, A. (2013). *The Big Book of Simulation Modeling*. AnyLogic North America.
- Law, A.M. (2015). *Simulation Modeling and Analysis* (5th ed.). McGraw-Hill.

16.12.3 Industry Case Studies

- Mercedes-Benz Sprinter production optimization
- Kuehne+Nagel warehouse picking algorithm selection
- Tesla autonomous mobile robot deployment

Tip

Getting Started: Download the free Personal Learning Edition of AnyLogic from anylogic.com. It includes all features and example models—the only limitation is model size.

Chapter 17

Working Effectively with AI

17.1 Learning Objectives

After completing this chapter, you will be able to:


1. Understand AI's role in modern engineering work and its limitations
 2. Apply the four steps of effective AI use: Define, Prompt, Iterate, Validate
 3. Apply prompt engineering principles to get better AI responses
 4. Distinguish between poor, adequate, and excellent prompts
 5. Select appropriate AI tools for different tasks (chat interfaces, NotebookLM, Claude Code, browser extensions)
 6. Use iterative AI collaboration to solve complex engineering problems
 7. Critically evaluate AI-generated content for accuracy and safety
 8. Identify tasks suited for AI assistance versus human expertise
 9. Apply ethical considerations when using AI in engineering contexts
-

17.2 Introduction: AI in the Modern Workplace

Artificial Intelligence has fundamentally changed how engineering work is performed. According to research, AI is predominantly used for **coding and technical work** (34% of professional use), with complex tasks showing potential **12x speedups** compared to traditional methods.

However, there's a critical paradox: **more complex tasks have lower success rates** (61-66% versus 70% for simpler tasks). This means engineers must develop skills to effectively collaborate with AI, not just delegate to it.

17.2.1 The Education Paradox

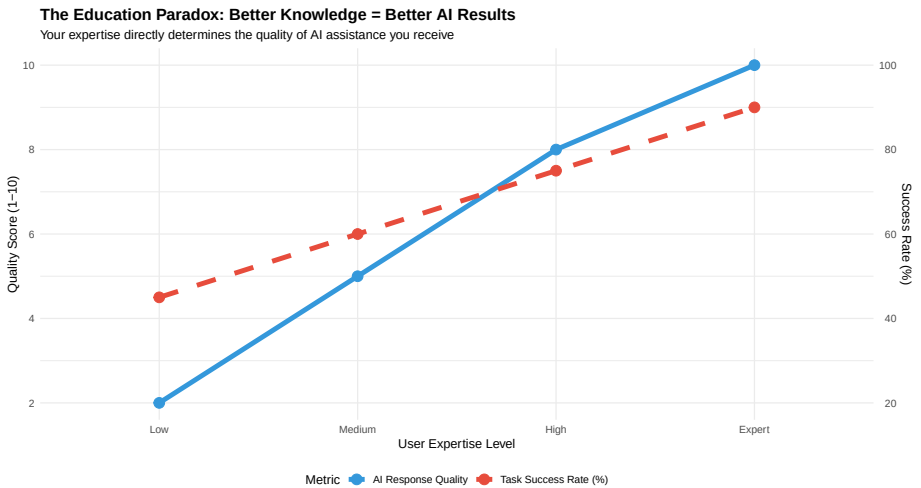

Key Insight: There is a nearly perfect correlation between prompt sophistication and response quality. You need strong foundational knowledge to get quality AI assistance. “AI will do it for me” is a trap.

Discussion: Why does expertise improve AI results?

The “education paradox” reveals a fundamental truth about AI collaboration:

- **Better questions lead to better answers:** Experts know what to ask and how to frame problems
- **Domain knowledge enables validation:** You can only verify AI output if you understand the domain
- **Iterative refinement requires expertise:** Knowing when to push back or ask follow-up questions
- **Critical evaluation is essential:** AI can sound confident while being wrong

Think about it: If you don’t understand the fundamentals of motor selection, how would you know if an AI recommendation is correct or dangerously undersized?

17.2.2 AI Impact by Industry

Table 17.1: AI Impact Across Engineering Industries

Industry	Common AI Applications	Potential Impact
Automotive	Simulation modeling, control systems, predictive maintenance	10-12x
Food Processing	Process optimization, quality control, equipment diagnostics	8-10x

Defense	System design, modeling, compliance documentation	10-12x
Mining	Equipment diagnostics, predictive maintenance, safety analysis	8-10x
General Manufacturing	Documentation, troubleshooting guides, process analysis	6-8x

Why do automotive and defense require “Critical” human oversight?

Safety-critical applications require mandatory human validation because:

1. **Regulatory requirements:** ISO 26262 (automotive) and MIL-STDs (defense) require documented human review
2. **Liability:** Engineers are legally responsible for designs, not AI tools
3. **Failure consequences:** Errors can cause injury, death, or mission failure
4. **AI limitations:** Current AI cannot reliably reason about edge cases and failure modes
5. **Standards compliance:** AI cannot certify compliance with safety standards

Best practice: Use AI for initial research and drafting, but always validate with human experts and formal analysis methods (FMEA, FTA, HAZOP).

17.3 Prompt Engineering Fundamentals

Prompt engineering is the skill of crafting inputs to AI systems that produce useful, accurate, and relevant outputs. In engineering contexts, this skill is becoming as important as technical writing.

Before you read: What makes a good question?

Think about the difference between these two questions:

1. “Can you help me with my motor problem?”
2. “I have a 3-phase 460V 50HP motor that trips its overload after 15 minutes of running. Ambient temperature is 35°C. What diagnostic steps should I follow?”

Which question would get better help from a human expert? The same principle applies to AI. Before reading about prompt engineering, consider what information you would need to give a colleague to get useful help.

17.3.1 The Seven Rules of Effective Prompts



17.4 Prompt Quality Comparison: Bad, Medium, and Good

The following examples demonstrate the dramatic difference that prompt quality makes. Each example shows the same task approached three ways.

17.4.1 Example 1: Motor Selection

Quality Level	Prompt
Bad	Help me pick a motor.
Medium	I need to select a motor for a conveyor system. The conveyor moves boxes that weigh
Good	Act as a senior electromechanical engineer. I need to select an AC induction motor fo

17.4.2 Example 2: Troubleshooting a PLC System

Quality Level	Prompt
Bad	My PLC isn't working. Fix it.
Medium	I have an Allen-Bradley PLC that's showing a fault. The output for a motor starter isn't turning
Good	Act as an experienced automation technician troubleshooting a control system issue.\n\nSystem:

17.4.3 Example 3: Safety Analysis

Quality Level	Prompt
Bad	Is this machine safe?
Medium	I have a robotic welding cell. What safety features does it need?
Good	Act as a certified machine safety engineer (TUV or equivalent).\n\nI need to perform a risk assess

Warning: For safety-critical applications, AI should NEVER be the final authority. Always validate AI-generated safety analyses with certified professionals and applicable standards.

17.5 Anatomy of an Excellent Engineering Prompt

Let's break down the components of a well-structured prompt:

Anatomy of an Excellent Engineering Prompt		
Each component serves a specific purpose in guiding AI response quality		
Role Assignment	"Act as a senior electromechanical engineer specializing in automotive systems"	Sets expertise level and perspective for response
Context	"I am designing a regenerative braking system for an electric vehicle"	Establishes the problem domain and application
Specifications	"Vehicle mass: 2000kg, max speed: 150km/h, battery: 400V nominal"	Provides concrete parameters for calculations
Constraints	"Must comply with ISO 26262 ASIL-B, budget under \$500/unit"	Defines boundaries and requirements
Deliverables	"Provide: 1) Energy calculations, 2) Component selection, 3) Control strategy"	Lists exactly what you need from the AI
Format	"Format as a technical design document with diagrams described"	Ensures output is immediately usable
Standards	"Reference ISO 26262 and SAE J2954 where applicable"	Grounds response in industry requirements

17.6 Interactive Exercise: Rate These Prompts

For each prompt below, identify what’s missing and how you would improve it.

17.6.1 Exercise 1: Pump Selection

Original Prompt: “What pump should I use for water?”

Table 17.5: Analysis: What’s Missing from This Prompt?

Missing Element	Why It’s Important
Flow rate requirement	Cannot size pump without knowing GPM or L/min needed
Head/pressure requirement	Total dynamic head determines pump curve selection
Fluid properties	Temperature, viscosity, solids content affect pump type
Operating environment	Indoor/outdoor, hazardous area, food-grade requirements
Power supply	Single/three phase, voltage determines motor options
Budget/efficiency goals	Premium efficiency vs. standard, capital vs. operating cost

Your Task: Rewrite this prompt to include all necessary information for a food processing application pumping tomato paste at 80°C.

17.6.2 Exercise 2: Identify the Quality Level

Rate each prompt as Bad, Medium, or Good and justify your rating:

Table 17.6: Exe

#	Prompt
1	How do I wire a motor?
2	Explain the difference between VFD and soft starter for a 50HP motor application in a cement plant with hig
3	Write code for Arduino.
4	Design a sensor network for predictive maintenance on a CNC machine. Include vibration, temperature, and c
5	Help with my project.

17.7 The Four Steps of Effective AI Use

The research shows that effectively working with AI follows a consistent four-step process. Master these steps to maximize the value of AI collaboration.

Warning: Using ``size`` aesthetic for lines was deprecated in ggplot2 3.4.0.
i Please use ``linewidth`` instead.



17.7.1 Step 1: Define the Task

Before engaging with AI, clearly define what you need:

- **What is the end goal?** A calculation, a design, troubleshooting guidance?

- **What constraints apply?** Budget, standards, materials, timeline?
- **What do you already know?** Your expertise shapes the conversation
- **Can AI actually help with this?** Some tasks require physical inspection or human judgment

Key Insight: The better you understand the problem, the better AI can help. Vague understanding leads to vague prompts and useless responses.

17.7.2 Step 2: Prompt with Context

Apply the seven rules of effective prompting:

1. Assign a role to establish expertise level
2. Provide complete context and background
3. Specify constraints and requirements
4. List clear deliverables
5. Request step-by-step reasoning
6. Define the output format
7. Include relevant standards

17.7.3 Step 3: Iterate and Refine

Rarely is the first response perfect. Plan for 3-6 turns of conversation:

- Review critically: What's useful? What's missing? What's wrong?
- Ask targeted follow-up questions
- Request expansions on specific areas
- Challenge assumptions and ask for alternatives

17.7.4 Step 4: Validate and Apply

AI output is a **starting point**, not a final answer:

- Verify calculations and units
- Cross-check against standards and codes
- Apply your engineering judgment
- Document what came from AI assistance
- Take responsibility for the final work product

Case Study: When validation caught an AI error

Scenario: An engineering student used AI to calculate the required conveyor belt width for a food processing line handling 500 kg/hr of bulk product.

AI Response: Recommended a 300mm belt based on throughput calculations.

Validation Issue: The AI correctly calculated volumetric flow but failed to consider: - Minimum belt width for the discharge chute (400mm required) - Product spread factor for irregular materials - Safety factor for surge capacity

Actual Requirement: 500mm belt per facility standards.

Lesson: AI calculations may be mathematically correct but miss practical engineering constraints. Always validate against physical requirements, codes, and site-specific standards.

Discussion: When should you NOT use AI?


AI is not appropriate when:

1. **Physical inspection is required:** AI cannot see, touch, or measure actual equipment
2. **Real-time safety decisions:** Lockout/tagout procedures, emergency response
3. **Legal certification:** Stamping drawings, signing off on safety assessments
4. **Novel situations:** First-of-a-kind designs with no training data
5. **Classified/proprietary work:** Confidential designs should not be uploaded

Rule of thumb: If a human expert would need to be physically present, AI cannot substitute.

17.8 AI Tools and Their Use Cases

Different AI tools serve different purposes. Understanding when to use each tool maximizes productivity.

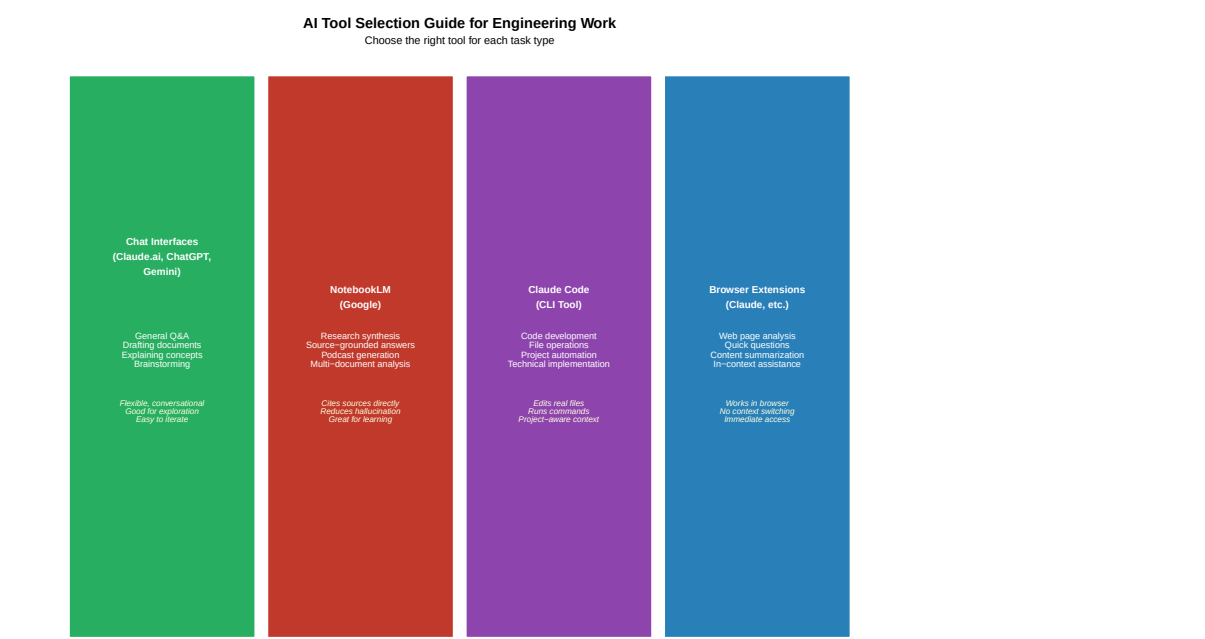

17.8.1 Chat Interfaces (Claude.ai, ChatGPT, Gemini)

Web-based conversational AI platforms are the most versatile starting point for AI collaboration.

Table 17.7: Common Engineering Use Cases

Use Case	Description
Technical Explanations	Explain complex concepts, standards, or technical principles in accessible language
Document Drafting	Draft reports, specifications, procedures, or technical memos
Calculation Verification	Double-check hand calculations; request step-by-step solutions
Brainstorming Solutions	Generate alternative approaches to engineering problems
Code Generation	Write PLC ladder logic concepts, Python scripts, or MATLAB code
Standard Interpretation	Interpret requirements from ISO, OSHA, NEC, or other standards

Best Practices for Chat Interfaces:

- Start new conversations for new topics (avoid context pollution)
- Use the “regenerate” feature to see alternative responses
- Upload images of diagrams, schematics, or equipment for visual analysis
- Copy important responses to notes (conversations can be lost)

17.8.2 NotebookLM (Google)

NotebookLM is specifically designed for **source-grounded research**. Upload documents, and the AI answers questions based only on your sources.

Table 17.8: NotebookLM Features for Engineering

Feature	Description
Source-Based Answers	Answers come directly from your uploaded documents, reducing hallucination
Citation Links	Every answer includes clickable citations to the exact source passage
Audio Overview	Generates AI podcast-style audio summaries of your documents for learning
Multi-Document Synthesis	Combines information from multiple PDFs, websites, or text files
Note Generation	Creates structured notes and summaries from source materials

Example NotebookLM Workflow:

1. Upload: ISO 12100, ISO 13849-1, equipment manual PDF
2. Ask: “What risk assessment steps does ISO 12100 require?”
3. Review: AI provides answer with direct citations to document sections
4. Generate: Create an audio overview to reinforce learning

When to Use NotebookLM: When you need answers grounded in specific documents rather than general AI knowledge. Ideal for standards compliance, equipment documentation, and research synthesis.

17.8.3 Claude Code (Command Line Tool)

Claude Code is a **terminal-based AI assistant** that can read, write, and execute code in your actual project environment.

Table 17.9: Claude Code Capabilities for Technical Work

Capability	Description	Example
File Operations	Read, write, and edit files directly in your project	Edit src/motor_control.py to add a new function
Code Development	Generate, refactor, and debug code with full context	Write a Python script to parse CSV data
Command Execution	Run build commands, tests, and system tools	Run pytest and fix any failing tests
Project Context	Understands your entire codebase structure	Find all files that reference the 'config' module
Git Integration	Create commits, branches, and pull requests	Commit changes with descriptive messages

Engineering Applications:

- **PLC Code Analysis:** Review and understand legacy ladder logic or structured text
- **Data Processing:** Create scripts to analyze production data, SPC charts, or sensor logs

- **Documentation Generation:** Auto-generate code documentation or API references
- **Test Automation:** Write unit tests for engineering calculations

Example Session:

```
> claude "Analyze the motor_control.py file and suggest improvements for
        handling encoder signal noise"
```

Claude Code reads the file, understands the context, and provides specific recommendations with code changes that can be applied directly.

17.8.4 Browser Extensions (Claude Extension, etc.)

Browser extensions provide **instant AI assistance** without leaving your current workflow.

Table 17.10: Browser Extension Use Cases

Use Case	How It Helps	Example
Webpage Summarization	Summarize long technical articles or datasheets instantly	On a 20-page document
Technical Documentation	Ask questions about the documentation page you’re reading	On All about Circuits
Email Composition	Draft professional responses to technical inquiries	‘Help me write an email to the client about the sensor issue’
Research Assistance	Explain unfamiliar terms or concepts on any webpage	Highlighting key points in a research paper
Quick Calculations	Get quick engineering calculations without switching apps	‘Convert 120V to 240V’

Best Practices:

- Use for quick queries and summaries
- For complex problems, move to a full chat interface
- Be cautious with confidential information on web pages
- Extensions work best for reading comprehension tasks

17.8.5 Choosing the Right Tool


Table 17.11: Tool Selection Quick Reference

Situation	Best Tool	Why
Need to understand a technical concept	Chat Interface	Flexible conversation, can ask follow-up questions
Writing code for a project	Claude Code	Can directly modify files and run code
Researching from specific documents	NotebookLM	Answers grounded in your uploaded documents
Quick question about a webpage	Browser Extension	No context switching, immediate answers
Drafting technical documentation	Chat Interface	Good at structured document generation
Analyzing production data	Claude Code	Can write and execute analysis scripts

17.9 The Iterative Approach: Multi-Turn AI Collaboration

Complex engineering problems are rarely solved in a single prompt. The iterative approach mirrors how you would work with a human expert.

17.9.1 The Iteration Cycle

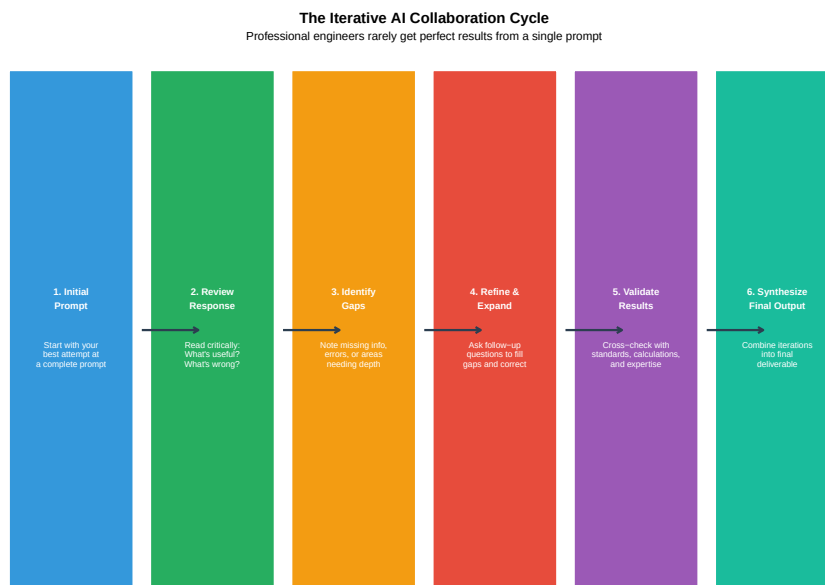

17.9.2 Worked Example: Designing a Conveyor Control System

Turn 1 - Initial Prompt:

Act as an automation engineer. Design a basic control system for a conveyor belt in a packaging line. The conveyor is 15m long and transports boxes to a palletizing station.

AI Response Summary: Generic overview with basic motor control, start/stop logic, and simple sensors.

Turn 2 - Adding Specificity:

Good start. Now expand with these details:

- Add accumulation zones (3 zones, 5m each) with photo-eye sensors
- Include a reject station at the 10m mark for overweight boxes
- Integrate with an upstream case sealer (need handshake signals)
- Use Allen-Bradley CompactLogix as the controller

Show the I/O list and basic ladder logic structure.

AI Response Summary: Detailed I/O list, zone control logic, sensor placement, and communication requirements.

Turn 3 - Safety and Edge Cases:

Now address:

1. What happens if the downstream palletizer faults?
2. Add E-stop integration per ISO 13849 PLd requirements
3. How do we handle box jams in each zone?
4. What's the startup sequence after E-stop reset?

Include safety relay wiring diagram description.

AI Response Summary: Complete safety integration, fault handling, jam detection, and recovery procedures.

Turn 4 - Final Validation:

Review your complete design and:

1. List any assumptions you made that I should verify
2. Identify potential failure modes you haven't addressed
3. What information would you need to finalize this for implementation?
4. Are there any code standards (ISA, IEC) I should reference?

AI Response Summary: Comprehensive assumption list, remaining questions, and standards references for documentation.

Key Point: This four-turn conversation produced a design that would have required a much longer single prompt to achieve, and the iterative approach allowed for course correction along the way.

Try it yourself: Practice iterative prompting

Your Challenge: Use the four-turn approach to design a temperature monitoring system for a food processing facility.

Turn 1: Define the basic requirements (number of zones, temperature ranges, alerting needs)

Turn 2: Add specifics (sensor types, communication protocol, integration with existing systems)

Turn 3: Address failure modes and safety (what happens if a sensor fails? How are critical temperature excursions handled?)

Turn 4: Request validation questions and identify what you need to verify before implementation

Compare your results: Did the iterative approach give you a more complete design than your initial prompt would have?

17.10 Practice Topics for Iterative AI Sessions

Use these topics to practice the iterative approach. Each topic is designed to require multiple turns to fully develop.

17.10.1 Beginner Level

Table 17.12: Beginner Practice Topics

Topic	Iteration Hint
Motor Starter Selection	Start with application, then add environment, protection requirements
Sensor Selection for Proximity Detection	Begin with what you're detecting, then material, distance, environment
Basic PLC Program for Traffic Light	Define sequence first, then timing, then inputs/outputs, then safety
Belt Conveyor Speed Calculation	Start with throughput requirement, then add physical constraints

17.10.2 Intermediate Level

Table 17.13: Intermediate Practice Topics

Topic	Iteration Hint
VFD Parameter Setup for Pump Application	Define motor and load first, then control requirements, then safety
PFMEA for Automated Assembly Station	Describe process steps, then potential failures, then iterate
Pneumatic Circuit Design with Safety	Start with actuator requirements, then add safety, then valves
HMI Screen Layout for Batch Process	Define operator tasks first, then alarms, then navigation, then safety

17.10.3 Advanced Level

Table 17.14: Advanced Practice Topics

Topic	Iteration Hint
Predictive Maintenance System Architecture	Define assets and failure modes, then sensors, then data
Robot Cell Integration with Vision System	Robot selection first, then vision requirements, then safety
Energy Management System for Manufacturing Plant	Start with loads and usage patterns, then monitoring
Complete Machine Safety Assessment	Describe machine function, then hazards, then risk

17.11 Critical Evaluation of AI Outputs

AI can produce confident-sounding responses that are completely wrong. Engineers must develop critical evaluation skills.

17.11.1 Red Flags in AI Responses

Table 17.15: Red Flags in AI-Generated Responses

Red Flag	Example
Calculations Without Units	"The motor needs 150" - 150 what? HP? kW? Nm?
Missing Safety Considerations	Design has no E-stop, no guarding discussion, no lockout procedure
Outdated Standards Referenced	References NEC 2014 when 2023 is current; cites withdrawn ISIRI standards
Overconfident Language	"This will definitely work" or "This is the only solution"
Generic Without Specifics	"Use appropriate sensors" without specifying type, range, or model
Ignoring Stated Constraints	You specified 24VDC and AI designs for 120VAC

17.11.2 Verification Checklist

Before using any AI-generated engineering content:

Table 17.16: AI Output Verification Checklist

Category	Verification Item	Verified
Calculations		
Calculations	All calculations include units	☐
Calculations	Results are dimensionally consistent	☐
Calculations	Order of magnitude is reasonable	☐
Standards Compliance		
Standards	Referenced standards are current versions	☐
Standards	Applicable regional codes are addressed (NEC, CSA, IEC)	☐
Safety		
Safety	All identified hazards have mitigation	☐
Safety	Failure modes are considered	☐
Safety	Human factors are addressed	☐
Practical Implementation		
Practical	Specified components are available/not obsolete	☐
Practical	Cost and lead time are realistic	☐

17.12 When NOT to Use AI

AI is a tool, not a replacement for engineering judgment. Recognize its limitations.

17.12.1 AI Excels At:

- Generating first drafts and starting points
- Explaining concepts and standards
- Creating documentation templates
- Performing routine calculations (with verification)
- Suggesting troubleshooting approaches
- Comparing options and trade-offs

17.12.2 AI Struggles With:

Table 17.17: Tasks Requiring Human Engineering Judgment

Limitation	Description	Example
Site-Specific Context	AI doesn't know your plant layout, existing equipment, or local practices	Recommendations
Current Conditions	AI cannot inspect, measure, or observe actual equipment conditions	Cannot diagnose
Ethical Judgment	Decisions balancing safety, cost, and risk require human judgment	Choosing between options
Novel Situations	Unprecedented problems may not have training data to draw from	First-of-kind problems
Physical Intuition	Experience-based intuition about what 'feels wrong' in a machine	Recognizing anomalies
Accountability	AI cannot stamp drawings, sign off on safety, or take legal responsibility	A P.Eng. must sign

Quick Check: AI or Human?

For each task below, decide whether AI assistance is appropriate, limited, or inappropriate:

1. **Drafting a maintenance procedure for a conveyor system** → *Appropriate with verification*
2. **Deciding whether to shut down a production line during a safety incident** → *Human only*
3. **Generating a bill of materials from a design specification** → *Appropriate with verification*
4. **Certifying a machine guarding design for compliance** → *Human only (requires P.Eng.)*
5. **Troubleshooting a motor that "sounds funny"** → *Limited - AI can suggest causes, human must inspect*
6. **Explaining the difference between ISO 13849 and IEC 62443** → *Appropriate*

Key insight: AI excels at information synthesis and drafting, but physical observation, legal certification, and real-time safety decisions require human expertise.

17.13 Ethical Considerations

Using AI in engineering work carries professional and ethical responsibilities.

17.13.1 Key Principles

- 1. **Transparency:** Disclose AI assistance where required by professional standards or employer policy
- 2. **Verification:** Never submit AI-generated work as final without verification by qualified personnel
- 3. **Accountability:** You remain responsible for work product regardless of AI assistance
- 4. **Confidentiality:** Do not input proprietary designs, client data, or trade secrets into public AI systems
- 5. **Competence:** AI assistance does not substitute for required qualifications or experience

17.13.2 Industry-Specific Considerations

Table 17.18: Industry-Specific AI Ethics Considerations

Industry	Key Ethical/Legal Concern	Guidance
Automotive	Functional safety (ISO 26262) requires traceable human decisions	Document AI use
Food Processing	Food safety regulations (FDA, CFIA) require validated processes	AI can draft recipes
Defense	ITAR/export controls may prohibit certain AI tool usage	Consult legal counsel
Mining	Worker safety regulations require qualified sign-off	P.Eng. or equivalent

Reflection: Your responsibilities as an AI-assisted engineer

Consider these questions for your own practice:

- 1. **Disclosure:** Does your employer have a policy on AI tool usage? What about your professional engineering body?
- 2. **Verification:** What specific steps will you take to verify AI-generated calculations before using them?

3. **Confidentiality:** What types of information from your work should NEVER be input into public AI tools?
4. **Professional development:** How will you continue building expertise rather than becoming dependent on AI for answers?
5. **Liability:** If an AI-assisted design fails, who is responsible? (Hint: It's always the licensed engineer who approved it.)

Remember: AI tools change rapidly, but professional engineering ethics remain constant. Your responsibility for the safety and quality of your work never transfers to a tool.

17.14 Hands-On Lab Exercise

17.14.1 Objective

Practice the complete AI collaboration workflow on a realistic engineering problem.

17.14.2 Scenario

You are tasked with designing an automated inspection station for a food packaging line. The station must:

- Inspect sealed packages for proper seal integrity
- Reject packages with defects
- Track inspection statistics
- Integrate with existing Allen-Bradley PLC system

17.14.3 Instructions


1. **Write your initial prompt** (5 minutes)
 - Apply the seven rules of effective prompts
 - Include role, context, specifications, constraints, and deliverables
2. **Conduct 3-4 iteration turns** (15 minutes)
 - Review each AI response critically
 - Identify gaps and request specific expansions
 - Push for component specifications and safety considerations
3. **Evaluate the final output** (5 minutes)
 - Use the verification checklist
 - Note any red flags
 - Identify what still requires human expertise
4. **Document your process** (5 minutes)
 - What worked well in your prompting approach?
 - What would you do differently next time?

- What human expertise was essential?

17.14.4 Deliverables

- Initial prompt (graded on structure and completeness)
 - Iteration log showing refinement process
 - Critical evaluation notes
 - Reflection on lessons learned
-

17.15 Summary

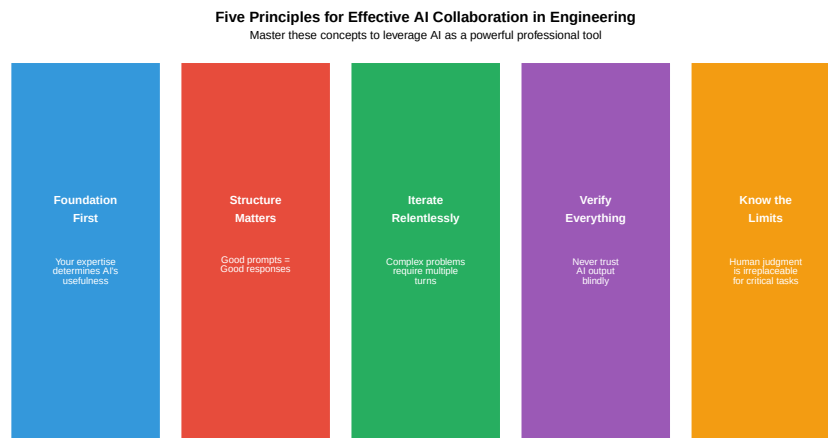

17.15.1 Key Takeaways

1. **The Education Paradox:** Strong foundational knowledge is required to get quality AI assistance. “AI will do it for me” is a dangerous mindset.
2. **The Four Steps:** Effective AI use follows a consistent process: Define → Prompt → Iterate → Validate. Skipping steps leads to poor results.
3. **Prompt Engineering is a Skill:** Like technical writing, crafting effective prompts requires practice and follows learnable principles.
4. **Choose the Right Tool:** Different AI tools serve different purposes. Chat interfaces for exploration, NotebookLM for source-grounded research, Claude Code for development, and browser extensions for quick assistance.
5. **Iteration is Normal:** Professional engineers should expect 3-6 turns of AI conversation for complex problems.

6. **Critical Evaluation is Essential:** AI produces confident-sounding outputs that may be wrong. Verify everything.
 7. **Human Judgment Remains Central:** AI augments but does not replace engineering expertise, especially for safety-critical decisions.
-

17.16 Review Questions

1. Explain the “education paradox” in AI usage and why it matters for engineering students.
 2. List and describe the four steps of effective AI use. Why is each step important?
 3. List the seven rules of effective engineering prompts and give an example of each.
 4. What are three red flags that should make you question an AI-generated engineering recommendation?
 5. Describe the iterative approach to AI collaboration and why single-prompt interactions are often inadequate.
 6. Compare and contrast the four main types of AI tools (chat interfaces, NotebookLM, Claude Code, browser extensions). When would you use each?
 7. For which types of engineering tasks is AI assistance most appropriate? Least appropriate?
 8. What ethical considerations apply when using AI for engineering work in safety-critical industries?
 9. Transform this bad prompt into a good prompt: “Help me size a pump.”
 10. You need to research a new ISO standard and create a summary for your team. Which AI tool(s) would you use and why?
 11. Why is it important to include standards references in engineering prompts?
 12. How does NotebookLM differ from general chat interfaces like ChatGPT or Claude.ai? When would this difference matter?
-

17.17 References and Further Reading

- Anthropic Economic Index Report (2026) - AI usage patterns in profes-

sional work

- ISO 12100 - Safety of machinery, General principles for design
 - IEC 62443 - Industrial communication networks, Network and system security
 - Professional Engineers Ontario - Use of Artificial Intelligence guidelines
 - OpenAI Prompt Engineering Guide - General prompting techniques
 - IEEE Code of Ethics - Professional responsibilities in technology
-

17.18 Glossary

Prompt Engineering: The practice of designing inputs to AI systems to achieve desired outputs.

Iteration/Multi-turn Conversation: Using multiple exchanges with AI to progressively refine and improve outputs.

Augmentation: Using AI to enhance human capabilities rather than replace them entirely.

Automation: Delegating complete tasks to AI with minimal human intervention.

Hallucination: AI generating plausible-sounding but factually incorrect information.

Context Window: The amount of text an AI can consider at once; important for complex problems requiring extensive background.

Chat Interface: Web-based conversational AI platforms (e.g., Claude.ai, ChatGPT, Gemini) for flexible, general-purpose AI interaction.

NotebookLM: Google's AI tool that provides source-grounded answers based on uploaded documents, with citation links and audio overview generation.

Claude Code: A command-line AI tool that can read, write, and execute code directly in project environments with full file system access.

Browser Extension: AI tools integrated into web browsers for instant assistance without switching applications; useful for webpage analysis and quick queries.

Source-Grounded AI: AI systems that base responses on specific provided documents rather than general training data, reducing hallucination risk.

Bibliography