This drawing cannot be reproduced nor given to a third party without a written authorization by CAVAGNA GROUP DIV. PERGOLA S.r.l. (ITALY)

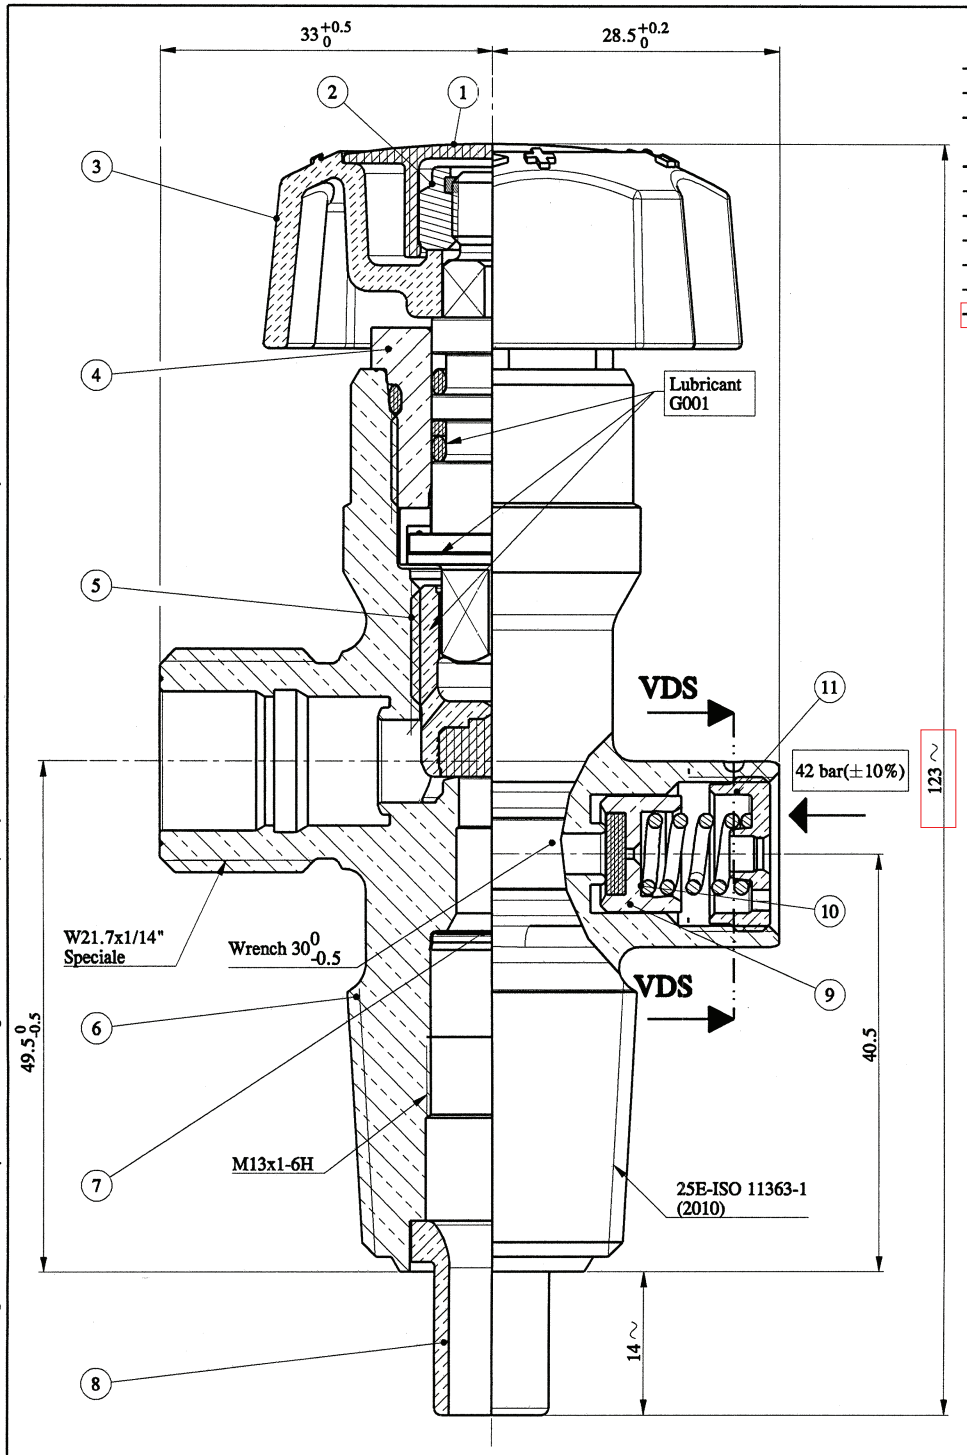

Markings:
- CAVAGNA GROUP symbol
- EU
- Year and month of construction (Ex.2011-03)
- R
- 25E
- W21.7
- ISO V
- ...(Production order)
- 42 bar
- TT 0029

Technical information:
Temperature range: -20°C +65°C
Orifice: ∅6.5 mm
Gland nut closure torque: 45-60 Nm
W.P.: 42 bar
HOMOLOGATION: L.30.930

Materials:
Seat pad: PA66
Toroidal rings: CR
Antifriction ring: DELRIN

Punchung of safety device



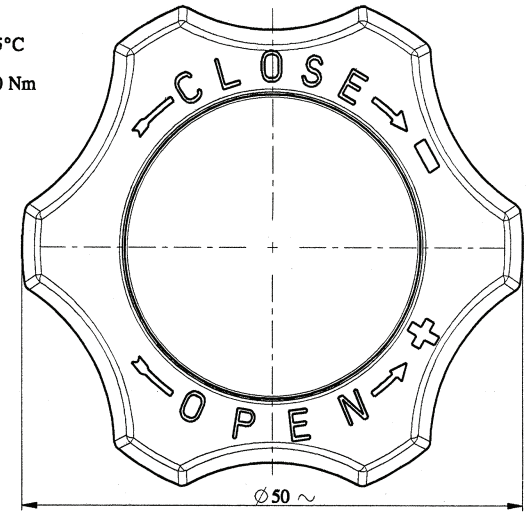

POS	DENOMINATION	Q.	MATERIAL	DRAW NR.
11	Spring retainer	1	Cu Zn39 Pb3 (CW614N) EN 12164	0801100007
10	Spring	1	Stainless steel AISI 302	0701100177
9	Assembled piston	1	-	0309500089
8	Deep tube	1	PA6 + 15% F.G	1201100033
7	Filter	1	Stainless steel AISI 304	1601105007
6	Body	1	Cu Zn40 Pb2 (CW617N) EN 12165	0171501272
5	Assembled piston	1	/	0379500029
4	Assembled spindle	1	/	1379500044
3	Handwheel Silver Grey	1	EN AC-AlSi11Cu2(Fe) UNI EN 1706	0271103546
2	Nut M8 INOX	1	X5CrNiMo1712 (1.4401 AISI316)	1071100164
1	Protection cap blue RAL5002	1	PA 6	1671101012

DESCRIPTION	Cylinder valve for refrigerant gases with VDS					
cavagna group pergola	GEN. TOLL. ±/	GEN. FILL. R /	ANG. TOLL. ±/	DRAFT /	SCALE 2:1	SHEET 1 /1
	RESPONS.	DRAWN	ISSUE	MATERIAL		
	DATE	12-12-03	12-12-03	/		
	SIGNATURE	Ragnoli	Cazzago			
ACTIVITY	NUMBER	10307	PROJECT	08881	DRAW NUMBER	
	SIGN.	Cazzago	REFERENCE	FRPB012040	VGG3SFR004	
	INDEX	A3	WEIGHT	0.440 Kg		