
Pocket Rough

Operation booklet

Operation snapshot

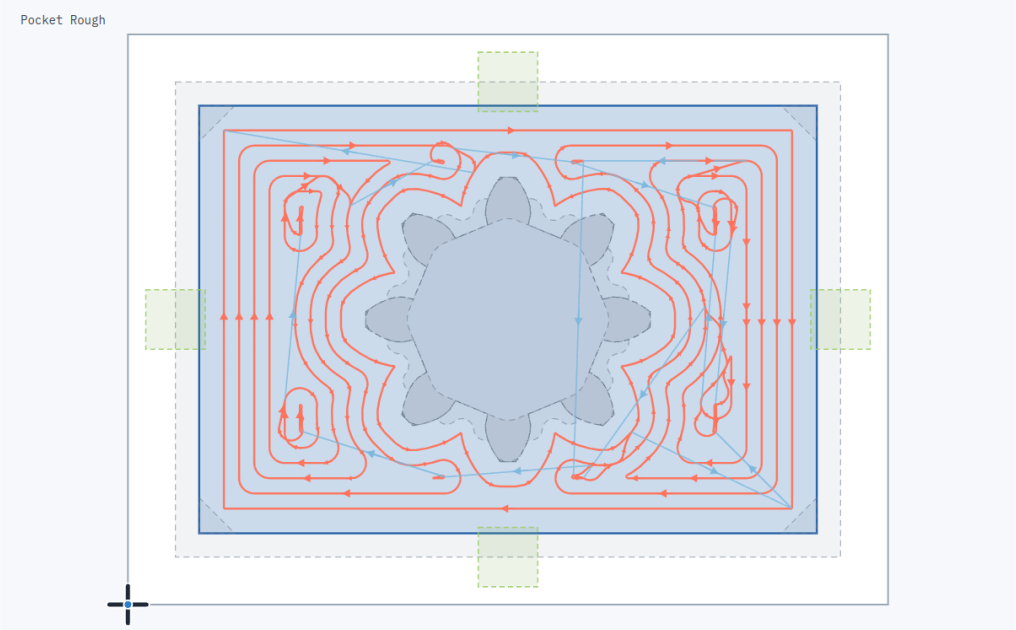

OVERVIEW

Project	booklet-test-01	**Generated**	2026-11-08 19:31 UTC-05:00
Units	Inch	**Stock size**	4 in x 3 in x 0.75 in
Origin Z	0.75 in		

TOOL

Name	1/4" Endmill	**Type**	flat endmill
Diameter	0.25 in	**Flutes**	2
Material	carbide	**Max cut depth**	1 in

OPERATION SETTINGS

Kind	Pocket	**Pass**	Rough
Target	Rect 44	**Feed**	30 in/min
Plunge feed	12 in/min	**RPM**	18000 rpm
Stepdown	0.125 in	**Stepover**	0.32
Cut direction	Conventional	**Machining order**	Feature first
Round outside corners Enabled		**Round link junctions** Enabled	
Pattern	offset	**Pocket angle**	0 deg

Slot feed	60 % of feed

Stock to leave radial
0.005 in

Stock to leave axial
0.005 in

TOOLPATH

Moves	5190	**Cut moves**	5136
Rapid moves	36	**Plunge moves**	18
Estimated feed time	4 min 18 s (excludes G0 rapid time)	**Feed travel**	117.02 in (feed and plunge moves)
Rapid travel	21.68 in (G0 speed machine-defined)	**Toolpath Z top**	0.95 in
Toolpath Z bottom	0.505 in		