

Detailed Report


Model Config: mobilenet_config_10

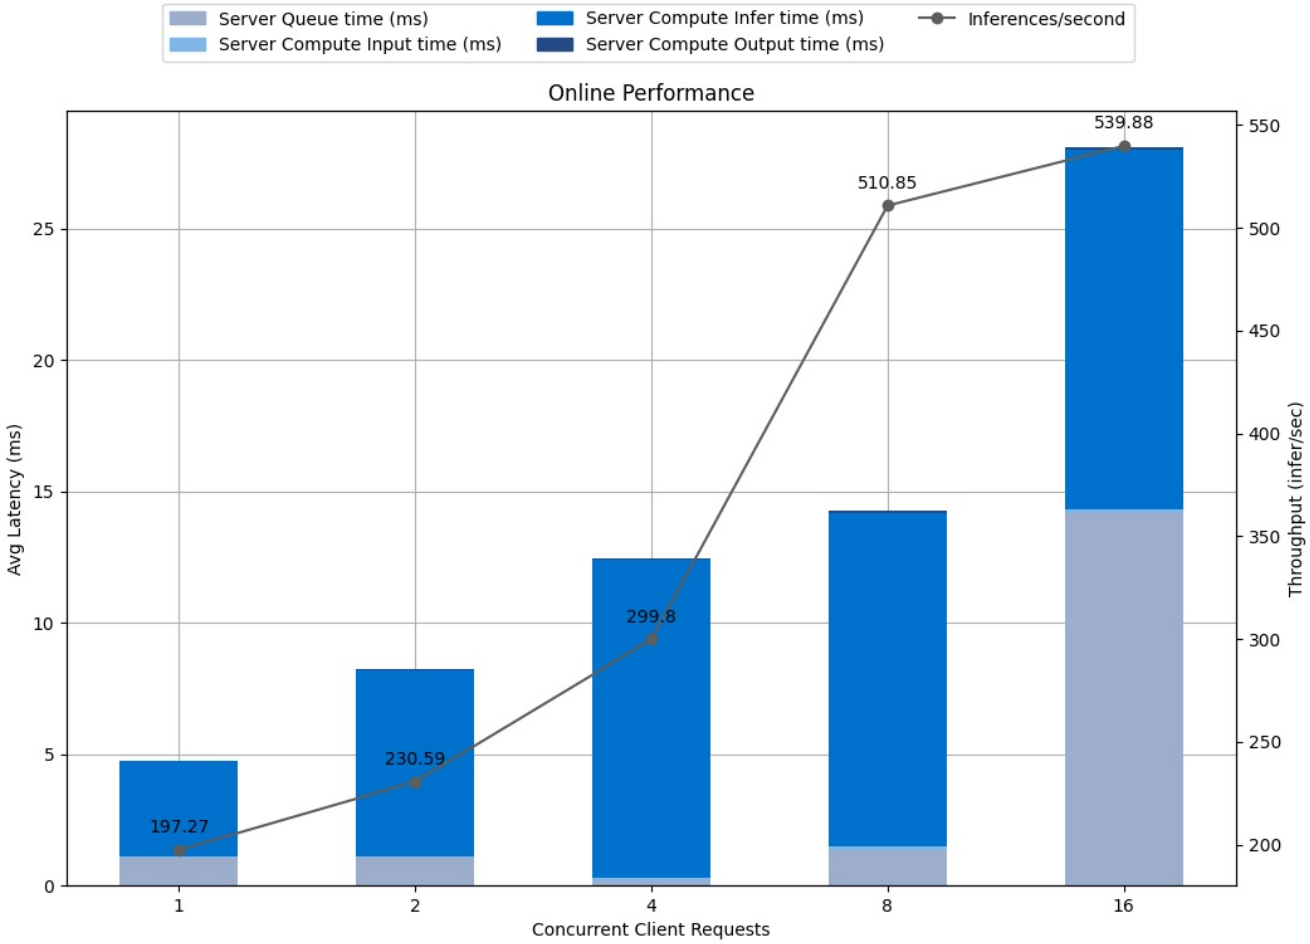


Latency Breakdown for Online Performance of mobilenet_config_10

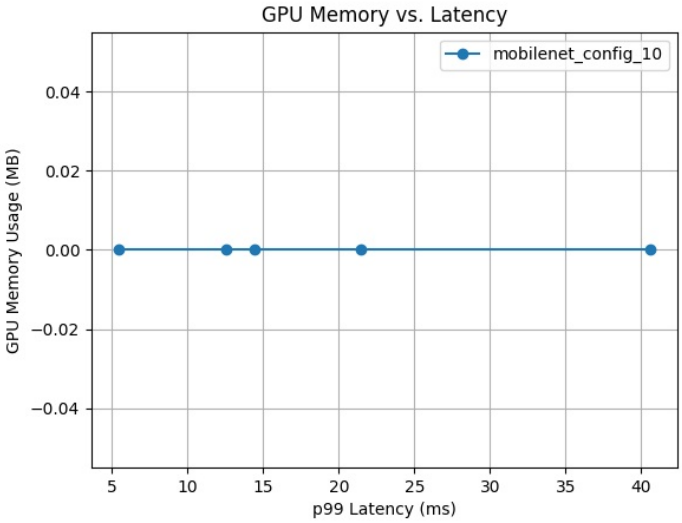


GPU Memory vs. Latency curves for config mobilenet_config_10

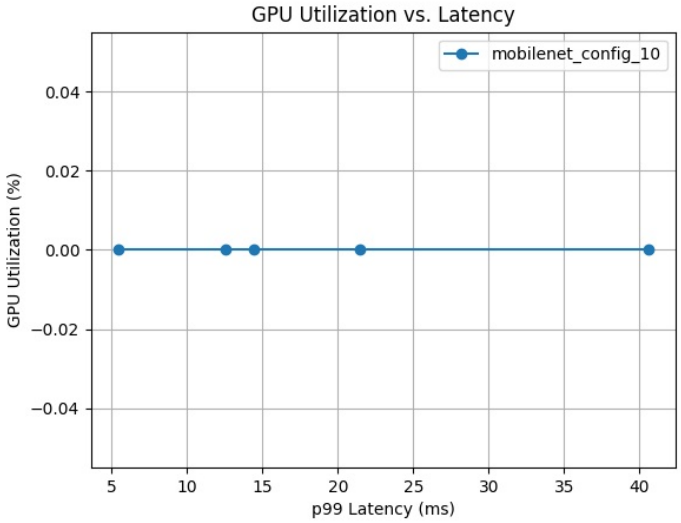

GPU Utilization vs. Latency curves for config mobilenet_config_10

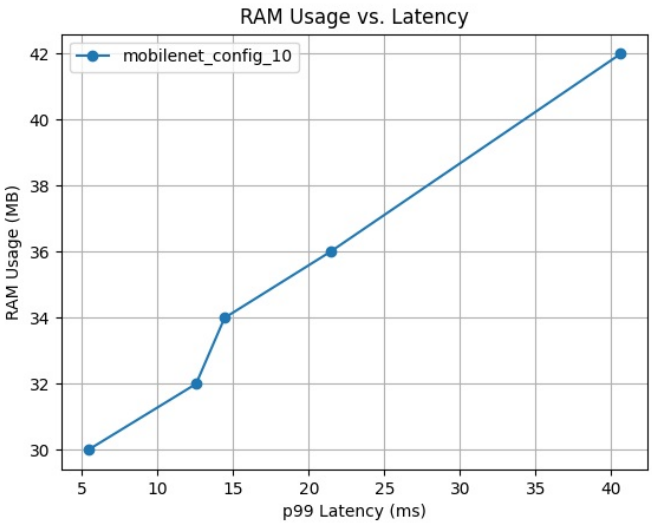

RAM Usage vs. Latency curves for config mobilenet_config_10

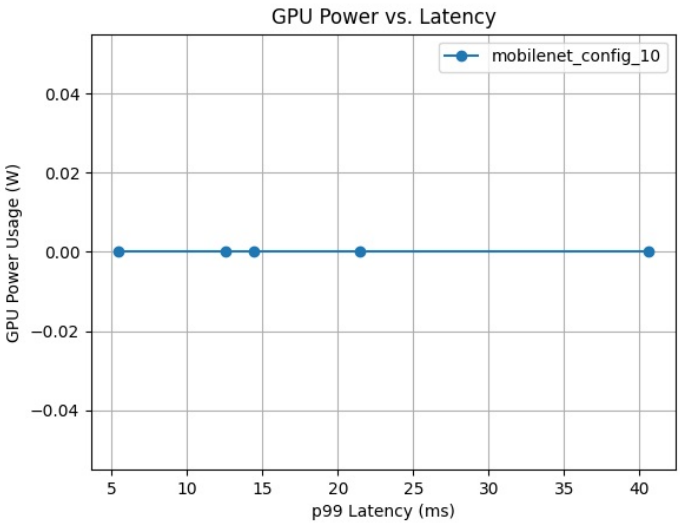

GPU Power vs. Latency curves for config mobilenet_config_10

Request Concurrency	p99 Latency (ms)	Client Response Wait (ms)	Server Queue (ms)	Server Compute Input (ms)	Server Compute Infer (ms)	Throughput (infer/sec)	Max CPU Memory Usage (MB)	Max GPU Memory Usage (MB)	Average GPU Utilization (%)
16	40.621	29.365	14.148	0.171	13.659	539.875	42.0	0	0
8	21.425	15.472	1.349	0.115	12.712	510.853	36.0	0	0
4	14.443	13.218	0.161	0.106	12.111	299.802	34.0	0	0
2	12.558	8.563	1.06	0.052	7.071	230.588	32.0	0	0
1	5.427	5.004	1.071	0.021	3.642	197.27	30.0	0	0

The model config **mobilenet_config_10** uses 2 CPU instances with a max batch size of 4 and has dynamic batching enabled. 5 measurement(s) were obtained for the model config on GPU(s) with total memory 0 GB. This model uses the platform .

The first plot above shows the breakdown of the latencies in the latency throughput curve for this model config. Following that are the requested configurable plots showing the relationship between various metrics measured by the Model Analyzer. The above table contains detailed data for each of the measurements taken for this model config in decreasing order of latency.