
Chapter 3: Processes





Chapter 3: Processes

- **Process Concept**
- **Process Scheduling**
- Operations on Processes
- **Interprocess Communication**
- Examples of IPC Systems
- Communication in Client-Server Systems

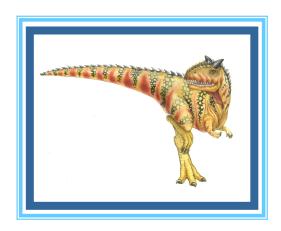



Objectives

- To introduce the notion of a process -- a program in execution, which forms the basis of all computation
- To describe the various features of processes, including scheduling, creation and termination, and communication
- To explore interprocess communication using shared memory and message passing
- To describe communication in client-server systems






Process Concept

- An operating system executes a variety of programs:
 - Batch system **jobs**
 - Time-shared systems user programs or tasks
- Textbook uses the terms *job* and *process* almost interchangeably
- Process a program in execution; process execution must progress in sequential fashion
- Multiple parts
 - The program code, also called text section
 - Current activity including **program counter**, processor registers
 - Stack containing temporary data
 - 4 Function parameters, return addresses, local variables
 - Data section containing global variables
 - Heap containing memory dynamically allocated during run time







Process Concept (Cont.)

- Program is *passive* entity stored on disk (executable file), process is *active* with a program counter specifying the next instruction to execute and a set.
- of associated resources.
 - Program becomes process when executable file loaded into memory
- Execution of program started via GUI mouse clicks, command line entry of its name, etc
- One program can be several processes
 - Consider multiple users executing the same program





Process in Memory

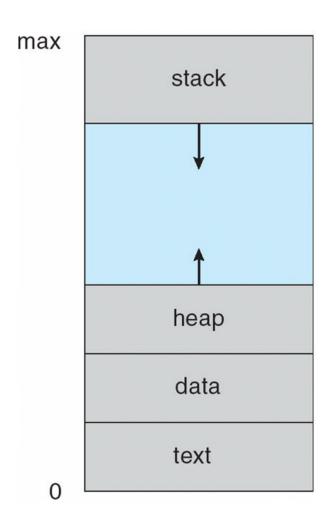






Process State

- As a process executes, it changes **state**
 - **new**: The process is being created
 - running: Instructions are being executed
 - waiting: The process is waiting for some event to occur
 - ready: The process is waiting to be assigned to a processor
 - **terminated**: The process has finished execution





Diagram of Process State

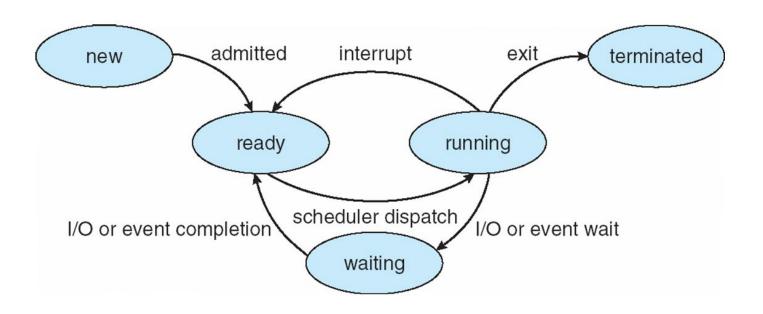





Process Control Block (PCB)

Information associated with each process (also called **task control block**)


- Process state running, waiting, etc
- Program counter location of instruction to next execute
- CPU registers contents of all process-centric registers
- CPU scheduling information- priorities, scheduling queue pointers
- Memory-management information memory allocated to the process
- Accounting information CPU used, clock time elapsed since start, time limits
- I/O status information I/O devices allocated to process, list of open files

process state process number program counter registers memory limits list of open files





CPU Switch From Process to Process

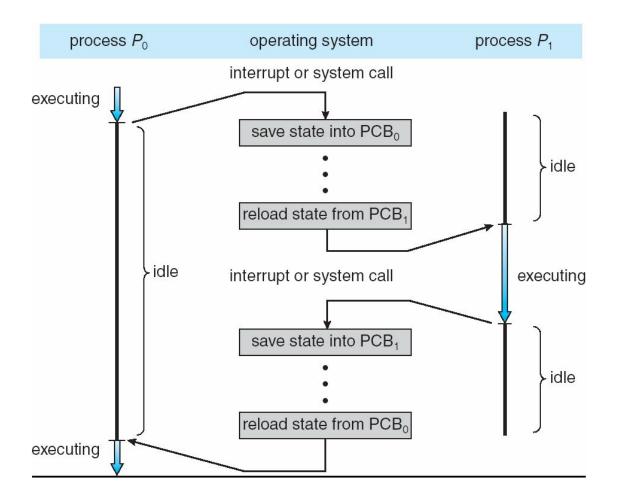





Threads

- So far, process has a single thread of execution
- Consider having multiple program counters per process
 - Multiple locations can execute at once
 - 4 Multiple threads of control -> threads
- Must then have storage for thread details, multiple program counters in PCB
- See next chapter






Process Representation in Linux

Represented by the C structure task_struct

```
pid t_pid; /* process identifier */
long state; /* state of the process */
unsigned int time_slice /* scheduling information */
struct task_struct *parent; /* this process's parent */
struct list_head children; /* this process's children */
struct files_struct *files; /* list of open files */
struct mm_struct *mm; /* address space of this process */
```

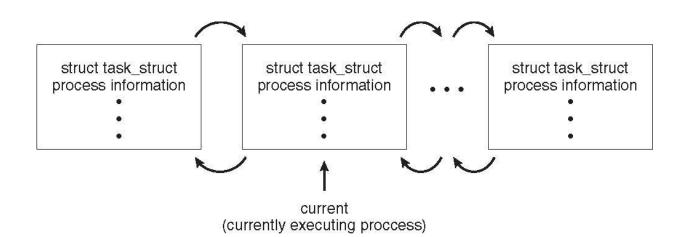






Process Scheduling


- Maximize CPU use, quickly switch processes onto CPU for time sharing
- Process scheduler selects among available processes for next execution on CPU
- Maintains scheduling queues of processes
 - **Job queue** set of all processes in the system
 - Ready queue set of all processes residing in main memory, ready and waiting to execute
 - **Device queues** set of processes waiting for an I/O device
 - Processes migrate among the various queues






Ready Queue And Various I/O Device Queues

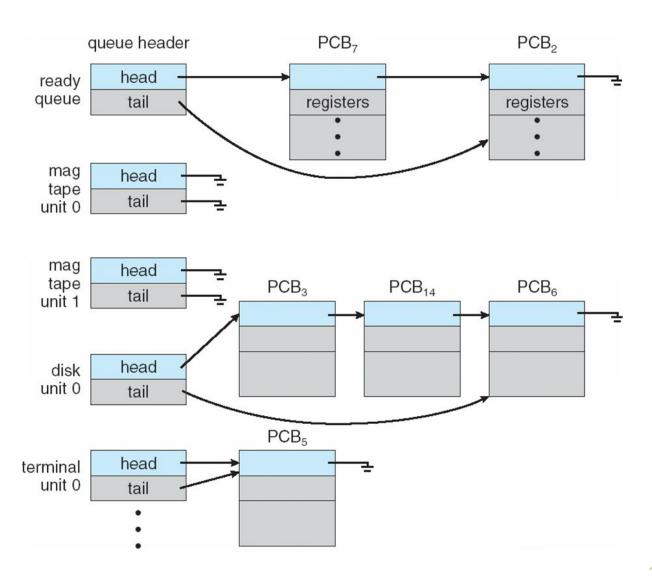



Representation of Process Scheduling

• Queueing diagram represents queues, resources, flows

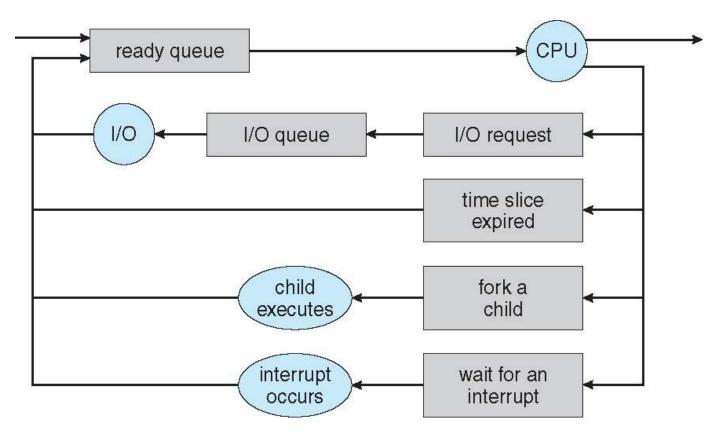





Schedulers


- Short-term scheduler (or CPU scheduler) selects which process should be executed next and allocates CPU
 - Sometimes the only scheduler in a system
 - Short-term scheduler is invoked frequently (milliseconds) \Rightarrow (must be fast)
- Long-term scheduler (or job scheduler) selects which processes should be brought into the ready queue
 - Long-term scheduler is invoked infrequently (seconds, minutes) ⇒ (may be slow)
 - The long-term scheduler controls the degree of multiprogramming
- Processes can be described as either:
 - I/O-bound process spends more time doing I/O than computations, many short CPU bursts
 - **CPU-bound process** spends more time doing computations; few very long CPU bursts
- Long-term scheduler strives for good *process mix*





Addition of Medium Term Scheduling

- Medium-term scheduler can be added if degree of multiple programming needs to decrease
 - Remove process from memory, store on disk, bring back in from disk to continue execution: **swapping**

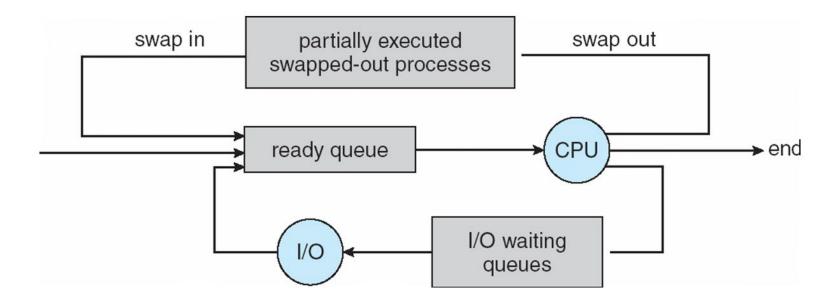





Context Switch

- When CPU switches to another process, the system must save the state of the old process and load the saved state for the new process via a context switch
- Context of a process represented in the PCB
- Context-switch time is overhead; the system does no useful work while switching
 - The more complex the OS and the PCB \square the longer the context switch
- Time dependent on hardware support
 - Some hardware provides multiple sets of registers per CPU
 multiple contexts loaded at once





Operations on Processes

- System must provide mechanisms for:
 - process creation,
 - process termination,
 - and so on as detailed next






Process Creation

- Parent process create children processes, which, in turn create other processes, forming a tree of processes
- Generally, process identified and managed via a process identifier
 (pid)
- Resource sharing options
 - Parent and children share all resources
 - Children share subset of parent's resources
 - Parent and child share no resources
- Execution options
 - Parent and children execute concurrently
 - Parent waits until children terminate





A Tree of Processes in Linux

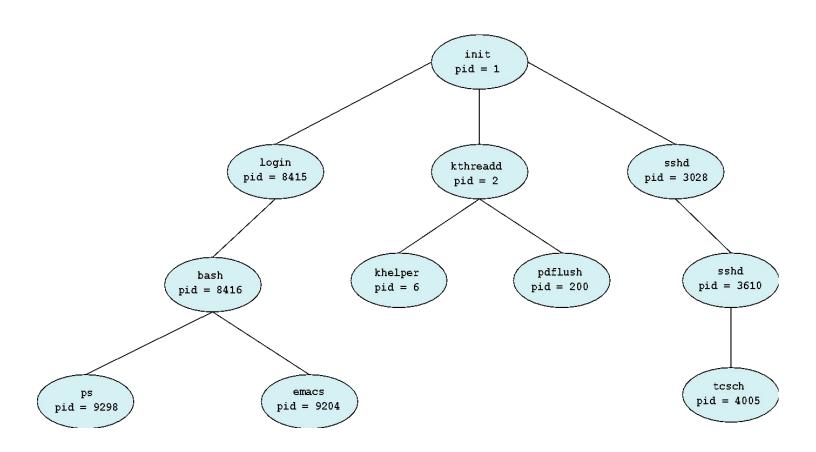






Process Creation (Cont.)

- Address space
 - Child duplicate of parent
 - Child has a program loaded into it
- UNIX examples
 - fork() system call creates new process
 - **exec()** system call used after a **fork()** to replace the process' memory space with a new program

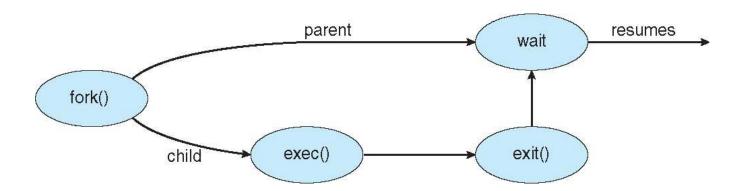





C Program Forking Separate Process

```
#include <sys/types.h>
#include <stdio.h>
#include <unistd.h>
int main()
pid_t pid;
   /* fork a child process */
   pid = fork();
   if (pid < 0) { /* error occurred */
      fprintf(stderr, "Fork Failed");
      return 1:
   else if (pid == 0) { /* child process */
      execlp("/bin/ls", "ls", NULL);
   else { /* parent process */
      /* parent will wait for the child to complete */
      wait (NULL);
      printf("Child Complete");
   return 0;
```



Creating a Separate Process via Windows API

```
#include <stdio.h>
#include <windows.h>
int main(VOID)
STARTUPINFO si;
PROCESS_INFORMATION pi;
   /* allocate memory */
   ZeroMemory(&si, sizeof(si));
   si.cb = sizeof(si);
   ZeroMemory(&pi, sizeof(pi));
   /* create child process */
   if (!CreateProcess(NULL, /* use command line */
     "C:\\WINDOWS\\system32\\mspaint.exe", /* command */
    NULL, /* don't inherit process handle */
    NULL, /* don't inherit thread handle */
    FALSE, /* disable handle inheritance */
    0, /* no creation flags */
    NULL, /* use parent's environment block */
    NULL, /* use parent's existing directory */
     &si,
     &pi))
      fprintf(stderr, "Create Process Failed");
      return -1;
   /* parent will wait for the child to complete */
   WaitForSingleObject(pi.hProcess, INFINITE);
   printf("Child Complete");
   /* close handles */
   CloseHandle(pi.hProcess);
   CloseHandle(pi.hThread);
```





Process Termination

- Process executes last statement and then asks the operating system to delete it using the exit() system call.
 - Returns status data from child to parent (via wait())
 - Process' resources are deallocated by operating system
- Parent may terminate the execution of children processes using the abort () system call. Some reasons for doing so:
 - Child has exceeded allocated resources
 - Task assigned to child is no longer required
 - The parent is exiting and the operating systems does not allow a child to continue if its parent terminates





Process Termination

- Some operating systems do not allow child to exists if its parent has terminated. If a process terminates, then all its children must also be terminated.
 - **cascading termination.** All children, grandchildren, etc. are terminated.
 - The termination is initiated by the operating system.
- The parent process may wait for termination of a child process by using the wait() system call. The call returns status information and the pid of the terminated process

```
pid = wait(&status);
```

- If no parent waiting (did not invoke wait()) process is a zombie
- If parent terminated without invoking wait, process is an orphan





Interprocess Communication


- Processes within a system may be *independent* or *cooperating*
- Cooperating process can affect or be affected by other processes, including sharing data
- Reasons for cooperating processes:
 - Information sharing
 - Computation speedup
 - Modularity
 - Convenience
- Cooperating processes need interprocess communication (IPC)
- Two models of IPC
 - Shared memory
 - Message passing





Communications Models

(a) Message passing. (b) shared memory.

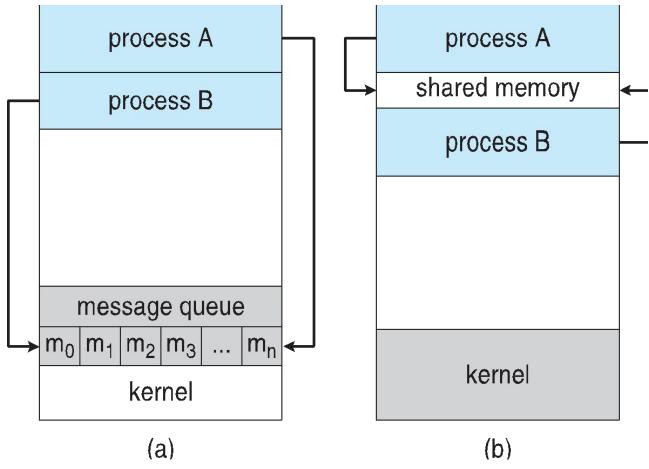



Producer-Consumer Problem

- Paradigm for cooperating processes, *producer* process produces information that is consumed by a *consumer* process
 - **unbounded-buffer** places no practical limit on the size of the buffer
 - **bounded-buffer** assumes that there is a fixed buffer size





Bounded-Buffer – Shared-Memory Solution

Shared data

```
#define BUFFER_SIZE 10

typedef struct {
    . . .
} item;

item buffer[BUFFER_SIZE];

int in = 0;

int out = 0;
```

• Solution is correct, but can only use BUFFER_SIZE-1 elements






Bounded-Buffer – Producer

```
item next_produced;
while (true) {
    /* produce an item in next produced */
    while (((in + 1) % BUFFER_SIZE) == out)
    ; /* do nothing */
    buffer[in] = next_produced;
    in = (in + 1) % BUFFER_SIZE;
}
```





Bounded Buffer – Consumer

```
item next_consumed;
while (true) {
    while (in == out)
        ; /* do nothing */
    next_consumed = buffer[out];
    out = (out + 1) % BUFFER_SIZE;

    /* consume the item in next consumed */
}
```





Interprocess Communication – Shared Memory

- An area of memory shared among the processes that wish to communicate
- The communication is under the control of the users processes not the operating system.
- Major issues is to provide mechanism that will allow the user processes to synchronize their actions when they access shared memory.
- Synchronization is discussed in great details in Chapter 5.





Interprocess Communication – Message Passing

- Mechanism for processes to communicate and to synchronize their actions
- Message system processes communicate with each other without resorting to shared variables
- IPC facility provides two operations:
 - send(message)
 - receive(message)
- The *message* size is either fixed or variable





Message Passing (Cont.)

- If processes P and Q wish to communicate, they need to:
 - Establish a *communication link* between them
 - Exchange messages via send/receive
- Implementation issues:
 - How are links established?
 - Can a link be associated with more than two processes?
 - How many links can there be between every pair of communicating processes?
 - What is the capacity of a link?
 - Is the size of a message that the link can accommodate fixed or variable?
 - Is a link unidirectional or bi-directional?





Message Passing (Cont.)

- Implementation of communication link
 - Physical:
 - 4 Shared memory
 - 4 Hardware bus
 - 4 Network
 - Logical:
 - 4 Direct or indirect
 - 4 Synchronous or asynchronous
 - 4 Automatic or explicit buffering






Direct Communication

- Processes must name each other explicitly:
 - send (*P*, *message*) send a message to process P
 - receive(Q, message) receive a message from process Q
- Properties of communication link
 - Links are established automatically
 - A link is associated with exactly one pair of communicating processes
 - Between each pair there exists exactly one link
 - The link may be unidirectional, but is usually bi-directional





Indirect Communication

- Messages are directed and received from mailboxes (also referred to as ports)
 - Each mailbox has a unique id
 - Processes can communicate only if they share a mailbox
- Properties of communication link
 - Link established only if processes share a common mailbox
 - A link may be associated with many processes
 - Each pair of processes may share several communication links
 - Link may be unidirectional or bi-directional





Indirect Communication

- Operations
 - create a new mailbox (port)
 - send and receive messages through mailbox
 - destroy a mailbox
- Primitives are defined as:

```
send(A, message) - send a message to mailbox A
receive(A, message) - receive a message from mailbox A
```





Indirect Communication

- Mailbox sharing
 - P_1 , P_2 , and P_3 share mailbox A
 - P_1 , sends; P_2 and P_3 receive
 - Who gets the message?
- Solutions
 - Allow a link to be associated with at most two processes
 - Allow only one process at a time to execute a receive operation
 - Allow the system to select arbitrarily the receiver. Sender is notified who the receiver was.





Synchronization

- Message passing may be either blocking or non-blocking
- **Blocking** is considered **synchronous**
 - **Blocking send** -- the sender is blocked until the message is received
 - **Blocking receive** -- the receiver is blocked until a message is available
- Non-blocking is considered asynchronous
 - Non-blocking send -- the sender sends the message and continue
 - **Non-blocking receive** -- the receiver receives:
 - A valid message, or
 - Null message
- Different combinations possible
 - If both send and receive are blocking, we have a **rendezvous**





Synchronization (Cont.)

Producer-consumer becomes trivial





Buffering

- Queue of messages attached to the link.
- implemented in one of three ways
 - 1. Zero capacity no messages are queued on a link. Sender must wait for receiver (rendezvous)
 - 2. Bounded capacity finite length of *n* messages Sender must wait if link full
 - 3. Unbounded capacity infinite length Sender never waits





Examples of IPC Systems - POSIX

- POSIX Shared Memory
 - Process first creates shared memory segment
 shm_fd = shm_open(name, O CREAT | O RDWR, 0666);
 - Also used to open an existing segment to share it
 - Set the size of the object

```
ftruncate(shm fd, 4096);
```

• Now the process could write to the shared memory

```
sprintf(shared memory, "Writing to shared
memory");
```






IPC POSIX Producer

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <fcntl.h>
#include <sys/shm.h>
#include <sys/stat.h>
int main()
/* the size (in bytes) of shared memory object */
const int SIZE = 4096;
/* name of the shared memory object */
const char *name = "OS";
/* strings written to shared memory */
const char *message_0 = "Hello";
const char *message_1 = "World!";
/* shared memory file descriptor */
int shm fd;
/* pointer to shared memory obect */
void *ptr;
   /* create the shared memory object */
   shm_fd = shm_open(name, O_CREAT | O_RDWR, 0666);
   /* configure the size of the shared memory object */
   ftruncate(shm_fd, SIZE);
   /* memory map the shared memory object */
   ptr = mmap(0, SIZE, PROT_WRITE, MAP_SHARED, shm_fd, 0);
   /* write to the shared memory object */
   sprintf(ptr, "%s", message_0);
   ptr += strlen(message_0);
   sprintf(ptr, "%s", message_1);
   ptr += strlen(message_1);
   return 0;
```





IPC POSIX Consumer

```
#include <stdio.h>
#include <stdlib.h>
#include <fcntl.h>
#include <sys/shm.h>
#include <sys/stat.h>
int main()
/* the size (in bytes) of shared memory object */
const int SIZE = 4096;
/* name of the shared memory object */
const char *name = "OS":
/* shared memory file descriptor */
int shm fd;
/* pointer to shared memory obect */
void *ptr;
   /* open the shared memory object */
   shm_fd = shm_open(name, O_RDONLY, 0666);
   /* memory map the shared memory object */
   ptr = mmap(0, SIZE, PROT READ, MAP SHARED, shm fd, 0);
   /* read from the shared memory object */
   printf("%s",(char *)ptr);
   /* remove the shared memory object */
   shm_unlink(name);
   return 0:
```



Examples of IPC Systems - Mach

- Mach communication is message based
 - Even system calls are messages
 - Each task gets two mailboxes at creation- Kernel and Notify
 - Only three system calls needed for message transfer


```
msg_send(), msg_receive(), msg_rpc()
```

• Mailboxes needed for commuication, created via

```
port_allocate()
```

- Send and receive are flexible, for example four options if mailbox full:
 - 4 Wait indefinitely
 - 4 Wait at most n milliseconds
 - 4 Return immediately
 - 4 Temporarily cache a message






Examples of IPC Systems – Windows

- Message-passing centric via advanced local procedure call (LPC) facility
 - Only works between processes on the same system
 - Uses ports (like mailboxes) to establish and maintain communication channels
 - Communication works as follows:
 - 4 The client opens a handle to the subsystem's **connection port** object.
 - 4 The client sends a connection request.
 - 4 The server creates two private **communication ports** and returns the handle to one of them to the client.
 - 4 The client and server use the corresponding port handle to send messages or callbacks and to listen for replies.





Local Procedure Calls in Windows

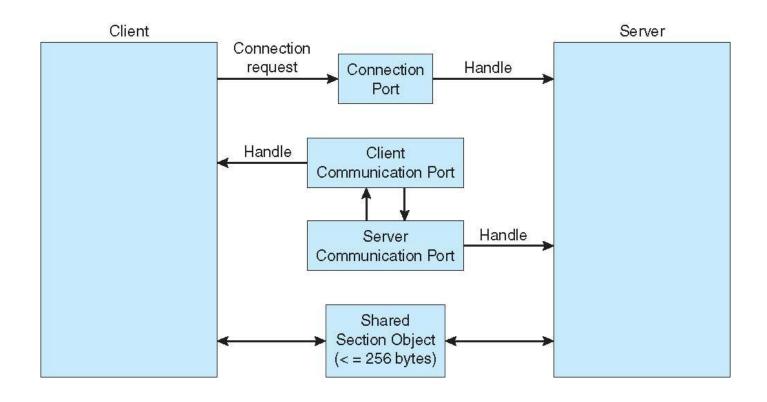





Communications in Client-Server Systems

- Sockets
- Remote Procedure Calls
- Pipes
- Remote Method Invocation (Java)



End of Chapter 3

