


Q-Add an A record in your DNS server configuration to map `www.musicmania.in` to the IP address `192.168.1.50`, then use the `nslookup` or `dig` command to verify the mapping works.


To configure and verify this DNS mapping in Cisco Packet Tracer, must add the record to a Server device configured as a DNS server and query it from a PC.

TOPOLOGY:

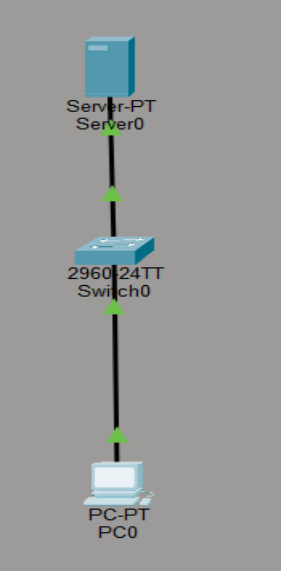


Step 1: Configure the DNS Server

1. Click on the **Server** device in your workspace and open its **Config** or **Services** tab.
2. Select **DNS** from the left-hand services menu. [\[1\]](#)
3. Turn the DNS service **On** by selecting the radio button.
4. Fill in the fields under **Resource Records**:
 - o **Name:** `www.musicmania.in`
 - o **Type:** A Record
 - o **Address:** `192.168.1.50`
5. Click the **Add** button. The record will appear in the list below.

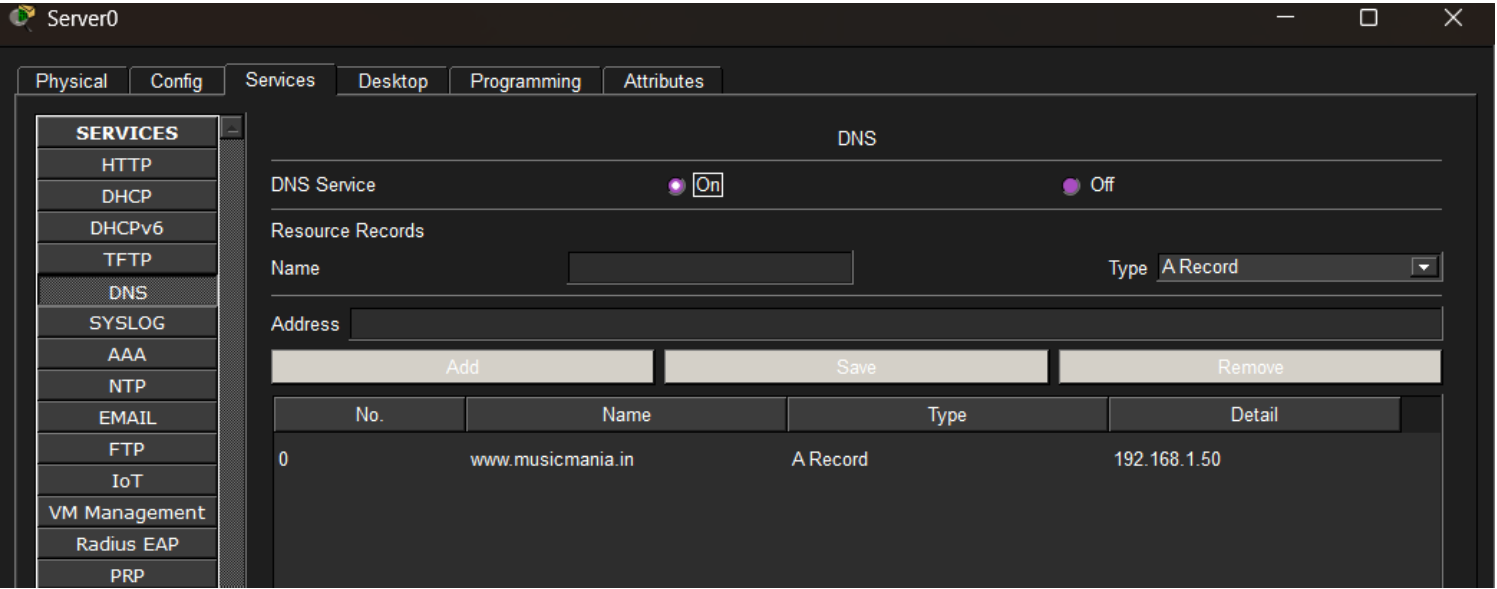

Step 2: Configure the Client PC

PC: Click PC -> **Desktop** -> **IP Configuration**. Set IP Address to 192.168.1.10, Subnet Mask to 255.255.255.0, and **DNS Server** to 192.168.1.50

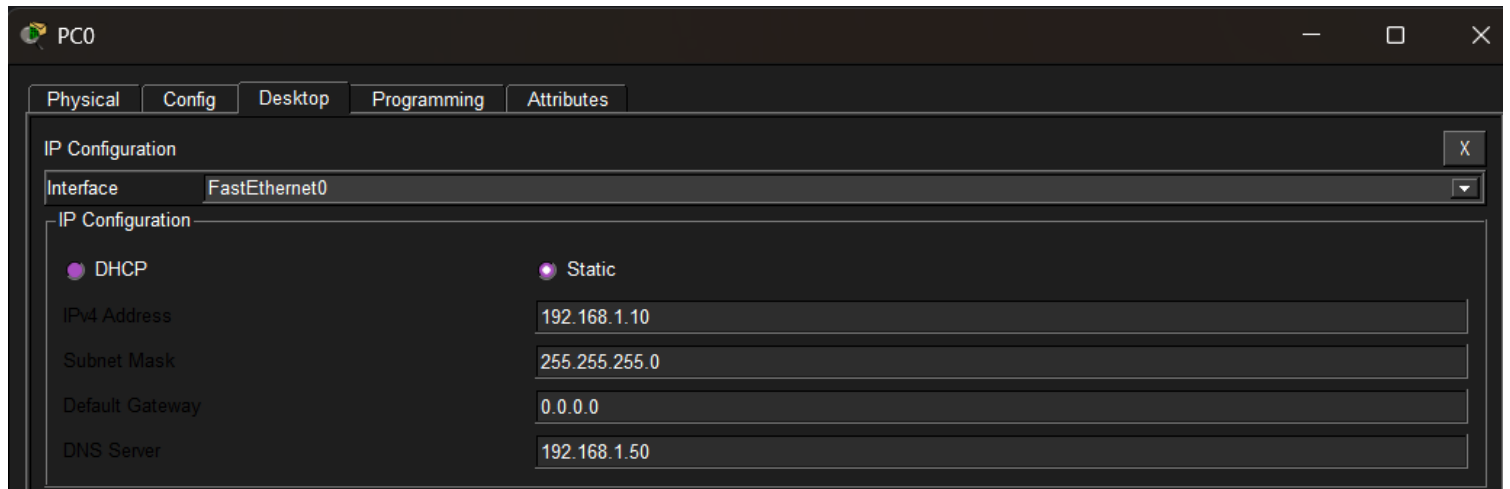

TEST OUTPUT:

```
C:\>nslookup www.musicmania.in

Server: [192.168.1.50]
Address: 192.168.1.50

Non-authoritative answer:
Name:   www.musicmania.in
Address: 192.168.1.50

C:\>
```