


Q-Test inter-VLAN connectivity by pinging from a PC in the Insta VLAN to a PC in the Zomato VLAN, and explain why the ping succeeds or fails based on your configuration.

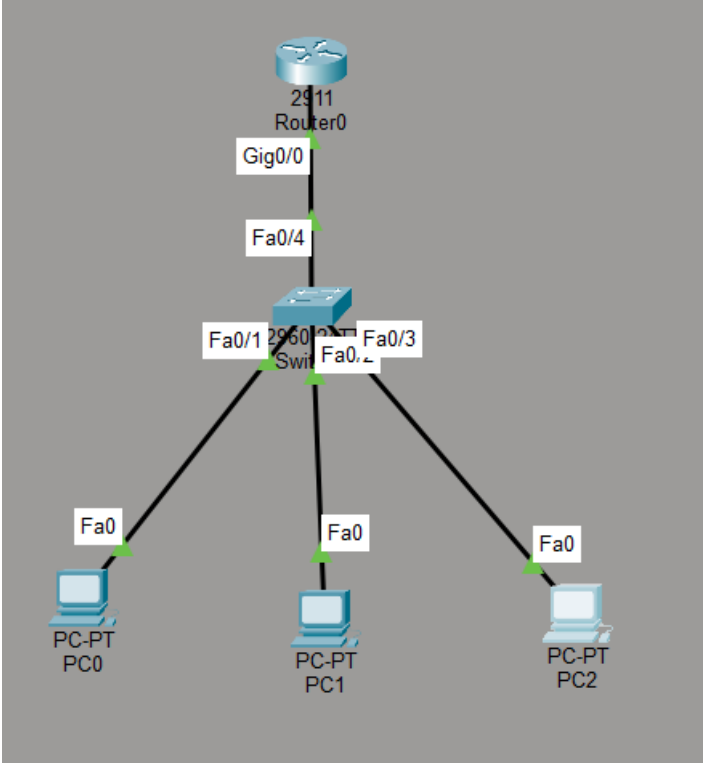

```
Switch#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Gig0/1, Gig0/2
10	Insta	active	Fa0/1
20	Zomato	active	Fa0/2
30	Flipkart	active	Fa0/3
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

Insta VLAN Ping Test Insta to Zomato

```
C:\>ping 192.168.20.10

Pinging 192.168.20.10 with 32 bytes of data:

Reply from 192.168.20.10: bytes=32 time=1ms TTL=127
Reply from 192.168.20.10: bytes=32 time=1ms TTL=127
Reply from 192.168.20.10: bytes=32 time<1ms TTL=127
Reply from 192.168.20.10: bytes=32 time=1ms TTL=127

Ping statistics for 192.168.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```