KMS Series Microminiature SMT Side Actuated

Features/Benefits



- Excellent tactile feel
- **ESD** protection
- Positioning pegs for stability
- RoHS compliant and compatible

Typical Applications

- Mobile phones
- Medical handheld monitors
- Consumer electronics
- Telecommunication networks



В

Specification

FUNCTION: Momentary

CONTACT ARRANGEMENT: SPST, N.O. TERMINALS: Gullwing type for SMT

IP40 Sealed

Mechanical

OVERLOAD: 20N

TACTILE FEELING: 15% min. for the 2N version

25% min for the 2.5N version

	Operating force	Operating life	
Type	Newtons (grams)	(operations)	Travel
KMS221G/GP	2N (200) ± 0.5	100 K cycles	$0,25 \pm 0,15$
KMS223G/GP	2N (200) ± 0.5	100 K cycles	$0,25 \pm 0,15$
KMS231G/GP	3N (300) ± 0.6	100 K cycles	0.3 ± 0.15
KMS233G/GP	3N (300) ± 0.6	100 K cycles	0.3 ± 0.15

Note: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Packaging

Tape and reels in reels of 3,000 pieces. External diameter 330mm ± 2mm.

Electrical Silver Gold MAXIMUM POWER: 0.2 VA 1 VA MAXIMUM VOLTAGE: 32 VDC 32 VDC MAXIMUM CURRENT DC: 50 mA 10 mA MINIMUM CURRENT DC: 1 mA 1 mA

DIELECTRIC STRENGTH: 250 VDC CONTACT RESISTANCE: ≤100 mΩ INSULATION RESISTANCE: $10^{9}\Omega$

BOUNCE TIME: ≤3 ms


Environmental Silver Gold OPERATING TEMPERATURE: -40°C to 85°C -40°C to 125°C STORAGE TEMPERATURE: -55°C to 85°C -55°C to 125°C

Process

Infared reflow soldering in accordance with IEC 61760-1


How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

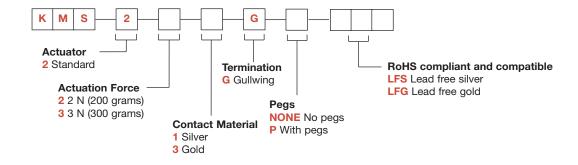





Ti di

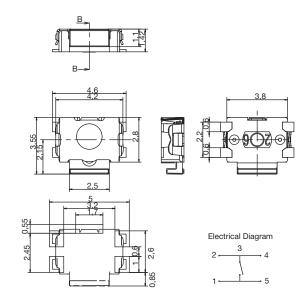


KMS WITH PEGS

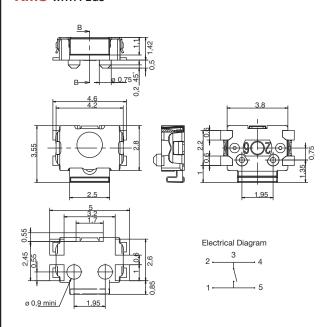

TAPE & REEL

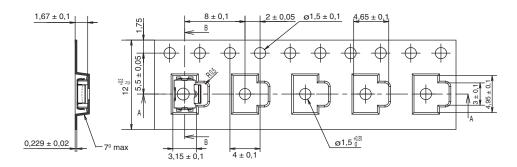

WITH PEGS

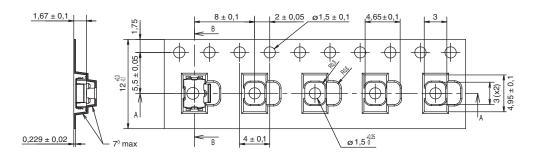





Dimensions are shown: mm Specifications and dimensions subject to change



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Components:

KMS231G KMS233G KMS231GLFS KMS233GLFG KMS231GPLFS KMS233GPLFG KMS221GPLFS KMS223GPLFG KMS22GPLFG KMS2CPLFG KMSCPLFG KMSCPLFG KMSCPLFG KMSCPLFG KMSCPLFG KMSCPL