
```
% rk4 internal heat.m
clc;
clear;
% Parameters
T0 = 65;
                        % Initial temperature
t0 = 0;
                        % Initial time
tf = 24;
                        % Final time
% Time vector
t = t0:dt:tf;
T = zeros(1, length(t)); % Preallocate solution
T(1) = T0;
                       % Initial condition
% Define internal heat source H(t)
H = Q(t) 7 * sech((3/4)*(t - 10)); % Heat from people/lights/machines
      ^^^ Change first value to modify input heat sources
% Define derivative function dT/dt
dTdt = Q(t, T) H(t); % No losses, only accumulation
% RK4 Integration
for i = 1:N
   ti = t(i);
   Ti = T(i);
   k1 = dt * dTdt(ti, Ti);
   k2 = dt * dTdt(ti + dt/2, Ti + k1/2);
   k3 = dt * dTdt(ti + dt/2, Ti + k2/2);
   k4 = dt * dTdt(ti + dt, Ti + k3);
   T(i+1) = Ti + (1/6)*(k1 + 2*k2 + 2*k3 + k4);
end
% Find and display max temperature and when it occurs
fprintf('Maximum temperature: %.2f °F\n', max_T);
Maximum temperature: 94.31 °F
```

```
Time of maximum temperature: 24.00 hours
```

```
% Plot the result figure;
```

fprintf('Time of maximum temperature: %.2f hours\n', time max T);

```
y_max = max_T + 5;
% Plot temperature T(t)
subplot(2, 1, 1);
plot(t, T, 'b-', 'LineWidth', 2);
xlabel('Time (Hours)');
ylabel('Temperature [°F]');
title('Building Temperature from Internal Heat Sources');
xlim([0 24]);
                     % Fix x-axis to 0-24 hours
ylim([min(T)-1, y max]); % Pad lower limit slightly for visibility
grid on;
% Add a red area to denote unsafe temps
hold on;
y_fill = 81 * ones(size(t));
y max = max(T) + 5;
fill([t, fliplr(t)], [y_fill, y_max * ones(size(t))], ...
     'r', 'FaceAlpha', 0.2, 'EdgeColor', 'none');
hold off;
% Add text to the graph where max temp occurs
hold on; % Keep the current plot
plot(time_max_T, max_T, 'ro'); % Mark the max temperature point
time_hours = floor(time_max_T); % Get the integer hours
time minutes = round((time max T - time hours) * 60); % Round minutes to nearest
integer
text(time_max_T, max_T, sprintf('Max: %.2f°F at t=%d hrs %d min', max_T,
time_hours, time_minutes), ...
    'VerticalAlignment', 'bottom', 'HorizontalAlignment', 'right');
hold off; % Release the plot
% Plot H(t) for comparison
%{
hold on;
plot(t, H(t), 'r--', 'LineWidth', 1.5);
legend('T(t)', 'H(t)');
%}
% Create a separate subplot for building usage
subplot(2, 1, 2);
plot(t, H(t), 'r--', 'LineWidth', 1.5);
xlabel('Time (Hours)');
ylabel('Building Usage');
title('Heat Sources Active Inside Building');
grid on;
```

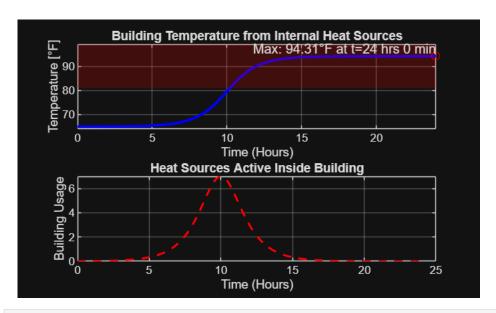

```
% --- Helper function for sech ---
function y = sech(x)
   y = 1 ./ cosh(x);
end
```