

Company Profile

Chengdu FulSailing Energy Technology Co., Ltd.

About us | Product & service portfolio | Our vision

Updated: March 2026

COMTENTS



01 Company Profile

02 Our People

03 Research and Development

04 Service Introduction



PART 01
Company Profile

- About us
- Our journey
- Qualification & certificates

Company Overview



Established: April 26, 2021
Location: Chengdu, Sichuan, China (The Land of Abundance)

FulSailing focuses on the R&D of various drilling and completion tools, including performance drilling tools, completion tools, near-bit tools, as well as water-based and oil-based LCM.

The company also offers technical services such as near-bit drilling, performance drilling, loss prevention and plugging services, as well as liner hanger completion services.

FulSailing adheres to ISO standards and API specifications, ensuring product and service quality.

Our Journey

2021

Founded on 26 April, 2021

2021

Y2021，began R&D for performance drilling tools, including 8” and 6-3/4” Hydro Thrusters

2022

Y2022，R&D for local manufacturing of near-bit tools, including near-bit housing and gap sub

2023

Y2023, developed WB/OB LCM, and Cement Supporting Umbrella

2024

Y2024，Continued R&D on new LCM and tools, including
Multiple Activation Bypass Valve,
Repeated Pressure-Test Burst System and Float Collar

2024

Nov 2024, authorized by NOV for LH sales & service

Chengdu Fulsailing Energy Technology Co., Ltd

ISO Certificates

CERTIFICATE

Bureau Veritas Certification Holding SAS - UK Branch certifies that the Management System of

Chengdu Fulsailing Energy Technology Co., Ltd.

No.9 Workshop West Side, No. 255, Section 1, Xinhua Avenue, Chengdu Cross-Straits IT Industry Development Zone, Wenjiang District, Chengdu City, Sichuan Province, China

Unified social credit code: 91510114MAACJ0FN38

has been audited and found to be in accordance with the requirements of the management system standards detailed below

ISO 9001:2015

Scope of certification:

Drilling & Completion Tools and Equipment Design, Assembly and Test; Oil & Gas Drilling & Completion Technical Service

Certificate No.: **CN058605**

Original certification date: 02-01-2023
Expiry date of previous cycle: NA
Recertification Audit date: NA
Current cycle start date: 24-12-2025
Expiry date: 01-01-2029
(Subject to the continued satisfactory operation of the organisation's Management System)
Version N: 1
Issue Date: 24-12-2025

Signed on behalf of BVCH SAS UK Branch

UKAS MANAGEMENT SYSTEMS 0008

Certification body address: 5th Floor, 100 Lower Thames Street, London, EC3R 6DL, United Kingdom

Local Office Address: Bureau Veritas Certification (Beijing) Co., Ltd, Room 02, 9 / F, West Office Building 1, Oriental Economic and Trade City, Oriental Plaza, No.1 East Chang'an Street, Dongcheng District, Beijing, China. 100738

Further clarifications regarding the scope and validity of this certificate, and the applicability of the management system requirements, please call : +86 10 59683663

Certified organisation has to accept and pass regular surveillance audits, then this certificate can be continuously valid. Information of this certificate may be obtained by visiting CNCA website (www.cnca.gov.cn).

CER CERTIF ALL TPL 001 Rev 4.4 C2.2 Contractual

1/1

CERTIFICATE

Bureau Veritas Certification Holding SAS - UK Branch certifies that the Management System of

Chengdu Fulsailing Energy Technology Co., Ltd.

No.9 Workshop West Side, No. 255, Section 1, Xinhua Avenue, Chengdu Cross-Straits IT Industry Development Zone, Wenjiang District, Chengdu City, Sichuan Province, China

Unified social credit code: 91510114MAACJ0FN38

has been audited and found to be in accordance with the requirements of the management system standards detailed below

ISO 14001:2015

Scope of certification:

Drilling & Completion Tools and Equipment Design, Assembly and Test; Oil & Gas Drilling & Completion Technical Service

Certificate No.: **CN058603**

Original certification date: 02-01-2023
Expiry date of previous cycle: NA
Recertification Audit date: NA
Current cycle start date: 24-12-2025
Expiry date: 01-01-2029
(Subject to the continued satisfactory operation of the organisation's Management System)
Version N: 1
Issue Date: 24-12-2025

Signed on behalf of BVCH SAS UK Branch

UKAS MANAGEMENT SYSTEMS 0008

Certification body address: 5th Floor, 100 Lower Thames Street, London, EC3R 6DL, United Kingdom

Local Office Address: Bureau Veritas Certification (Beijing) Co., Ltd, Room 02, 9 / F, West Office Building 1, Oriental Economic and Trade City, Oriental Plaza, No.1 East Chang'an Street, Dongcheng District, Beijing, China. 100738

Further clarifications regarding the scope and validity of this certificate, and the applicability of the management system requirements, please call : +86 10 59683663

Certified organisation has to accept and pass regular surveillance audits, then this certificate can be continuously valid. Information of this certificate may be obtained by visiting CNCA website (www.cnca.gov.cn).

CER CERTIF ALL TPL 001 Rev 4.4 C2.2 Contractual

1/1

CERTIFICATE

Bureau Veritas Certification Holding SAS - UK Branch certifies that the Management System of

Chengdu Fulsailing Energy Technology Co., Ltd.

No.9 Workshop West Side, No. 255, Section 1, Xinhua Avenue, Chengdu Cross-Straits IT Industry Development Zone, Wenjiang District, Chengdu City, Sichuan Province, China

Unified social credit code: 91510114MAACJ0FN38

has been audited and found to be in accordance with the requirements of the management system standards detailed below

ISO 45001:2018

Scope of certification:

Drilling & Completion Tools and Equipment Design, Assembly and Test; Oil & Gas Drilling & Completion Technical Service

Certificate No.: **CN058604**

Original certification date: 02-01-2023
Expiry date of previous cycle: NA
Recertification Audit date: NA
Current cycle start date: 24-12-2025
Expiry date: 01-01-2029
(Subject to the continued satisfactory operation of the organisation's Management System)
Version N: 1
Issue Date: 24-12-2025

Signed on behalf of BVCH SAS UK Branch

UKAS MANAGEMENT SYSTEMS 0008

Certification body address: 5th Floor, 100 Lower Thames Street, London, EC3R 6DL, United Kingdom

Local Office Address: Bureau Veritas Certification (Beijing) Co., Ltd, Room 02, 9 / F, West Office Building 1, Oriental Economic and Trade City, Oriental Plaza, No.1 East Chang'an Street, Dongcheng District, Beijing, China. 100738

Further clarifications regarding the scope and validity of this certificate, and the applicability of the management system requirements, please call : +86 10 59683663

Certified organisation has to accept and pass regular surveillance audits, then this certificate can be continuously valid. Information of this certificate may be obtained by visiting CNCA website (www.cnca.gov.cn).

CER CERTIF ALL TPL 001 Rev 4.4 C2.2 Contractual

1/1

API Certificates



American Petroleum Institute

REGISTRATION NO. Q1-5059

Certificate of Registration

The American Petroleum Institute certifies that the quality management system of

CHENGDU FULSAILING ENERGY TECHNOLOGY CO., LTD
No. 9 Workshop West Side, Section 1, Xinhua Avenue
Chengdu Cross-Straits IT Industry Development Zone
Wenjiang District
Chengdu, Sichuan
People's Republic of China

has been assessed by the American Petroleum Institute and found to be in conformance with the following:

API Spec Q1, 10th Edition

The scope of this registration and the approved quality management system applies to the

Design, Manufacture and Sales of Kelly Valves, Packers and Continuous Circulation Joints for the Oil and Gas Industry


API approves the organization's justification for excluding
Validation of Processes

Effective Date:	NOVEMBER 10, 2025
Expiration Date:	FEBRUARY 27, 2027
Registered Since:	FEBRUARY 27, 2024

API Spec Q1 Registered

Senior Vice President of Global Industry Services

This certificate is valid for the period specified herein. The registered organization must continually meet all requirements of API Spec Q1, *Specification for Quality Management System Requirements for Manufacturing Organizations for the Petroleum and Natural Gas Industry*, and the requirements of the Registration Agreement. Registration is maintained and regularly monitored through annual full system audits. This certificate has been issued from API offices located at 700 Massachusetts Avenue, NW Suite 1100, Washington, DC 20001-5571, U.S.A. It is the property of API and must be returned upon request.
To verify the authenticity of this certificate, go to www.api.org/compositelist.

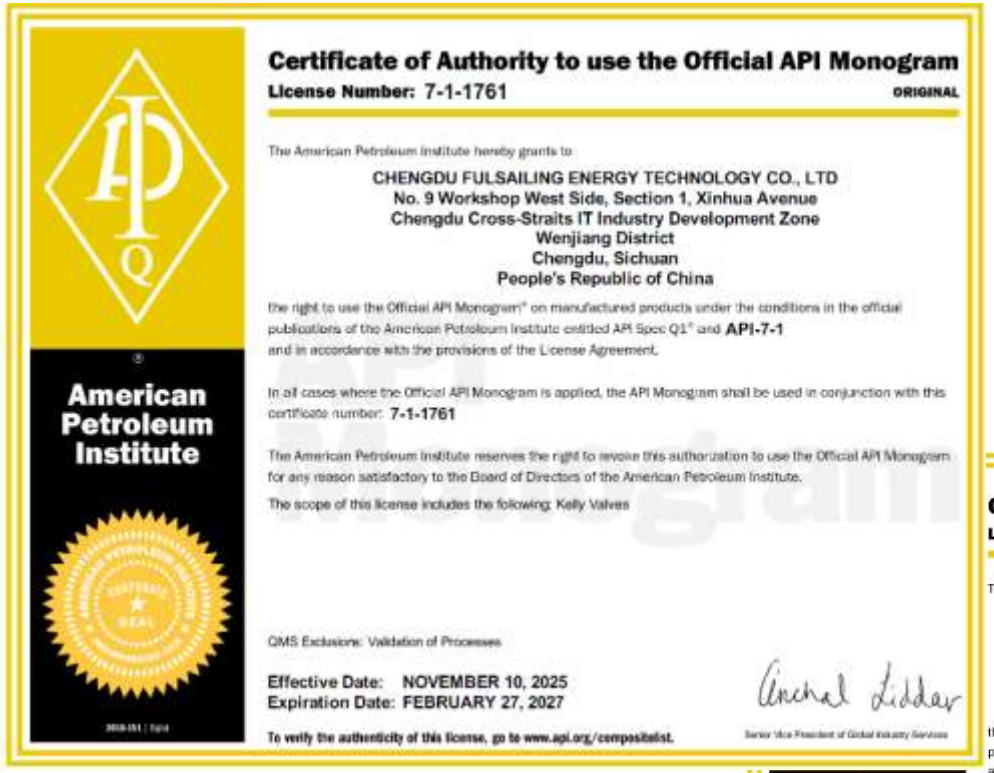

American Petroleum Institute

Certificate of Authority to use the Official API Monogram

License Number: 7-1-1761 ORIGINAL

The American Petroleum Institute hereby grants to

CHENGDU FULSAILING ENERGY TECHNOLOGY CO., LTD
No. 9 Workshop West Side, Section 1, Xinhua Avenue
Chengdu Cross-Straits IT Industry Development Zone
Wenjiang District
Chengdu, Sichuan
People's Republic of China

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API-7-1** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: **7-1-1761**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: Kelly Valves

QMS Exclusions: Validation of Processes

Effective Date: NOVEMBER 10, 2025
Expiration Date: FEBRUARY 27, 2027

To verify the authenticity of this license, go to www.api.org/compositelist.

Senior Vice President of Global Industry Services



American Petroleum Institute

Certificate of Authority to use the Official API Monogram

License Number: 11D1-0231 ORIGINAL

The American Petroleum Institute hereby grants to

CHENGDU FULSAILING ENERGY TECHNOLOGY CO., LTD
No. 9 Workshop West Side, Section 1, Xinhua Avenue
Chengdu Cross-Straits IT Industry Development Zone
Wenjiang District
Chengdu, Sichuan
People's Republic of China

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API-11D1** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: **11D1-0231**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: Packers at V6-R, V6

QMS Exclusions: Validation of Processes

Effective Date: NOVEMBER 10, 2025
Expiration Date: FEBRUARY 27, 2027

To verify the authenticity of this license, go to www.api.org/compositelist.

Senior Vice President of Global Industry Services




PART 02

Our Team

- People
- Organization
- The R&D team

Our People

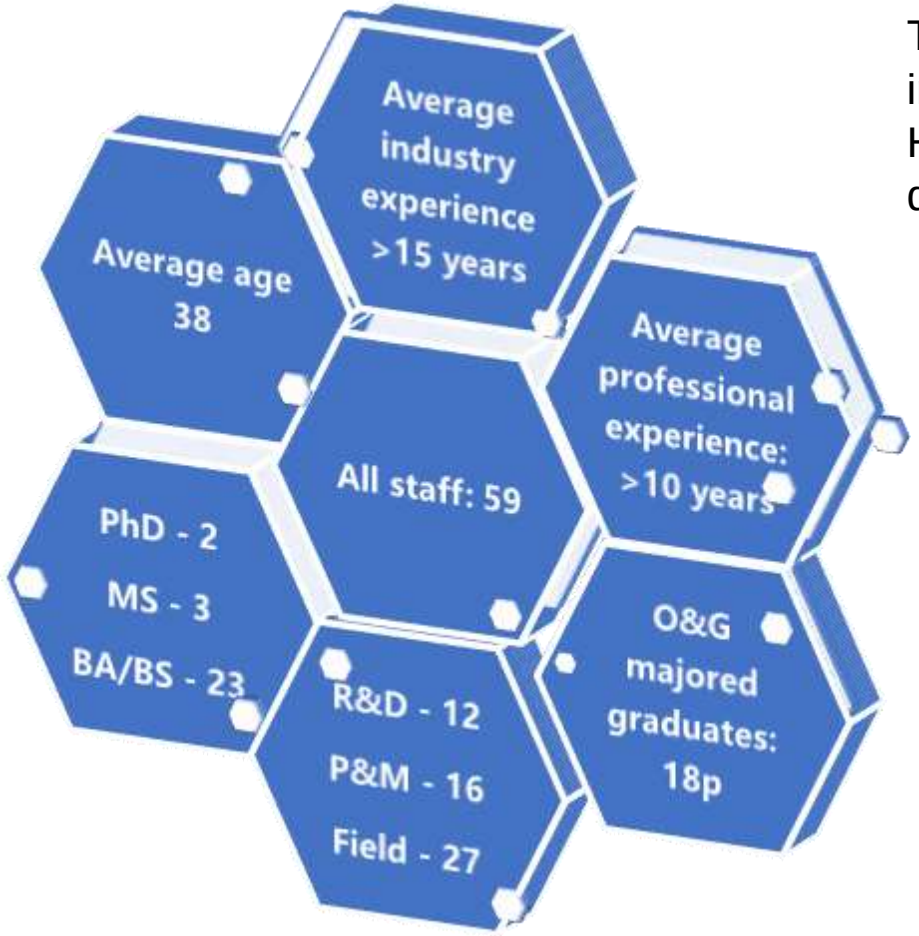

FulSailing boasts a strong R&D team with over 25 years of experience in mechanical design, drilling tools, and oilfield chemicals.


The team is made up of industry elites who have worked for well-known international companies such as Baker Hughes, Schlumberger, Halliburton, and Weatherford, offering deep expertise in product development, management, and market expansion.



Organization

Site Engineer Team

- Completion service team
- Drilling service team
- Oilfield chemicals team

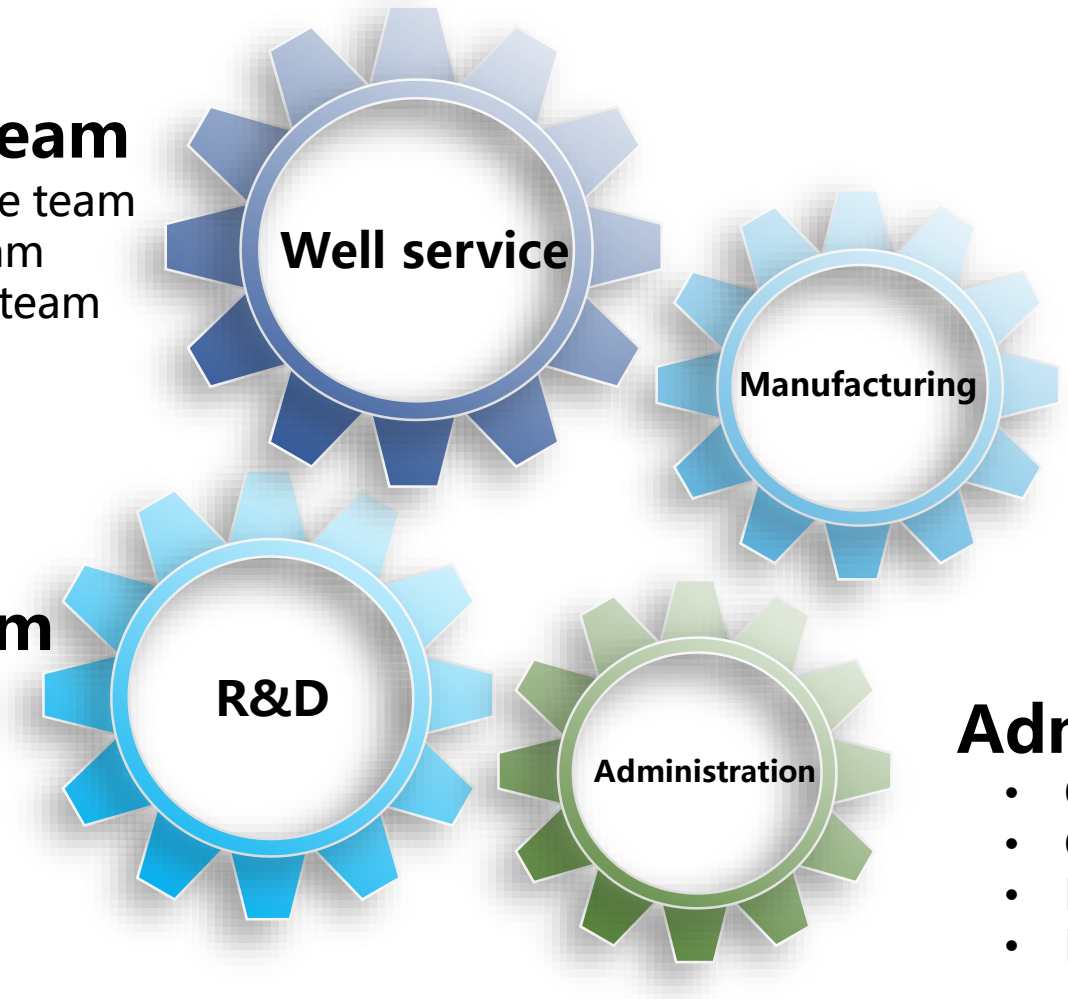

Manufacturing Team

- Machining center
- Assembly & maintenance
- Process engineering
- QA & QC
- Supply chain


Innovative R&D Team

- Drilling tech center
- Completion tech center
- Oilfield chemicals center

Admin & Support Team

- QHSE
- Commercial & procurement
- Finance & assets
- HR

R&D Center

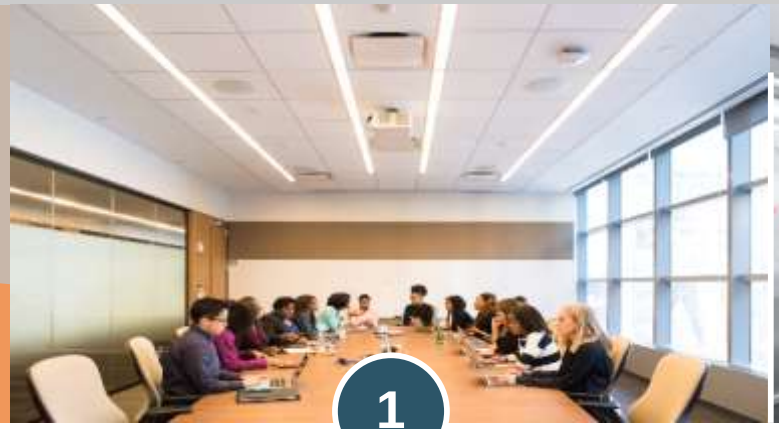

1

- **Mechanical Team** – Drilling & completion tools and equipment
- **Oilfield Chemicals Team** – Loss circulation material

Both teams are led by PhDs with >25 years of relevant experience



2

Drilling & Completion Tools and Equipment R&D Team led by 1 PhD, supported by 2 MS and 6 BS

- Specialized in mechanical design and mechatronics
- With over 10 years of relevant experience
- A blend of expertise and balanced team dynamic



3

Oilfield Chemicals R&D Team led by 1 PhD, supported by 1 MS and 3 BS

- Majored in Applied Chemistry or Oilfield Chemistry
- Works closely with mud and LCM engineers to address real challenges
- Combining chemical expertise with practical oilfield applications



PART 03

Products & Services

- Near bits
- Performance Drilling tools
- Completion tools
- Loss circulation material
- Other products

Product Portfolio -1

Hydro Thruster




- Reduces friction and improve the effectiveness of WOB transfer in drilling operations
- Converts static friction into dynamic friction, thus improving drilling efficiency and reducing the risk of sticking

Repeated Pressure-Test Burst System



- Eliminates the complex steps of establishing a flow path for the first frac stage (e.g., coiled tubing perforation)
- Allows for two high-pressure tests, with no time limit per test, ensuring post-cementing casing integrity testing saving construction time and improving operational efficiency

Multiple Activation Bypass Valve

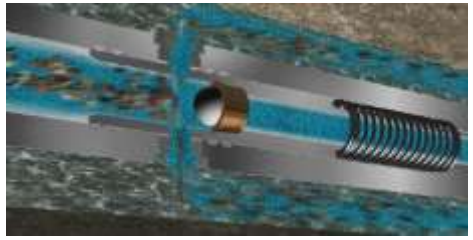


- Multiple opening and closing bypass tool, designed for special operations to open/close bypass holes as needed based on downhole conditions
- Enhances cleaning of cuttings beds in directional and horizontal well sections
- Reduces trip time and costs, minimizing sticking risks and improving overall operational efficiency

Near Bit Tool



- Uses near-bit measurement subs to send wireless current signals
- MWD-probe encodes and sends info via mud pulse signals
- Surface equipment receives and decodes the signals to obtain downhole data

Loss Prevention & Plugging material

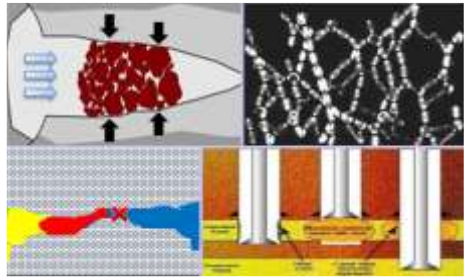

- Water-based or oil-based drilling fluid
- Multifunctional Consolidation Plugging
- Oil-Based High Fluid Loss Solidifying Plugging
- Quick Dehydration Consolidation Plugging
- Plugging under High-Pressure
- Dynamic Plugging under Pressure while drilling

Product Portfolio -2

Continuous Circulation Drilling System



- Maintains continuous circulation of drilling fluid during MU/BO drill pipe operations, effectively reducing wellbore temperature and improving operation safety
- Continuously circulates out drill cuttings, enhancing drilling efficiency and effectively reducing drilling accidents

Floatation Collar



- One of the most effective methods to overcome casing running difficulties in horizontal wells, far extened reach wells
- Reduces friction between the casing and the wellbore, ensuring safe casing run-in
- Features high-pressure rupture disks with high compressive stability

Cement Support Umbrella



- Designed for high-quality well abandonment
- Isolates cement and prevents fluid displacement from underlying formations, providing excellent support for the injected cement slurry
- Improves cement plugging, ensuring operations and long-term wellbore stability after sealing
- Prevents underground fluid leakage, minimizes risks and costs

Mechanical Top Drive Casing Running Tool



- Significantly enhances overall efficiency of drilling operations by improving casing running speed, quality, and safety
- Effectively addresses common sticking issues encountered during traditional casing running operations
- Reliable in complex and harsh geological environments

Liner Hanger



- Activated by hydraulic pressure differential without the need of rotation, providing high load capacity, high reliability, and excellent sealing performance in complex well conditions
- Specially designed slips hardened to securely grip the casing wall without damaging the parent pipe

Hydro Thruster

The Hydro Thruster generates axial vibrations through its own motion, converting static friction into dynamic friction. This reduces frictional resistance, alleviates or eliminates challenges such as stick-slip vibration, weight-on-bit (WOB) instability, weight transmission inconsistencies, tool face instability, and stuck pipe issues during drilling.

The Hydro Thruster improves drilling efficiency and stability, especially in challenging conditions such as high deviated wells, horizontal sections, or complex formations with significant well trajectory changes in azimuth. It effectively transmits weight to bit and enhances the ability to adjust the tool face, allowing for further penetration into target formations. It also reduces the need for excessive tool face adjustments during drilling, maintaining tool face stability and improving mechanical drilling rates.

The Downhole Activated Hydro Thruster remains inactive and does not produce vibrations in non-target sections. Once reaches the target section, a ball is dropped to activate the tool, initiating vibration to assist in accelerating drilling rate.

Features

- Low pressure drop
- Minimized unwanted vibration
- Vibration activated as needed

Benifits

- Increased ROP
- Improves WOB transfer
- Improves directional control
- Adaptable to most MWD/LWD





Zero Pressure Drop Hydro Thruster

The Zero Pressure Drop Hydro Thruster is a new-generation friction reduction and performance drilling tool developed for complex well conditions. The system optimizes the hydraulic pulse structure, achieving vibration-assisted drilling without generating additional flow pressure.

The unique zero pressure drop design ensures that while maintaining stable bottom hole pressure and flow rate, the tool provides continuous axial vibrations to the drill string. This effectively reduces friction, improves WOB transfer efficiency, and reduces the risk of sticking, thus improving the overall ROP.

The fluid channel is specially optimized to ensure no pressure drop during operation, guaranteeing that pumping efficiency and circulation stability are not affected.

In situations where the on-site circulation system is pressure-limited, this tool is the preferred choice for friction reduction and ROP enhancement.


Features	Nearly zero pressure drop, maintaining stable pump pressure
	High-frequency axial vibration, reducing friction between drill bits and wellbore
	Compatible with various drilling systems and tool combinations, easy to install and operate
Benefits	Maintains stable bottom hole pressure, avoiding circulation lost and disturbances
	Improves pressure transmission and wellbore trajectory control
	Suitable for both water-based and oil-based environments



Repeatable Pressure-Test Burst System

In projects such as shale gas, shale oil, and coalbed methane, hydraulic fracturing is the most common measure to increase oil and gas production.

Designed to provide a fracturing channel for the first stage of fracturing in multi-stage fractured wells, the tool is activated when needed, allowing for up to two times of high-pressure tests on the casing string, ensuring casing string integrity before fracturing operations and maximizing the controllability and economic benefits of the job.

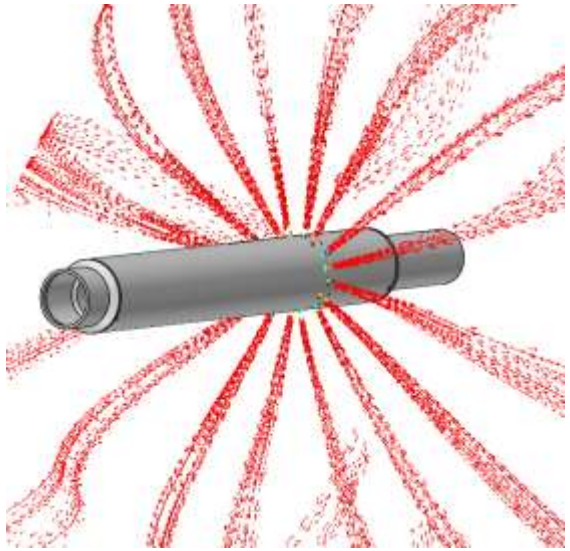



Features

- 360°evenly distributed large flow channel
- Low pressure activation
- Tailored thread connection

Application


- Open hole or cement completion
- Casing size 5-1/2in
- Casing weight 23lb/ft – 26.8lb/ft
- Max working temperature 150℃
- Max W.P. 120MPa (incl. hydrostatic pressure)
- Vertical well depth 2,000-5,000m

Benefits

- Simple and reliable
- Full bore design, compatible with wiper plug
- Anti-premature activation design
- Two high-pressure tests can be performed with no time limit for a single test

Multiple Activation Bypass Tool

The Multiple Activation Bypass Tool is an innovative piece of equipment designed to enable multiple opening and closing operations. Typically installed in special drilling tool assemblies such as directional drilling, and logging while drilling, this tool is cleverly engineered to meet the complex demands of downhole conditions. It can promptly open or close bypass ports, allowing for various specialized operations. This functionality greatly enhances the versatility of special tool assemblies, enabling them to flexibly adapt to different downhole environments and operational requirements.

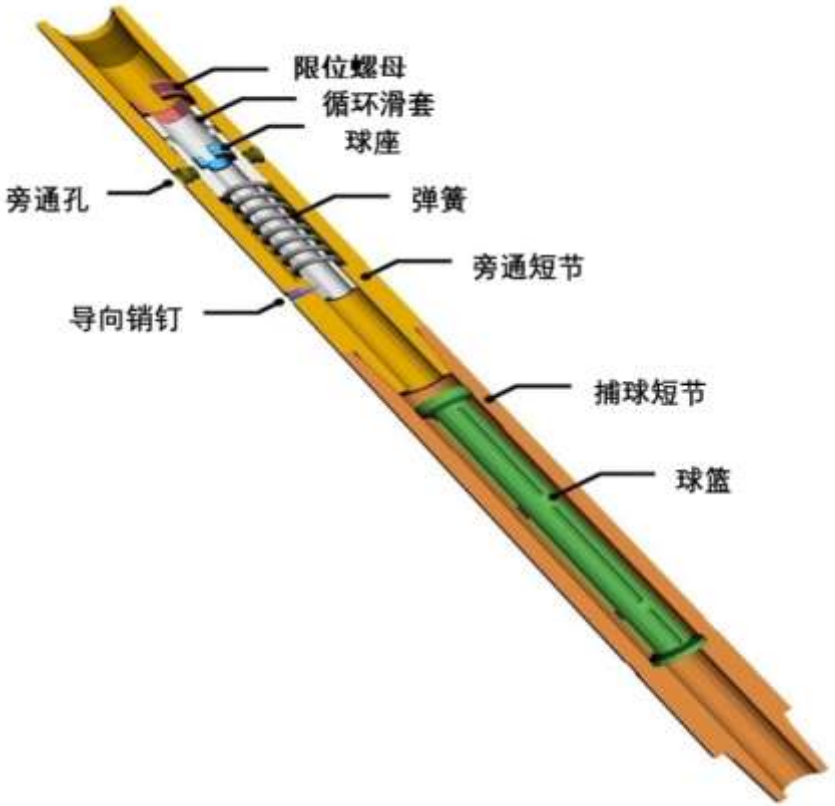

Applications

- Directional drilling, no impact to MWD/LWD or motor
- Bypasses lower BHA to pump LCM pills
- Increases flow rate and lowers pump pressure
- Hole cleaning
- Cleans riser and BOP in deep water operations


Benefits

- Reduces POOH operations
- Optimizes bit, motor & RSS performance
- Single tool for multiple uses
- Easy operation, no need of special operators
- Ensure wellbore integrity

Near-Bit Az GR Sub

The Near-Bit Az GR Sub measures the Gamma of formation and send wireless current signal to receiver. The receiver gets and decodes the signals, which are then sent to the MWD (Measurement While Drilling) tool for data encoding and transmission. Finally, the data is received and decoded by surface equipment through mud pulse signals, providing downhole Az GR measurement data.

The At-Bit system, located close to the drill bit, utilizes wireless short-range communication to send measurement data from the Near-Bit Sub via MWD (Measurement While Drilling) in real-time. It is capable of measuring various parameters such as bottom hole inclination, temperature, RPM (revolutions per minute), downhole vibrations, and azimuthal gamma data, providing critical information for interpreting formation changes and significantly enhancing geological steering capabilities.

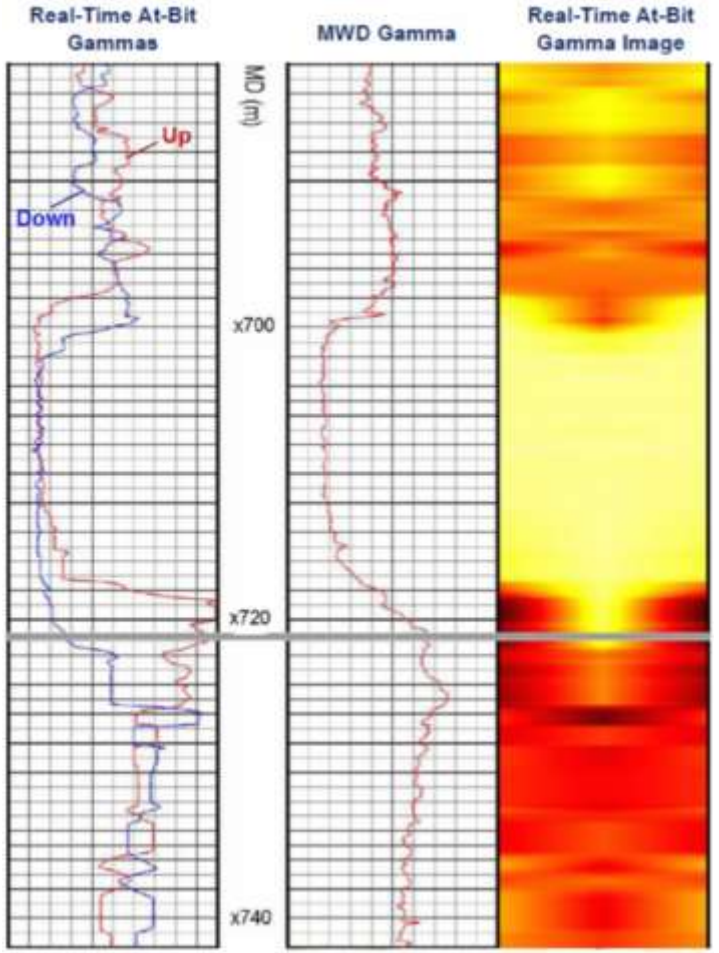





Continuous Circulation Drilling System (CCDS)

Circulation Sub

Switches quickly between the main channel (top drive to drill pipe) and the bypass channel

Diverter Manifold

Switches pathways of the HP drilling fluid to adjust pressure



Plug back Tool

Establishes a bypass path between the circulation sub and the diversion manifold

Control System

Achieves remote control through electro-hydraulic integrated operation, with high responsiveness and safety


- Reduced connection time
  - ✓ Modular design for easy assembly
- Improved Safety/Reduced risk of a well control event over a connection
  - ✓ Improved hole cleaning
  - ✓ Continuous cuttings transport
  - ✓ No need to ream/backream a stand
  - ✓ No cuttings slogs or drop out
  - ✓ Reduced risk of pack off
  - ✓ Less bottoms up cleaning time before POOH
- Constant BHP prevents hole collapse / cavings
- Significantly reduces stuck pipe incidents
- Even and constant drilling mud treatment cycling, no need to break gels

Casing Floating Sub

The Float Collar is an auxiliary tool designed for casing running in horizontal wells and far extended reach wells. It solves the difficulty of casing running in complex wellbore sections, making it one of the most efficient solutions for solving casing running challenges in complex wellbore conditions.

By incorporating the float collar in the casing string, it utilizes the buoyancy created by the trapped air or low-density drilling fluid between the collar and the casing shoe to effectively reduce friction between the casing and the wellbore during the running process, ensuring the casing reaches the desired depth smoothly and safely.


FSL's IF Series Floatation Collar uses a high-pressure, highly stable rupture disk, combined with a pressure-activated mechanical impact system. This design meets the demands of deep and high-pressure wells, with the activation pressure of the impact system adjustable according to the well conditions. Once the rupture disk is activated and broken, it ensures a full-bore passage, and the debris from the rupture disk can be fully circulated out of the well.

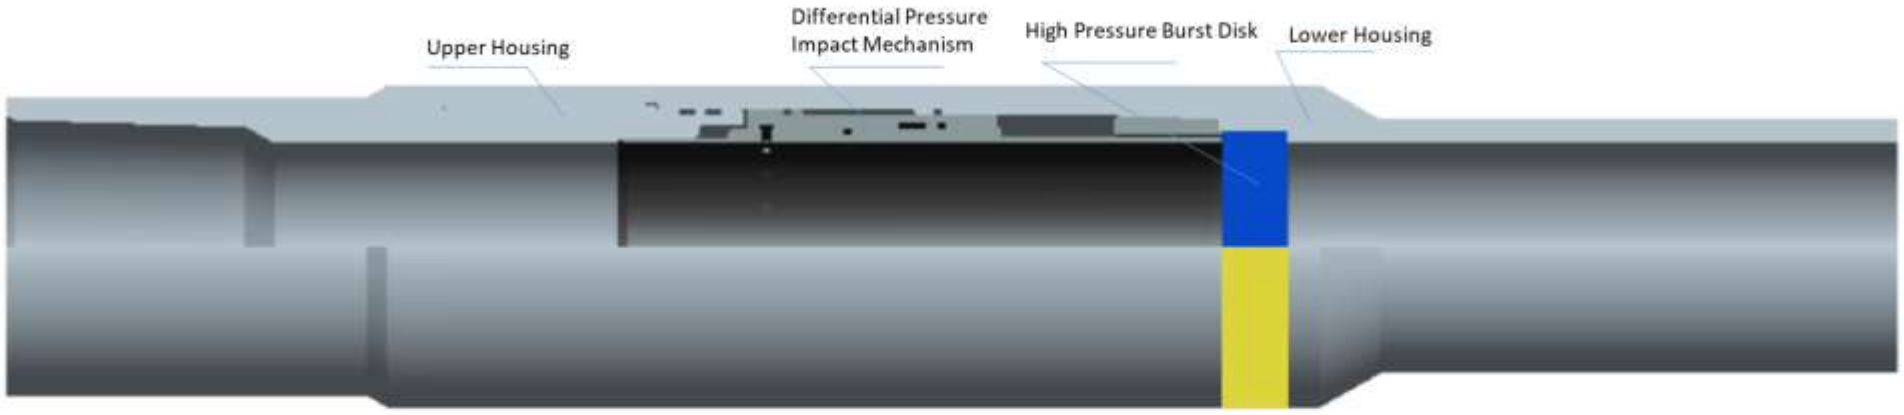

Cement Support Umbrella

Designed to increase the success rate of cement plugging or blocking operations, it is the best solution for suspending cement plugs. The tool is pumped downhole through the drill string, and it automatically expands and locks in larger diameter casings or open-hole sections, forming a stable cement support platform. This prevents cement slurry from leaking downward or mixing, ensuring the cement plug's bonding quality and sealing integrity.

The tool features a mechanical self-locking structure and a high-reliability isolation umbrella system. It includes an independent anti-retreat mechanism, which keeps the tool stable in place after it expands to match the wellbore diameter, preventing retraction due to external force or fluid flow. Its rubber bowl guide design significantly improves the pumpability within the drill string and fluid flow guidance performance. The dual-layer isolation umbrella enhances the cement slurry isolation effect. The operation requires no additional downhole tools or on-site assembly, simplifying the installation process and eliminating manual intervention, thereby improving operational efficiency and safety.

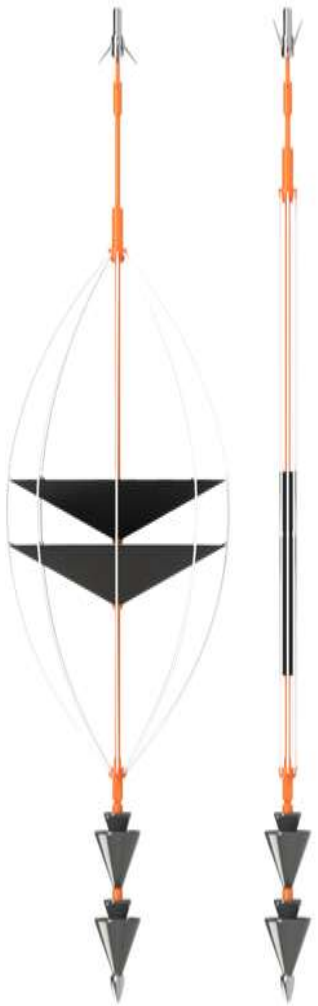

Features

- Mechanical self-locking design prevents premature opening
- Fully drillable design, no interference with subsequent downhole operations
- Anti-retreat design prevents the umbrella body from retracting
- Dual-layer isolation umbrella structure improves cement slurry isolation performance



Mechanical Top Drive Casing Running Tool

The Mechanical Top Drive Casing Running Tool is a highly reliable mechanical tool specifically designed for casing running and casing drilling operations on rigs equipped with top drives, capable to perform various functions, such as casing PU/SO, MU/BO, circulation, cementing, and rotation.

This tool features torque-activated cam locking technology to securely lock the casing. Fully mechanical, it applies downward force and right/left rotation to lock and release the tool, requiring no external power unit or control system.

Compared to traditional casing running methods, FSL's Mechanical Top Drive Casing Running Tool has clear advantages in several aspects, particularly in operation safety, quality and running speed. It significantly improves operational efficiency and effectively resolves issues related to stuck pipe during casing running operations.


It is also capable in coping with casing drilling operations, where the casing directly replaces traditional drill pipes, serving as the passage for drilling fluid and the final casing for the completion, reducing the drilling cycle time.

Features

- Fully mechanical, no additional control panels or hydraulic power systems
- Cam clamping mechanism for stable operation in extreme well conditions
- Built-in cementing passage for high flow rate circulation

Benefits

- Carry out rotation, PU/SO and circulation at the same time to prevent casing sticking
- Applicable to various top drive rig platforms and casing sizes
- Switches between mud filling and circulation mode swiftly for high efficiency

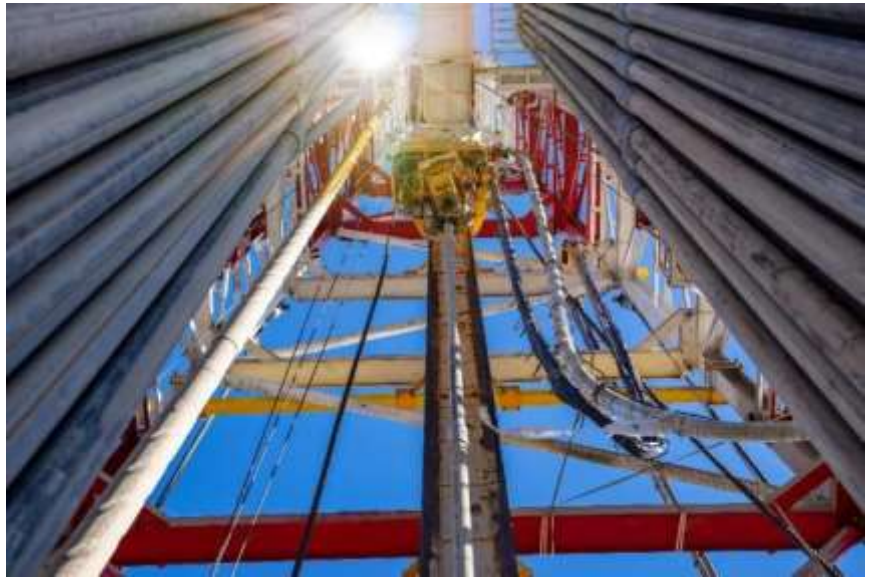

Liner Hanger

Liner Hanger is a key component used in liner suspension systems, activated by hydraulic pressure to secure the liner in place within the casing. This tool utilizes a hydraulic setting method, offering high load capacity, reliability, and superior sealing performance in complex well environments.

Our Liner Hanger is specifically optimized for deep wells, high-deviated wells, HPHT wells, and extended reach wells. Its unique hydraulic activation system enables smooth, controllable setting actions. The hanger's mechanically hardened slips ensure secure engagement with the casing wall without damaging the parent pipe.

Equipped with a high-strength bearing system, the tool supports continuous rotation of the liner after suspension, ensuring wellbore cleaning, adequate mud displacement, and cementing quality. For operations where rotation is not required, a static model liner hanger can be used to simplify the design and improve reliability. Its one-piece central shaft structure can handle up to 300 tons of suspended load, making it an ideal solution for complex completions and long-section cementing needs.

Features	Heavy-duty bearing design, allowing the liner to rotate after suspension
	High-strength slip structure, maximum hanging capacity of over 380 tons
	Multiple material options: L80, T95, P110, Q125, 22Cr, 125ksi, etc.
Benefits	Secure slip engagement with casing, suitable for extended liner operations
	Smooth setting process, avoiding premature setting or slippage
	Rotating suspension design for cement bond and wellbore integrity




Loss Prevention and Plugging material

FSL offers a range of loss circulation materials, including bridge plugging products and cementing sealing products. These materials are suitable for a variety of well conditions and formations that have been encountered to date.

Depending on the type of loss, multiple sealing methods can be employed to address different leakage situations effectively.

#	Product	Acid Solubility (15%HCl)	Temperature Resistance (℃)	Pressure Resistance (MPa)
	Consolidation Plugging Agents			
1	Multifunctional Consolidation Plugging Agent /MMC	≥80%	160	
2	High Fluid Loss Consolidation Plugging Agent /QLS	≥80%	150	
3	Oil Based High Fluid Loss Consolidation Plugging Agent /HOSM	38.1%	120	
	Bridge-Sealing Materials			
1	Pressure Bearing Plugging Agent /MWS	≥22%	260	
2	Acid-Soluble Plugging under High Pressure /VS	≥98%	250	
3	Wellbore Strengthening Agent /MUP	≥20%	150	
4	Elastic Graphite /QE	≥10%	500	
5	Bridge Plugging Agent /SQD-98	≥84%	200	
6	Rigid Plugging Agent under High Pressure /RP	≥18%	200	
7	Rigid Plugging Agent /KGD	≥95%	250	

After compounding, the pressure resistance capacity is >15 Mpa, with a maximum of up to 35MPa.

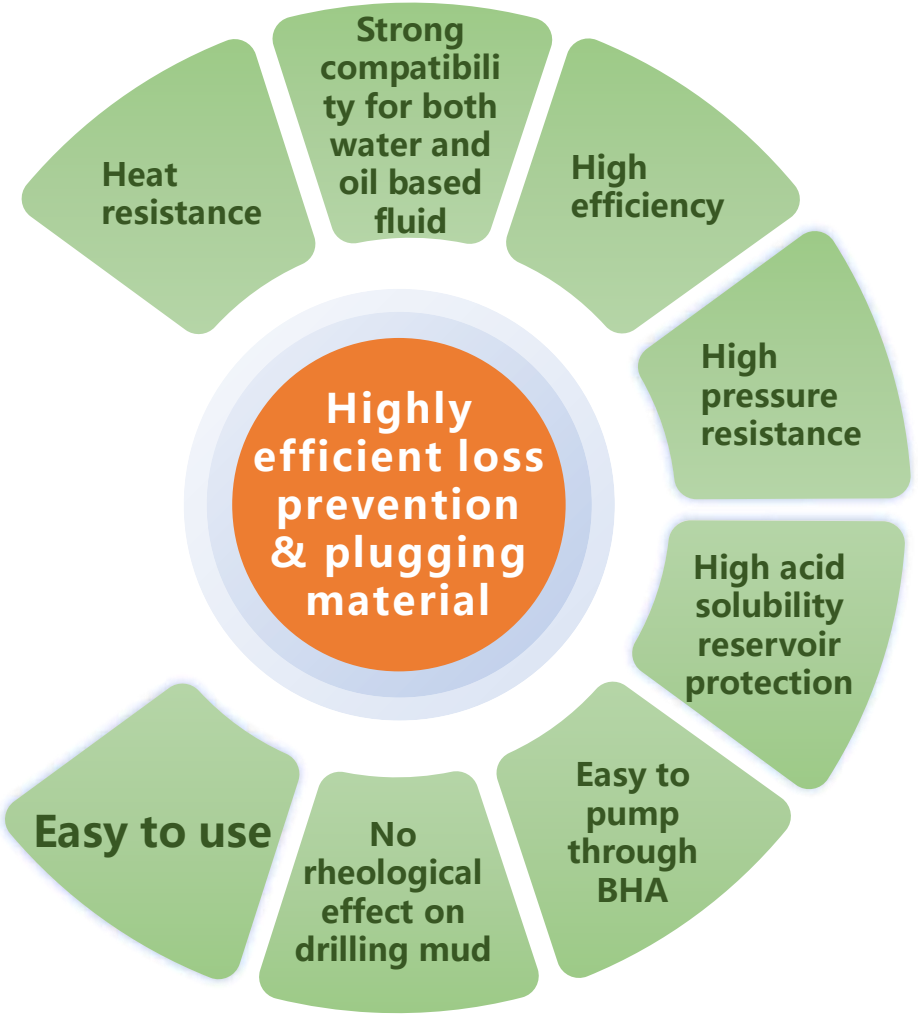

Loss Prevention and Plugging material

FSL developed a full range of Loss Prevention and Plugging products, forming multiple sets of plugging technologies, including:

- Multifunctional Consolidation Plugging Agent
- Oil Based High Fluid Loss Consolidation Plugging Agent
- High Fluid Loss Consolidation Plugging Agent
- Pressure Bearing Plugging Agent
- Plugging Agent for Dynamic Pressure While Drilling

Multifunctional Consolidation Plugging Agent

Suitable for severe mud loss in fractured zone or faulty formation

Suitable for oil-based mud loss in fractured and micro-fractured formation

Oil Based High Fluid Loss Consolidation Plugging Agent

High Fluid Loss Consolidation Plugging Agent

Suitable for porous sandstone formations, fissile graywacke formations, fissile mud shale formations

Suitable for porous sandstone formations, fissile graywacke formations, fissile mud shale formations

Pressure Bearing Plugging Agent

Plugging Agent for Dynamic Pressure While Drilling

Suitable for fractured and micro-fractured formation.

Services: Drilling & Completion

Performance Drilling Services

Drilling enhancement services using Hydro Thrusters, Axial Impactors, and Multiple Activation Bypass Valves





Top Drive Casing Running Services (CRT)

Runs 5" to 20" casing with load capacity from 450 ton to 750 ton operations with dozens of CRT tools

Directional Drilling Services

- Conventional Directional Drilling Services
- Near Bit AZ Gamma survey Services





Liner Hanger Services

Offers wide range of Liner Hanger services, for different sizes and material

Services: Loss Prevention & Plugging

Loss Prevention & Plugging Services

FSL offers a range of loss circulation materials, including bridge plugging products and cementing sealing products. These materials are suitable for a variety of well conditions and formations that have been encountered to date.

Our highly competent and experienced application engineers offer solution design and site operation depending on the type of loss, multiple sealing methods can be employed to address different leakage situations effectively.

- Conventional Drilling Fluid Services
- Special Service to combat the Lost Circulation condition by introducing various Patented Lost Circulation Agents products

1



2





Q & A

Contact：Commercial@fulsailing.com