User Manual

Rhizomatica

July 28, 2022

Abstract

This is the user manual of the High-Frequency Emergency and Rural Multimedia Exchange System (HERMES) digital telecommunication system. HERMES combines a set of technologies in order to provide telecommunications services over the HF frequency band. Among these technologies are an affordable HF transceiver, a high-performance software-defined modem, the Unix-to-Unix Communication Protocol (UUCP) and a set of carefully configured user services which are available over a local WiFi network. This manual addresses the basic equipment operation, including the usage of the web-based graphic user interface (GUI) and the email transport system.

Contents

1 Introduction

HERMES is a telecommunication system which operates in the High Frequency (HF) band. HERMES allows digital multimedia exchange between users and stations, including exchange of text, image, audio or any other file type. The system interface to the users is a web interface available to users within WiFi connectivity distance to a HERMES transceiver.

The system relies heavily on the e-mail protocol, which can be managed and accessed thought the system's web interface or through specialized apps, like DeltaChat[1]. HERMES also supports peer-to-peer secure messages between the Host stations, which works as a bulletin board system (BBS).

The system employs a star topology network in which a Gateway station connects to all Host stations in remote locations. The Gateway station routes e-mail and other messages locally (back to Host stations over HF) or over the Internet to the wider world. The synchronization between the data to be sent or received from each remote station is asynchronous and orchestrated by the Gateway station in a round-robin fashion (one Host station after another, in order) during pre-established times.

1.1 HERMES HF Transceiver

The front panel of the equipment is shown in Figure 2.

The HERMES box includes the following input / output interfaces, as shown in Figure 1.

1. Back Panel - Serial number;

2. Back Panel - Ground connector;

3. Back Panel - Ventilation openings;

4. Back Panel - HF antenna connector (PL-259 / UHF female);

5. Back Panel - Fuse (10A);

6. Back Panel - 12V DC power input, positive (red) and negative (black) terminals;

7. Back Panel - WiFi antenna connector (RP-SMA female);

8. Back Panel - RJ-45 Ethernet port, for connection to external switch or router;

9. Front Panel - Power switch (on/off);

---

[1]DeltaChat, a multi-plataform e-mail messenger: https://delta.chat/

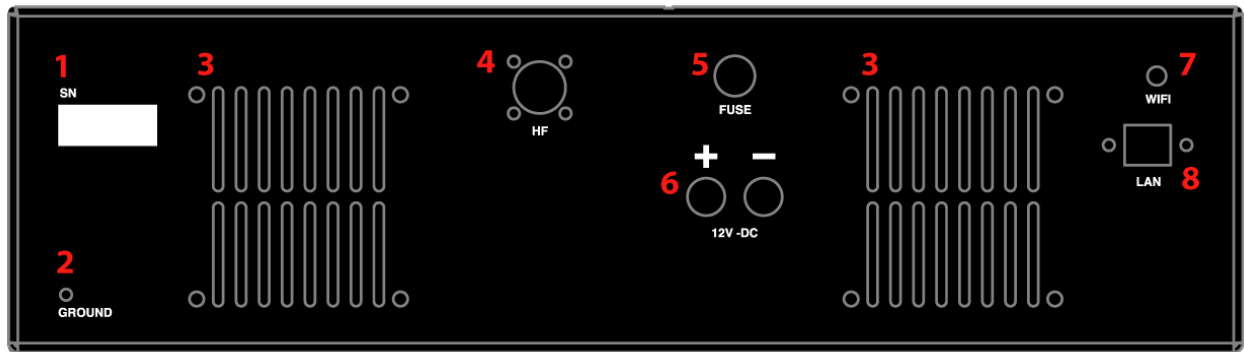10. Front Panel - 4 indicator LED's (System LED, Antenna Status LED, Connected LED, TX LED).
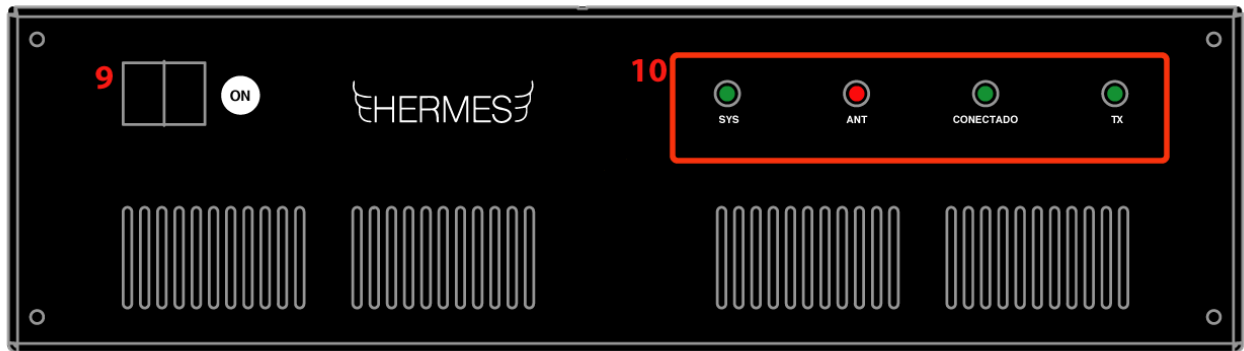

Figure 1: Back view of HERMES box

Figure 2: Indicator's LED on front panel

The LED indicator lights are set to show the following:

- SYS: System LED, blinks when the system is not ready to be used. SYS LED typically blinks when the equipment is turning on or when it is turning off;

- ANT: Green when the antenna is functioning properly, and no high SWR value is detected. ANT LED turns Red when a high SWR value is detected, meaning the high SWR protection is enabled and the radio will not transmit. SWR protection needs to be reset if active (Red), for the radio to became operational again, which can be done in the radio administrative interface. Check the RF cable and Antenna before resetting in the interface;

- CONECTADO: LED on (solid Green) means that the station is connected to another station;

- TX: LED on means the radio is transmitting. When this LED is off, it is in receive mode. If the CONECTADO LED is on and the TX LED is off, the station is actively receiving. During active communication with another station the CONECTADO LED will be solid Green and the TX LED will turn on and off;

1.2   HF Antenna Recommendation

An HF antenna tuned to the desired operating frequency must be connected to the equipment. Never turn on the equipment without first connecting to an appropriate antenna!

There are many HF antennas, each one fitting a different purpose. For short and medium range communications (up to about 800 km), a quarter wavelength dipole installed in inverted V configuration is a good and affordable option.

1.3   Power Requirements

The system is designed to operate with between 12V DC to 14V DC power. A typical setup would use 12V DC from a battery connected to a solar charge controller and photo-voltaic panels. Another setup option is to use a 12V or 13.8V AC/DC power supply.

The red connector on the back of the transceiver should be connected to the positive (+) polarity of the battery or power supply unit, while the black connector to the negative (-) polarity. The system has polarity inversion protection, but care should be taken to proper power installation of power connections. The transceiver consumes approximately 2A in receive mode, and 6A in transmit mode.

2   Web Interface

HERMES provides a web interface which can be accessed through a local WiFi network. When accessing the HERMES WiFi network, the following information applies:

- Network Name (ESSID): HERMES
- Password: amazonia

Be aware that on some mobile phones a browser will automatically open with the the main HERMES web page, while in others, to access the HERMES web interface, you must open the browser and access http://ac1.hermes.radio or http://10.0.0.1.

On the main page 3 you will find the following links:

1. Domain name of your current station;
2. Main menu;
3. Welcome message;
4. Link to Public Messages;
5. Login and logout link and info;
6. Dark/light mode activator tab;
7. Station information and status;

The web interface allows admin users to manage e-mail accounts, to perform radio configurations (like setting frequency and SSB mode) and exchange direct messages between stations (BBS). The interface also contains its own administrative section, for defining and managing users and their privileges.

It is important to note that same user name created for the administrative interface will be used for the e-mail address assigned to that user. For example, user "amelia" in the local interface will have the email "amelia@ac2.hermes.radio". Note that the email address is composed of the user name @ the name of the station, which corresponds to its internet domain name, in this example, "ac2.hermes.radio". Each station domain name is written in the header on the Hermes web interface. If the domain begins with "ga" then it is a Gateway station.

2.1 Administrative Interface

Figure 4: Admin interface

To access admin features, you need an admin password. While anyone can create a user account, only a system admin can create new administrator user and give admin power to other users. To login, click on the login icon on the top right of the web interface.

The default administrator login username is: "root" and the password is: "caduceu".

Inside the administration section, an admin user will find the following options: user management, messages administration, network information, stations, detailed log and radio configuration.

2.1.1 User management

Allows the creation of new users, updating data of registered users and to delete users of the system. Every username corresponds to an email account with the same name as in the example above (e.g. amelia@ac2.hermes.radio).

Figure 5: Create user interface

Administrators can also give admin powers to regular users, by clicking on the "is admin" checkbox at the bottom of the Create User page.

2.1.2 Messages administration

From this page, an admin can determine who will be able to send public messages between stations and who can attach files to this messages: everyone; only registered users or only administrators. It is worth thinking this through with the users as attachments can slow the system down considerably.

Figure 6: Messages administration Interface

2.2 Transmission List

All data exchange in the HERMES system is done through UUCP. Being an asynchronous protocol, all the data is first queued before being transmitted. The elements of the UUCP queue are called "jobs", and each job in the HERMES system can be an e-mail, a public message, or special remote command execution message (for example, to inform of a new e-mail user creation). A system administrator can cancel a job before it is sent. Administrators can also erase the public messages for any reason, including the case when the equipment storage space is reaching its limit. The storage space available is shown in the web interface footer.

The queues of all Host stations are transmitted periodically when the Gateway station connects to each remote station based on whatever schedule has been configured. In an emergency, a system administrator can force message transmission and bypass the queue by clicking on the "force transmission" link. This could interrupt receiving messages from other stations for a while and should be avoided unless absolutely necessary.

Figure 7: Transmission list interface

2.2.1 Radio configuration

Provides a direct interface to change various radio settings like frequency, transmission mode, restore factory configuration and it also allows one to view sensor readings about the HF antenna of the system.

Figure 8: Radio configuration interface

2.2.2 Stations

Provides a list of the available stations on the system. If the station is a gateway station, you can choose which stations will be enabled to transmit and receive messages.

Figure 9: Stations interface

2.2.3 Central Station

The central station is a special station that keeps connected to the internet. If you are in the central station, this option will be shown in the menu. From there is possible to create schedules for transmission to other stations, that are the time slots when the transmission will happen between all the stations connected to the network. It's possible also to enable or disable schedules or change their times from this menu.

Figure 10: Stations interface

2.2.4 Network info

Displays some information about the system, such as network addresses, callsign, servername etc

Figure 11: Network information page

2.2.5 Detailed Log

Provides access to system logs, such as email logs and UUCP logs, that register every activity on the system.

Figure 12: Logs page on the web interface

2.3 Public Messages (BBS)

Direct messages can be sent between stations with support for cryptography and multimedia compression. Sent and received messages can be found in the Messages tab of the web interface. One Admin of the system can select who will be able to send public messages to other or tho it's own station.

2.3.1 How to write public messages

Figure 13: Interface to compose messages

By clicking on the compose ()icon, it's possible to write a new message and to attach files such as images or audio files. The icon will only show up if it's allowed for the user to compose messages on the station. An admin can determine who can send public messages between stations and who can attach files to public messages by setting permissions in the admin tab.

Public messages can also be sent to your own station, which is an easy way to publicize news inside your own community.

Public messages can also be password protected, which means that only recipients that know the password will be able to read their content, while the message description will still be readable by everyone. Have in mind that once a password for the message (has to be at least 4 characters) is defined, there is no way to recover it, nor to change it.

On the message administration link in the admin section, a system administrator can change who can attach files to messages between stations: everyone with access to the network, only registered users, or only administrators.

Because the data throughput over HF is relatively low, file attachments are limited to 20KB. The system will accept inputs for image and sound up to 30 MB and for other files up to 2 MB, and will try to compress them to fit the maximum size of 20KB using state-of-the-art compression techniques. Obviously, this can have an effect on both image and sound file quality. For other file formats, a simple compressor will be applied, and messages with attachment size greater than 20 KB will be cancelled.

2.4 Languages supported

The HERMES interface is also available in Portuguese and Spanish, and these versions can be accessed on the Language tab of the main menu.
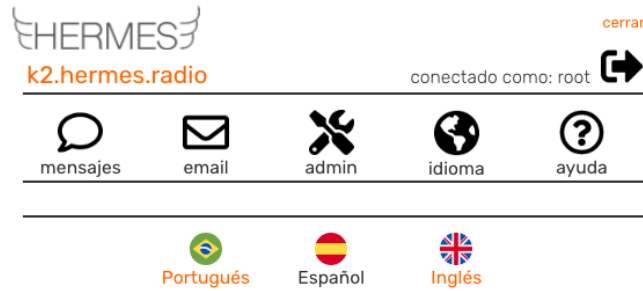
Figure 14: Page to access translations

3 E-mail
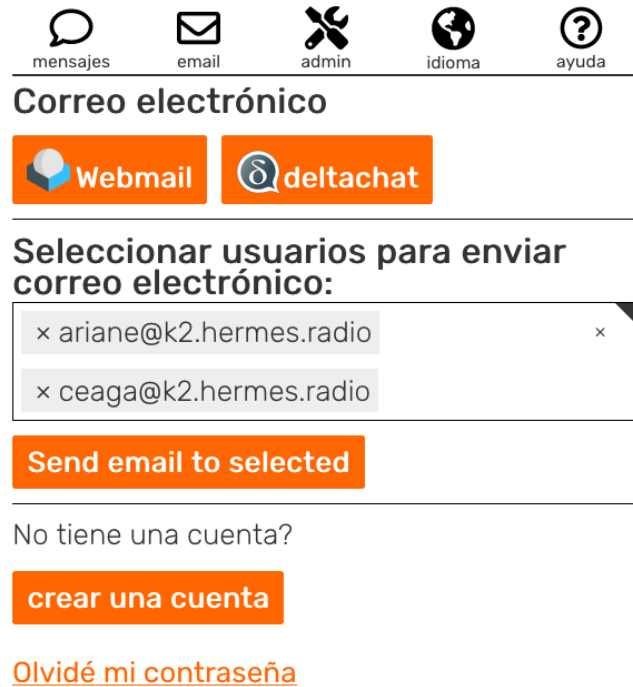
Figure 15: Page to access webmail interface

A key service provided by the HERMES is E-mail. The E-mail is communication protocol attributes to each e-mail bearer an address in the format "username@host". In the case of HERMES, the "username" part of the email is created by a HERMES user in the web interface, while the host (also called domain) is already set in the system, and typically has the format "community_id.hermes.radio". So a typical HERMES emails looks like, for example, "amelia@ac4.hermes.radio". The "username" is the same username as created in the user creation page in the HERMES administration interface.

HERMES email users can send and receive e-mail just like any other e-mail user. The only restriction which must be considered is that in order to avoid clogging the system with large messages, emails with large attachments will be cancelled by the system, with the appropriate cancellation message sent to the user.

While there are many e-mail clients, like Thunderbird and Outlook Express, the recommended e-mail client to be used with HERMES is DeltaChat. DeltaChat installers are available for download through the interface for Android, Windows, MacOS and Linux. A backup option is to use RoundCube webmail which is also accessible through the HERMES web interface.

3.1   DeltaChat
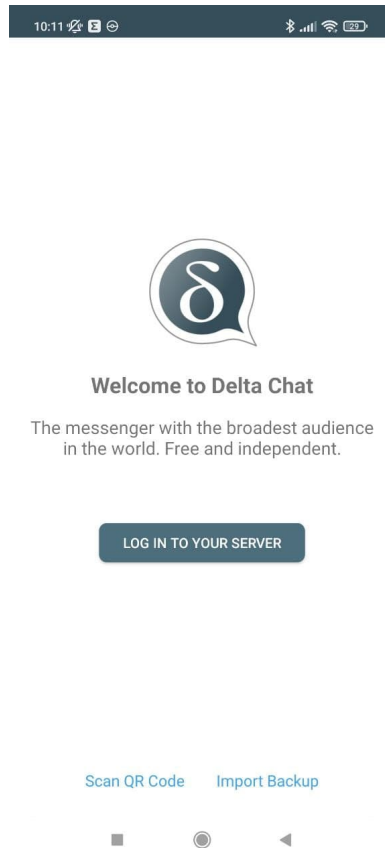
Figure 16: Deltachat intro (first screen)

Figure 17: Deltachat chat room example

With the DeltaChat application, you can use HERMES email to carry out personal communications for exchanging messages. This app works on most common smartphones and feels like a common messaging application like Telegram, WhatsApp or Signal. Keep in mind that due to the message transmission schedule, messages may take a while to arrive, depending on the amount of messages in the queue and the transmission window length.

3.1.1 Installation

DeltaChat is available in most common app stores and repositories. As HERMES is designed for places with low or no connectivity, it is possible to download it through the HERMES web interface, selecting one of the packages provided according to your device operational system. HERMES provides installation files for mobile or computer systems such as Android, GNU/Linux, Windows and MacOSX. The installer files can be accessed here if you're reading this using a HERMES system network: Android, Windows, Debian and Mac OS

3.1.2 Configuration

The HERMES system includes a compression system suitable for multimedia messages like images or audio being sent over HF. End-to-end encryption should be disabled in order to allow the server-based image and audio compression to work properly, otherwise image and audio exchange will not be possible.

The steps to find this feature in Deltachat are: Burger Menu (≡) -> Settings -> Advanced -> Autocrypt, turn off: Prefer End-To-End Encryption) as shown in Figure 18.
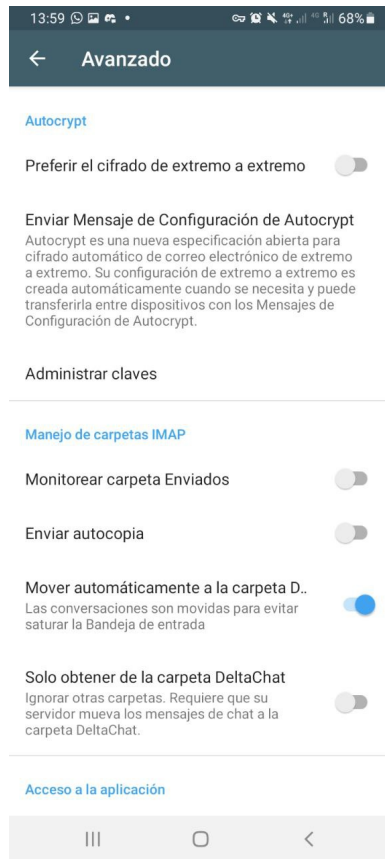
Figure 18: Deltachat Advanced settings

Deltachat, by default, tags its emails and show only the "known" messages (emails) that was sent by another Deltachat application. In order to be able to interact with e-mails from any e-mail client software, enable the option "show all emails". The steps to find this feature in Deltachat are: Burger Menu (≡) -> Settings -> Chats and Media -> Show Classic E-Mails -> All. As shown in Figure 19
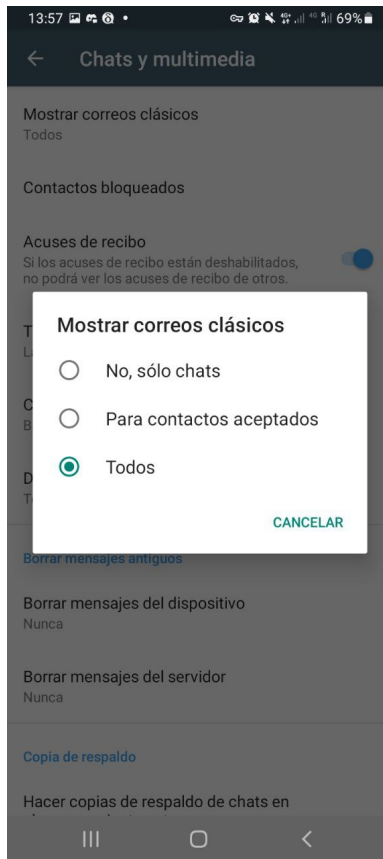
Figure 19: Deltachat Setup all emails

3.1.3 Usage

In order to configure DeltaChat, first an e-mail account should be created, as described in section 2.1. In order to login to an e-mail account, only the e-mail address and password fields should be filled, as shown in Figure 20. The user and password will be the same as those created when first creating a login on HERMES and for use with the RoundCube webmail.
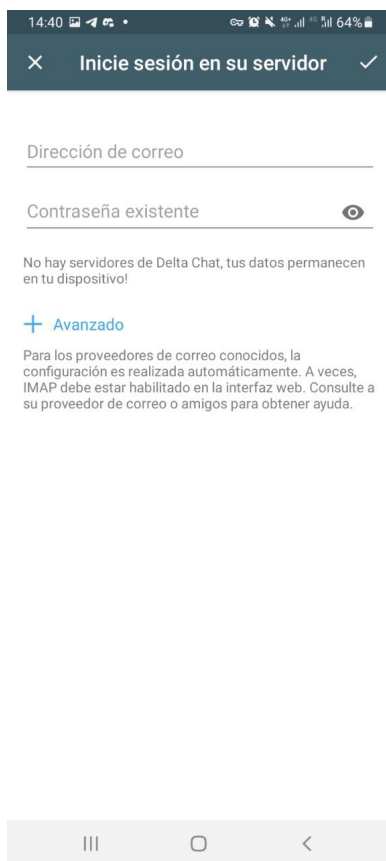
Figure 20: Deltachat Login example

3.2 Other email clients

Other email clients can also be used. We can't cover all cases, but the HERMES system uses default services like IMAP to synchronize email folders and SMTP to send the messages. Specific technical information about the ports can be found in the appendix: A.2.1

4 Troubleshooting

The HERMES web interface indicates when something is wrong with the system. When a red dot appears in the footer bar (figure 21), it becomes interactive, and when clicked, it lists the names of the services that are experiencing a problem.

Figure 21: Red dot on the web interface can be clicked to check what part of the system may be broken

In case of problems with the antenna, a red led in the antenna (ANT) position will light up on the HERMES box (not the web interface). In this case, check the correct position of the power supply wires and check the position and integrity of the antenna, RF connectors, coaxial cable, and the transmitter. After checking that, it will be necessary to rest the antenna protection on the radio config section on the web interface for the radio transmit again.

If the messages in the transmission list are not being transmitted at the allotted time, check that the radio settings have not been changed by going to the Admin tab. If that is not the case, it's possible that the other stations are offline.

techinfo

A   Appendix - technical information

A.1   Network Information

Each HERMES system provides a WiFi access point. The configuration is:

- WiFi Network Name: `HERMES`
- WiFi Password: `amazonia`

The IP of the HERMES station (in the wireless interface) is **10.0.0.1** and the ethernet connection will connect as a dhcp client to an already existing network.

A.2   Network Services

A.2.1   E-mail services

The e-mail settings are the following:

- Server address: `hermes` (IP `10.0.0.1`)
- SMTP (Simple Mail Transfer Protocol): port `25`
- SMTPS (Secure Simple Mail Transfer Protocol): port `465`, with SSL support (used for DeltaChat, the certificates are valid until 2031)
- IMAP (Internet Message Access Protocol): port `143`
- Webmail URL acessible: `http://hermes/mail` or `http://10.0.0.1/mail`

These settings should not be needed by most users as DeltaChat automatically identifies all the settings by entering just the e-mail address and password at the login prompt.

A.2.2   Web services

The HERMES web interface runs on port 80 on http, and provides these capabilities:

- BBS P2P public messaging capability (over UUCP);
- E-mail user administration;
- UUCP queue management;
- HF radio transceiver management tools;
- Customized permissions for users send multimedia messages;
- Page for radio service tasks (like test tone generation and PTT control);

- A network information page (for cases in which the HERMES system connects to a larger IP network);

- DeltaChat client downloads for Android, MacOS, Windows and Linux.

A.3   Other network Services

- SSH Secure Shell - for special system administration: port 22
  user: "hermes", password: hermes
  user: "root" password: "caduceu"

- VPN - Virtual Private Network client ready for remote access

- ISPCONFIG admin web interface
  port 8080 / credentials: "admin" "caduceu"

- mariaDB, the Database server for storing messages and users on station-api and ISPconfig

- E-mail services with transports connected to UUCP
  Postfix, dovecot, spamassin, postgrey, amavis, clamav (hold) and ISPconfig as a manager

- iwatch: handles inbox HMP folder and triggers UUCP spool compression

- hostapd: sets the wireless interface into Access Point mode

- dnsmasq: provides a domain name server and aliases

- uucp: accessible via network with credentials user/pass

- VNC: Virtual X session environment with VARA monitor   port: 5901 (Eg. in the local wifi network: vncviewer 10.0.0.1:5901)   user: "hermes", password: "hermes"

B   Additional information

The main system runs Debian GNU/Linux release Bullseye and we try to follow their guidelines.

B.1   Password Cheat Sheet

Description	User	Password
Web Interface	root	caduceu
WiFi Network	hermes	amazonia

B.2   Field trials

HERMES system prototypes were tested on a test bed with stations installed in three cities: Brasília/DF, Belo Horizonte/MG and Hortolândia/SP. Most of the tests happened between Brasília and Belo Horizonte, and Belo Horizonte and Hortolândia. The straight line distance between Brasília and Belo Horizonte is 620 km, while Belo Horizonte and Hortolândia straight line distance is 470 km. All the stations are equipped with simple dipole installed as inverted V, tuned to the 40m amateur radio band.

In our internal tests, between Belo Horizonte and Hortolândia, the modem reached more than 1000 bps in an average propagation condition (0db of SNR in the receiver). A 10Kb message, which is the

typical size of an email with a picture takes about 4 minutes to be exchanged. In poor propagation conditions, this time can go up to 10 minutes.

The adaptive modem starts the communication with slower speeds, but if propagation is good, it gears up and automatically and increases the speed, and on the other hand, if propagation deteriorates, the modem reduces the speed, increasing the signal robustness.

B.3   Source Code

Source code is available inside the folders /home/hermes/install with the latest git versions before the deployment and is also available online at:

- Web Front-end Interface, written using the Angular framework: https://github.com/DigitalHermes/angular;

- Web Back-end Interface, written in PHP: https://github.com/DigitalHERMES/station-api;

- HF transceiver description and schematics: https://github.com/DigitalHERMES/rhizo-transceiver;

- HF transceiver firmware and userland tools, written in C: https://github.com/DigitalHermes/ubitxv6;

- Network management software for UUCP and the HF modem (VARA or Ardop) integration, written in C: https://github.com/DigitalHERMES/rhizo-uuardop

C   Licensing

All the project's source code is licensed under the GPL version 3 or any greater version, unless stated differently in the repository.

C.1   GNU General Public License Version 3

High-Frequency Emergency and Rural Multimedia Exchange System (HERMES).

Copyright (C) 2021-2022 Rhizomatica.

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

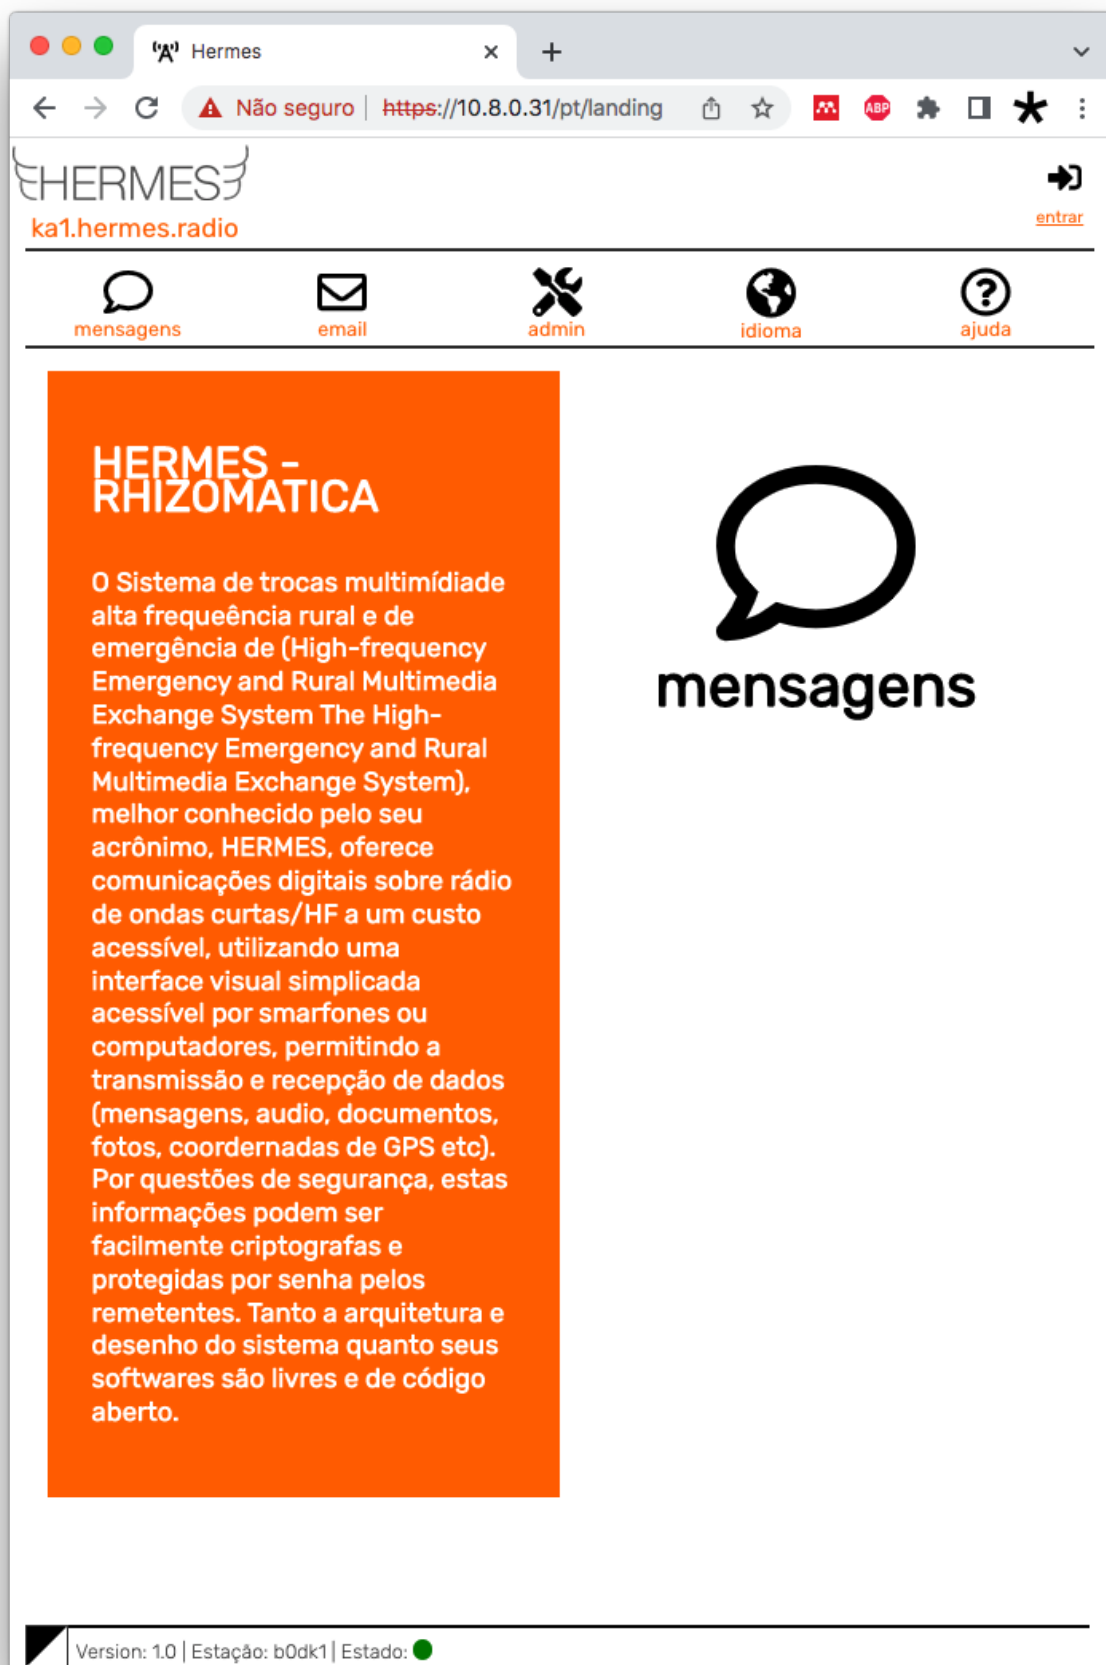You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Figure 3: Hermes Home page and elements