Print


EXTERIOR PANELS / TRIM NAME PLATE REMOVAL

PROCEDURE




■ 1.REMOVE HOOD EMBLEM SUB-ASSEMBLY

75303A

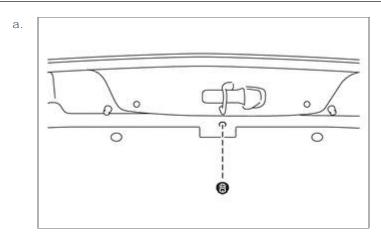

Remove the nut.

b.

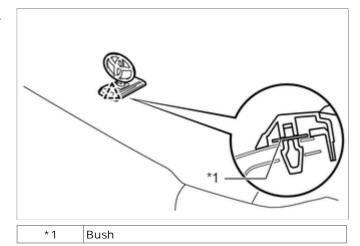

Стр. 1 из 9 21.11.2017, 10:16





vetach the clip and remove the hood emblem sub-assembly.

Remove the bush.



2.REMOVE BACK DOOR NAME PLATE

75441B

HINT:


When removing the back door name plate, heat the vehicle body and back door name plate using a heat light.

Standard:

Item	Temperature
Vehicle Body	40 to 60°C (104 to 140°F)
Back Door Name Plate	20 to 30°C (68 to 86°F)

NOTICE:

Do not heat the vehicle body or back door name plate excessively.

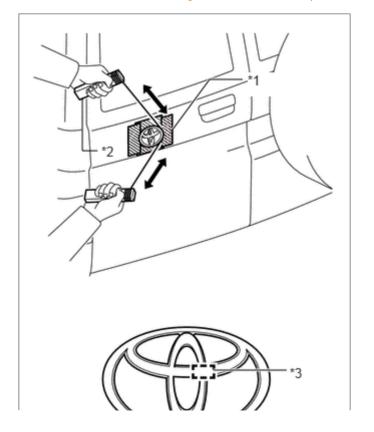

Стр. 2 из 9







*1	Protective Tape
*2	Wooden Block
*3	Boss

- a. Put protective tape around the back door name plate.
- b. Insert a piano wire between the vehicle body and back door name plate.

HINT:

Be careful of the boss positions.

- c. Tie objects that can serve as handles (for example, wooden blocks) to the piano wire ends.
- d. Pull the piano wire and scrape off the double-sided tape that holds the back door name plate to the vehicle body.

NOTICE:

Be careful not to damage the vehicle body.

e. Remove the back door name plate.



3.REMOVE REAR NO. 4 NAME PLATE

75463

HINT:

When removing the rear No. 4 name plate, heat the vehicle body and rear No. 4 name plate using a heat light.

Standard:

Item	Temperature
Vehicle Body	40 to 60°C (104 to 140°F)
Rear No. 4 Name Plate	20 to 30°C (68 to 86°F)

NOTICE:

Do not heat the vehicle body or rear No. 4 name plate excessively.

- a. Put protective tape around the rear No. 4 name plate.
- b. Insert a piano wire between the vehicle body and rear No. 4 name plate. HINT:

Стр. 3 из 9 21.11.2017, 10:16




Be careful of the boss positions.

- c. Tie objects that can serve as handles (for example, wooden blocks) to the piano wire ends.
- d. Pull the piano wire and scrape off the double-sided tape that holds the rear No. 4 name plate to the vehicle body. NOTICE:

Be careful not to damage the vehicle body.

e. Remove the rear No. 4 name plate.

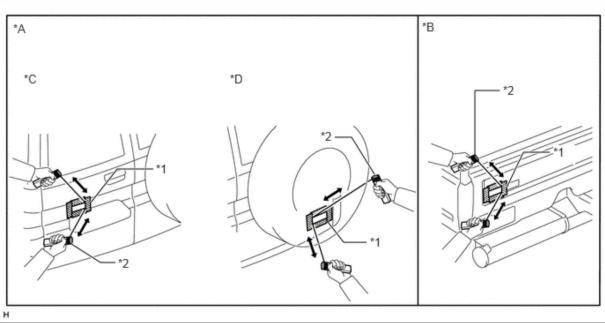

*A	except Model Code #J79 Series	*B	for Model Code #J79 Series
*C	w/o Auxiliary Tank	*D	w/ Auxiliary Tank
*1	Protective Tape	*2	Wooden Block

4.REMOVE REAR NO. 5 NAME PLATE

Стр. 4 из 9



en rem


removing the rear No. 5 name plate, heat the vehicle body and rear No. 5 name plate using a heat light.

Standard:

Item	Temperature
Vehicle Body	40 to 60°C (104 to 140°F)
Rear No. 5 Name Plate	20 to 30°C (68 to 86°F)

NOTICE:

Do not heat the vehicle body or rear No. 5 name plate excessively.

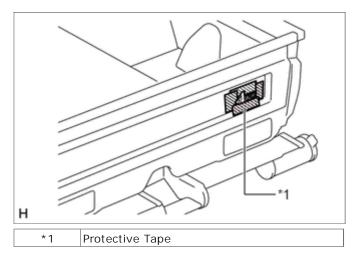

- a. Put protective tape around the rear No. 5 name plate.
- b. Heat the vehicle body surface and rear No. 5 name plate using a heat light.
- c. Pull back an edge of the rear No. 5 name plate and pull it parallel to the vehicle body to remove it.



5.REMOVE REAR BODY NO. 1 NAME PLATE

75471B


HINT:

When removing the rear body No. 1 name plate, heat the vehicle body and rear body No. 1 name plate using a heat light.

Standard:

rtariaara.		
Item	Temperature	
Vehicle Body	40 to 60°C (104 to 140°F)	

Стр. 5 из 9






NOTICE:

Print-Service Information

Do not heat the vehicle body or rear body No. 1 name plate excessively.



*1	Protective Tape
*2	Wooden Block

- a. Put protective tape around the rear body No. 1 name plate.
- b. Insert a piano wire between the vehicle body and rear body No. 1 name plate.

HINT:

Be careful of the boss positions.

- c. Tie objects that can serve as handles (for example, wooden blocks) to the piano wire ends.
- d. Pull the piano wire and scrape off the double-sided tape that holds the rear body No. 1 name plate to the vehicle body. NOTICE:

Стр. 6 из 9



Be careful not to damage the vehicle body.



e. Remove the rear body No. 1 name plate.



6.REMOVE NO. 5 BACK DOOR NAME PLATE

75445A

HINT:

When removing the No. 5 back door name plate, heat the vehicle body and No. 5 back door name plate using a heat light.

Standard:

Item	Temperature
Vehicle Body	40 to 60°C (104 to 140°F)
No. 5 Back Door Name Plate	20 to 30°C (68 to 86°F)

NOTICE:

Do not heat the vehicle body or No. 5 back door name plate excessively.

- a. Put protective tape around the No. 5 back door name plate.
- b. Insert a piano wire between the vehicle body and No. 5 back door name plate.

HINT:


Be careful of the boss positions.

- c. Tie objects that can serve as handles (for example, wooden blocks) to the piano wire ends.
- d. Pull the piano wire and scrape off the double-sided tape that holds the No. 5 back door name plate to the vehicle body.


NOTICE:

Be careful not to damage the vehicle body.


e. Remove the No. 5 back door name plate.

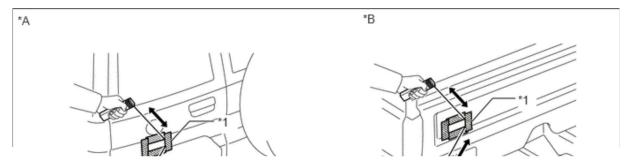

Стр. 7 из 9




Print-France Service Information



*A	except Model Code #J79 Series, w/o Auxiliary Tank	*B	for Model Code #J79 Series
*1	Protective Tape	*2	Wooden Block

7.REMOVE FRONT FENDER EMBLEM

75365

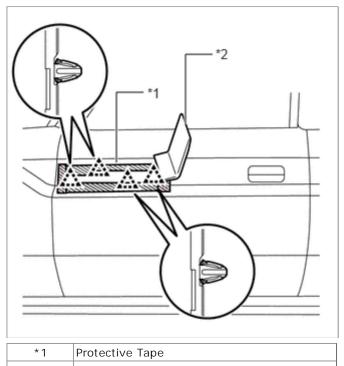

*1	Protective Tape
*2	Moulding Remover

a. Put protective tape around the front fender emblem.

Стр. 8 из 9 21.11.2017, 10:16



Using a moulding remover, detach the 4 clips and remove the front fender emblem.

© 2012 TOYOTA MOTOR CORPORATION. All Rights Reserved.

Стр. 9 из 9