

BILL OF MATERIALS

ASSEMBLY MKD' : 3SB96

ASSY QTY : 8

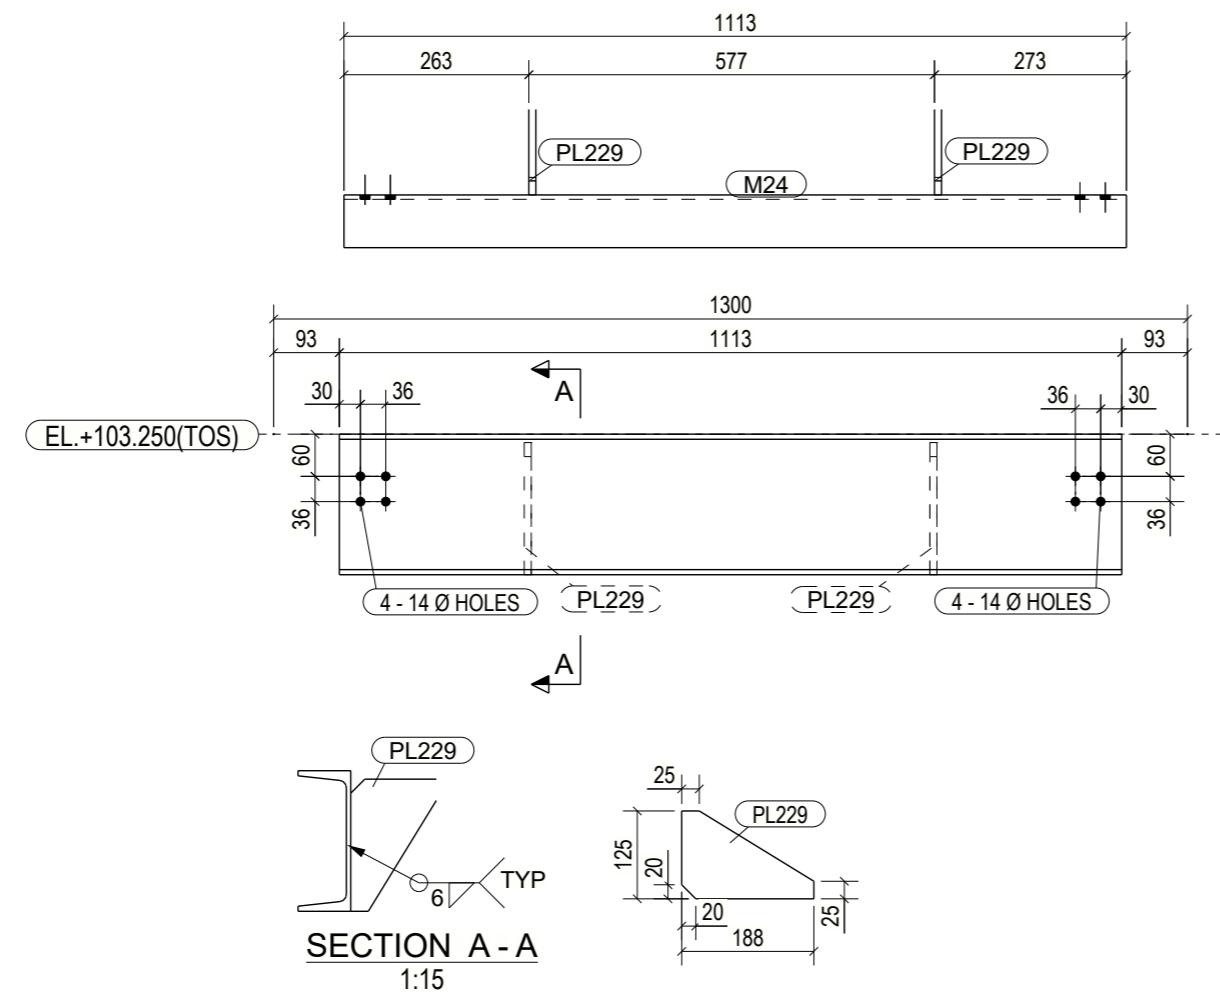
MARK	DESCRIPTION	LENGTH (mm)	QTY. (Nos.)	SURFACE AREA (M ²)	NET WT PER ITEM (Kg)	TOTAL WT (Kg)	REMARKS
M24	ISM200	1113	1	0.75	24.90	24.90	
PL229	PLT10*125	188	2	0.07	1.19	2.38	
WEIGHT FOR ONE ASSEMBLY :							27.28 Kg

BOLT LIST

ASSEMBLY MKD' : 3SB96

ASSY QTY : 8

BOLT DIA	GRADE	LENGTH (mm)	QTY. Nos. TOTAL	QTY. Nos. TOTAL	TYPE
M 12	4.6XOX	35	64	64	Site

**NOTES:**

- 1) ALL DIMENSIONS ARE IN MILLIMETERS AND LEVELS ARE IN METERS.
- 2) DIMENSIONS SHALL NOT BE SCALED & ONLY FIGURED DIMENSIONS SHALL BE FOLLOWED.
- 3) DENOTES SHOP MARK SHALL BE PROVIDED BY THE FABRICATOR ON FLANGE OF MEMBER/FACE OF PLATES ON EACH ASSEMBLY AS SHOWN ON THE SHOP DETAIL DRAWINGS, SAME IS TO BE REFERRED FOR ORIENTATION DURING ERECTION OF THE ASSEMBLY.
- 4) ALL SHOP WELDS SHALL BE 6mm CONTINUOUS FILLET WELD ALL AROUND & SITE WELDS SHALL BE 8mm (UNO).
- 5) THE CONTRACTOR SHALL BE VERIFY ALL DIMENSIONS & REPORT ANY DISCREPANCIES TO THE ENGINEER BEFORE PROCEEDING WITH THE WORK.
- 6) ALL WORKMANSHIP SHALL BE ACCORDANCE WITH THE CURRENT EDITIONS OF ALL RELEVANT SPECIFICATION, STANDARDS AND CODES OF PRACTICE.
- 7) ALL INDIAN STRUCTURE STEEL SECTION SHALL BE MILD STEEL GRADE Fe410WA CONFORMING TO IS2062-1992 WHERE AS ALL BRITISH STRUCTURAL STEEL SECTION SHALL CONFORM TO BS EN 10025 & SHALL BE GRADE S275JR FOR THICKNESS <40mm AND S275JD FOR THICKNESS >40mm
- 8) STRUCTURAL STEEL SHALL BE SAND BLASTED & PAINTED.

8 Nos. SECONDARY BEAM REQUIRED AS DRAWN MKD' 3SB96

R0	23.05.2025	ISSUED FOR CONSTRUCTION	JJC	KDM	RMB
REV.	DATE	DESCRIPTION	PREP. BY	CHEC. BY	APP. BY
QUANTA PROCESS SOLUTIONS PVT. LTD.					
www.quantaprocess.com					
CLIENT : GFCLV Products Limited,					
DAHEJ, GUJARAT					
PROJECT: HH-3					
DETAILER:-					
SUNRISE ENGINEERING SOLUTIONS PVT. LTD.					
VADODARA, GUJARAT					
TITLE					
PROCESS PLANT BUILDING FABRICATION DRAWING					
DETAIL OF SECONDARY BEAM MKD - 3SB96					
PREP.:	JJC	CHECKED:	SCALE:		
REVIEWED:	KDM		DATE :	23.05.2025	
APPROVED:	RMB	PROJECT NO.:- 1619	SHEET:		
DWG. NO.1619-CS-STR-504-FD-3SB96					REV. R0