
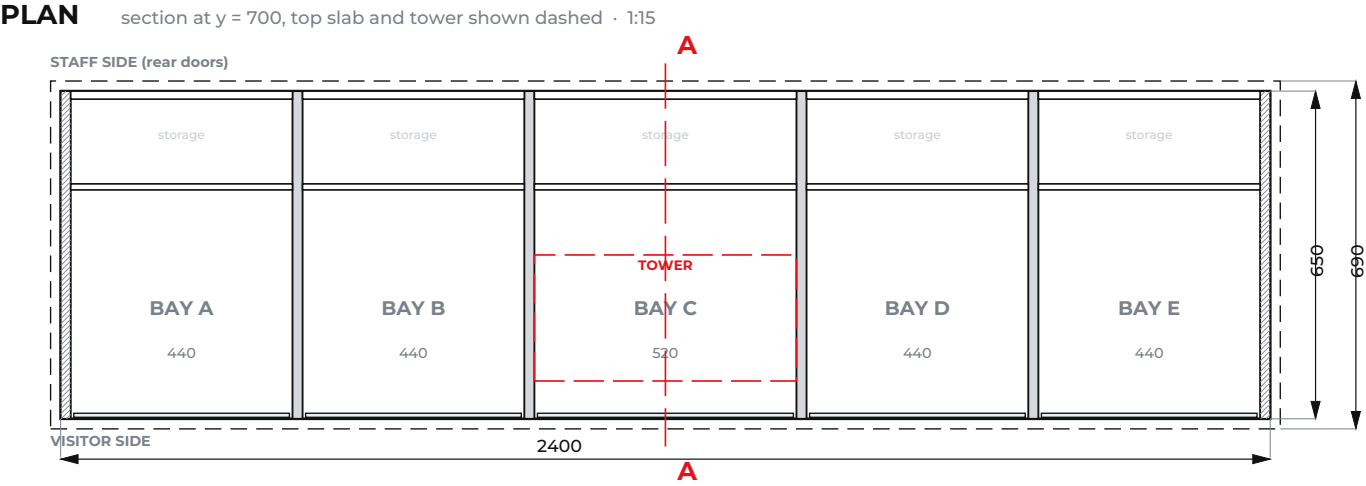
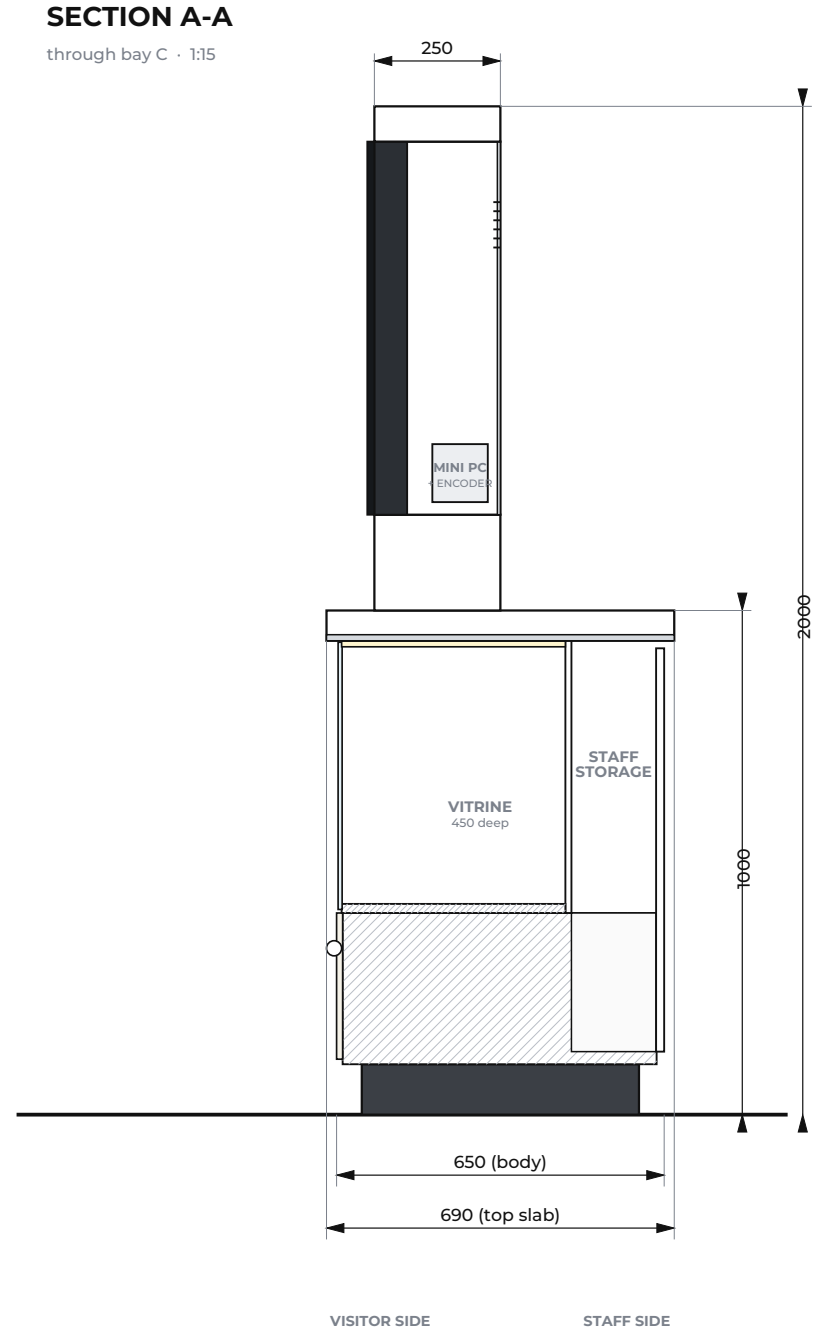


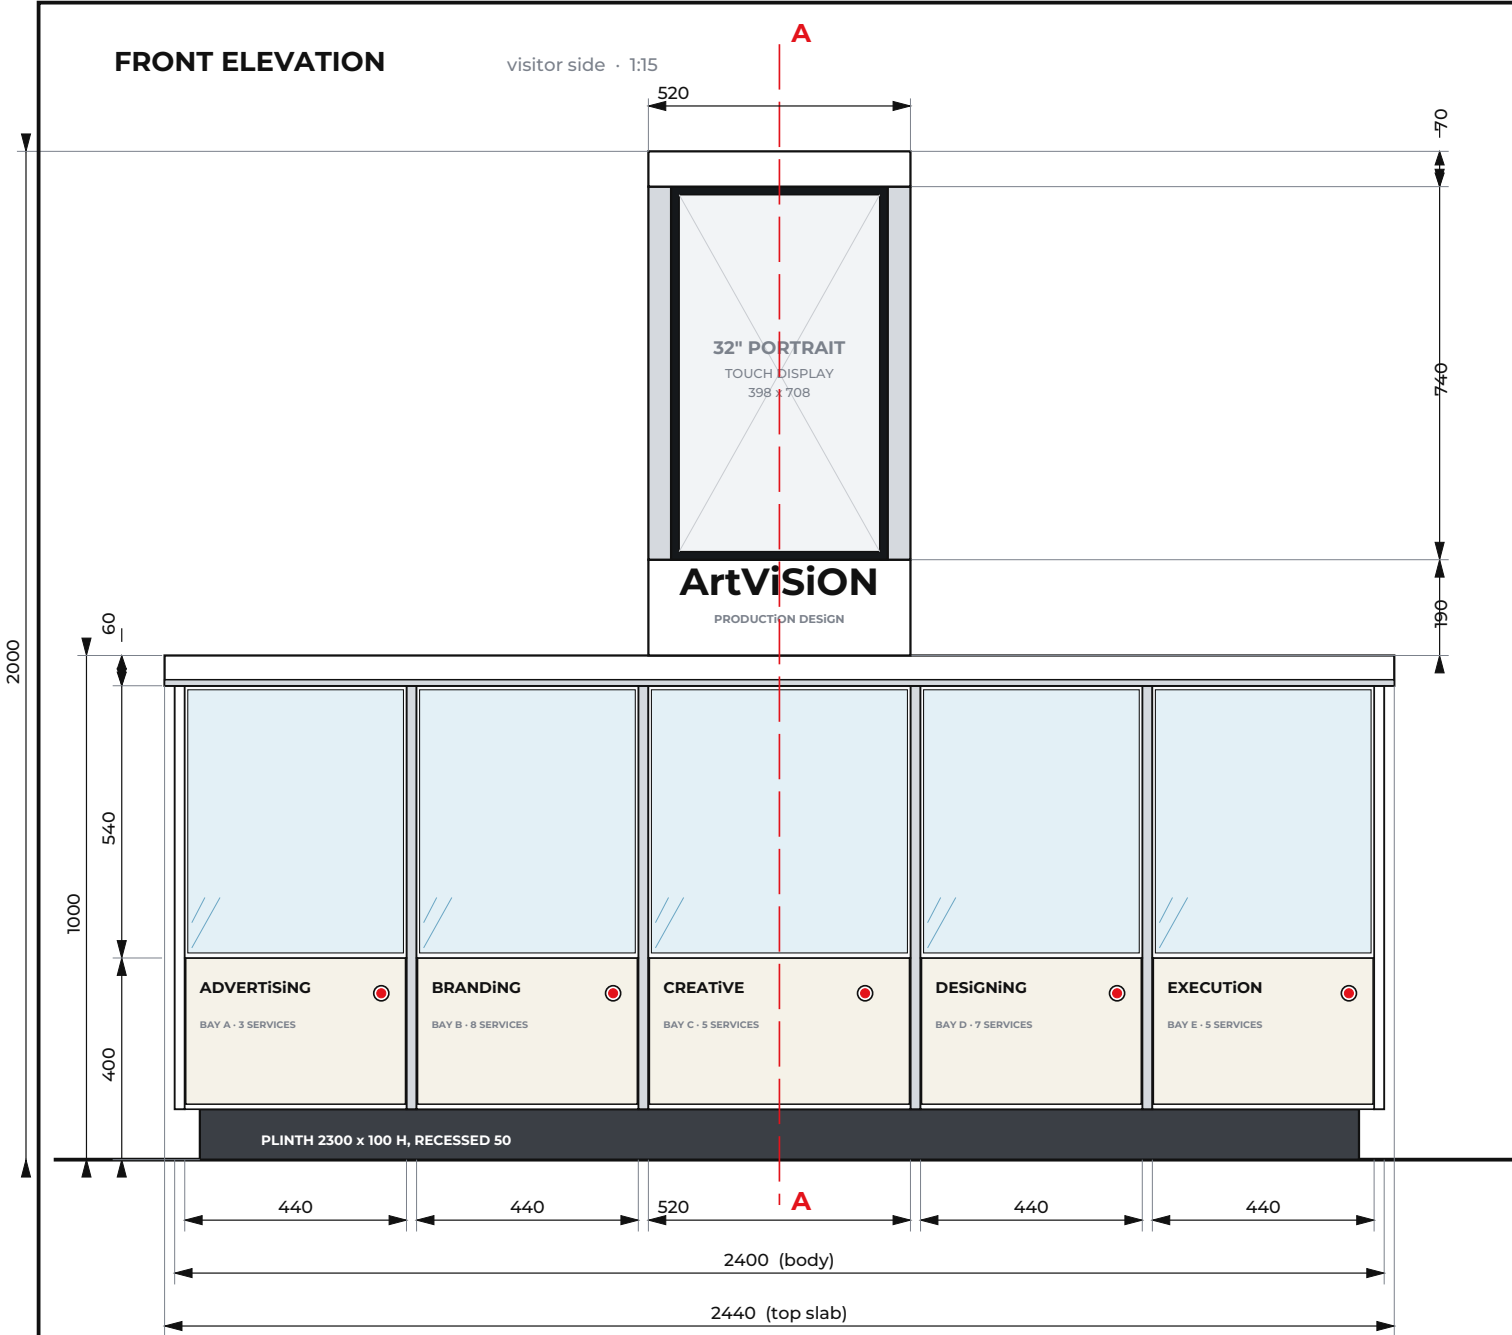

MATERIAL KEY

M1 Matte white ACP 4 mm	M4 8 mm toughened glass
M2 Brushed silver ACP 4 mm	M5 Backlit opal acrylic label
M3 Graphite powder-coat frame	M7 LED light, 4000 K

KEY NOTES

- Bays A-E clear widths 440 / 440 / 520 / 440 / 440; dividers and end panels 20 thick.
- Label panels 290 tall, backlit; Ø30 button at bay centre + 170, y 330 (key 1-5).
- Vitrine clear height 540 (y 400-940), depth 450; 4000 K LED ceiling in the top slab.
- Staff side: five rear doors, 800 tall, keyed alike; storage behind the vitrines.
- Tower 520 x 250; screen bezel 430 x 740, active area 398 x 708 (32" portrait).
- Plinth recessed 50 from the body all round; 6 levelling feet.
- One 230 V inlet at rear-left of the plinth; about 250 W peak.
- Keep ACP film on until handover; see sheet 2 for BOM and assumptions.

ArtViSiON

PRODUCTION DESIGN · Indore

DISPLAY COUNTER

Studio / office reception

FRONT · SECTION A-A · PLAN

All dimensions in mm. Concept drawing: confirm on site
before fabrication (see assumptions, sheet 2).

Drawn for: Ranjan (Rj) Sarkar

SCALE

1:15

REV

C1

SHEET

1 / 2

DATE

01-10-2026

BILL OF MATERIALS indicative take-off, rates not included

CODE	PART	QTY	SIZE (mm)	MATERIAL / FINISH	REMARKS
STRUCTURE					
S1	Plinth frame	1	2300 × 550 × 100	MS square tube 40×40×2, welded · graphite powder-coat	6 levelling feet M10 (±15 mm); recessed 50 mm all round
S2	Lower cabinet carcass	1	2360 × 620 × 300	18 mm BWP / MR plywood	Label back-boxes, cable run and LED-driver bay inside
S3	Body end panel	2	650 × 840	18 mm ply core · matte white ACP both faces	Left and right ends
S4	Bay divider	4	650 × 840 × 20	18 mm ply core · brushed silver ACP both faces	Doubles as the vitrine side walls
S5	Vitrine floor deck	5	440 / 520 × 450	18 mm ply · matte white ACP on top	Finished height y = 400 mm
S6	Vitrine back panel	5	440 / 520 × 530	12 mm ply · matte white ACP on the front face	Separates display from the staff-side storage
S7	Rear door (staff side)	5	432 / 512 × 800	18 mm ply · matte white ACP	2 hinges + cylinder lock (keyed alike); flush silver pull
S8	Top slab	1	2440 × 690 × 60	25 mm ply core · white ACP top and edges · silver ACP under-band	20 mm overhang all round; houses the vitrine LED ceilings
S9	Tower frame	1	520 × 250 × 1000	MS box 25×25×1.6, welded · bolted through the top slab	Display on VESA plate (per model!); vent slots at the back
S10	Tower cladding set	1	logo plate 520×190 · column 520×740 · cap 520×70	White ACP (plate, cap) · brushed silver ACP (column)	Bezel frame 430 × 740 in black powder-coat
GLASS & ACRYLIC					
G1	Bay glass front	5	440 / 520 × 530 × 8	8 mm toughened clear glass, polished edges	Sits in aluminium U-channel, silicone-set
G2	Glass channel (top + bottom)	10	440 / 520 × 12	Aluminium U-channel, silver anodised	
G3	Backlit label panel	5	436 / 516 × 290 × 12	5 mm opal acrylic · backlit film print · white ACP tray	Division name, bay letter, press-button hint
G4	Logo plate face	1	500 × 173	5 mm opal acrylic · backlit print	ArtViSION lock-up
ELECTRICAL & DIGITAL					
E1	Touch display	1	32" portrait · outline ~ 430 × 740	Commercial 1080×1920, PCAP touch, 350 nit+	Model to be confirmed, cut-outs follow the real outline
E2	Mini PC (kiosk player)	1	compact	Fanless, Windows or ChromeOS, 4 GB+, HDMI + USB	Mounted in the tower; runs kiosk.html in Chrome kiosk mode
E3	Phygital push-button	5	Ø 30 (hole Ø 25)	Illuminated momentary switch, red LED	At bay centre + 170 mm, y = 330; sends keys 1-5
E4	USB HID encoder	1	board	5-input USB keyboard encoder	In the tower; maps buttons to keys 1 ... 5
E5	LED strip 4000 K, CRI 90+	18	metres (incl. spare)	24 V, about 6 W/m, aluminium profile + opal diffuser	Vitrine ceilings, label back-lights, plinth glow, tower halo
E6	LED driver 24 V / 100 W	2	unit	Constant-voltage, 0-10 V or timer dimmable	Left rear storage, ventilated
E7	Power distribution	1	set	6 A MCB, earthed socket strip, cable glands	Single 230 V inlet, rear-left of the plinth
ACCESSORIES (OPTIONAL)					
A1	QR standee	1	110 × 155	Acrylic + print (WhatsApp QR)	Counter top, left
A2	Card holder + brochure stand	1	set	Acrylic / aluminium	Counter top
A3	Acrylic "A" monument on turntable	1	200 × 200 × 195	Acrylic letter, red LED edge, slow-turn motor	Counter top, right (product 17)

MATERIAL SCHEDULE

M1	Matte white ACP	9.91 m² net · 4 sheets 1220×2440
M2	Brushed silver ACP	5.32 m² net · 3 sheets 1220×2440
M3	Graphite powder-coat	~ 22 m of 40×40 tube
M4	Toughened glass	1.21 m²
M5	Opal acrylic + backlit film	~ 0.75 m²
M6	Plywood, BWP / MR	~ 6 sheets 1220×2440 (estimate)
M7	LED 4000 K, CRI 90+	~ 18 m + 2 drivers

ACP total 15.23 m2 net, 17.1 m2 with 12% wastage.

Electrical: ~218 W running, design for 250 W peak. One 230 V / 6 A MCB, earthed.

ASSUMPTIONS TO CONFIRM

- Overall size 2400 × 650 × 1000 mm with the tower to 2000 mm — check it against the reception space, door width and lift.
- Bays 440 / 440 / 520 / 440 / 440 mm (A–E) with 20 mm dividers. Bay C is wider because it is the centre of the tower.
- Screen: 32" portrait commercial touch display with outline ~ 430 × 740 mm. Cut-outs must be taken from the real unit.
- Materials and thicknesses (4 mm ACP, 8 mm glass, 18 mm ply) are typical values — swap to your vendor's standard stock.
- The sample pieces inside the vitrines are illustrative. The studio supplies the real models and prints.
- If site access is tight, split the body at dividers into modules (A + B | C | D + E); the tower stays as one piece.
- LED colour 4000 K neutral white; brand red is used only as a small accent (buttons, status light, "A" monument).
- All quantities are indicative take-offs (flat faces only, 12 % wastage on ACP). Rates are left blank in the BOQ.

ArtViSiON

PRODUCTION DESIGN · Indore

DISPLAY COUNTER

Studio / office reception

BILL OF MATERIALS · NOTES

All dimensions in mm. Concept drawing: confirm on site before fabrication (see assumptions, sheet 2).

Drawn for: Ranjan (Rj) Sarkar

SCALE
n.t.s.

REV

C1

SHEET
2 / 2

DATE

01-10-2026