ROBSTRIDE DYNAMICS



ROBSTRIDE 10PCANFD

42N.M 一体化电机模组

使用手册

北京市灵足时代科技有限公司
https://www.robstride.com/

RS10P instruction manual

Precautions

1. Please use according to the working parameters specified in this article, otherwise it may cause serious damage to the product!

2. Do not switch the control mode when the joint is running. If you need to switch, send the command to stop the operation before switching.

3. Check whether the parts are in good condition before use. If the parts are missing or damaged, contact technical support in time.

4. Do not disassemble the motor at will, so as to avoid unrecoverable failure.

5. Ensure that there is no short circuit when the motor is connected, and the interface is correctly connected as required.

Legal Statement

Before using this product, please read this manual carefully and operate the product according to the contents of this manual. If the user violates the contents of this manual to use this product, resulting in any property damage, personal injury accident, the company does not assume any responsibility. Because this product is composed of many parts, do not allow children to touch this product to avoid accidents. In order to prolong the service life of the product, do not use this product in high temperature and high pressure environment. This manual has been printed to the extent possible to include a description of the functions and instructions for use. However, due to the continuous improvement of product functions, design changes, etc., there may still be discrepancies with the products purchased by users.

The color and appearance of this manual may differ from the actual product. Please refer to the actual product. This manual is published by Beijing Lingfoot Times Technology Co., LTD. (hereinafter referred to as Lingfoot), and Lingfoot may at any time make necessary improvements and changes to the inaccurate and up-to-date information in this manual, or make improvements to procedures and/or equipment. Such changes will be uploaded to the company's official website in electronic format. Details can be found in the

download center (www.robstride.com). All images are for reference only. Please refer to actual objects.

After-sales Policy

The after-sales service of this product is implemented in strict accordance with the Law of the People's Republic of China on the Protection of Consumer Rights and Interests and the Product Quality Law of the People's Republic of China. The service content is as follows:

1. Warranty period and contents

    a. Users who place orders on the online channel to purchase this product can enjoy the return service without reason within seven days from the day after signing. When returning goods, the user must present a valid proof of purchase and return the invoice. The user must ensure that the returned goods maintain the original quality and function, the appearance is intact, the trademarks and various logos of the goods themselves and accessories are complete, and if there are gifts, they should be returned together. If the goods are artificially damaged, artificially disassembled, missing packaging boxes, missing parts and accessories, they will not be returned. The logistics cost incurred during the return shall be borne by the user (see "After-sales Service Fee Standard"). If the user does not settle the logistics cost, it will be deducted from the refund amount according to the actual amount incurred. Refund the amount paid to the user within seven days from the date of receipt of the returned item. Refund method is the same as payment method. The specific arrival date may be affected by factors such as banks and payment institutions.

    b. The warranty period of this product is 1 year.

    c. Within 7 days after the user signs for the next day, non-human damage performance failure occurs, through the Lingzhu after-sales service center test and confirmation, for the user to handle the return business, the user must present a valid purchase voucher, and return the invoice. Any freebies should be returned.

    d. From 7 days to 15 days after the user signs for the next day, non-human damage performance failure occurs, through the Lingfoot after-

sales service center test and confirmation, for the user to replace the whole set of goods. After the replacement, the three guarantee period of the goods themselves is recalculated.

e. From 15 days to 365 days after the user signed the next day, after the inspection and confirmation of the Lingfoot after-sales service center, it is a quality fault of the product itself, and can provide free maintenance services. The replacement of the faulty product is owned by Lingzu Company. The product is not faulty and will be returned as is. This product has been strictly tested after the factory, if there is a quality fault other than the product itself, we will have the right to refuse the user's return demand.

2. Non-warranty regulations The following circumstances are not covered by the warranty:

3. Exceed the warranty period specified in the warranty terms.

4. Failure to follow the instructions, resulting in product damage caused by wrong use.

5. Damage caused by improper operation, maintenance, installation, modification, testing and other improper use.

6. Non-quality failure caused by conventional mechanical loss, wear.

7. Damage caused by abnormal working conditions, including but not limited to falling, impact, liquid immersion, violent impact, etc.

8. Damage caused by natural disasters (such as floods, fires, lightning strikes, earthquakes, etc.) or incapacitated forces.

9. Damage caused by exceeding peak torque.

10. Damage caused by exceeding peak torque.

11. Failure or damage caused by other non-product design, technology, manufacturing, quality and other problems.

In the case of the above situation, the user must pay the cost.

Table of contents


Precautions 1
Legal Statement 1
After-sales Policy 2
Motor specification 7
1.1. Outline and mounting dimensions 7
1.2. Standard service condition 7
1.3. Electrical characteristic 7
1.4. Mechanical characteristic 9
2. Driver Product Information 10
2.1. Driver product Specifications 10
2.2. Driver interface definition 10
2.3. Recommended driver interface brand and model 10
3. Upper computer instructions 11
3.1. Hardware disposition 11
3.2. Upper computer interface and description 12
3.3. Motor settings 13
3.3.1. Motor connection settings 13
3.3.2. Motor configuration module 14
3.3.3. Motor upgrade module 14
3.3.4. Parameter settings 17
3.3.5. Oscilloscope 24
3.3.6. Canfd communication failure protection 26
3.3.7. Motor fault instructions 26
3.4. Control Demo 28
3.4.1. Operation and control mode 29
3.4.2. Current mode 30
3.4.3. Speed Mode 31
3.4.4. Position Mode (PP) 32
3.4.5. Location mode（CSP） 34
4. Driver protocol and instructions 36
4.1. Description of the communication protocol type 36
4.1.1. Communication type 0: Get device ID 36
4.1.2. Communication Type 1: operation control mode motor control instruction 37
4.1.3. Communication Type 3: Motor enabled to run 38
4.1.4. Communication Type 4: Motor stops running 38

Version number read frame 38
4.1.5. Communication type 6: Set motor mechanical zero 39
4.1.6. Communication type 17: Single parameter read 39
4.1.7. Communication type 18: Single parameter write (lost in power failure) 40
4.1.8. Communication type 21: Fault feedback frame 40
4.1.9. Communication type 22: Motor data save frame 41
4.1.10. Communication type 23: Motor baud rate modification frame (re-power-on effect) 41
4.1.11. Communication type 24: The motor actively reports frames 42
4.1.12. Communication type 25: Motor protocol modification frame (re-power-on effect) 43
4.1.13. Read and write a single parameter list 43
4.1.14. Read example: 45
4.2. Motor Function Description 46
4.2.1. Active Reporting 46
4.2.2. Zero-Point Flag (zero_sta) 46
4.2.3. Type 2 Update 46
4.2.4. Protocol Switching *(Requires CAN adapter)* 46
4.2.5. Motor Post-Power-Off Anti-Backdrive Protection 47
4.2.6. Zero Calibration Rules 47
4.2.7. Position Offset 47
4.2.8. The CANopen ID of the motor is consistent with the CAN ID. 48
4.2.9. Motor Initialization Calibration 48
4.2.10. Cogging Calibration Function 48
4.2.11. PP Mode Deceleration 48
4.3. Control mode instructions 49
4.3.1. Operation control mode 49
4.3.2. Current mode 50
4.3.3. Velocity mode 50
4.3.4. Location Mode (CSP) 50
4.3.5. Location Mode (PP) 51
4.3.6. Stop running 51
4.4. Program sample 51
4.4.1. Motor Enabled Run frame (communication type 3) 53
4.4.2. Operation control mode Motor control instruction (communication type 1) 54
4.4.3. Motor stop frame (communication type 4) 55
4.4.4. Motor mode parameter write command (communication type 18,

running mode switch) 56
4.4.5. Motor mode parameter write command (communication type 18, control parameter write) 57
5. Version History 59

Motor specification

1.1. Outline and mounting dimensions

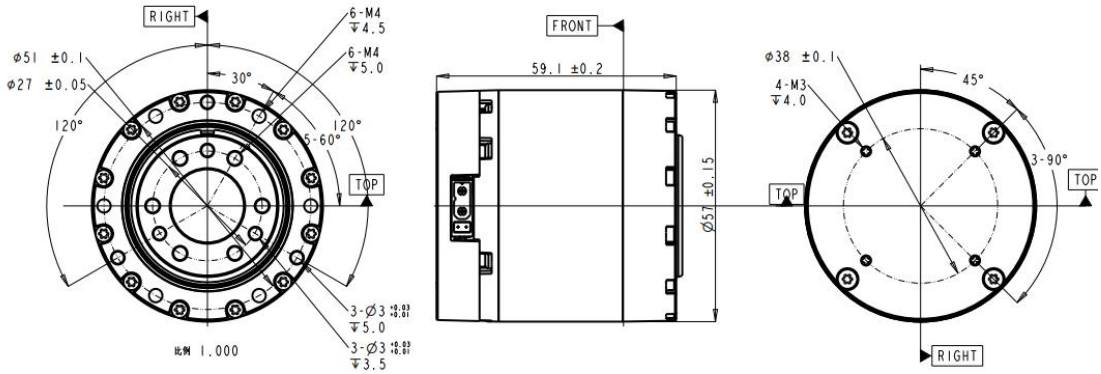

When fixing, the screw depth should not exceed the depth of the casing thread


1.2. Standard service condition

1. Rated voltage: 48 VDC
2. Operating voltage range: 24V-60 VDC
3. Rated load (CW) : 14 N.m(Heatsink dimensions: 210mm×210mm)
4. Operation direction: CW/CCW from the direction of the exit shaft
5. Use posture: the direction of the exit axis is horizontal or vertical
6. Standard operating temperature: 25±5℃
7. Operating temperature range: -20 ~ 50℃
8. Standard operating humidity: 65%
9. Humidity range: 5 ~ 85%, no condensation
10. Storage temperature range: -30 ~ 70℃
11. Insulation Class: Class B

1.3. Electrical characteristic

1. No load speed: 125 rpm±10%

2. No-load current: 0.4 Arms
3. Rated load: 14 N.m(Tested at 100 rpm)
4. Rated stall load: 9.5 N·m
5. Rated load phase current (peak) : 5.3Apk±10%
6. Peak load: 42 N.m
7. Maximum load phase current (peak) : 19Apk±10%
8. Insulation resistance/stator winding: DC 500VAC, 100M Ohms
9. High voltage/stator and housing: 600 VAC, 1s, 2mA
10. Motor back potential: 9.5Vrms/kRPM±10%
11. Torque constant(Valid value): 3.73N.m/Arms
12. T-N curve (48V)

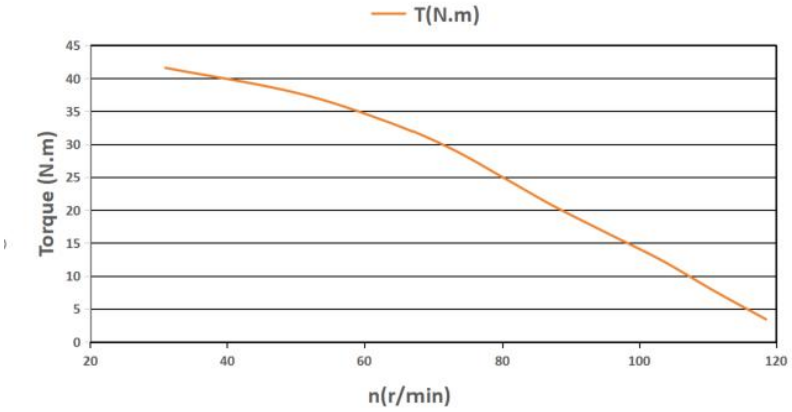

13. Maximum overload curve of motor rotation

Test Conditions:

Ambient Temperature: 25℃

Heater Material: Aluminum Alloy Dimensions: 90mm × 85mm

Winding Limit Temperature: 135℃ (This is the constraint temperature; the actual temperature is 180℃)

Speed: Tested at 10rpm

Test Data (Reduced heat sink size, lower rated torque)

Loat	Operating time(s)
42	4
35	6
30	10
25	22
20	68
14	rated

14. Maximum overload curve of motor stall

The winding temperature of a single phase is calculated in real time using the motor phase current and the motor thermistor temperature sensor. When the motor enters a stalled state, the three phases heat unevenly. The system calculates the temperature of each phase based on the current, and triggers protection when the calculated temperature reaches the thermal threshold.

PS: Under stall conditions, the heat generation of a single phase is 1.414 times that under rotating conditions. The stall overload time is as follows.

Loat	Operating time(s)
42	1
35	2
30	3
25	6
20	17
14	120
9.5	rated

1.4. Mechanical characteristic

1. Weight: 460g ± 3g
2. Number of poles: 28
3. Number of phases: 3
4. Drive method: FOC
5. Reduction ratio: 25:1

2. Driver Product Information

2.1. Driver product Specifications

project	data
The rated working voltage	48VDC
The maximum allowable voltage	60VDC
Rated working phase current	5.3Apk
Maximum allowable phase current	19Apk
Standby power	≤18mA
CAN bus bit rate	5Mbps
Dimensions	Φ57mm
Working environment temperature	-20℃ to 50℃
The maximum allowable temperature of the control board	145℃
encoder resolution	14bit (absolute turn)

2.2. Driver interface definition



2.3. Recommended driver interface brand and model

board end model	brand manufacturer	line end model	brand manufacturer
XT30PB(2+2)-M.G.B	AMASS (Ams)	XT30(2+2)-F.G.B	AMASS (Ams)

3. Upper computer instructions

Please go to www.robstride.com website download center

3.1. Hardware disposition


The articulated motor uses the CANFD communication mode and has two communication cables. It is connected to the debugger through the canfd to USB tool. The debugger needs to be installed with the ch340 driver in advance and works in AT mode by default.

It should be noted that we are based on the specific can to USBFD tool development of the debugger, so we need to use our recommended serial port tool to debug the debugger, if you want to transplant to other debugger platform can refer to the third chapter of the instructions for development.

The CANFD to USB tool is recommended to use the official USB-CANFD module of Lingzu Times. The frame header of the corresponding serial port protocol is 41 54, and the frame tail is 0D 0A.

When using the CANFD-to-USB module, pay attention to the settings of the DIP switches on the module: When DIP switch 1 is in the ON position, the module enters Boot mode and cannot establish a connection with the host computer. When DIP switch 2 is in the ON position, a 120Ω terminal resistor is connected to the module port, allowing normal communication with the host computer.

3.2. Upper computer interface and description

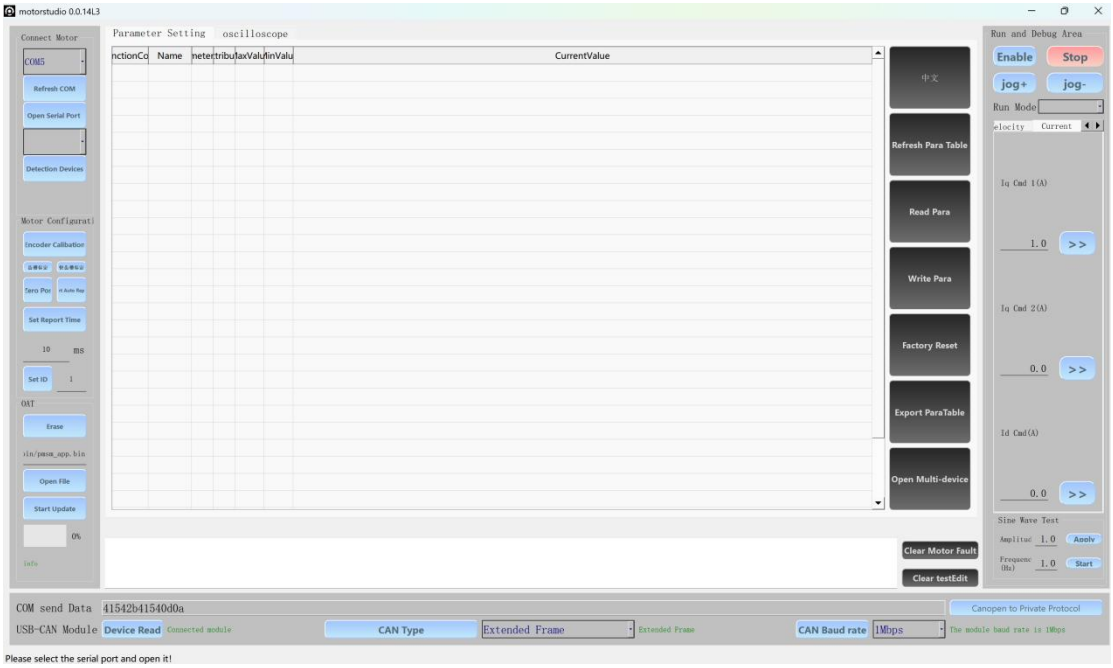

Mainly includes:

A. Motor Connection Module

- Refreshing the Serial Port
- Opening the Serial Port
- Testing the Device

B. Motor Configuration Module

- Starting the Upgrade
- Opening a File
- Starting the Upgrade
- Modifying the Motor CAN ID
- Setting the Motor's Mechanical Zero Position

C. Motor Upgrade Module

- Magnetic Encoder Calibration
- Motor Active Reporting Switch
- Setting the Motor Active Reporting Time
- Modifying the Motor CAN ID

- Setting the Motor's Mechanical Zero Position

D. Motor Main Interface


- Parameter Settings
- Motor Oscilloscope

E. Run and Debug Area

- Parameter Debugging Buttons
- Motor Mode Configuration and Parameter Modification
- Sine Signal Testing

3.3. Motor settings

3.3.1. Motor connection settings

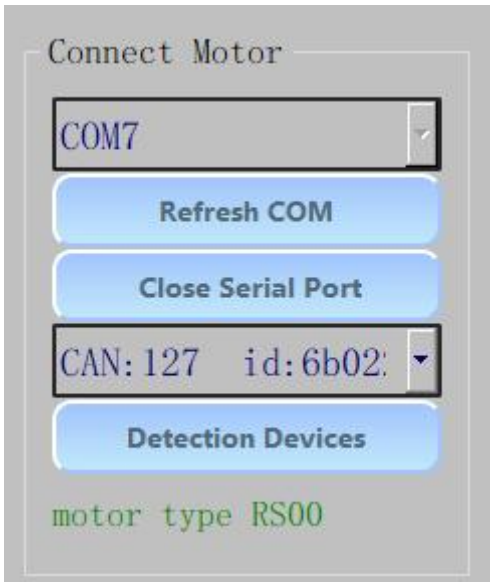

Connect the CAN to USB tool (install the ch340 driver, which works in AT mode by default), click Refresh Serial Port, open the serial port, and click Detect Device to detect the corresponding motor. The green text below is the motor type.

3.3.2. Motor configuration module



1. Recalibrate the motor magnetic encoder. Reinstalling the motor board and motor, or reconnecting the motor's three-phase wiring requires recalibrating the magnetic encoder.


2. Enable active motor reporting. Click Start Reporting to enable active motor reporting in communication type 2. You can set the interval below, with a minimum of 10ms.

3. Set ID: Set the motor's CAN ID.


4. Set Zero Position: Set the current position to 0.

3.3.3. Motor upgrade module


1. 1. Click to open the file and select the firmware to upgrade. The rs-0x in the firmware name is the selected motor type.

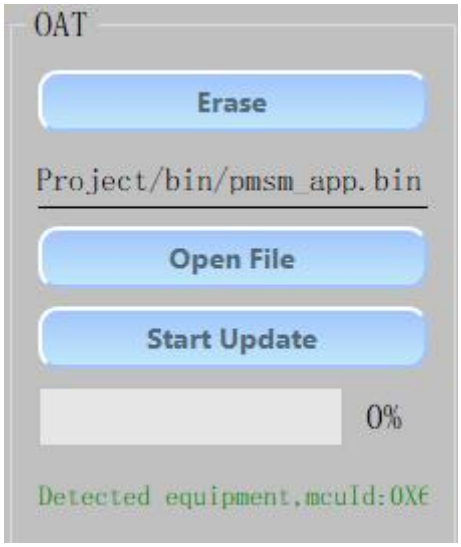


2. Click Start Upgrade, and the motor will enter the upgrade preparation stage.

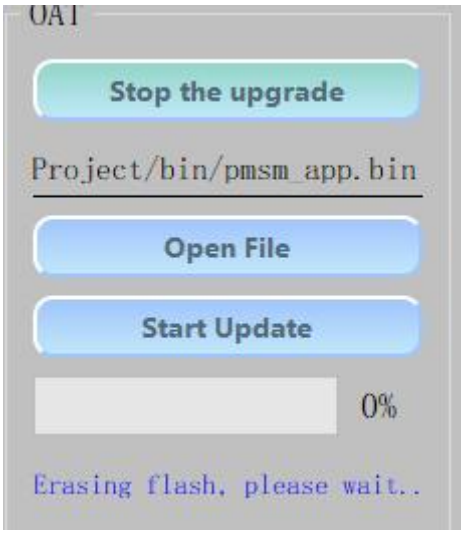

3. When the green text "Device has entered upgrade mode" pops up, click to start the upgrade

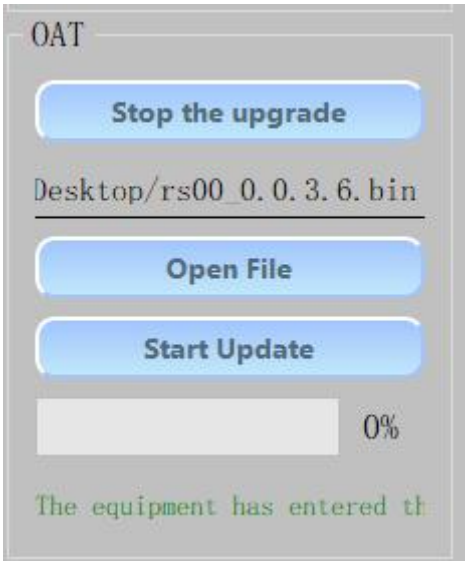


4. When the green text "Upgrade Successfully" pops up, the upgrade is complete.

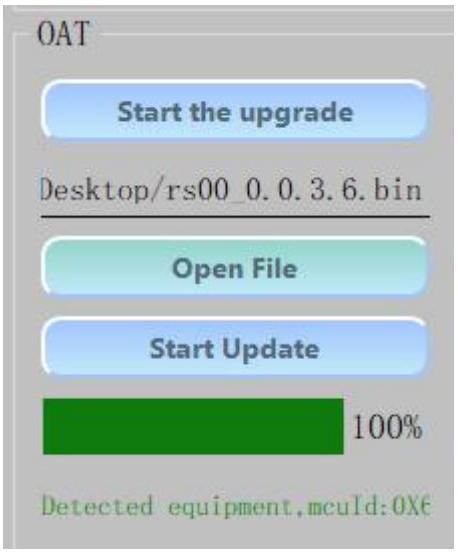

If the green progress bar gets stuck halfway through the upgrade, you can click to stop the upgrade, or re-power on and re-enter the upgrade process. The internal program of the motor will not be lost after the upgrade fails. Please check whether the communication environment is good before upgrading again.

3.3.4. Parameter settings

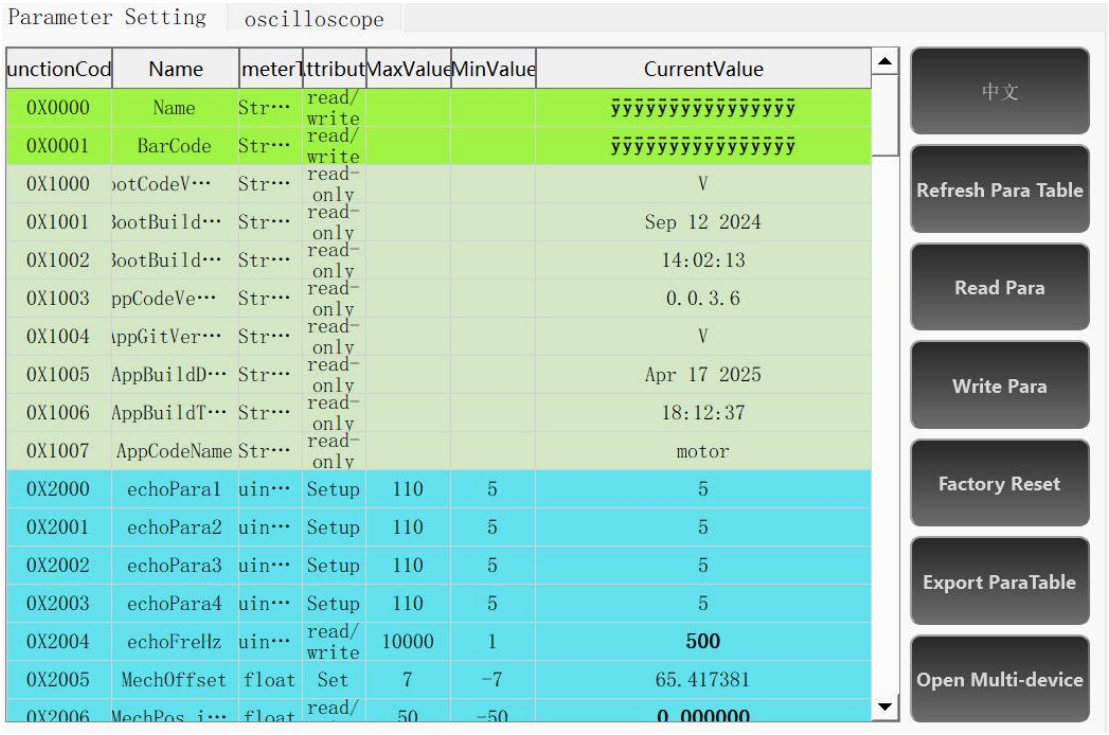

After successfully connecting to the motor,

1. Click Refresh Parameter Table. "Updated Parameter Table Successfully" will appear at the top, indicating that the motor parameters have been successfully read (Note: The parameter table must be configured while the motor is in standby mode. If the motor is running, the parameter table refresh cannot be performed). The interface will display the motor's parameters. Parameters in blue are stored internally in the motor and can be modified in the Current Value field following the corresponding parameter.

2. Click Read Parameters to upload the motor parameters to the debugger. Parameters in light blue are observed parameters, which are collected and can be observed in real time.

3. Click Write Parameters to download the debugger parameters to the motor.

4. Click Restore Factory to restore the motor's default parameters for the latest firmware.

5. Click Export to export the current motor parameters in the parameter table.

6. Click Open Multi-Device Connection to connect the host computer to

multiple motors. Note that because the parameter interfaces for different motor types vary, multi-device connection is only used for upgrades. After upgrading and debugging the motor, close multi-device connection and search for the motor again.

Note: Please do not change the torque limit, protection temperature and overtemperature time of the motor. Our company will not bear any legal responsibility for any damage to human body or irreversible damage to joints caused by illegal operation of this product.

function code	name	parameter type	attribute	Maximum value	Minimum value	Current value (for reference)	备注
0X0000	Name	String	Read/Write			ÿÿÿÿÿÿÿÿÿÿÿÿÿÿÿÿ	
0X0001	BarCode	String	Read/Write			ÿÿÿÿÿÿÿÿÿÿÿÿÿÿÿÿ	
0X1000	BootCodeVersion	String	Read only			0.1.5	
0X1001	BootBuildDate	String	Read only			Mar 16 2022	
0X1002	BootBuildTime	String	Read only			20:22:09	
0X1003	AppCodeVersion	String	Read only			0.0.0.1	Motor program version number
0X1004	AppGitVersion	String	Read only			7b844b0fM	
0X1005	AppBuildDate	String	Read only			Apr 14 2022	
0X1006	AppBuildTime	String	Read only			20:30:22	
0X1007	AppCodeName	String	Read only			Lingzu_motor	
0X2000	echoPara1	uint16	disposition	74	5	5	
0X2001	echoPara2	uint16	disposition	74	5	5	
0X2002	echoPara3	uint16	disposition	74	5	5	
0X2003	echoPara4	uint16	disposition	74	5	5	
0X2004	echoFreHz	uint32	Read/Write	10000	1	500	
0X2005	MechOffset	float	Settings	7	-7	4.619583	Motor magnetic encoder Angle offset
0X2006	MechPos_init	float	Read/Write	50	-50	4.52	Reserved parameter
0X2007	limit_torque	float	Read/Write	17	0	17	Torque limitation

function code	name	parameter type	attribute	Maximum value	Minimum value	Current value (for reference)	备注
0X2008	I_FW_MAX	float	Read/Write	33	0	0	Weak magnetic current value, default 0
0X2009	motor_baud	uint8	Settings	20	0	1	Baud rate flag bit
0X200a	CAN_ID	uint8	Settings	127	0	1	id of this object
0X200b	CAN_MASTER	uint8	Settings	127	0	0	can host id
0X200c	CAN_TIMEOUT	uint32	Read/Write	100000	0	0	can timeout threshold. The default value is 0
0X200d	status2	int16	Read/Write	1500	0	800	Reserved parameter
0X200e	status3	uint32	Read/Write	1000000	1000	20000	Reserved parameter
0X200f	status1	float	Read/Write	64	1	7.75	Reserved parameter
0X2010	Status6	uint8	Read/Write	1	0	1	Reserved parameter
0X2011	cur_filt_gain	float	Read/Write	1	0	0.9	Current filtering parameter
0X2012	cur_kp	float	Read/Write	200	0	0.025	Current kp
0X2013	cur_ki	float	Read/Write	200	0	0.0258	Current ki
0X2014	spd_kp	float	Read/Write	200	0	2	Velocity kp
0X2015	spd_ki	float	Read/Write	200	0	0.021	Speed ki
0X2016	loc_kp	float	Read/Write	200	0	30	Position kp
0X2017	spd_filt_gain	float	Read/Write	1	0	0.1	Velocity filter parameter
0X2018	limit_spd	float	Read/Write	200	0	2	Location mode speed limit
0X2019	limit_cur	float	Read/Write	23	0	23	Position, Velocity mode current limit
0X201a	loc_ref_filt_gai	float	Read/Write	100	0	0	Reserved parameter
0X201b	limit_loc	float	Read/Write	100	0	0	Reserved parameter
0X201c	position_offset	float	Read/Write	27	0	0	High speed segment offset
0X201d	chasu_angle_	float	Read/Write	27	0	0	The low end is

function code	name	parameter type	attribute	Maximum value	Minimum value	Current value (for reference)	备注
	offs						offset
0X201e	spd_step_value	float	Read/Write	150	0		Velocity-mode acceleration
0X201f	vel_max	float	Read/Write	20	0		PP mode speed
0X2020	acc_set	float	Read/Write	1000	0		PP mode acceleration
0X2021	zero_sta	float	Read/Write	100	0	0	Zero marker
0x2022	protocol_1	uint8	Read/Write			0	Protocol flag
0x2023	damper	uint8	Read/Write	0	20	0	Damping switch
0x2024	add_offset	float	Read/Write	-7	7	0	Position offset parameter
0X3000	timeUse0	uint16	Read only			5	
0X3001	timeUse1	uint16	Read only			0	
0X3002	timeUse2	uint16	Read only			10	
0X3003	timeUse3	uint16	Read only			0	
0X3004	encoderRaw	int16	Read only			11396	Magnetic encoder sampling value
0X3005	mcuTemp	int16	Read only			337	mcu internal temperature, *10
0X3006	motorTemp	int16	Read only			333	Motor ntc temperature, *10
0X3007	vBus(mv)	uint16	Read only			24195	Bus voltage
0X3008	adc1Offset	int32	Read only			2084	adc sampling channel 1 Zero current bias
0X3009	adc2Offset	int32	Read only			2084	adc sampling channel 2 Zero current bias
0X300a	adc1Raw	uint16	Read only			1232	adc sampling value 1
0X300b	adc2Raw	uint16	Read only			1212	adc sampling value 2
0X300c	VBUS	float	Read only			36	Bus voltage V
0X300d	cmdId	float	Read only			0	id ring instruction, A
0X300e	cmdIq	float	Read only			0	iq ring command, A
0X300f	cmdlocref	float	Read only			0	Position loop command, rad

function code	name	parameter type	attribute	Maximum value	Minimum value	Current value (for reference)	备注
0X3010	cmdspdref	float	Read only			0	Speed loop command, rad/s
0X3011	cmdTorque	float	Read only			0	Torque instruction, nm
0X3012	cmdPos	float	Read only			0	mit Protocol Angle instruction
0X3013	cmdVel	float	Read only			0	mit Protocol Speed instruction
0X3014	rotation	int16	Read only			1	Number of turns
0X3015	modPos	float	Read only			4.363409	Motor uncounted coil mechanical Angle, rad
0X3016	mechPos	float	Read only			0.777679	Load end loop mechanical Angle, rad
0X3017	mechVel	float	Read only			0.036618	Load speed: rad/s
0X3018	elecPos	float	Read only			4.714761	Electrical Angle
0X3019	ia	float	Read only			0	U-wire current, A
0X301a	ib	float	Read only			0	V-wire current, A
0X301b	ic	float	Read only			0	W-wire current, A
0X301c	timeout	uint32	Read only			31600	Timeout counter value
0X301d	phaseOrder	uint8	Read only			0	Directional marking
0X301e	iqf	float	Read only			0	iq filter value，A
0X301f	boardTemp	int16	Read only			359	Plate temperature，*10
0X3020	iq	float	Read only			0	iq Original value，A
0X3021	id	float	Read only			0	id Original value，A
0X3022	faultSta	uint32	Read only			0	Fault status value
0X3023	warnSta	uint32	Read only			0	Warning status

function code	name	parameter type	attribute	Maximum value	Minimum value	Current value (for reference)	备注
							value
0X3024	drv_fault	uint16	Read only			0	The driver chip fault value is 1
0X3025	drv_temp	int16	Read only			48	The driver chip fault value is 2
0X3026	Uq	float	Read only			0	Q-axis voltage
0X3027	Ud	float	Read only			0	D-axis voltage
0X3028	dtc_u	float	Read only			0	The duty cycle of the U-phase output
0X3029	dtc_v	float	Read only			0	The duty cycle of the V-phase output
0X302a	dtc_w	float	Read only			0	The duty cycle of the W-phase output
0X302b	v_bus	float	Read only			24.195	Vbus in the closed loop
0X302c	torque_fdb	float	Read only			0	Torque feedback value，nm
0X302d	rated_i	float	Read only			8	Rated current of motor
0X302e	limit_i	float	Read only			27	The motor limits the maximum current
0X302f	spd_ref	float	Read only			0	Motor speed expectation
0X3030	spd_reff	float	Read only			0	Motor speed expectation 2
0X3031	zero_fault	float	Read only			0	Motor position determination parameters
0X3032	chasu_coder_raw	float	Read only			0	Motor position determination parameters
0X3033	chasu_angle	float	Read only			0	Motor position determination parameters
0X3034	as_angle	float	Read only			0	Motor position determination


function code	name	parameter type	attribute	Maximum value	Minimum value	Current value (for reference)	备注
							parameters
0X3035	vel_max	float	Read only			0	Motor position determination parameters
0X3036	judge	float	Read only			0	Motor position determination parameters
0X3037	position	float	Read only			0	Position value
0X3038	chasu_angle_init	float	Read only			-0.002301	Angle initialization
0X3039	chasu_angle_out	float	Read only			-0.23012	Motor position determination parameters
0X303a	motormechinit	float	Read only			-0.000383	Motor position determination parameters
0X303b	mech_angle_init2	float	Read only			-0.000115	Motor position determination parameters
0X303c	mech_angle_rotat	float	Read only			0	Motor position determination parameters
0X303d	fault1	uint32	Read only			0	Log failure
0X303e	fault2	uint32	Read only			0	Log failure
0X303f	fault3	uint32	Read only			0	Log failure
0X3040	fault4	uint32	Read only			0	Log failure
0X3041	fault5	uint32	Read only			0	Log failure
0X3042	fault6	uint32	Read only			0	Log failure
0X3043	fault7	uint32	Read only			0	Log failure
0X3044	fault8	uint32	Read only			0	Log failure
0X3045	ElecOffset	float	Read only			0	electrical Angle offset
0X3046	mcOverTemp	int16	Read only			0	Overtemperature threshold
0X3047	Kt_Nm/Amp	float	Read only			0	Moment coefficient
0X3048	Tqcali_Type	uint8	Read only			0	Motor type
0X3049	low_position	float	Read only			0	Motor position determination parameters

function code	name	parameter type	attribute	Maximum value	Minimum value	Current value (for reference)	备注
0X304a	theta_mech_1	float	Read only			0	Type 2 Low speed Angle
0X304b	instep	float	Read only			0	Motor protection decision parameters
0X304c	adc0ffset_1	int32	Read only			2034	adc sampling channel 1 Zero current bias
0X304d	adc0ffset_2	int32	Read only			2040	adc sampling channel 2 Zero current bias
0X304e	pos_cnt1	uint16	Read only			0	System parameters
0X304f	E’	uint8	Read only			72	System parameters


3.3.5. Oscilloscope

The interface supports viewing and observing the graph generated by real-time data, including motor Id/Iq current, temperature, real-time speed at the output end, rotor (encoder) position, output end position, etc.

Click on the oscilloscope module in the analysis module, select the appropriate parameters in the channel (parameter meaning can be referred to the parameter table), set the output frequency, click on the start plot to observe the data graph, stop the plot to stop the observation graph.

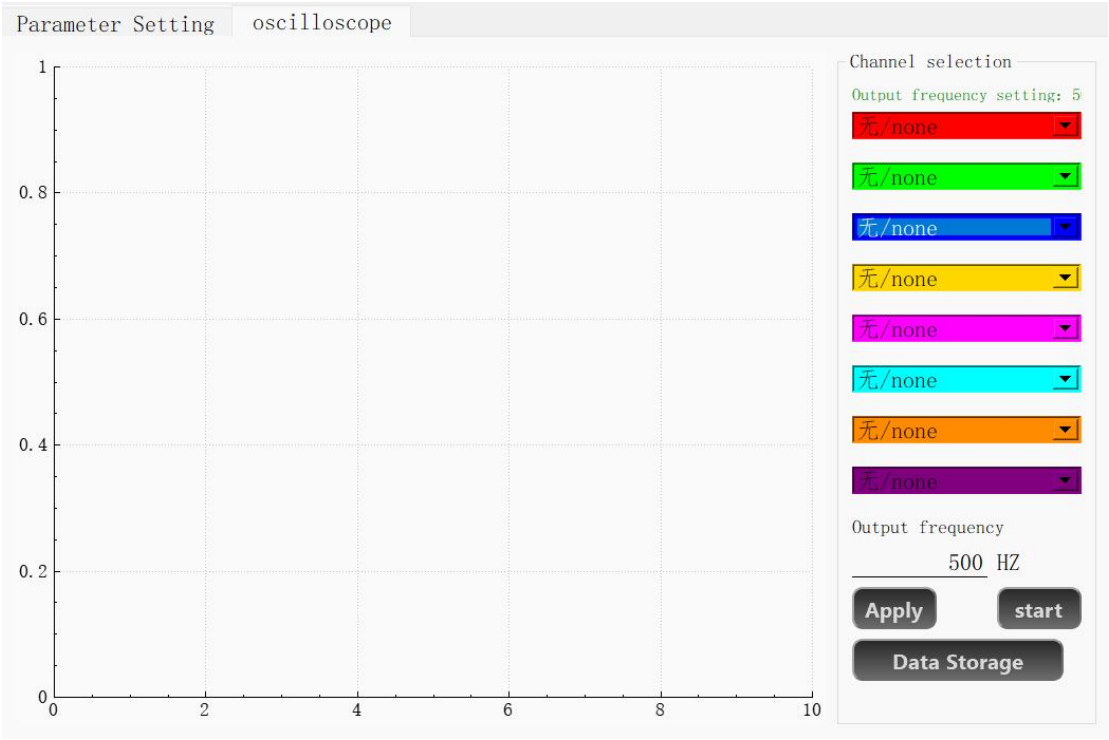

The command sent is in the communication command box below

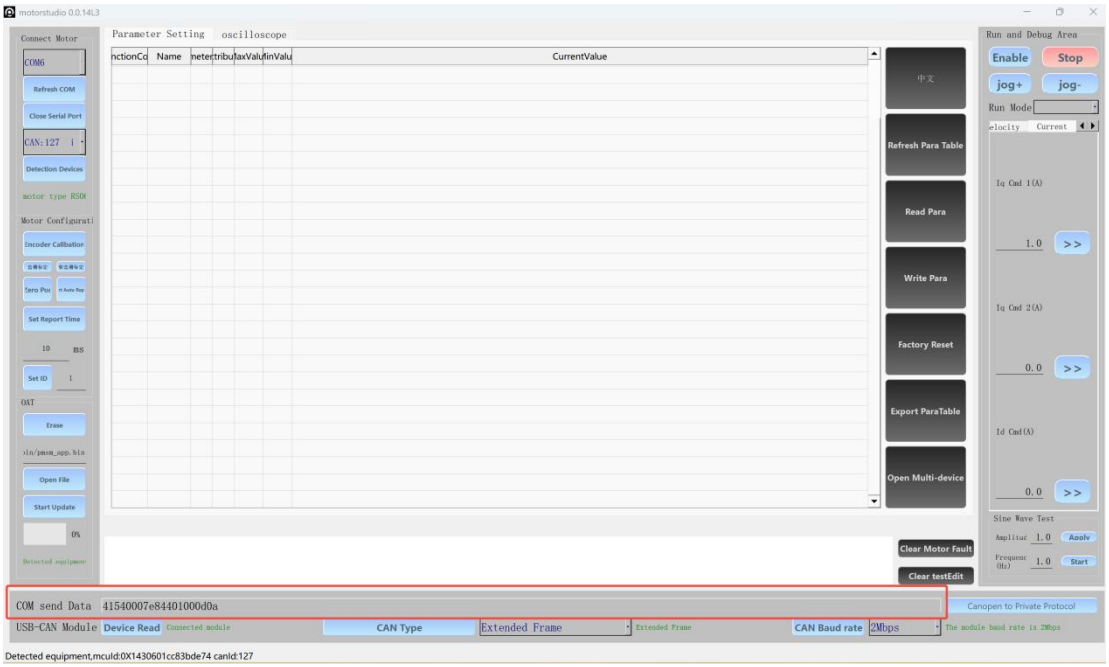

Communication box instruction example:

41 54 90 07 e8 0c 08 05 70 00 00 01 00 00 00 0d 0a

The meaning is as follows

41 54	**90 07 e8 0c**	**8**	**05 70 00 00 01 00 00 00**	**0d 0a**
frame	Number of data	extended	data frame	frame tail

header	bits	frame		

The translation of extended frame canfdid into real canfdid requires the following transformations:

90 07 e8 0c converts to binary as 1001 0000 0000 0111 1110 1000 0000 1100, shift three positions to the right and it becomes 1 0010 0000 0000 1111 1101 0000 0001, convert it to hexadecimal, It is 12 00 FD 01. According to the communication protocol, the meaning is as follows:

12 in hexadecimal	**0**	**FD**	**1**
Communication type 18 (in decimal base)	No meaning	host id	motor canid

3.3.6. Canfd communication failure protection

When the value of CAN_TIMEOUT is 0, this function is disabled

When the CAN_TIMEOUT value is non-0, when the motor does not receive the can command within a certain period of time, the motor enters the reset mode, and 20000 is 1s

3.3.7. Motor fault instructions

Function code 0x3022 indicates the fault code, where

Bit 16: Motor current fault: A-phase current sampling overcurrent

Bit 14: Motor stall overload algorithm protection

Bit 9: Position initialization fault

Bit 8: Hardware identification fault

Bit 7: Encoder uncalibrated: Motor encoder not calibrated

Bit 5: Motor current fault: C-phase current sampling overcurrent

Bit 4: Motor current fault: B-phase current sampling overcurrent

bit3: Overvoltage fault: the motor voltage exceeds the protection voltage by 60V

bit2: Undervoltage fault: the motor voltage is lower than the protection voltage of 12V

bit1: Driver chip failure: Motor driver chip failure reported

bit0: Motor overtemperature fault: motor thermistor temperature exceeds 145 degrees

Function code 0x3024 is driver chip fault code 1. The specific faults are as follows

Table 11. Fault Status Register 1 Field Descriptions


Bit	Field	Type	Default	Description
10	FAULT	R	0b	Logic OR of FAULT status registers. Mirrors nFAULT pin.
9	VDS_OCP	R	0b	Indicates VDS monitor overcurrent fault condition
8	GDF	R	0b	Indicates gate drive fault condition
7	UVLO	R	0b	Indicates undervoltage lockout fault condition
6	OTSD	R	0b	Indicates overtemperature shutdown
5	VDS_HA	R	0b	Indicates VDS overcurrent fault on the A high-side MOSFET
4	VDS_LA	R	0b	Indicates VDS overcurrent fault on the A low-side MOSFET
3	VDS_HB	R	0b	Indicates VDS overcurrent fault on the B high-side MOSFET
2	VDS_LB	R	0b	Indicates VDS overcurrent fault on the B low-side MOSFET
1	VDS_HC	R	0b	Indicates VDS overcurrent fault on the C high-side MOSFET
0	VDS_LC	R	0b	Indicates VDS overcurrent fault on the C low-side MOSFET

Function code 0x3025 is driver chip fault code 2. The specific faults are as follows

Table 12. Fault Status Register 2 Field Descriptions

Bit	Field	Type	Default	Description
10	SA_OC	R	0b	Indicates overcurrent on phase A sense amplifier (DRV8353xS)
9	SB_OC	R	0b	Indicates overcurrent on phase B sense amplifier (DRV8353xS)
8	SC_OC	R	0b	Indicates overcurrent on phase C sense amplifier (DRV8353xS)
7	OTW	R	0b	Indicates overtemperature warning
6	GDUV	R	0b	Indicates VCP charge pump and/or VGLS undervoltage fault condition
5	VGS_HA	R	0b	Indicates gate drive fault on the A high-side MOSFET
4	VGS_LA	R	0b	Indicates gate drive fault on the A low-side MOSFET
3	VGS_HB	R	0b	Indicates gate drive fault on the B high-side MOSFET
2	VGS_LB	R	0b	Indicates gate drive fault on the B low-side MOSFET
1	VGS_HC	R	0b	Indicates gate drive fault on the C high-side MOSFET
0	VGS_LC	R	0b	Indicates gate drive fault on the C low-side MOSFET

3.4. Control Demo

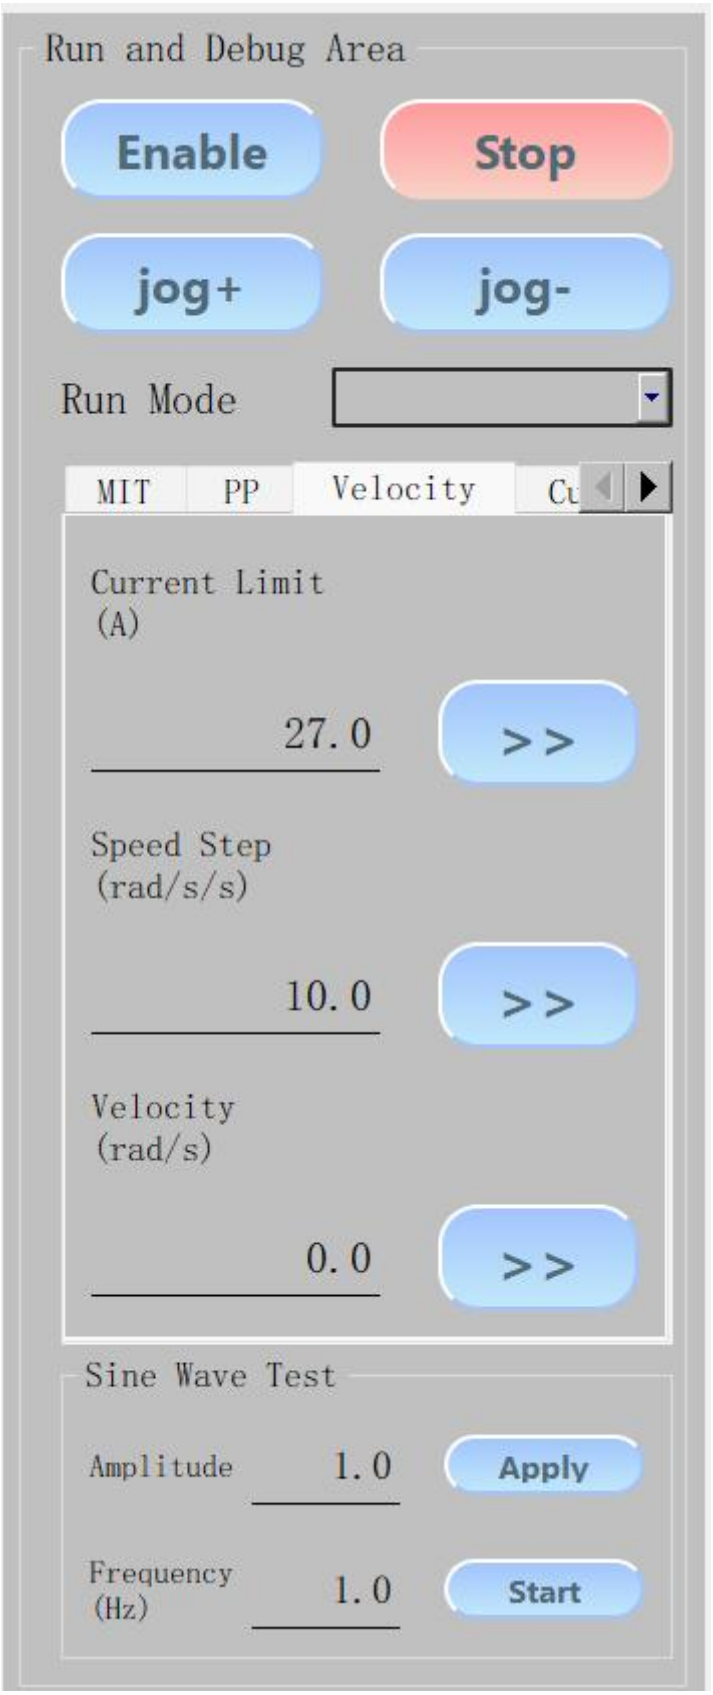


Jog Run

Click JOG +/- to run the motor forward and reverse at a speed of 1 rad/s.

Control Mode Switching


Select the desired control mode in the command box to the right of the run mode.

3.4.1. Operation and control mode

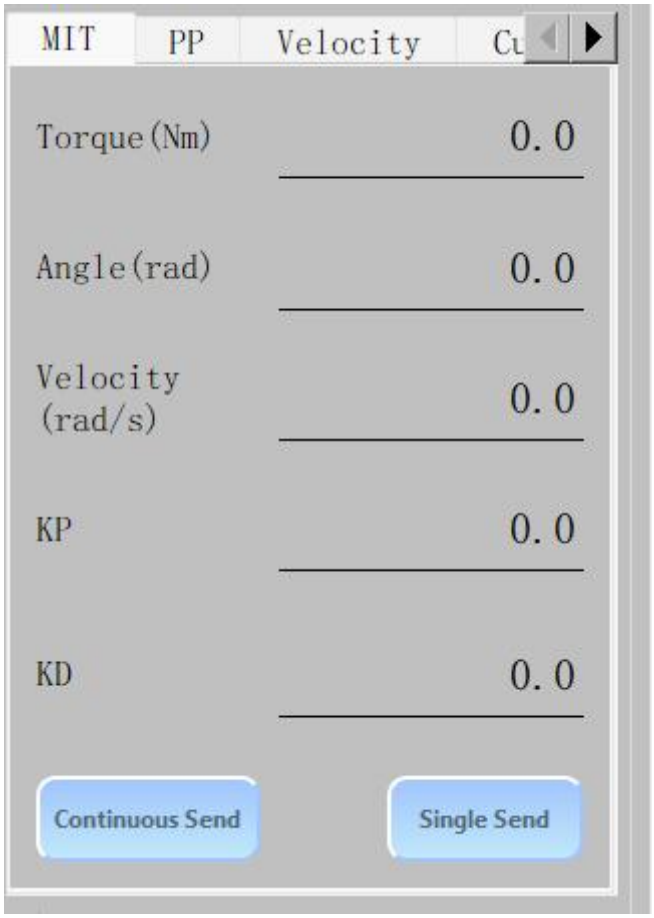


1. Switch the control mode to operation mode.
2. The motor starts running and enters motor_mode.
3. Set five parameter values and click Start or Send continuously. The motor will return feedback frames and run according to the target command.
4. Click Stop to stop the motor and terminate the continuous sending of commands.

3.4.2. Current mode

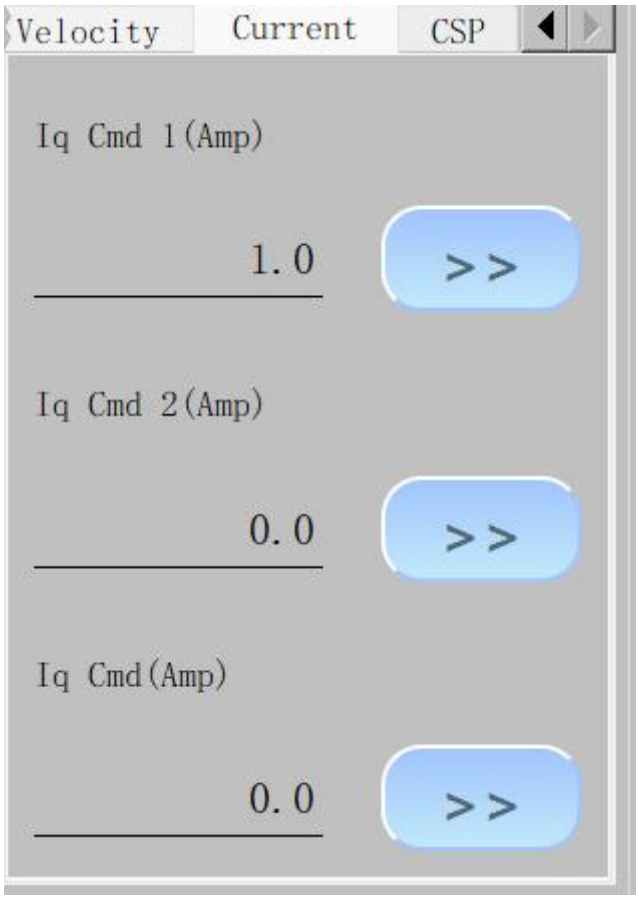

1. Switch the control mode to current mode.
2. The motor starts running and enters motor_mode.
3. Set the current command value for Iq Command 1 (A). Click the >> button on the right. The motor will follow the current command.
4. Click Stop to stop the motor.

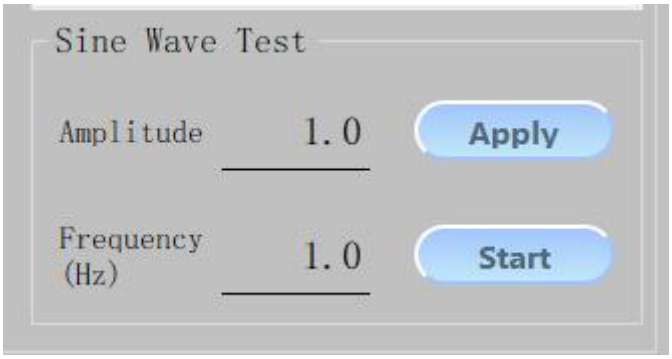

Motor Current Sine Test


1. Switch the control mode to current mode.

2. The motor starts running and enters motor_mode.

3. Set the amplitude and frequency, click OK, and then click Start. The corresponding mode target command will be planned according to the sine law.

4. Click Stop to stop the motor.

3.4.3. Speed Mode

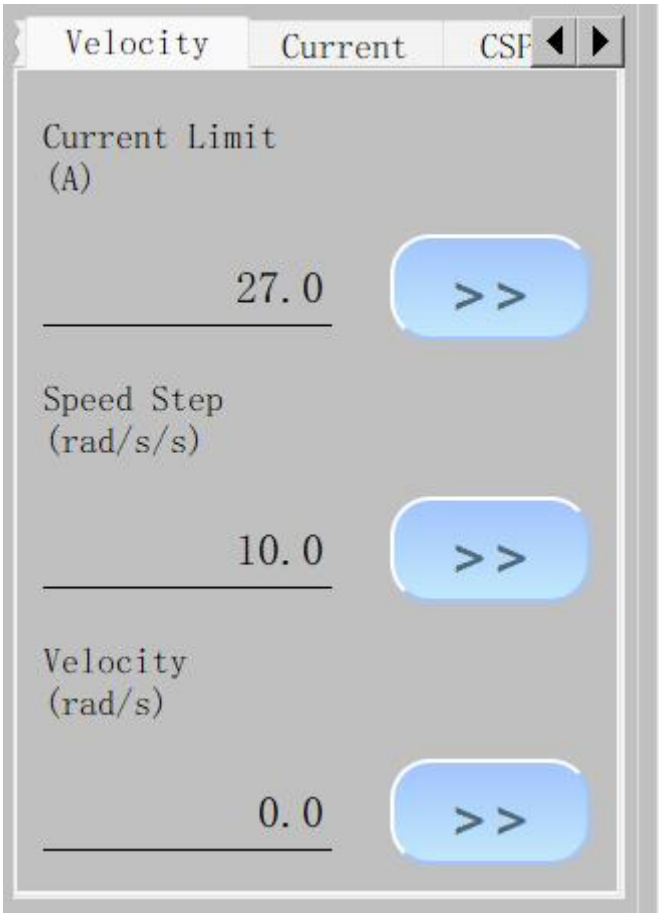


1. Switch the control mode to speed mode.

2. The motor starts running and enters motor_mode.

3. First, set the current limit (maximum phase current) and speed step value (motor acceleration). If no settings are made, the motor will operate at the default values. Finally, set the speed command (target speed). The motor will follow the command.


4. Click Stop to stop the motor.

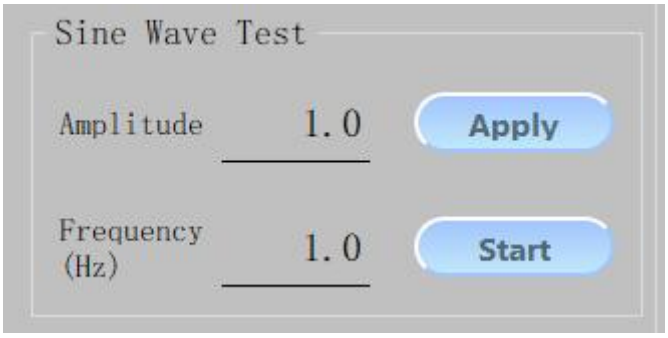


Motor Speed Sine Test

1. Switch the control mode to speed mode.
2. The motor starts running and enters motor_mode.
3. Set the amplitude and frequency, click OK, and then click Start. The corresponding mode target command will be planned according to the sine law.
4. Click Stop to stop the motor.

3.4.4. Position Mode (PP)

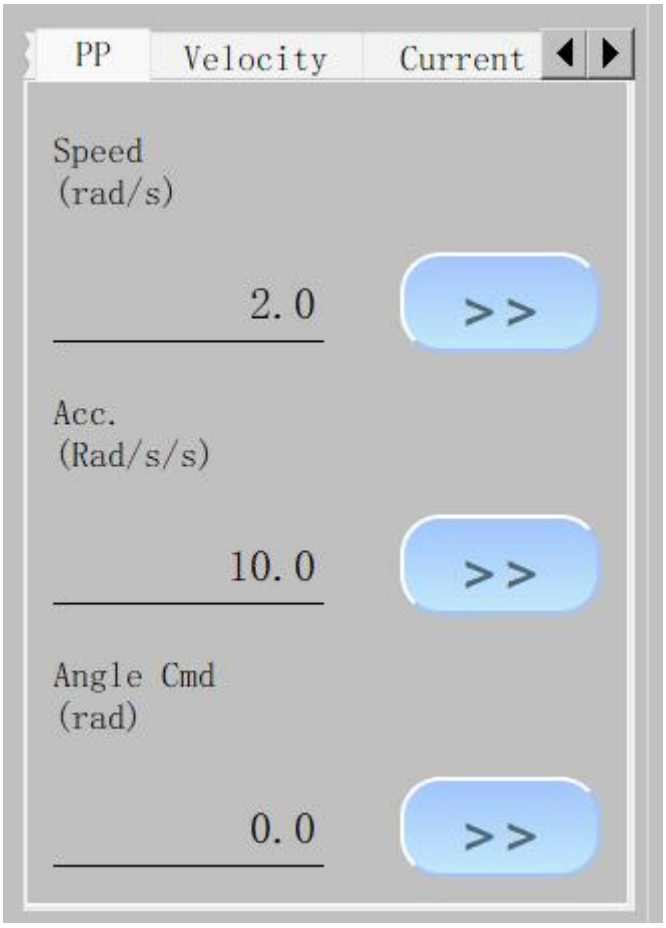


1. Switch the control mode to interpolation position mode.
2. Start the motor and enter motor_mode.
3. First, set the speed and acceleration. If not set, the motor will operate at the default values. Finally, set the position command (target position). The motor will follow the command.
4. Set the speed to 0 to stop the motor at the current position. To continue operation, re-issue the speed and position.
5. Click Stop to stop the motor.

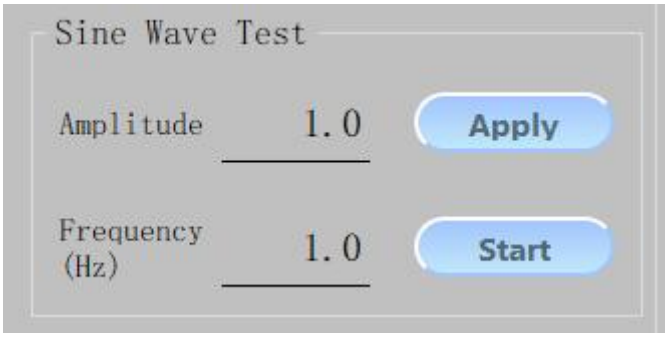


Motor Position Sine Test

1. Switch the control mode to interpolation position mode.
2. Start the motor and enter motor_mode.
3. Set the amplitude and frequency, click OK, and then click Start. The corresponding mode target command will be planned according to the sine law.
4. Click Stop to stop the motor.

3.4.5. Location mode（CSP）

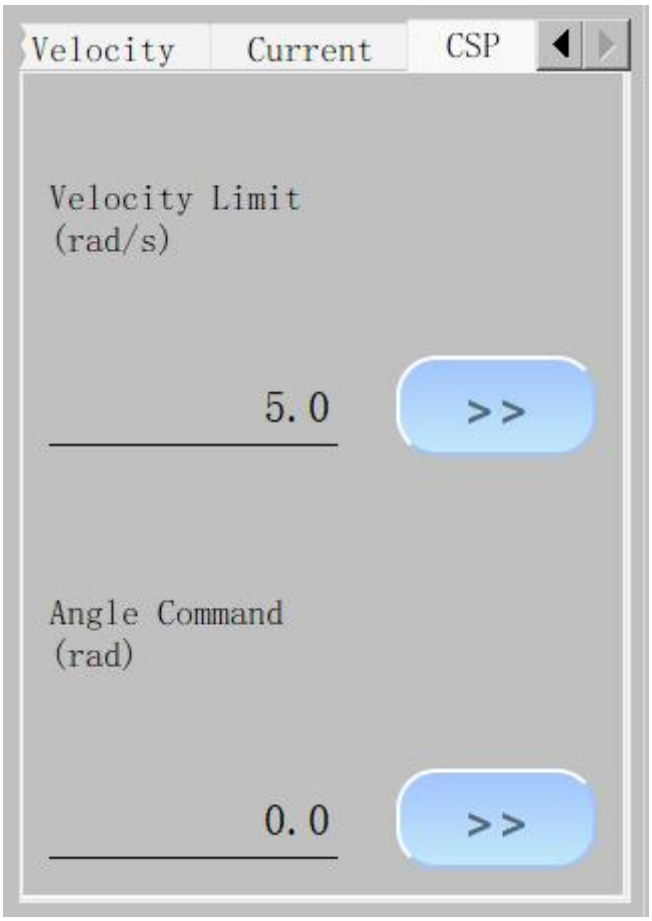

1. Switch the control mode to position mode.
2. The motor starts running and enters motor_mode.
3. Set the speed first. If no speed setting is made, the motor will run at the default value. Finally, set the position command (target position). The motor will follow the command.
4. Click Stop to stop the motor.

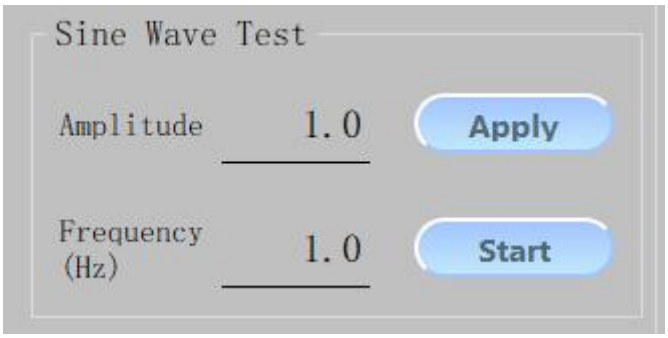

Motor position sinusoidal test

1. Switch the control mode to position mode.

2. The motor starts running and enters motor_mode.

3. Set the amplitude and frequency, click OK, and then click Start. The corresponding mode target command is then sinusoidally planned.

4. Click Stop to stop the motor.

4. Driver protocol and instructions

The motor communication is the CANFD communication interface, the baud rate is 5Mbps, and the extended frame format is adopted as follows:

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
Description	Communication type	data area 2	Destination address	data area 1

The control modes supported by the motor include:

- Operation control mode: set 5 parameters of motor operation control;
- Current mode: the specified Iq current of the given motor;
- Velocity mode: the specified running speed of the given motor;
- Position mode: Given the specified position of the motor, the motor will run to the specified position;

4.1. Description of the communication protocol type

4.1.1. Communication type 0: Get device ID

Gets the device's ID and 64-bit MCU unique identifier

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
Description	0x0	bit15~8: identifies host CAN_ID	target motor CAN_ID	0

Reply frame:

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
Description	0x0	target motor CAN_ID	0XFE	64-bit MCU unique identifier

4.1.2. Communication Type 1: operation control mode motor control instruction

Data field	29 bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x1	Byte2: Torque (0~65535) corresponds to (-14Nm~14Nm)	target motor CAN _ID	Byte0~1: target Angle [0~65535] corresponds to (-12.57f~12.57f) Byte2~3: Target angular velocity [0~65535] corresponds to (-13rad/s~13rad/s) Byte4~5: Kp [0~65535] corresponds to (0.0~5000.0) Byte6~7: Kd [0 to 65535] corresponds to the above data (0.0 to 100.0). After the conversion, the high byte is in front and the low byte is in

Response frame: Response motor feedback frame (see communication type 2)

Communication Type 2: motor feedback data

Data field	29 bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
Description	0x2	Bit8~Bit15: CAN ID of the current motor bit21~16: fault information (0 none 1 has) bit21: uncalibrated bit20: Uncalibrated bit20: Gridlock overload fault bit19: magnetic coding fault bit18: overtemperature bit17: Three-phase overcurrent fault bit16: undervoltage fault bit22~23:	host CAN _ID	Byte0~1: The current Angle [0~65535] Corresponding to (-12.57f~12.57f) Byte2~3: Current angular velocity [0~65535] corresponds to (-13rad/s~13rad/s) Byte4~5: Current torque [0~65535] corresponds to (-42Nm~42Nm) Byte6~7: Current temperature: Temp(Celsius) *10 If the value is higher than 10, the high byte is first and the low byte is last

		Mode status 0: Reset mode [reset] 1: Cali mode [calibration] 2: Motor mode [Run]		

4.1.3. Communication Type 3: Motor enabled to run

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
Description	0x3	bit15~8: identifies the main CAN_ID	and target motor CAN_ID	

Response frame: Response motor feedback frame (see communication type 2)

4.1.4. Communication Type 4: Motor stops running

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x4	bit15~8: used to identify the main CAN_ID	target motor CAN_ID	When the motor is running normally, 0 must be cleared in the data field. Byte[0]=1: The fault is cleared.

Response frame: Response motor feedback frame (see communication type 2)

Version number read frame

Data field	**29 bit ID**			**8Byte data field**
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x4	bit15~8: used to identify the main CAN_ID	target motor CAN_ID	Byte[0]=0x00 Byte[1]=0xC4

Response frame:

data field	**29 位 ID**			**8Byte data field**
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x2	Bit8~Bit15: CAN ID of the current motor bit21~16:	target motor	Byte0=0x00 Byte1=0xC4

		fault information (0 none 1 has) bit21: uncalibrated bit20: Uncalibrated bit20: Gridlock overload fault bit19: magnetic coding fault bit18:overtemperature bit17: Three-phase current fault bit16: undervoltage fault bit22~23: Mode status 0: Reset mode [reset] 1: Cali mode [calibration] 2: Motor mode [Run]	CAN_ID	Byte2=0x56 Byte3~6:Motor version number Order from high to low

4.1.5. Communication type 6: Set motor mechanical zero

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x6	bit15~8: Identifies the main CAN_ID	and target motor CAN_ID	Byte[0]=1

Response frame: Response motor feedback frame (see communication type 2)

Communication type 7: Set motor CAN_ID

Change the current motor CAN_ID, effective immediately.

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x7	bit15~8: used to identify main CAN_ID Bit16~23: preset CAN_ID	Target motor CAN_ID	

Answer frame: Answer motor broadcast frame (see communication type 0)

4.1.6. Communication type 17: Single parameter read

Data field	29 bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x11	bit15~8:	target	Byte0~1: index. For details, see the

		Used to identify the main CAN_ID	motor CAN_ID	readability parameter table below Byte2~3:00 Byte4~7: In data above 00, the low byte is first and the high byte is second (

Reply frame:

Data field	29 bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x11	bit15~8: indicates that the master CAN_ID Bit23~16:00 indicates that the master CAN_ID is successfully read. 01 indicates that the master can_ID	Byte0~1: Byte2~3:00 Byte4~7:Parameter data. 1 byte of data above Byte4 is preceded by low bytes and followed by high bytes at	

4.1.7. Communication type 18: Single parameter write (lost in power failure)

With type 22, the parameter starting with function code 0x20 of the parameter table in the upper computer module can be saved

Data field	29 bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x12	bit15~8: Used to identify the main CAN_ID	target motor CAN_ID	Byte0~1: index. For details, see the readability parameter table below Byte2~3: 00 Byte4~7: Parameter data In the preceding data, the low byte is in the front and the high byte is in the rear

Response frame: Response motor feedback frame (see communication type 2)

4.1.8. Communication type 21: Fault feedback frame

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7

description	0x15	bit15~8: motor CAN_ID	identifies the main CAN_ID	Byte0~3: fault value (non-0: faulty; 0: faulty). Normal) Bit 16: A-phase current sampling overcurrent Bit 14: Motor stall overload algorithm protection Bit 9: Position initialization fault Bit 8: Hardware identification fault Bit 7: Encoder uncalibrated: Motor encoder not calibrated Bit 5: C-phase current sampling overcurrent Bit 4: B-phase current sampling overcurrent bit3: overvoltage fault bit2: undervoltage fault bit1: driver chip fault bit0: motor overtemperature fault, Default 145 ° C Byte4~7: warning Value bit0: motor overtemperature warning, the default is 135 ° c

4.1.9. Communication type 22: Motor data save frame

data field	29-bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
Description	0x16	bit15~8: identifies the main CAN_ID	and target motor CAN_ID	01 02 03 04 05 06 07 08

Response frame: Response motor feedback frame (see communication type 2)

4.1.10. Communication type 23: Motor baud rate modification frame (re-power-on effect)

Data field	29 bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x17	bit15~8: used to identify the main	target motor CAN_ID	01 02 03 04 05 06 F_CMD Among them, the F_CMD byte is the motor baud rate Among them, 01 is 1M 02 is 500K

		CAN_ID		03 is 250K	04 is 125K

Response frame: Response motor feedback frame (see communication type 0)

4.1.11. Communication type 24: The motor actively reports frames

data field	29-bit ID			**8Byte data field**
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x18	bit15~8: identifies the main CAN_ID	target motor CAN_ID	01 02 03 04 05 06 F_CMD Among them, the F_CMD byte is the motor reporting switch 00 is to disable active reporting (default) 01 To enable active reporting, the default reporting interval is 10ms

Response frame:

data field	**29 位 ID**			**8Byte data field**
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x18	Bit8~Bit15: CAN ID of the current motor bit21~16: fault information (0 none 1 has) bit21: uncalibrated bit20: Uncalibrated bit20: Gridlock overload fault bit19: magnetic coding fault bit18:overtemperature bit17: Three-phase current fault bit16: undervoltage fault bit22~23: Mode status 0: Reset mode [reset] 1: Cali mode [calibration] 2: Motor mode [Run]	target motor CAN_ID	Byte0~1: The current Angle [0~65535] Corresponding to (-12.57f~12.57f) Byte2~3: Current angular velocity [0~65535] corresponds to (-13rad/s~13rad/s) Byte4~5: Current torque [0~65535] corresponds to (-42Nm~42Nm) Byte6~7: Current temperature: Temp(Celsius) *10 If the value is higher than 10, the high byte is first and the low byte is

				last

4.1.12. Communication type 25: Motor protocol modification frame (re-power-on effect)

Data field	29 bit ID			8Byte data field
Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
description	0x19	bit15~8: used to identify the main CAN_ID	target motor CAN_ID	01 02 03 04 05 06 F_CMD Among them, the F_CMD byte is the motor protocol type Among them, 0 is a private protocol (default) 1 is the Canopen protocol 2 is the MIT protocol

Response frame: Response motor feedback frame (see communication type 0)

4.1.13. Read and write a single parameter list

index		Description	Type	Number of bytes		R/W Read and write permission
0X7005	run_mode	0: operation mode 1: position mode (PP) 2: Velocity mode 3: Operation mode Current mode 5: Position mode (CSP)	uint8	1		W/R
0X7006	iq_ref	Current mode Iq command	float	4	-19 to 19A	W/R
0X700A	spd_ref	Rotational Velocity mode Rotational speed command	float	4	-13 to 13rad/s	W/R
0X700B	limit_torque	torque limit	float	4	0 to 42Nm	W/R
0X7010	cur_kp	Kp	float	4	The default value is 0.1	W/R
0X7011	cur_ki	Ki	float	4	The default value is 0.012	W/R
0X7014	cur_filt_gain	filt_gain	float	4	0 to 1.0, The default value	W/R

index		Description	Type	Number of bytes		R/W Read and write permission
					is 0.1	
0X7016	loc_ref	Position Mode Angle instruction	float	4	rad	W/R
0X7017	limit_spd	Location mode (CSP) speed limit	float	4	0 to 13rad/s	W/R
0X7018	limit_cur	Velocity position mode Current limitation	float	4	0 to 19A	W/R
0x7019	mechPos	Mechanical Angle of the loading coil	float	4	rad	R
0x701A	iqf	iq Filter	float	4	A	R
0x701B	mechVel	Speed of the load	float	4	rad/s	R
0x701C	VBUS	Bus voltage	float	4	V	R
0x701E	loc_kp kp	at	float	4	The default value is 40	W/R
0x701F	spd_kp	Indicates the speed kp	float	4	The default value is 6	W/R
0x7020	spd_ki	ki	float	4	The default value is 0.02	W/R
0x7021	spd_filt_gain	Speed filter value	float	4	The default value is 0.1	W/R
0x7022	acc_rad	velocity mode acceleration	float	4	The default value is 20rad/s^2	W/R
0x7024	vel_max	Location mode (PP) speed	float	4	The default value is 10rad/s	W/R
0x7025	acc_set	Location mode (PP) acceleration	float	4	The default value is 10rad/s^2	W/R
0x7026	EPScan_time	Indicates the report time. 1 indicates 10ms. Plus 1 increments by 5ms	uint16	2	The default value is 1	W/R
0x702	canTim	can The timeout	uint	4	The default	W/R

index		Description	Type	Number of bytes		R/W Read and write permission
8	eout	threshold, 20000 is 1s	32		value is 0	
0x7029	zero_sta	Indicates the zero flag bit, 0 means 0-2π and 1 means -π-π	uint8	1	The default is 0	W/R
0x702A	damper	Damping switch	uint8	1	The default value is 0	W/R
0x702B	add_offset	Zero offset	float	4	The default is 0	W/R
0x702C	alveolous_open	Cogging Compensation Switch	uint8	1	The default is 0	W/R
0x702D	iq_test	Motor Initialization Calibration Switch	uint8	1	The default is 0	W/R
0x702E	dcc_set	Deceleration in Motor PP Mode (Normally Disabled)	float	4	The default is 10rad/s^2	W/R

4.1.14. Read example:

Take reading loc_kp as an example:

Read instruction is

Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
	0x11	0x00FD	0x7F	1E 70 00 00 00 00 00 00
Description	Type 17	Host id 0xFD	Target motor CAN_ID 7F	Byte0~1: index, corresponding to loc_kp

The feedback instruction is

Size	Bit28~bit24	bit23~8	bit7~0	Byte0~Byte7
	0x11	0x007F	0xFD	1E 70 00 00 00 00 F0 41
Description	Type 17	bit15~8: Target motor CAN_ID 7F	Host id 0xFD	Byte0~1: index, corresponding to loc_kp Byte4~7:loc_kp value 30, high right byte, (32-bit single precision) hexadecimal IEEE-754 standard floating point number

4.2. Motor Function Description

(If the following features are unavailable, please upgrade to the latest version via the official Git repository.)

4.2.1. Active Reporting

- **Disabled by default**. Enable via **Type 24**.
- Report type: **Type 2** (default interval: **10ms**). Adjust interval by modifying `EPScan_time` via **Type 18**.

4.2.2. Zero-Point Flag (`zero_sta`)

- Modify via:
  - **Host computer (上位机)**
  - **Type 18** (*requires saving via **Type 22** for communication*)
- **Default flag**: `0` → Power-on position range: **0–2π**.
- **If set to `1`**: Power-on position range: **π–π**.

4.2.3. Type 2 Update

- Updated to **periodic looping within -4π–4π** (enables cycle counting).
- **Note**: Position interface parameters must be adjusted:
  - `P_MIN`: **12.57f**
  - `P_MAX`: **12.57f**

4.2.4. Protocol Switching *(Requires CAN adapter)*

- Methods:

- Modify protocol_1 via host computer.
- Send **Type 25** command.

- **Reboot required** after switching.
- **Post-switch CAN commands**:
  - **CANopen**: Send extended frame (protocol switch frame).
  - **MIT Protocol**: Send standard frame (**Command 8**).

4.2.5. Motor Post-Power-Off Anti-Backdrive Protection

- **The motor’ s post-power-off anti-backdrive protection can be enabled or disabled.If the motor is rotated rapidly while unpowered, a certain damping force will be felt. This protection prevents surges caused by excessively high external rotation speeds.The protection can be disabled by setting damper to 1.**

4.2.6. Zero Calibration Rules

- **Zero calibration is supported in CSP and Motion Control modes, but blocked in PP mode.**
- **In old firmware versions, zero calibration would cause a large deviation between the motor's target and actual position, triggering an immediate movement of the motor to the target position.**
- **In new firmware versions, when zero calibration is performed in CSP or Motion Control mode, the motor's target position is instantly updated to 0, so the motor remains stationary. Zero calibration is unavailable in PP mode.**

4.2.7. Position Offset

- **A position offset can be added. If an offset of 1 is set, the new zero point will be the original zero point plus 1.**
- **Some customers cannot perform zero calibration at the physical zero position due to mechanical limits.For example, if the zero point is set at a position of 1 radian, and add_offset is then set to 1, after a power cycle, the motor’ s position of 1 radian will correspond to the original 1 radian**

position, and the motor’ s zero point will be 1 radian counterclockwise from the original 1 radian position.

4.2.8. The CANopen ID of the motor is consistent with the CAN ID.

- **The CANopen ID is kept the same as the CAN ID under the private protocol.**

4.2.9. Motor Initialization Calibration

- When the motor sets iq_test to 1, the initialization time is extended, resulting in a more accurate motor initial reference.

4.2.10. Cogging Calibration Function


- Before calibration, set iq_test to 1 and restart the motor; the motor must be under no-load conditions. Then perform cogging calibration via the host computer. After successful calibration, max_alve will be non-zero. Next, set alveolous_open to 1 to activate the function in Motion Control mode.

4.2.11. PP Mode Deceleration

- By setting acc_stutus to 1, the acceleration and deceleration for PP mode can be configured separately. The deceleration value is stored at 0x702E. When acc_stutus is set to 0, the acceleration parameter controls both acceleration and deceleration.
-

4.3. Control mode instructions

4.3.1. Operation control mode

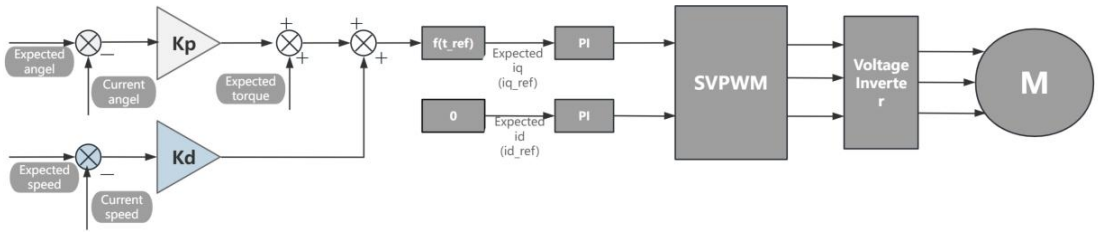


The motor is in operation control mode by default after power-on.

Send motor Enable Run frame (communication type 3) --> Send operation mode motor control command (communication type 1) --> Receive motor feedback frame (communication type 2)


Operation control mode description: The control logic of the operation and control mode is t_ref=Kd * (v_vset-v_actual)+Kp * (p_set-p_actual)+t_ff. Tref is converted to the expected iq current through an internal formula and output through the current loop Simple control demonstration: Set t_ff to 0, v_vset to 1, Kd to 1, p_set to 0, Kp to 0. If there is no external load on the motor, it will run at a speed of 1rad/s. If there is an external load, kd needs to be increased to resist the external load Set t_ff to 0, v_vset to 0, Kd to 1, p_set to 0, Kp to 0, the motor is in damping mode. When the motor is externally rotated, a damping is applied, which increases with the increase of kd. It should be noted that the motor generates electricity under this condition and requires power supply to prevent overvoltage Set t_ff to 0, v_vset to 0, Kd to 1, p_set to 5, Kp to 1. If there is no external load on the motor, it will run to the target position of 5. Increasing kp will increase the force required to maintain the target position, and kd is damping. Without kd, the motor will sway to the target position

4.3.2. Current mode

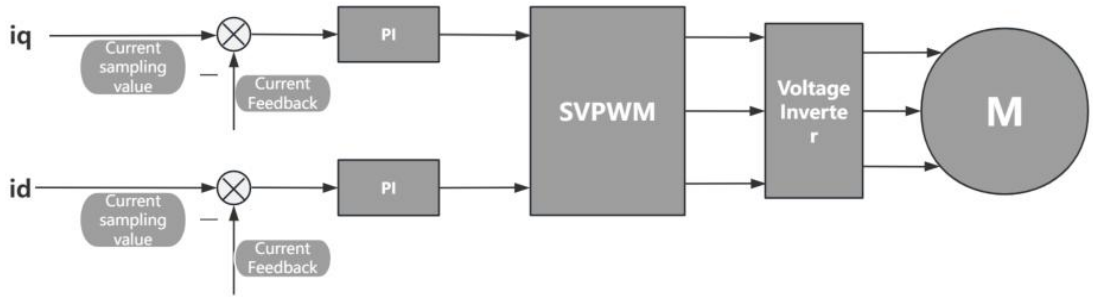


Send motor mode parameter write command (communication type 18) Set the runmode parameter to 3 --> Send motor Enable run frame (communication type 3) --> Send motor mode parameter write command (communication type 18) set the iq_ref parameter to the default current instruction

4.3.3. Velocity mode

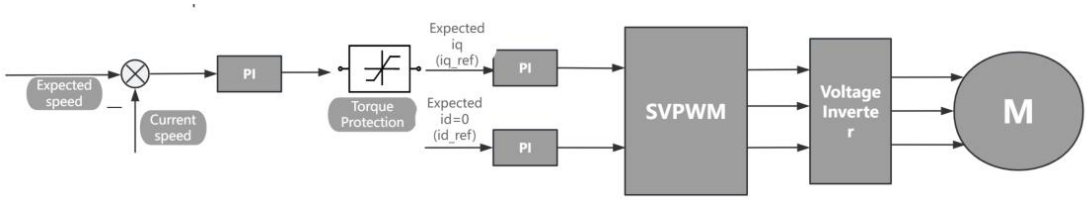

Send motor mode parameter write command (communication type 18) Set the runmode parameter to 2 --> Send motor Enable run frame (communication type 3) --> Send motor mode parameter write command (communication type 18) set limit_cur parameter as default maximum current instruction --> Send motor mode parameter write command (communication type 18) Set acc_rad parameter as default acceleration instruction --> Send motor mode parameter write command (communication type 18) Set spd_ref parameter as default speed instruction


4.3.4. Location Mode (CSP)

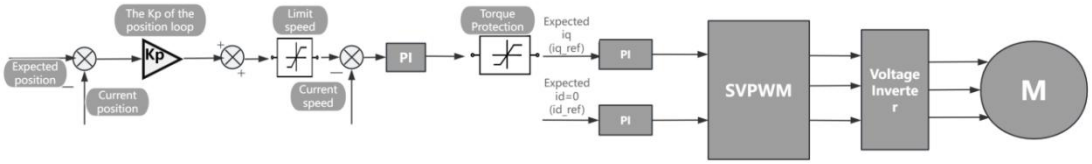

Send motor mode parameter write command (communication type 18) Set the runmode parameter to 5 --> Send motor Enable run frame (communication

type 3) --> Send motor mode parameter write command (communication type 18) set limit_spd parameter as default maximum speed instruction --> Send motor mode parameter write command (communication type 18) Sets loc_ref parameter as default position instruction

4.3.5. Location Mode (PP)

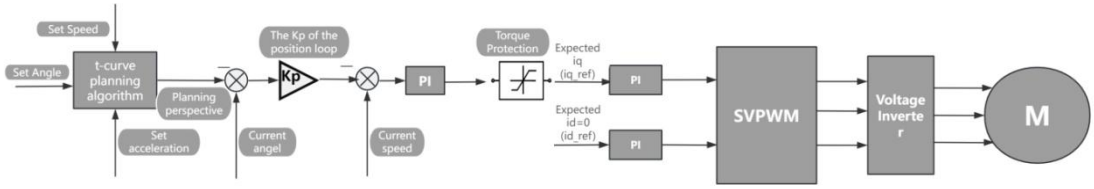

Send motor mode parameter write command (communication type 18) Set the runmode parameter to 1 --> Send motor Enable run frame (communication type 3) --> Send motor mode parameter write command (communication type 18) set The vel_max parameter is the default maximum speed instruction --> Send motor mode parameter write command (communication type 18) Set the acc_set parameter to the default acceleration instruction --> Send motor mode parameter write command (communication type 18) Set the loc_ref parameter to the default position instruction

Note: This mode does not support changing the speed and acceleration during operation. If you want to make an emergency stop, you can change vel_max to 0 during the process, and it will stop at the current speed and acceleration plan

4.3.6. Stop running

Sending motor stop frame (communication type 4)

4.4. Program sample

Examples of various mode control motors are provided below (take gd32f303 as an example)

The following are library, function, and macro definitions for the various instances

```
Plain Text
```

```
#define P_MIN -12.57f //0.0.2.6 及之前为 12.5，之后为 12.57
#define P_MAX 12.57f  //0.0.2.6 及之前为 12.5，之后为 12.57
#define V_MIN -13.0f
#define V_MAX 13.0f
#define KP_MIN 0.0f
#define KP_MAX 500.0f
#define KD_MIN 0.0f
#define KD_MAX 5.0f
#define T_MIN -42.0f
struct exCanIdInfo{
    uint32_t id:8;
    uint32_t data:16;
    uint32_t mode:5;
    uint32_t res:3;
};
can_receive_message_struct rxMsg;
can_trasnmit_message_struct txMsg={
    .tx_sfid = 0,
    .tx_efid = 0xff,
    .tx_ft = CAN_FT_DATA,
```

```
    .tx_ff = CAN_FF_EXTENDED,

    .tx_dlen = 8,

};

#define txCanIdEx (*((struct exCanIdInfo*)&(txMsg.tx_efid)))

#define rxCanIdEx (*((struct exCanIdInfo*)&(rxMsg.rx_efid))) //Parses the extended frame id into a custom data structure

int float_to_uint(float x, float x_min, float x_max, int bits){

    float span = x_max - x_min;

    float offset = x_min;

    if(x > x_max) x=x_max;

    else if(x < x_min) x= x_min;

    return (int) ((x-offset)*((float)((1<<bits)-1))/span);

}

#define can_txd() can_message_transmit(CAN0, &txMsg)

#define can_rxd() can_message_receive(CAN0, CAN_FIFO1, &rxMsg)
```

The following lists the common types of communication sent:

4.4.1. Motor Enabled Run frame (communication type 3)

Plain Text

```
void motor_enable(uint8_t id, uint16_t master_id)
```

```
{
    txCanIdEx.mode = 3;
    txCanIdEx.id = id;
    txCanIdEx.res = 0;
    txCanIdEx.data = master_id;
    txMsg.tx_dlen = 8;
    txCanIdEx.data = 0;
    can_txd();
}
```

4.4.2. Operation control mode Motor control instruction (communication type 1)

Plain Text

```
void motor_controlmode(uint8_t id, float torque, float MechPosition, float speed, float kp, float kd)

{

    txCanIdEx.mode = 1;

    txCanIdEx.id = id;

    txCanIdEx.res = 0;

    txCanIdEx.data = float_to_uint(torque,T_MIN,T_MAX,16);

    txMsg.tx_dlen = 8;

    txMsg.tx_data[0]=float_to_uint(MechPosition,P_MIN,P_MAX,16)>>8;

    txMsg.tx_data[1]=float_to_uint(MechPosition,P_MIN,P_MAX,16);

    txMsg.tx_data[2]=float_to_uint(speed,V_MIN,V_MAX,16)>>8;
```

```
    txMsg.tx_data[3]=float_to_uint(speed,V_MIN,V_MAX,16);

    txMsg.tx_data[4]=float_to_uint(kp,KP_MIN,KP_MAX,16)>>8;

    txMsg.tx_data[5]=float_to_uint(kp,KP_MIN,KP_MAX,16);

    txMsg.tx_data[6]=float_to_uint(kd,KD_MIN,KD_MAX,16)>>8;

    txMsg.tx_data[7]=float_to_uint(kd,KD_MIN,KD_MAX,16);

    can_txd();

}
```

4.4.3. Motor stop frame (communication type 4)

Plain Text

```
void motor_reset(uint8_t id, uint16_t master_id)

{

    txCanIdEx.mode = 4;

    txCanIdEx.id = id;

    txCanIdEx.res = 0;

    txCanIdEx.data = master_id;

    txMsg.tx_dlen = 8;

    for(uint8_t i=0;i<8;i++)

    {
```

```
        txMsg.tx_data[i]=0;
    }
    can_txd();
}
```

4.4.4. Motor mode parameter write command (communication type 18, running mode switch)

Plain Text

```
uint8_t runmode;
uint16_t index;
void motor_modechange(uint8_t id, uint16_t master_id)
{
    txCanIdEx.mode = 0x12;
    txCanIdEx.id = id;
    txCanIdEx.res = 0;
    txCanIdEx.data = master_id;
    txMsg.tx_dlen = 8;
    for(uint8_t i=0;i<8;i++)
    {
        txMsg.tx_data[i]=0;
```

```
    }
    memcpy(&txMsg.tx_data[0],&index,2);
    memcpy(&txMsg.tx_data[4],&runmode, 1);
    can_txd();
}
```

4.4.5. Motor mode parameter write command (communication type 18, control parameter write)

Plain Text

```
uint16_t index;
float ref;
void motor_write(uint8_t id, uint16_t master_id)
{
    txCanIdEx.mode = 0x12;
    txCanIdEx.id = id;
    txCanIdEx.res = 0;
    txCanIdEx.data = master_id;
    txMsg.tx_dlen = 8;
    for(uint8_t i=0;i<8;i++)
```

```
    {
        txMsg.tx_data[i]=0;
    }
    memcpy(&txMsg.tx_data[0],&index,2);
    memcpy(&txMsg.tx_data[4],&ref,4);
    can_txd();
}
```

5. Version History

Version Number	Description	Date
1.0	Initial Release	May 28, 2026