
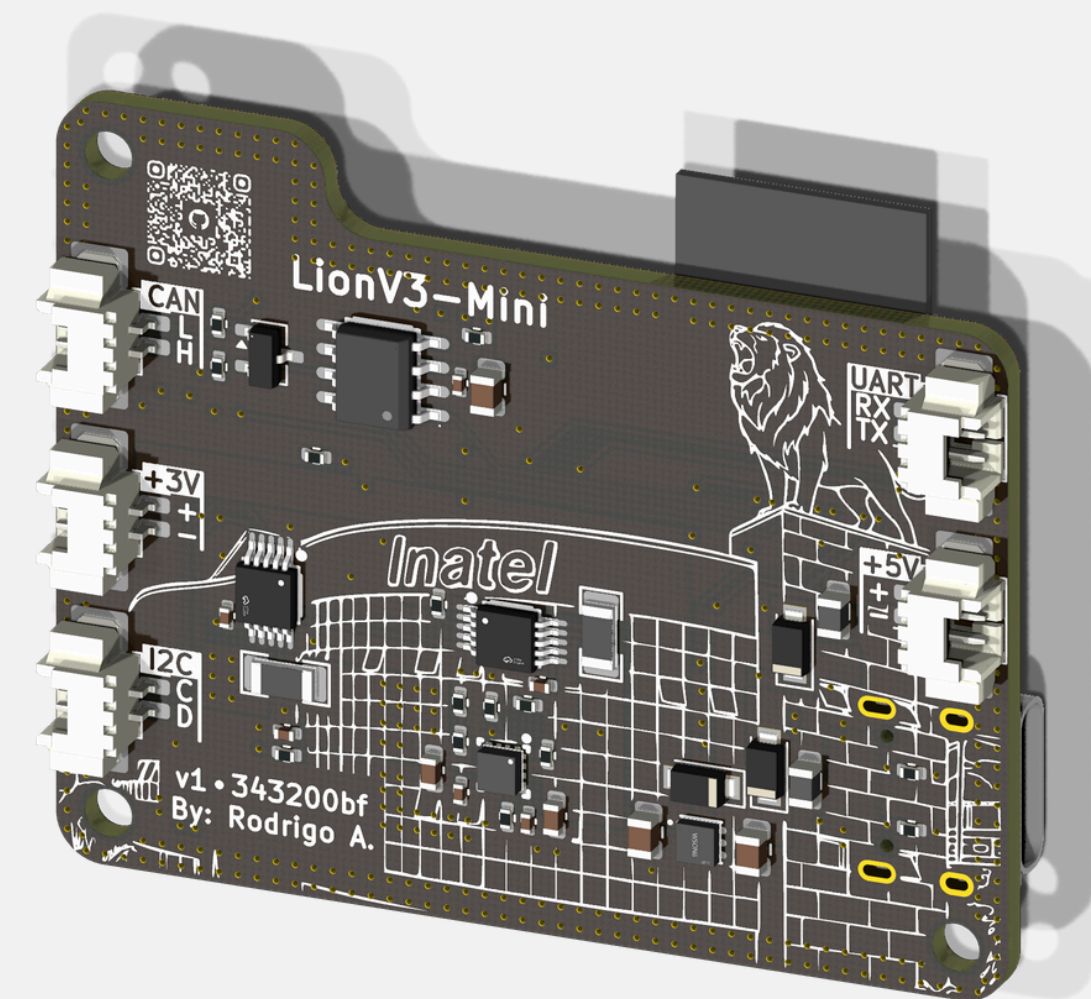


LIONv3-Mini Fabrication Guide

Rodrigo Andrade | 4 Out. 2026

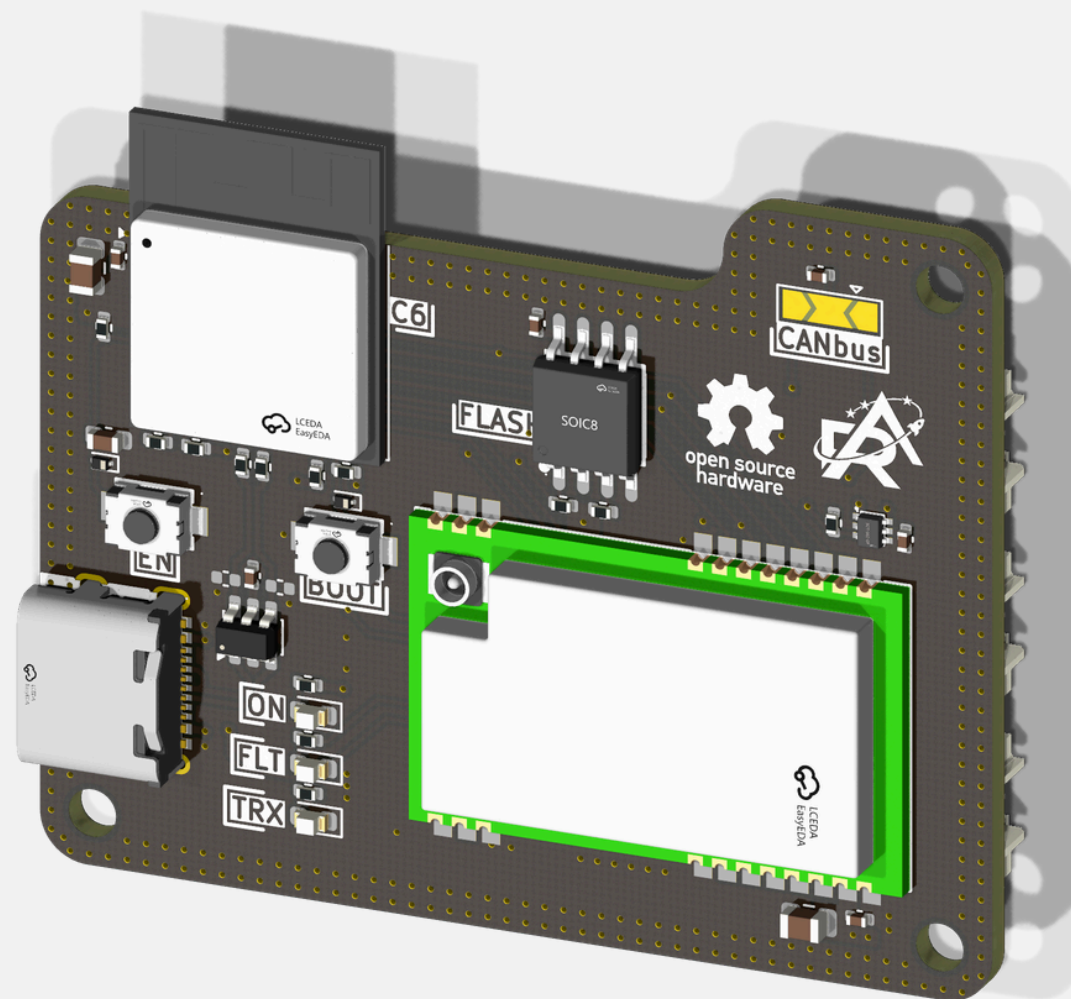


BOM: <https://github.com/RodrigoCAndrade/LIONv3-R/hardware/Fabrication/BOM-LIONv3.csv>

GERBER: <https://github.com/RodrigoCAndrade/LIONv3-R/hardware/Fabrication/GERBER-LIONv3.zip>

Online PCB Quote

[Re-Upload](#) [Gerber Viewer](#)

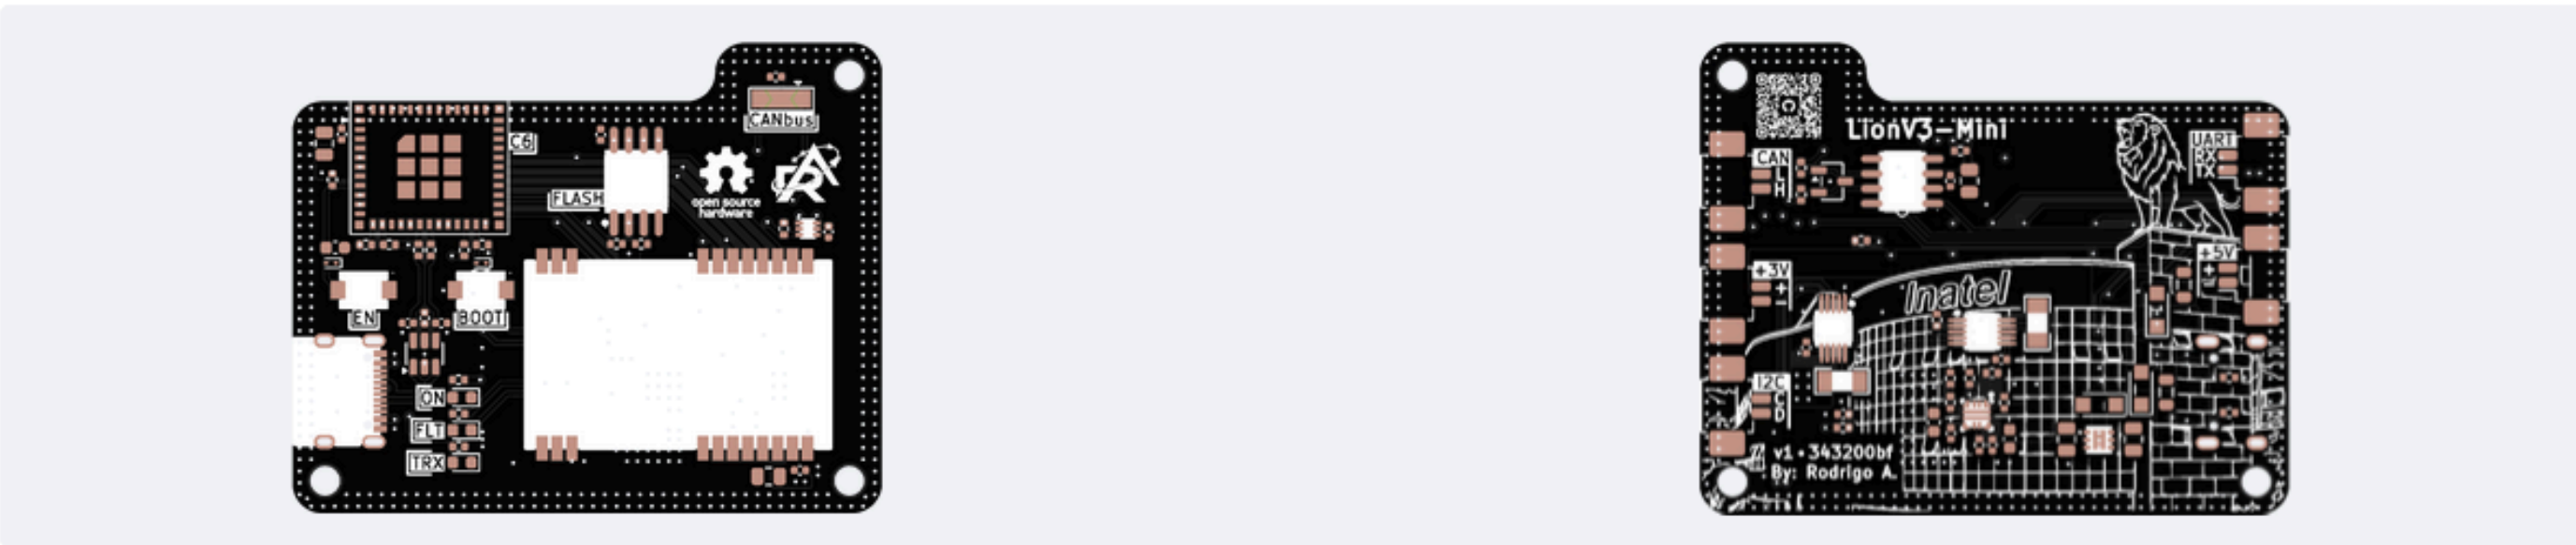

Detected 4 layer board of 40.15×50.15mm(1.581×1.974 inches).

Base Material	?  FR-4	 Flex	 Aluminum	 Copper Core	 Rogers	 PTFE Teflon	 HDI
Layers	? 1 2 4 High Precision PCB 6 8 10 12 14 16 More						
Dimensions	? 50.15 * 40.15 mm						
PCB Qty	? 5						
Product Type	? Industrial/Consumer electronics Aerospace Medical						

PCB Specifications



Different Design



1

2

3

4

Delivery Format



Single PCB

Panel by Customer

Panel by JLCPCB

PCB Thickness



0.4mm

0.6mm

0.8mm

1.0mm

1.2mm

1.6mm

2.0mm

PCB Color



Green

Purple

Red

Yellow

Blue

White

Black

Silkscreen



White

Material Type



FR4 TG135

FR4 TG155

Nan Ya NP-140F

KB6164 - TG135

Nan Ya NP-155F

KB-6165 - TG155

S1141 TG140

S1000H TG155

Surface Finish



OSP

New

HASL(with lead)

LeadFree HASL

ENIG

Gold Thickness



1 U"

2 U"

High-spec Options



Outer Copper Weight



1 oz

2 oz

Inner Copper Weight



0.5 oz

1 oz

2 oz

Specify Layer Sequence



No

Yes

Specify Stackup



No

Yes

[Impedance calculator >](#)

Layer Stackup



No requirement

JLC04161H-7628

JLC04161H-3313

JLC04161H-1080

JLC04161H-7628A

JLC04161H-3313A

JLC04161H-1080A

JLC04161H-7628B

JLC04161H-2116A

JLC04161H-2116B

JLC04161H-2116C

JLC04161H-7628G

JLC04161H-2116

JLC04161H-7628E

JLC04161H-2116D

JLC04161H-7628F

JLC04161H-2116E

JLC04161H-7628C

[View Stackup](#)

Impedance Control

No requirement

±10% (±5Ω if value≤50Ω)

Via Covering



Plugged

Untented

Epoxy Filled & Capped

Copper paste Filled & Capped

Tented

Not Specified

Conductive Adhesive

Horizontal Electroless Copper Plating

High-spec Options



Outer Copper Weight



1 oz

2 oz

Inner Copper Weight



0.5 oz

1 oz

2 oz

Specify Layer Sequence



No

Yes

Specify Stackup



No

Yes

[Impedance calculator >](#)

Layer Stackup



No requirement

JLC04161H-7628

JLC04161H-3313

JLC04161H-1080

JLC04161H-7628A

JLC04161H-3313A

JLC04161H-1080A

JLC04161H-7628B

JLC04161H-2116A

JLC04161H-2116B

JLC04161H-2116C

JLC04161H-7628G

JLC04161H-2116

JLC04161H-7628E

JLC04161H-2116D

JLC04161H-7628F

JLC04161H-2116E

JLC04161H-7628C

[View Stackup](#)

Impedance Control

No requirement

±10% (±5Ω if value≤50Ω)

Via Covering



Plugged

Untented

Epoxy Filled & Capped

Copper paste Filled & Capped

Tented

Not Specified

Conductive Adhesive

Horizontal Electroless Copper Plating

Via Covering ?

Via Plating Method ?

Epoxy-filled or copper-paste-filled vias require Horizontal Electroless Copper Plating.

Min via hole size/diameter ?

Board Outline Tolerance ?

Confirm Production file ?

Mark on PCB ?

Electrical Test ?

Gold Fingers ?

Castellated Holes ?

Press-Fit Hole ?

Castellated Holes	?	<input checked="" type="button" value="No"/>	Yes
Press-Fit Hole	?	<input checked="" type="button" value="No"/>	Yes (Tolerance +/-0.05mm)
Edge Plating	?	<input checked="" type="button" value="No"/>	Yes
Blind Slots	?	<input checked="" type="button" value="No"/>	Yes
UL Marking	?	<input checked="" type="button" value="No"/>	Yes (Any Position) Yes (Specify Position)
Backdrill	?	<input checked="" type="button" value="No"/>	Yes
Humidity Indicator Card	?	<input checked="" type="button" value="No"/>	Yes

Advanced Options

PCB Remark 

Epoxy Filled & Capped selected: please fill and cap ALL vias on the board, including vias in pads (via-in-pad), no exceptions.

126/200 

Please add the following remark on the PCB:

“Please add the board version to the stencil for easier identification. The following would be good: "LIONv3-MINI (rev1.0) • 343200bf”



Stencil

Order together with PCB

[Stencil Order Guide>](#)



Framework



No

Yes

Step Stencil



No

Yes

Nano-Coating

New



No

Yes

Stencil Side



Top only

Bottom only

Top + Bottom(On Single Stencil)

Top + Bottom(On Separate Stencils)

Please select the Stencil Side according to your design requirements.

Dimensions



Standard Size

Custom Size

380*280(Valid Area 360mm*200mm, \$7.22 ,0.8kg)



Stencil Qty



2

Thickness



Select by JLCPCB

Select by Customer

Stencil Qty	2
Thickness	<input checked="" type="button" value="Select by JLCPCB"/> Select by Customer
Stencil Process Type	<input checked="" type="button" value="Solder paste stencil"/> Red glue stencil
Polishing Process	<input checked="" type="button" value="Sanding"/> Etching Electropolishing
Fiducials	<input checked="" type="button" value="No Fiducial"/> Etched Through Etched Half
Confirm Production file	No <input checked="" type="button" value="Yes"/>
Engrave Text	No <input checked="" type="button" value="Yes"/>
Your Engraving: LIONv3-MINI (rev1.0) • 343 200bf Edit	
Stencil Aperture Openings	<input checked="" type="button" value="Follow JLCPCB's Standard"/> 1:1 as per Paste Layer
Package Box	<input checked="" type="button" value="With JLCPCB logo"/> Blank box

Stencil Remark 

Notes:

- ① Stencil aperture openings follow JLCPCB's standard by default. If you request a 1:1 opening to match your paste layer, please leave a remark.
- ② Tips to reduce engineering questions for your SMT stencil orders

Please add the board version to the stencil for easier identification. The following would be good: "LIONv3-MINI (rev1.0) • 343200bf"

PCB Fabrication Checklist



Parameter	Specification
Base Material	FR4
Layers	4
PCB Color	Black
Surface Finish	ENIG
Specify Stackup	Yes (JLC04161H-7628)

Parameter	Specification
Impedance Control	No Requirement
Via Covering	Epoxy Filled & Capped
Confirm Production file	Yes
PCB Remark	Fill and cap ALL vias on the board

Stencil Fabrication Checklist



Parameter	Specification
Stencil Side	Top + Bottom (On Separate Stencils)
Confirm Production file	Yes
Engrave Text	Yes (LIONv3-MINI (rev1.0) • 343200bf)